


GNSS observation file monitoring for 0512


Last RINEX file: 05122091.220
RINEX version: 3.02
Marker: 1292
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE

Epochs

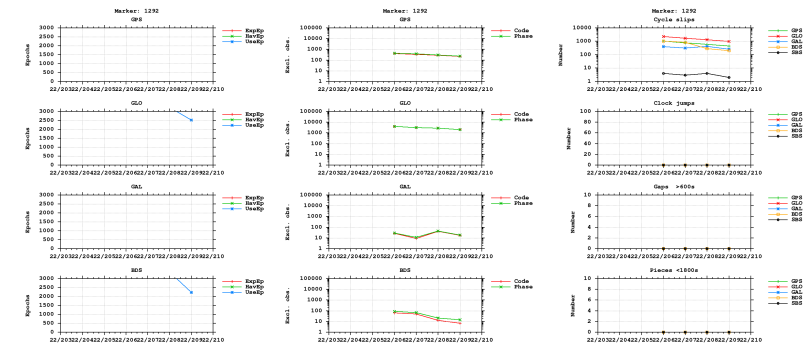



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

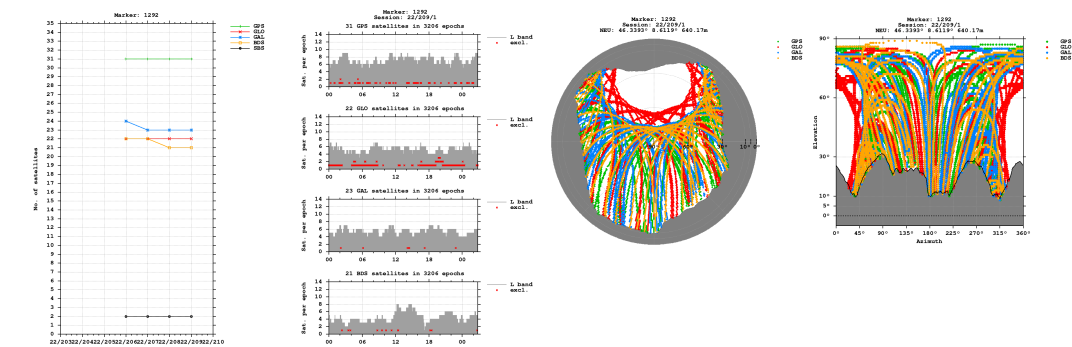


Bands

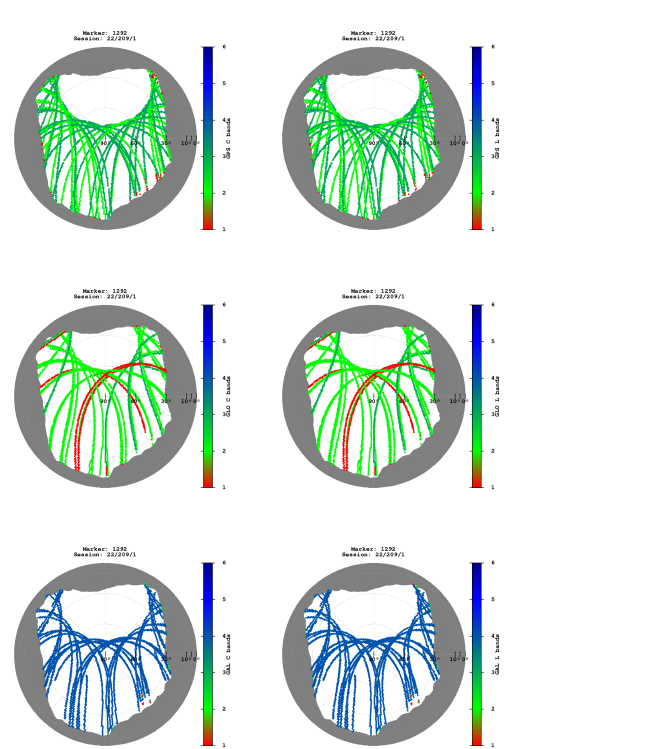


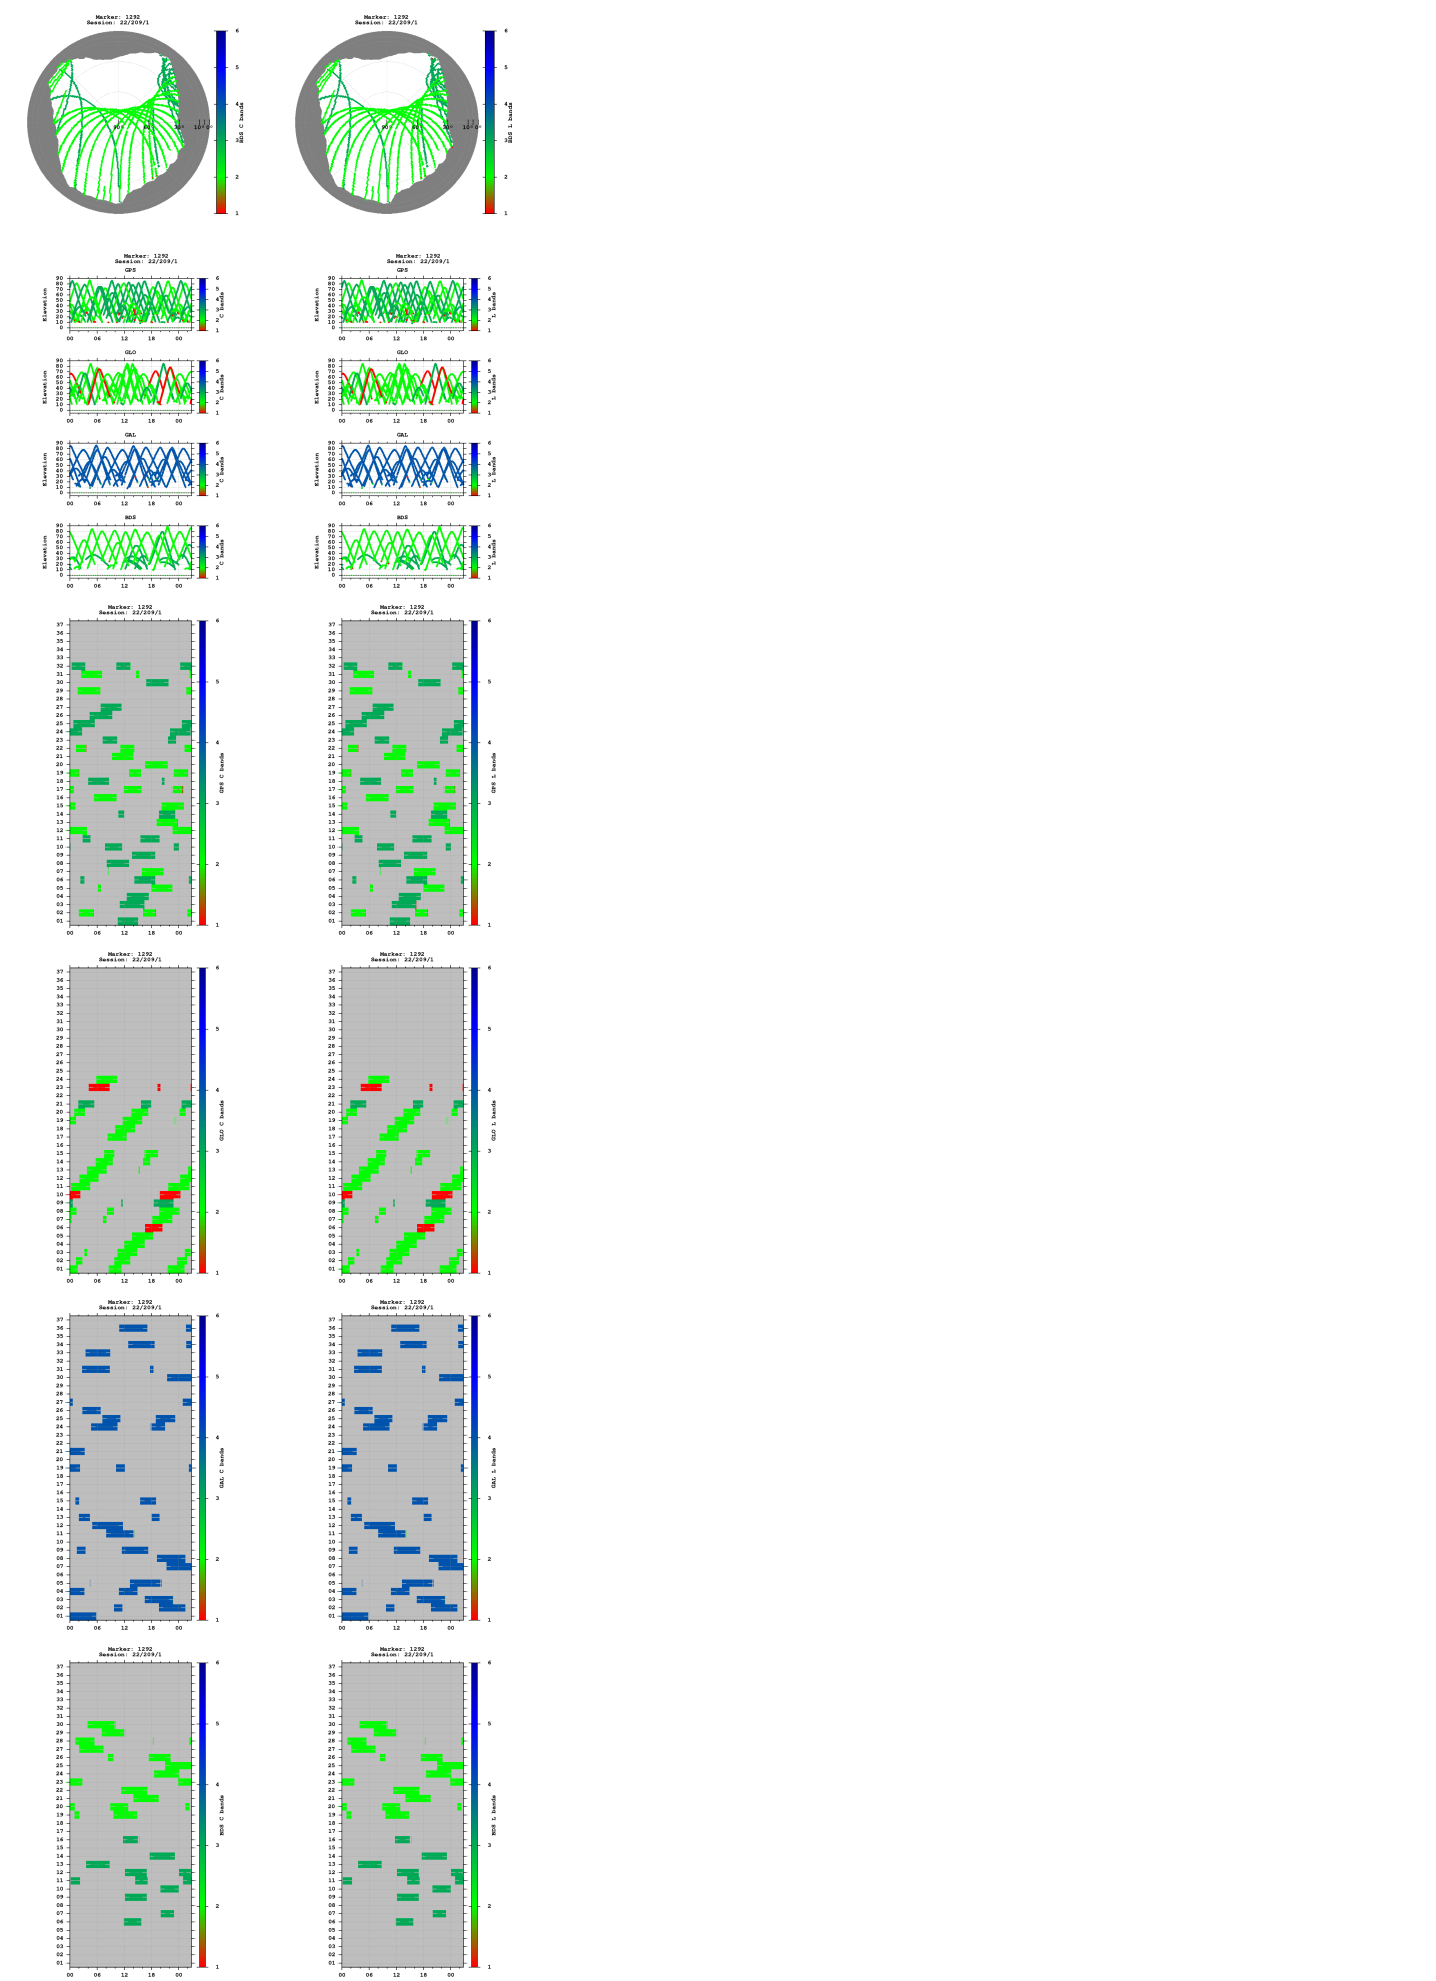


Observations

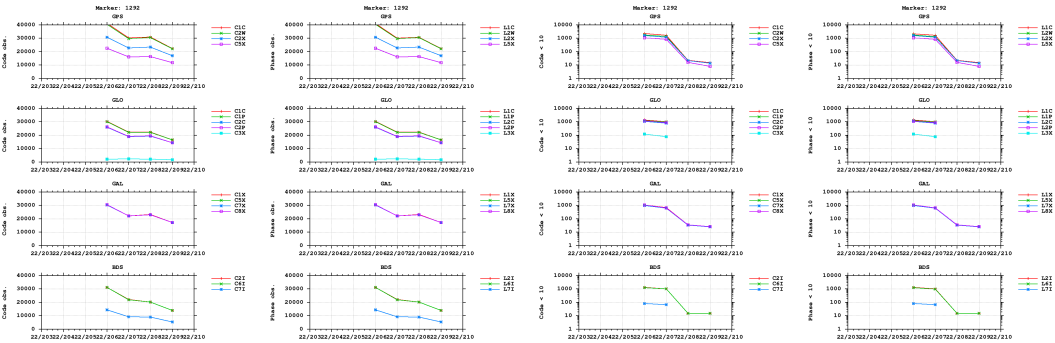


Multipath

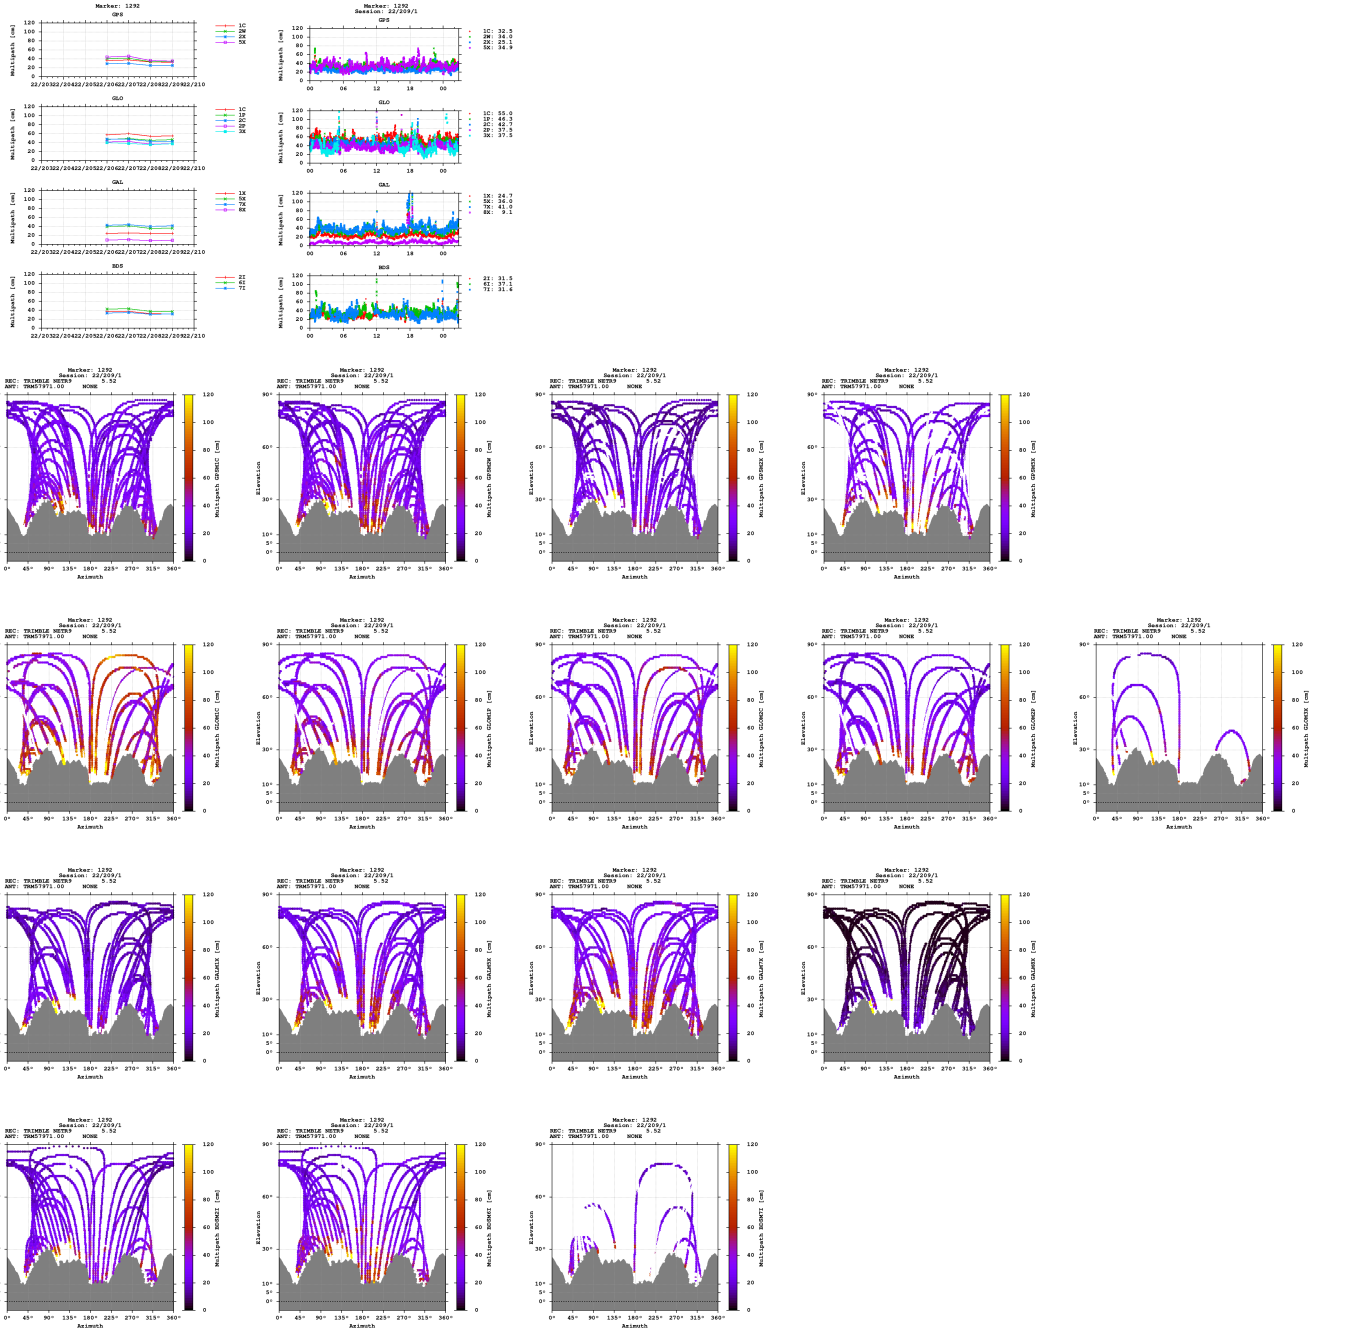


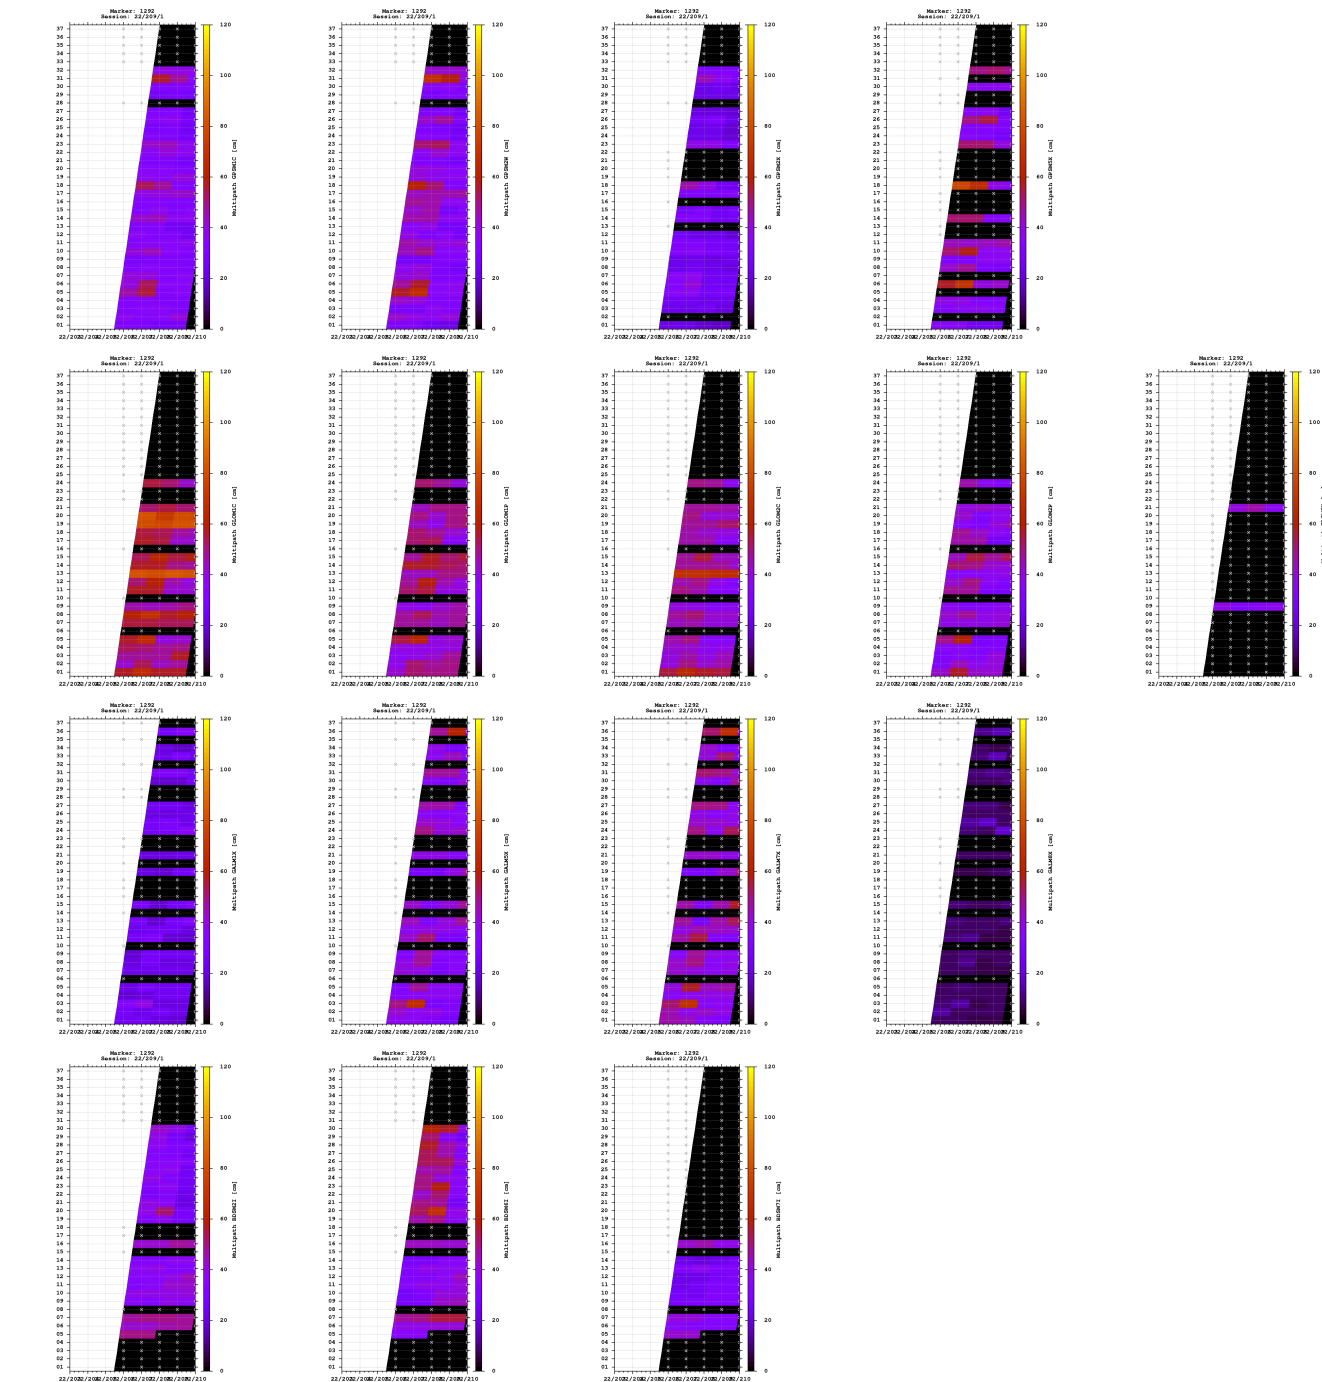


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

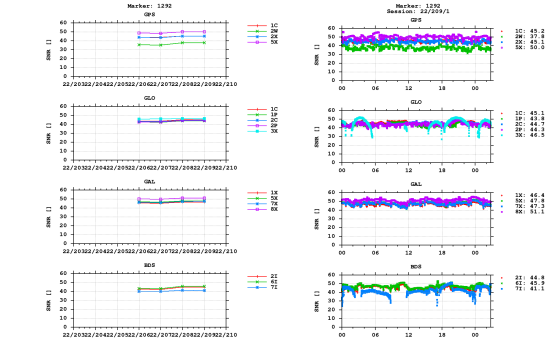


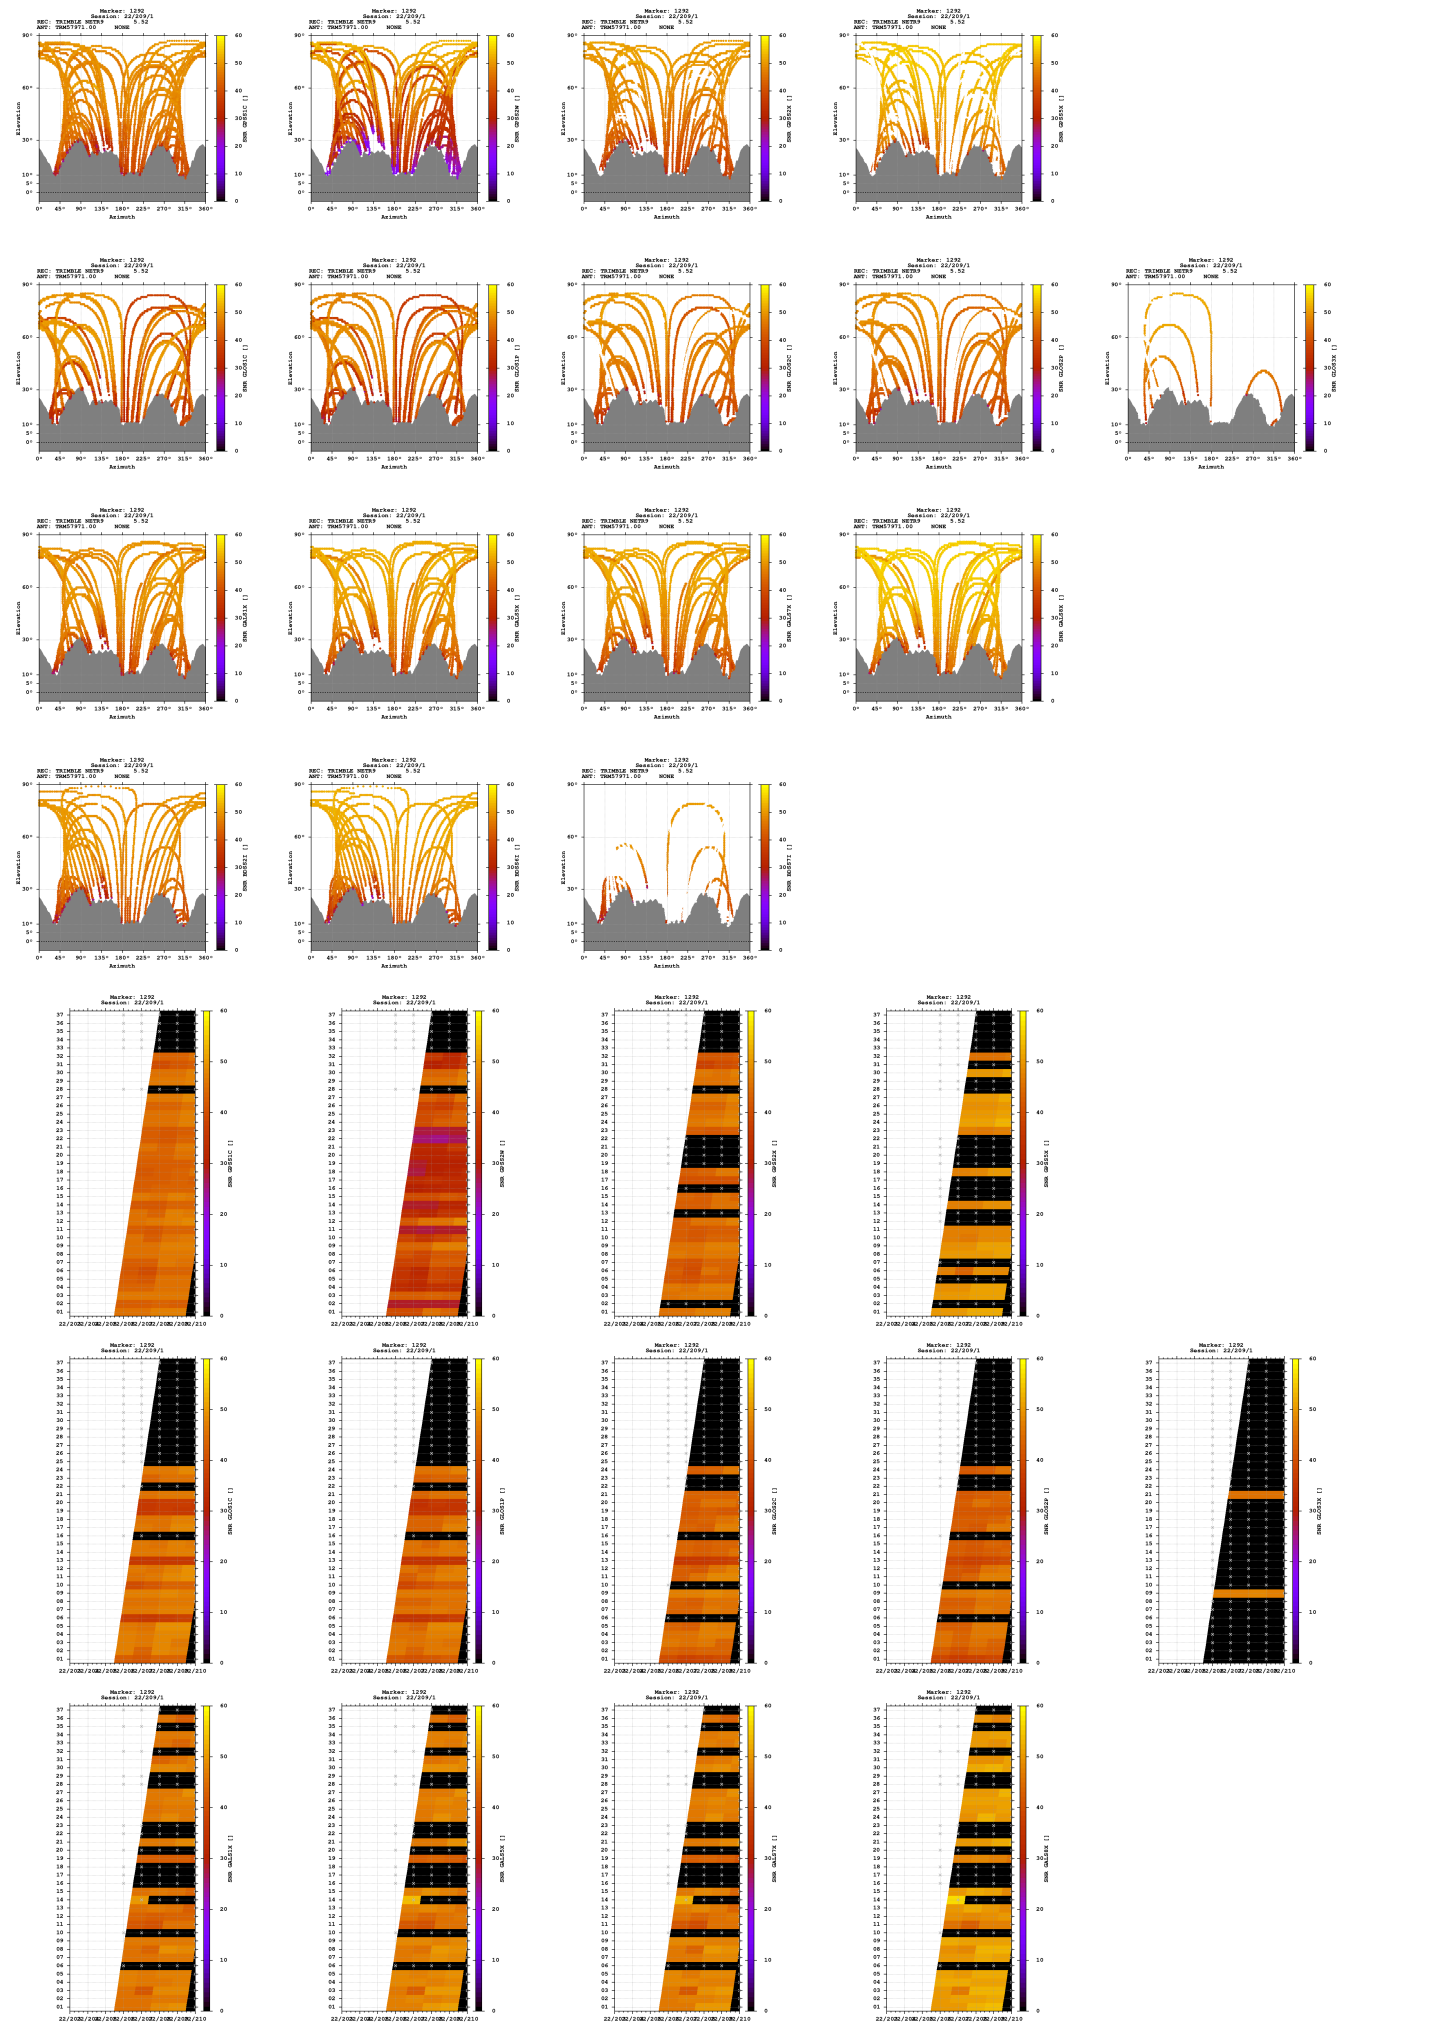

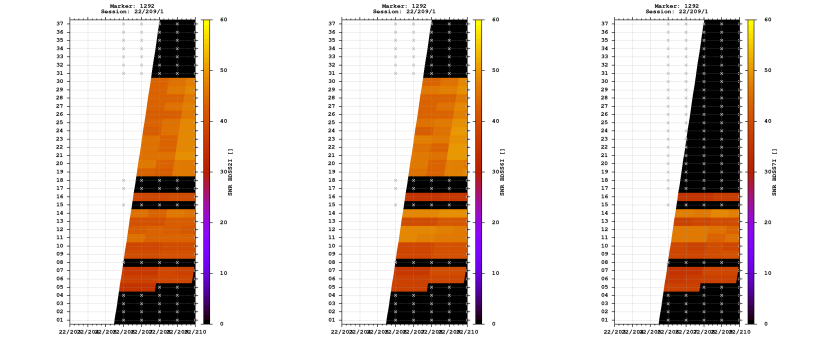



Estimates

2022-07-27 11:37:30	GPS	4361812.6176	660589.2997	4591832.2237	46.339341249	8.611906285	640.1658
2022-07-27 11:37:30	GLO	4361812.1534	660589.0168	4591831.1971	46.339338137	8.611903555	639.0770
2022-07-27 11:37:30	GAL	4361812.7728	660589.4625	4591832.3997	46.339341184	8.611908074	640.4159
2022-07-27 11:37:30	BDS	4361812.8927	660593.1357	4591832.4059	46.339336873	8.611955009	640.8820

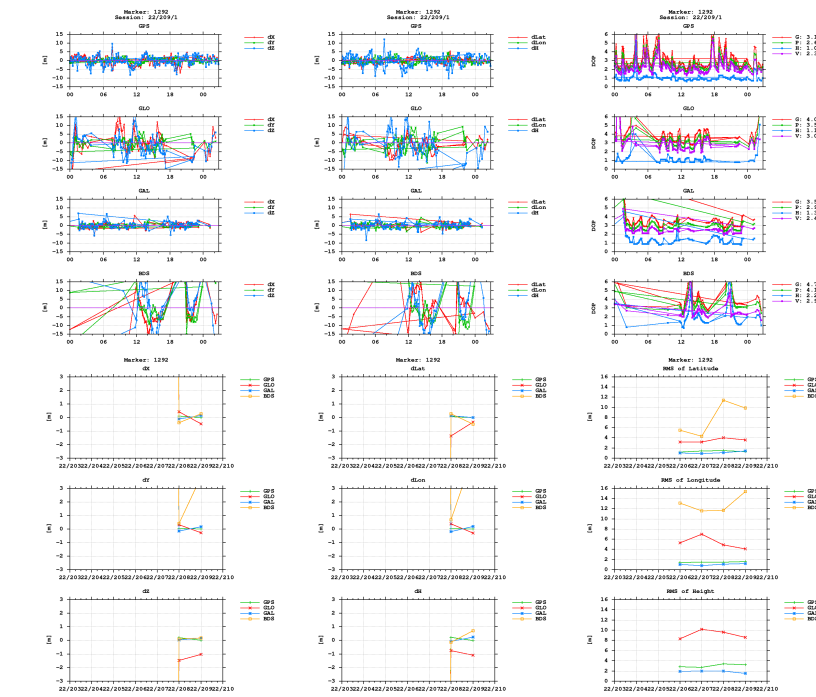

BNC

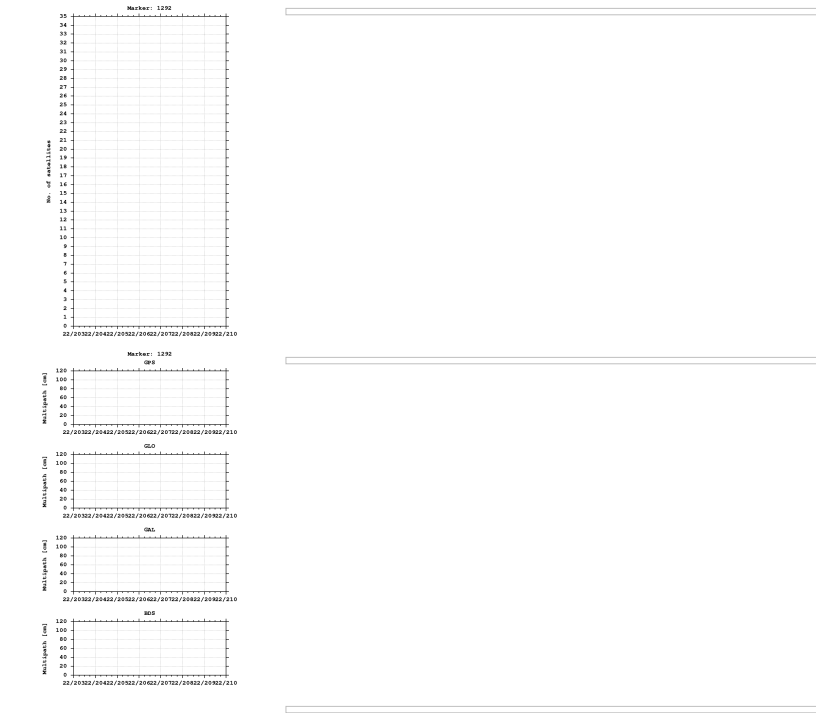

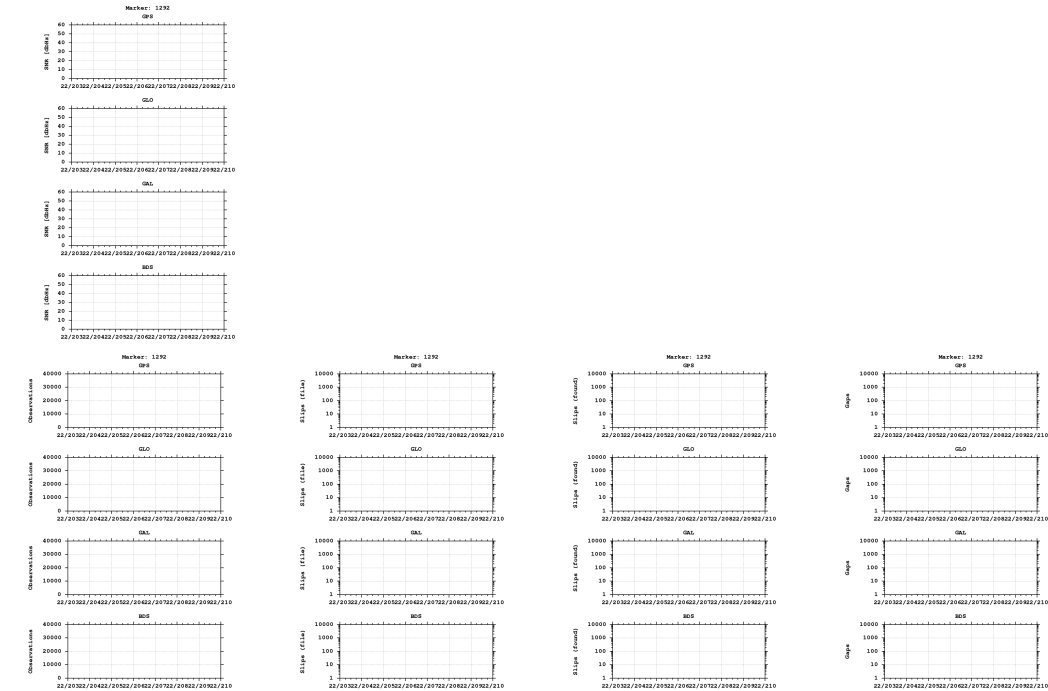

Equipment

2022-07-25 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)