


GNSS observation file monitoring for 0513


Last RINEX file: 05132061.22O
RINEX version: 3.02
Marker: 1373
Receiver: 513 TRIMBLE NETR9 5.52
Antenna: 513 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites


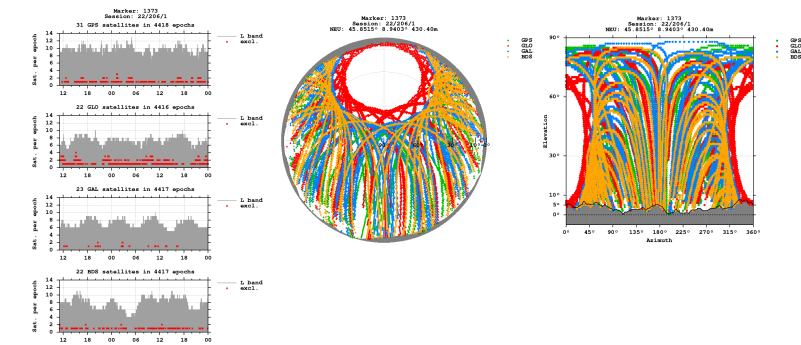


Bands

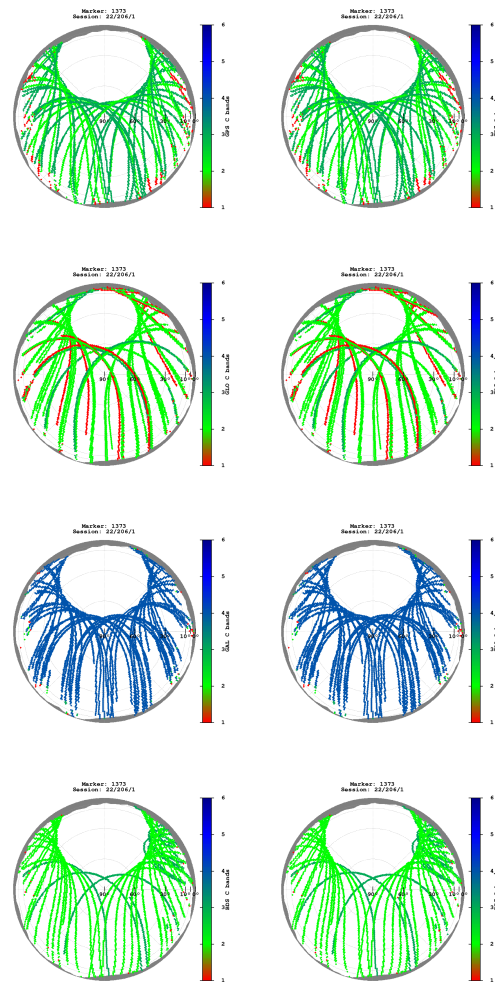

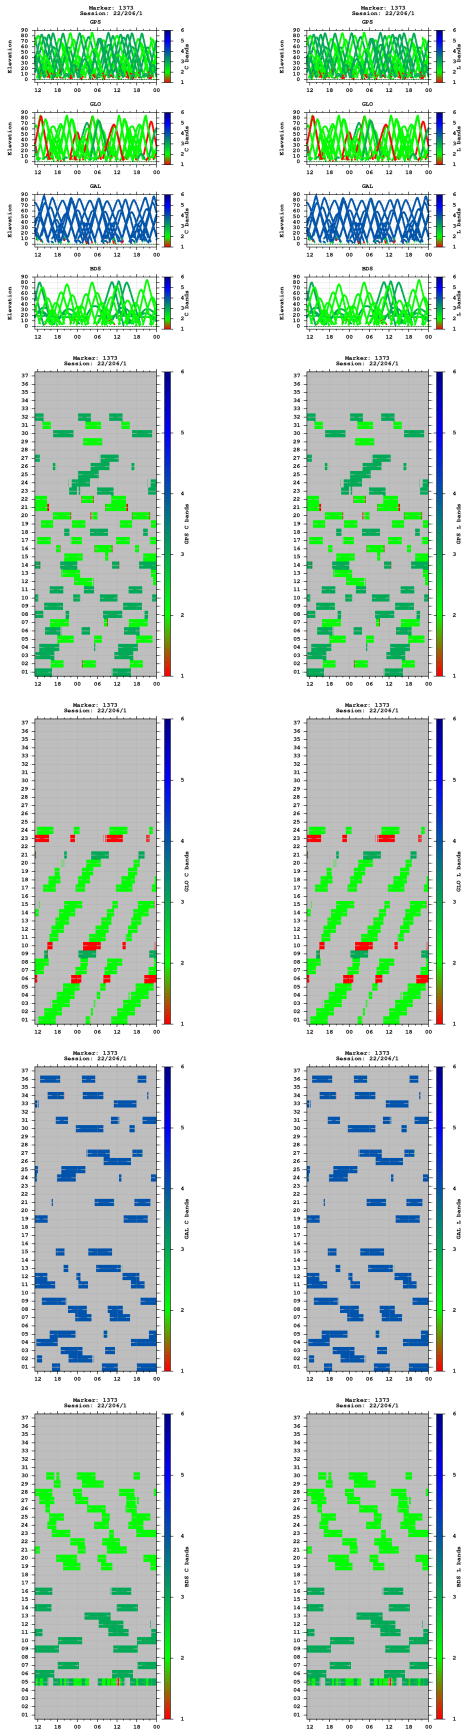



Multipath

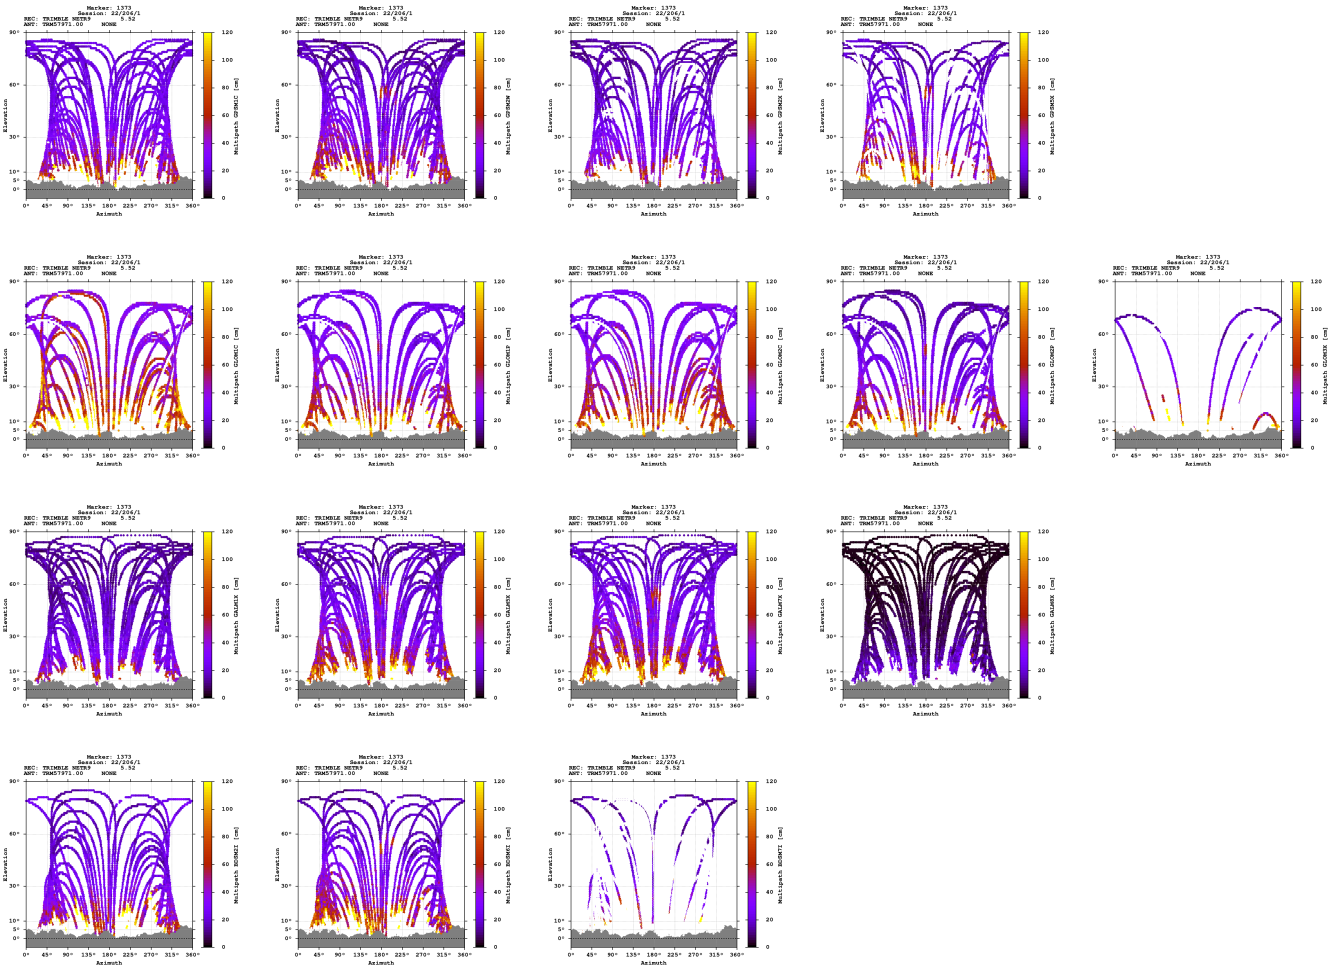

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

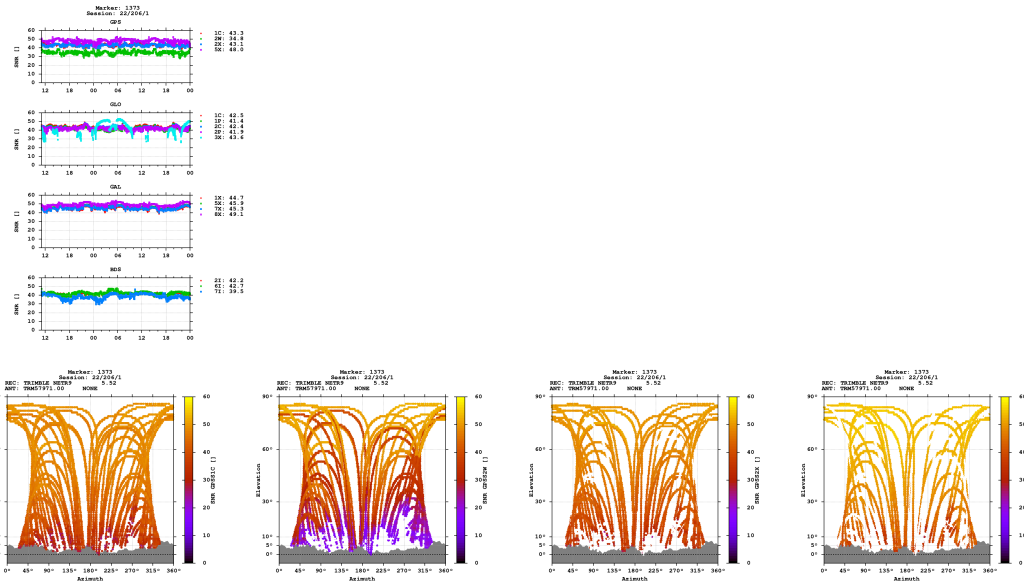

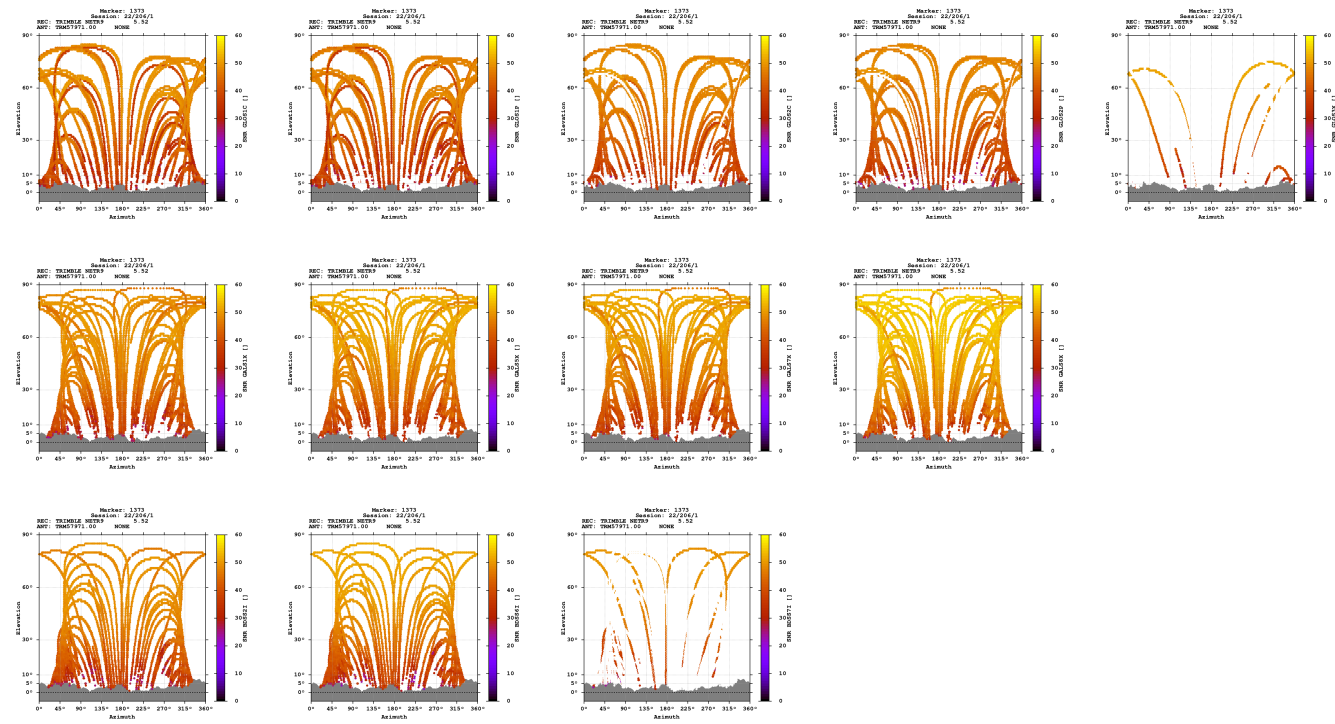

Estimates

2022-07-25 11:07:00	GPS	4396411.6250	691631.8681	4554071.5287	45.851453441	8.940347141	430.3992
2022-07-25 11:07:00	GLO	4396411.2659	691631.8826	4554070.1200	45.851446890	8.940348044	429.1429
2022-07-25 11:07:00	GAL	4396411.7868	691631.6397	4554071.3106	45.851451272	8.940343913	430.3294
2022-07-25 11:07:00	BDS	4396409.1086	691630.8155	4554070.1303	45.851461782	8.940338789	427.5505

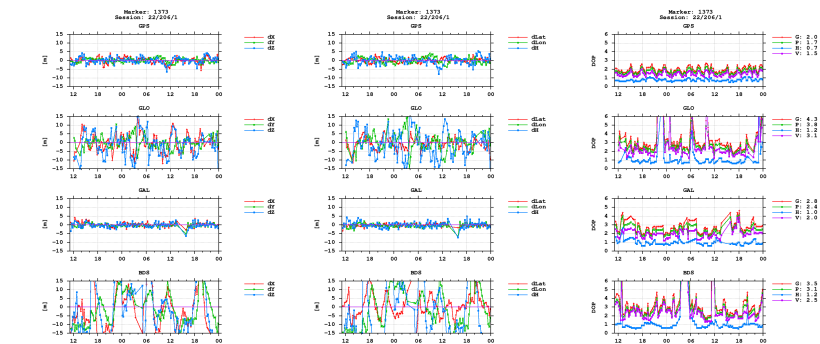

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)