


GNSS observation file monitoring for 0513


Last RINEX file: 05132081.220
RINEX version: 3.02
Marker: 1312
Receiver: 513 TRIMBLE NETR9 5.52
Antenna: 513 TRM57971.00 NONE

Epochs

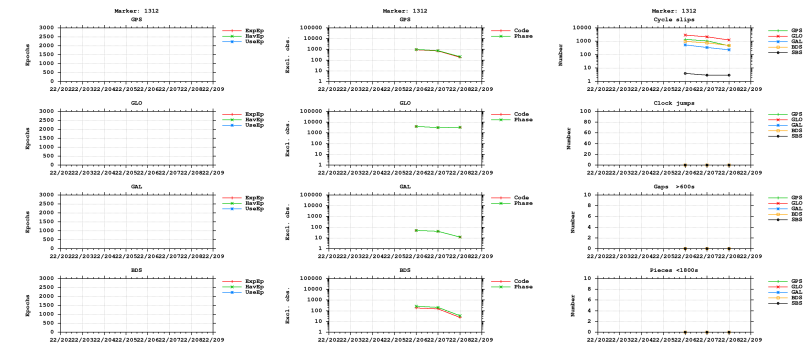



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

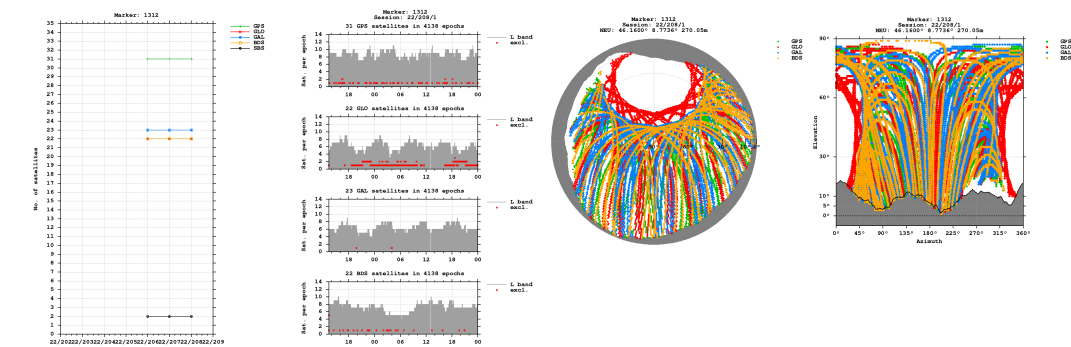


Bands

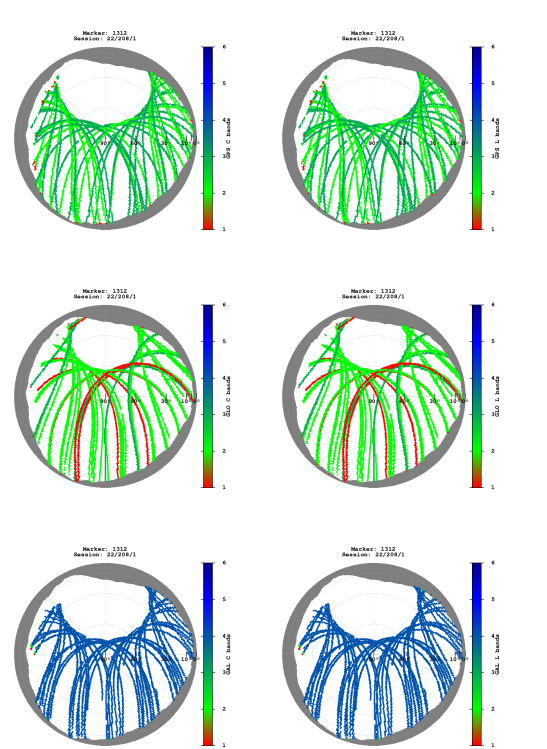


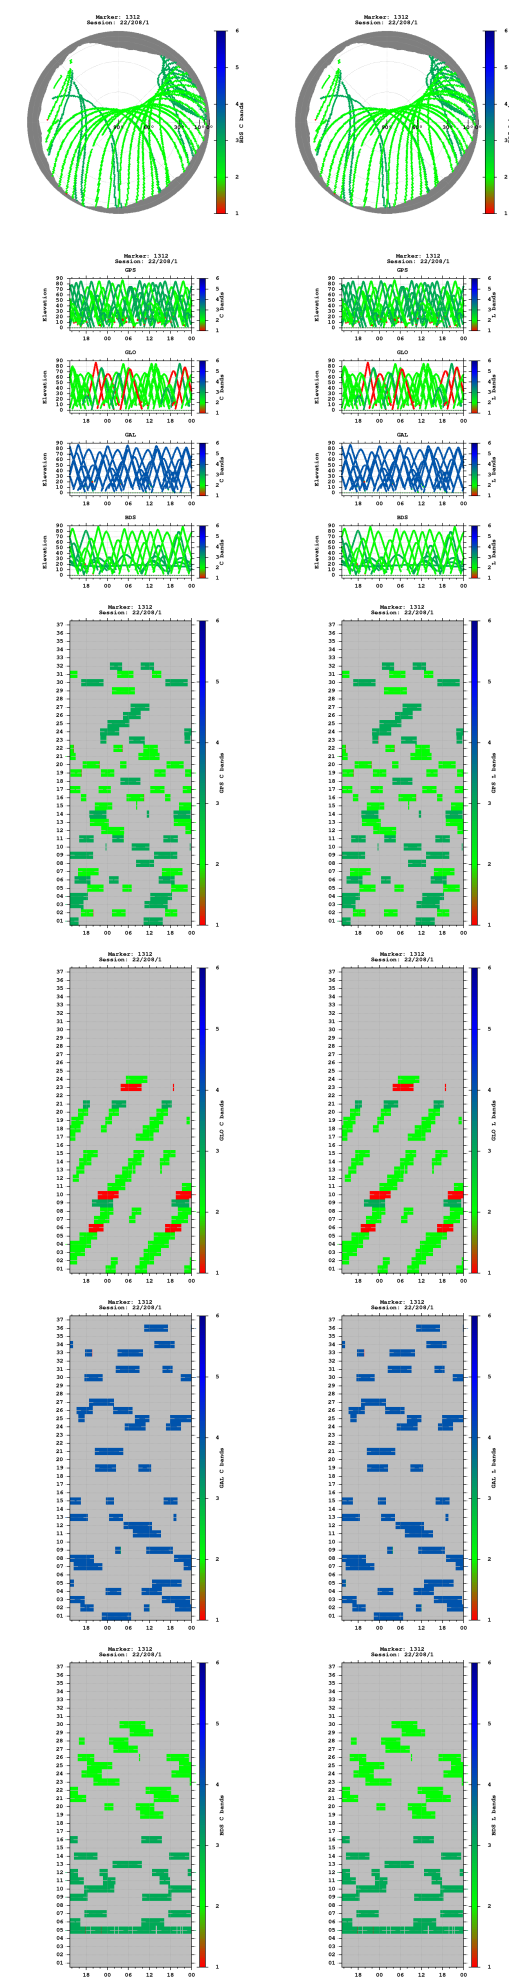


Observations

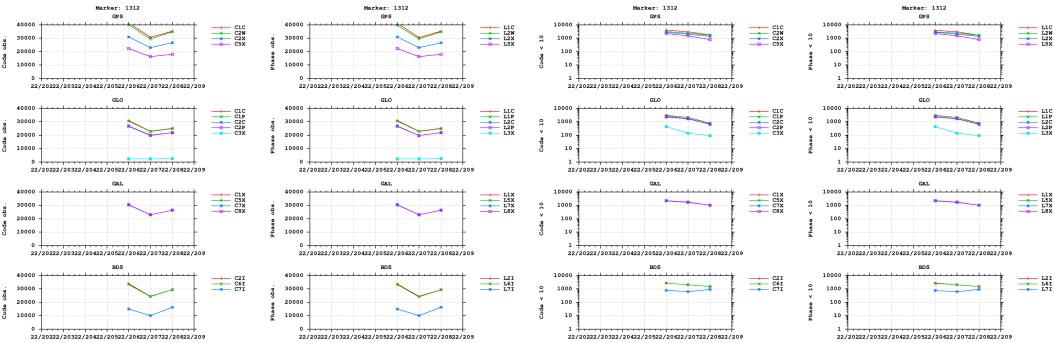


Multipath

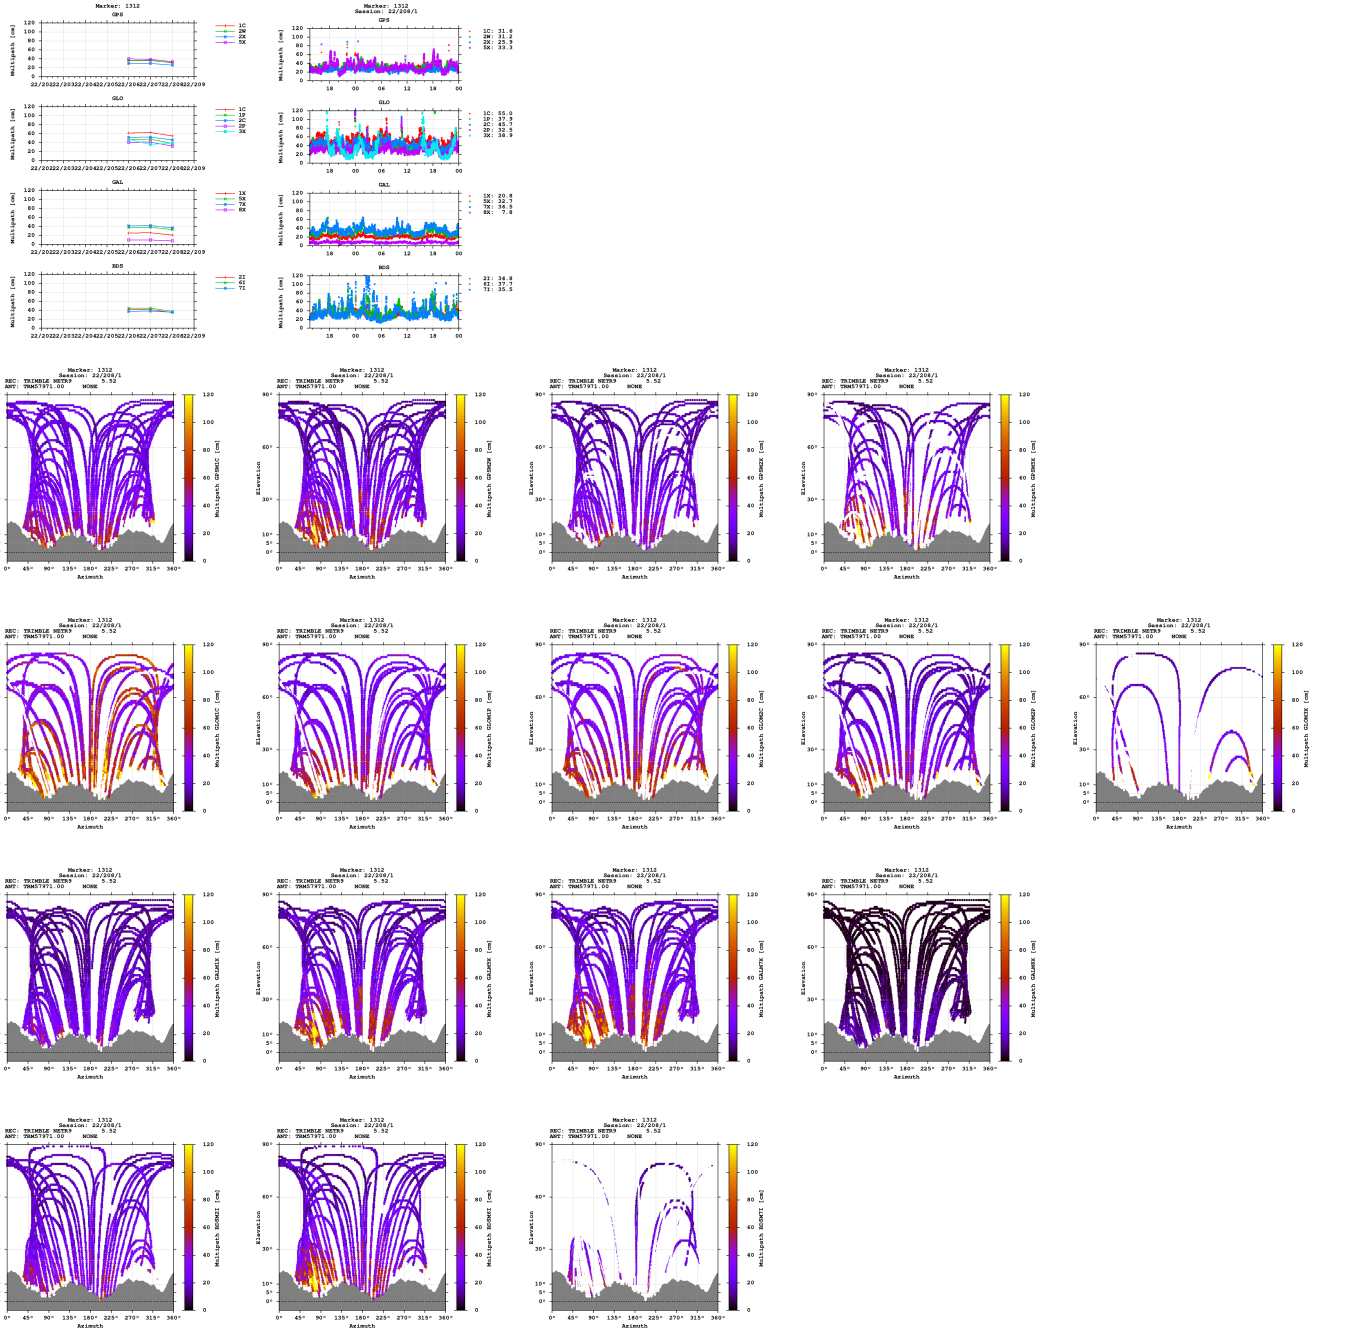


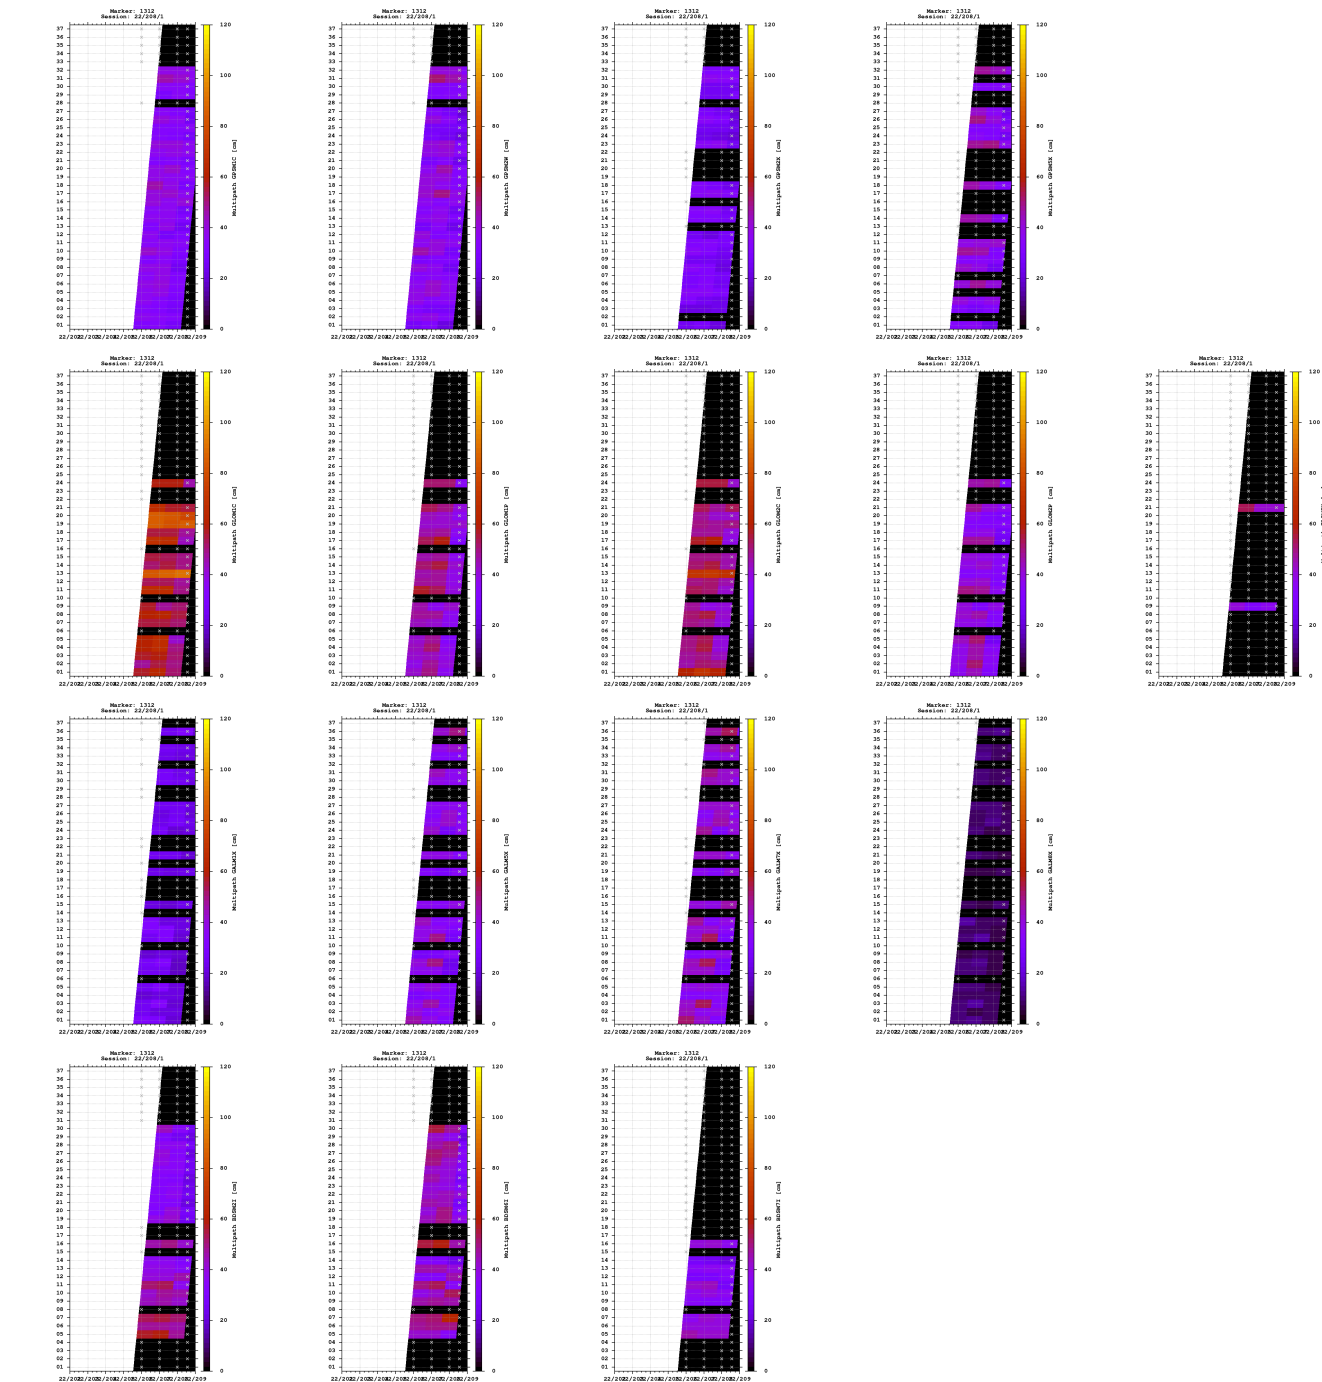


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

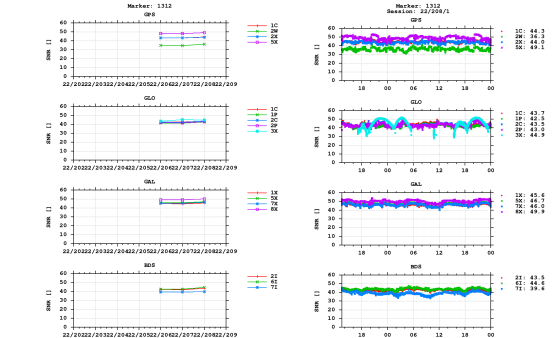


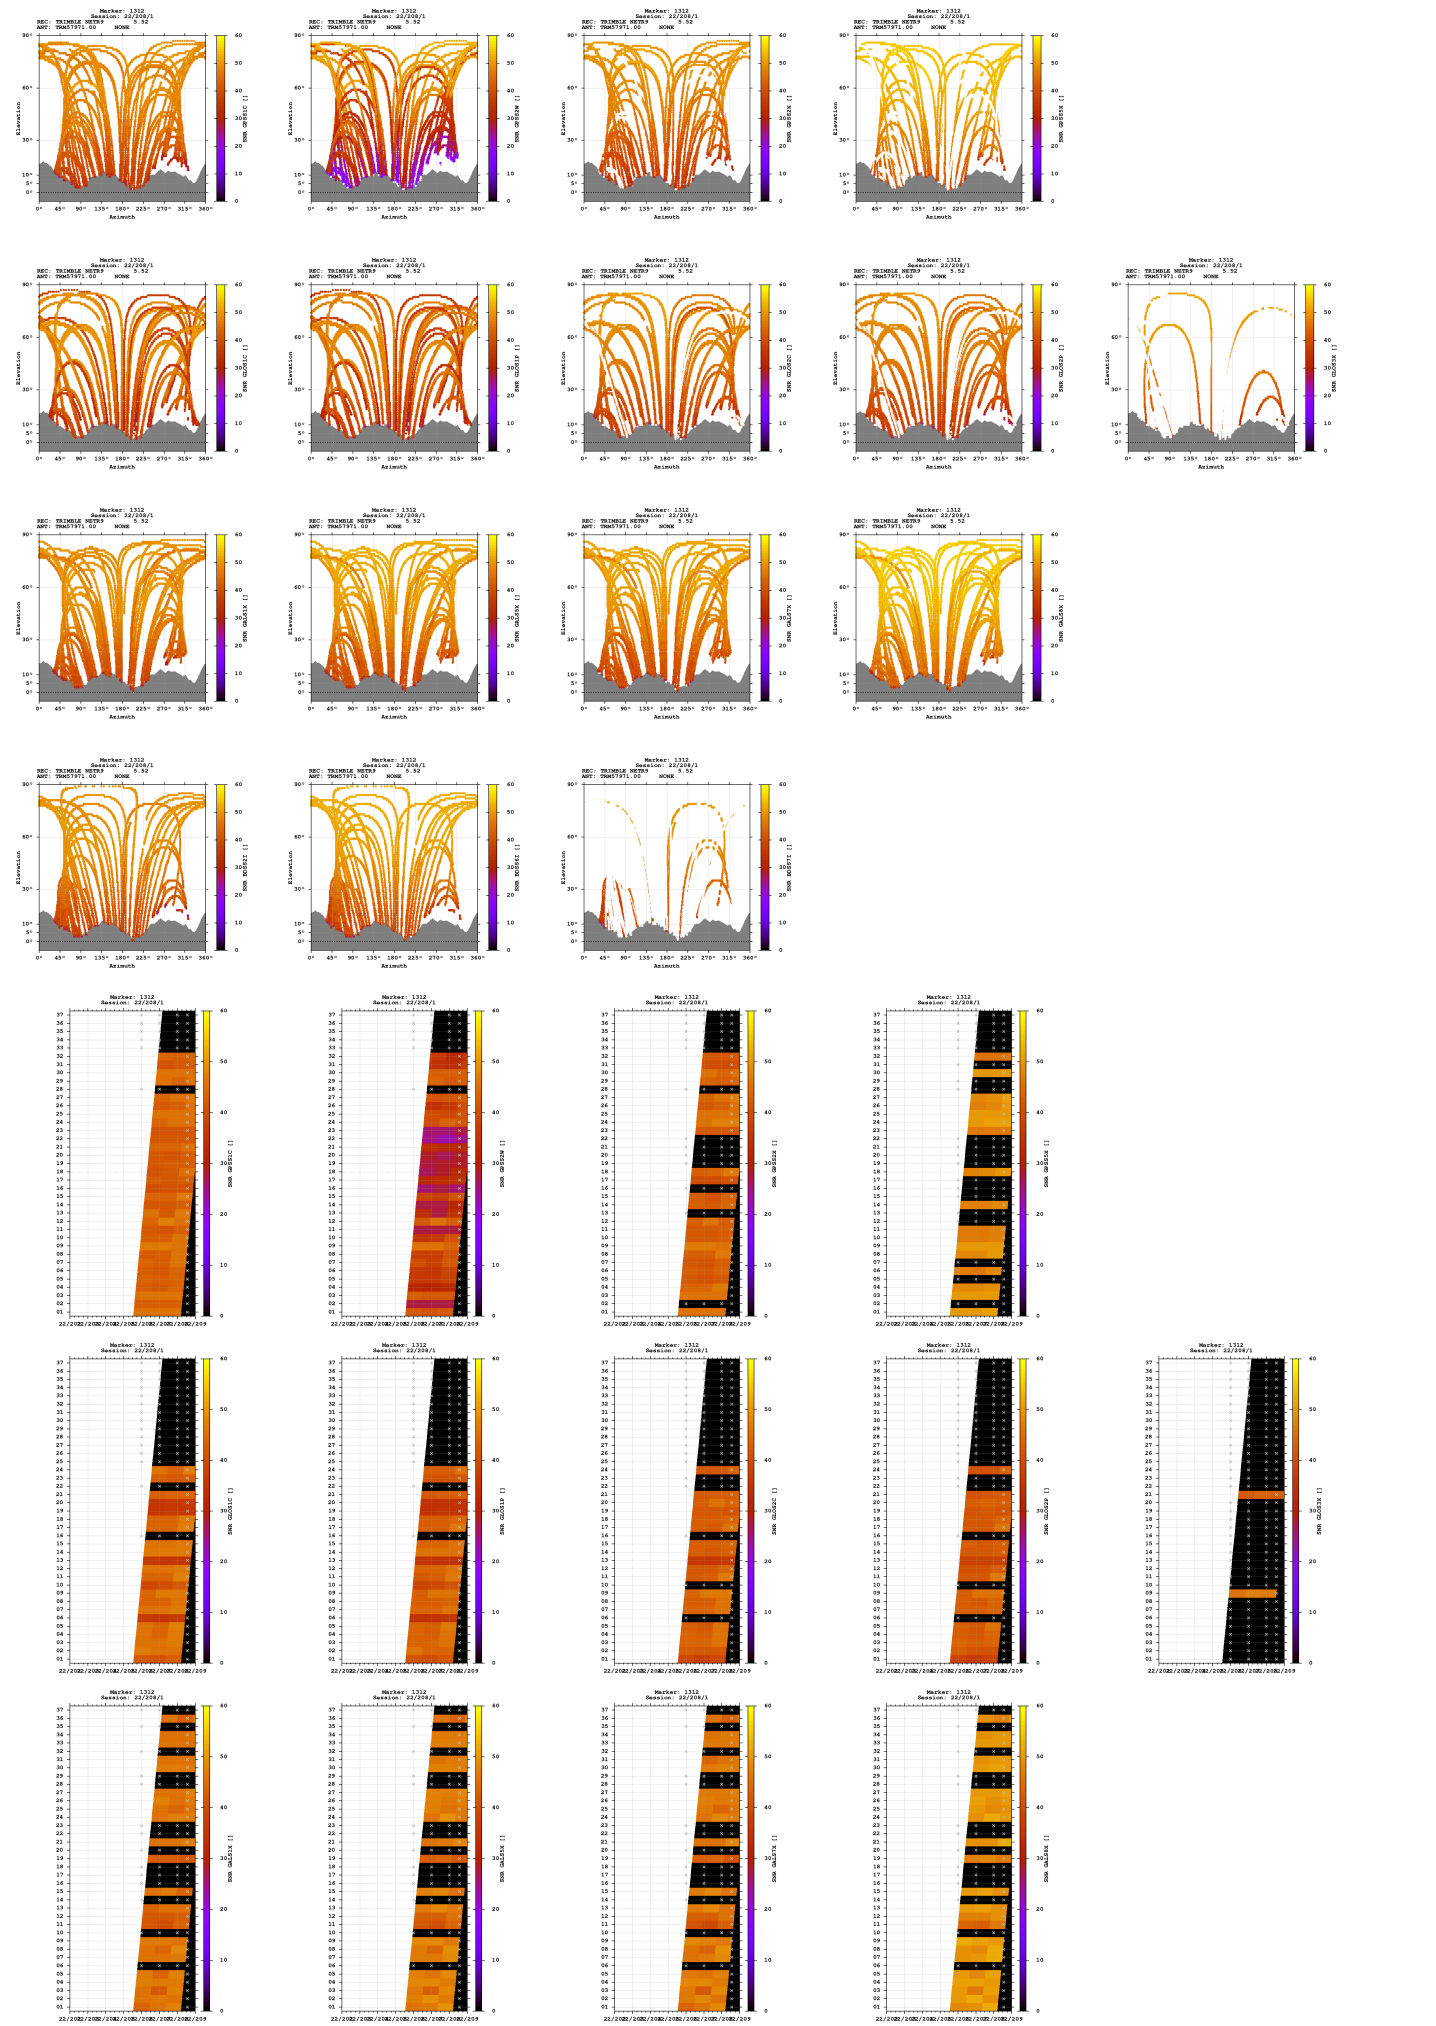

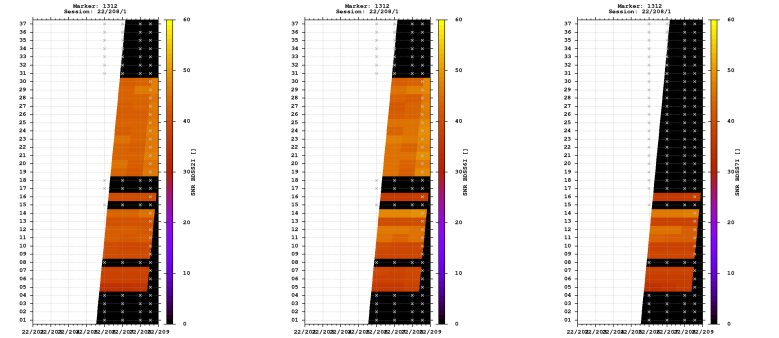



Estimates

2022-07-27 13:23:00	GPS	4373909.2025	675049.7400	4577780.6043	46.160026440	8.773552985	270.0512
2022-07-27 13:23:00	GLO	4373909.5085	675049.6694	4577780.5798	46.160024394	8.773551477	270.2355
2022-07-27 13:23:00	GAL	4373909.2225	675049.5187	4577780.0536	46.160023100	8.773550114	269.6442
2022-07-27 13:23:00	BDS	4373908.8643	675049.3689	4577782.6433	46.160041681	8.773548905	271.2512

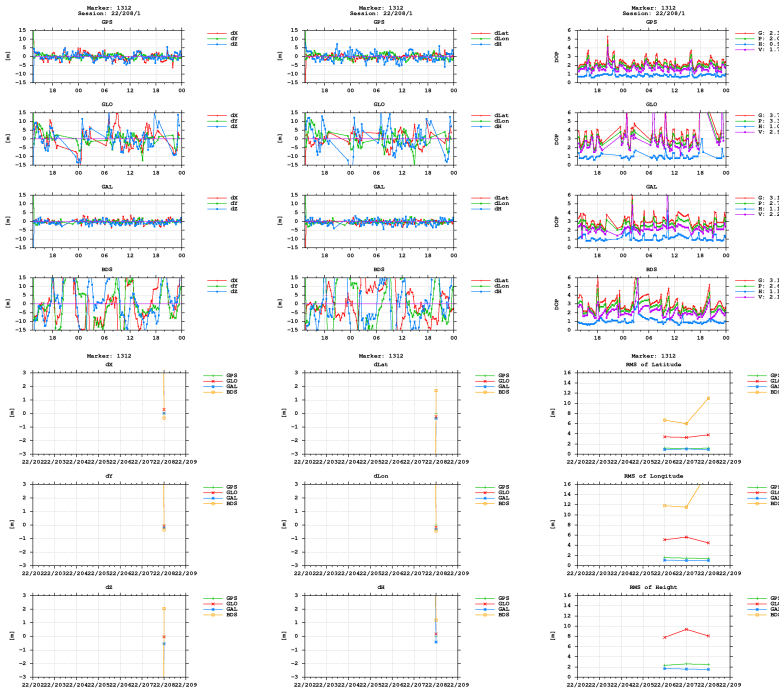

BNC

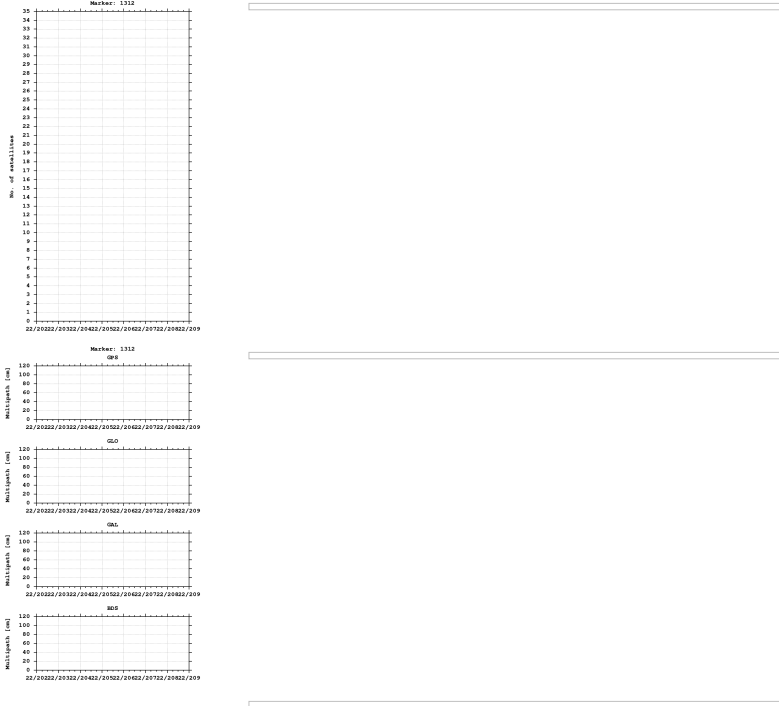

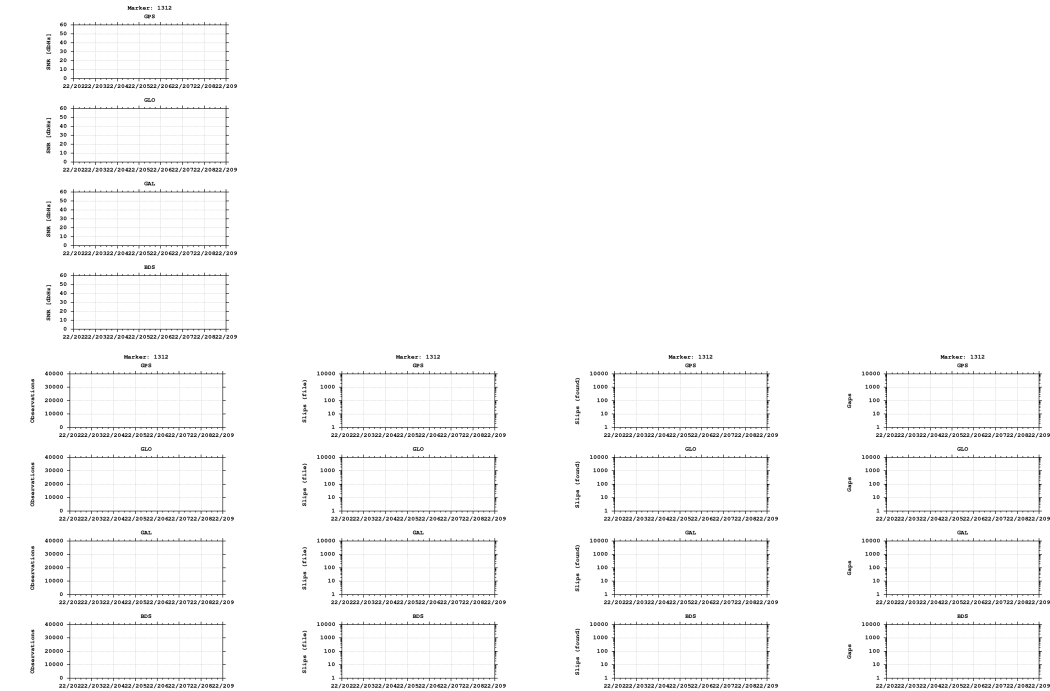

Equipment

2022-07-25 00:00:00 TRIMBLE NETR9 5.52 513 TRM57971.00 NONE 513

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)