


GNSS observation file monitoring for 0514


Last RINEX file: 05142071.22O
RINEX version: 3.02
Marker: 1353
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

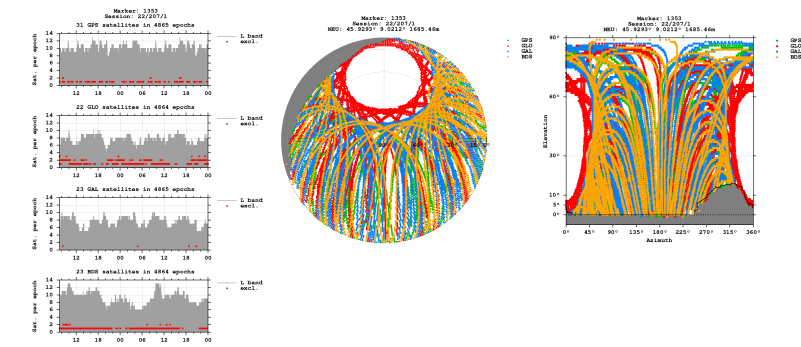


Bands

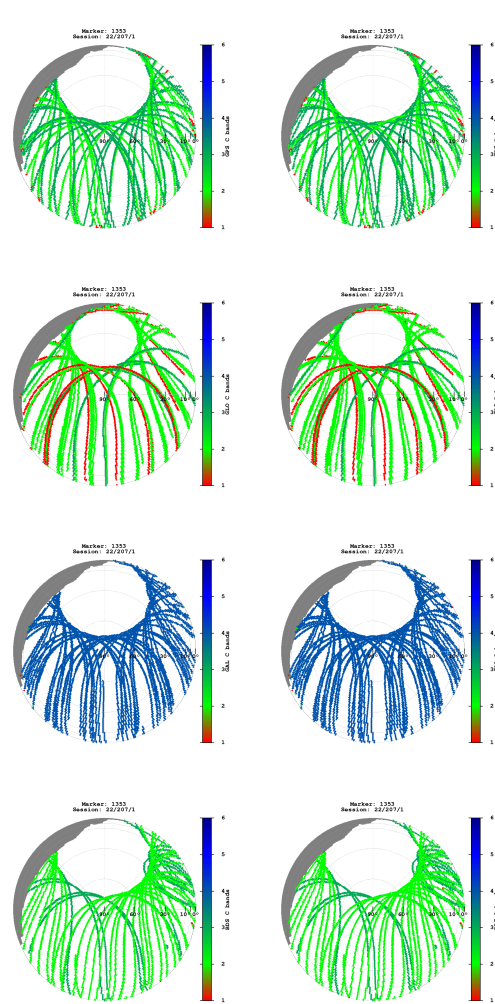

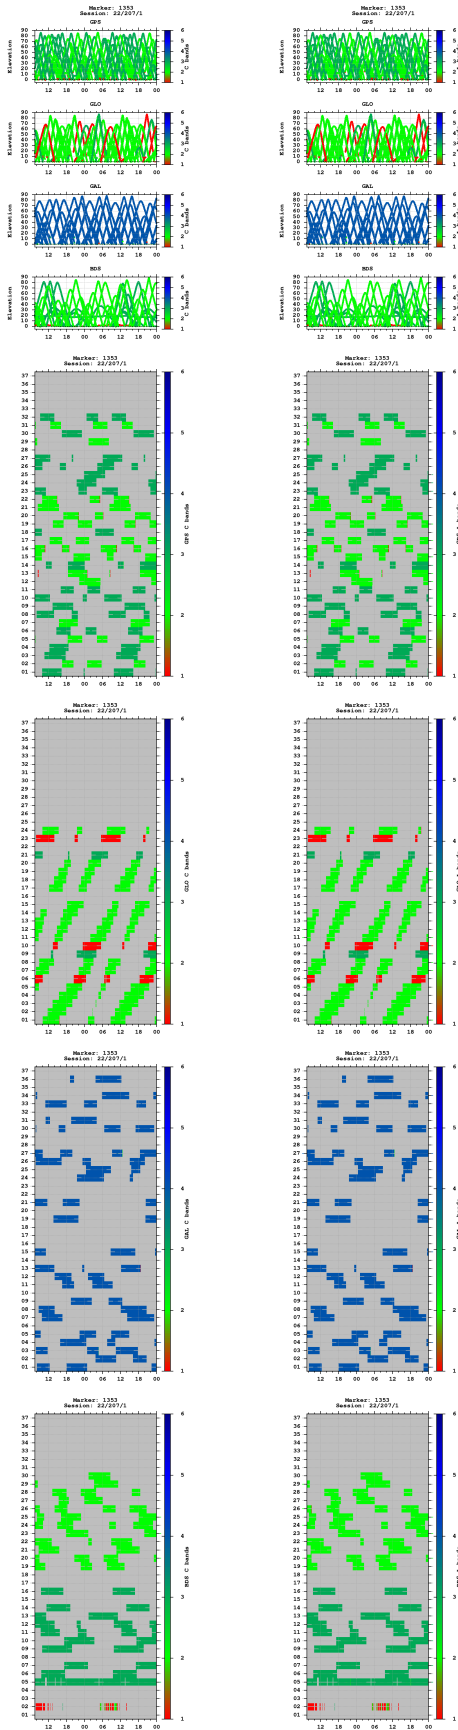


Multipath

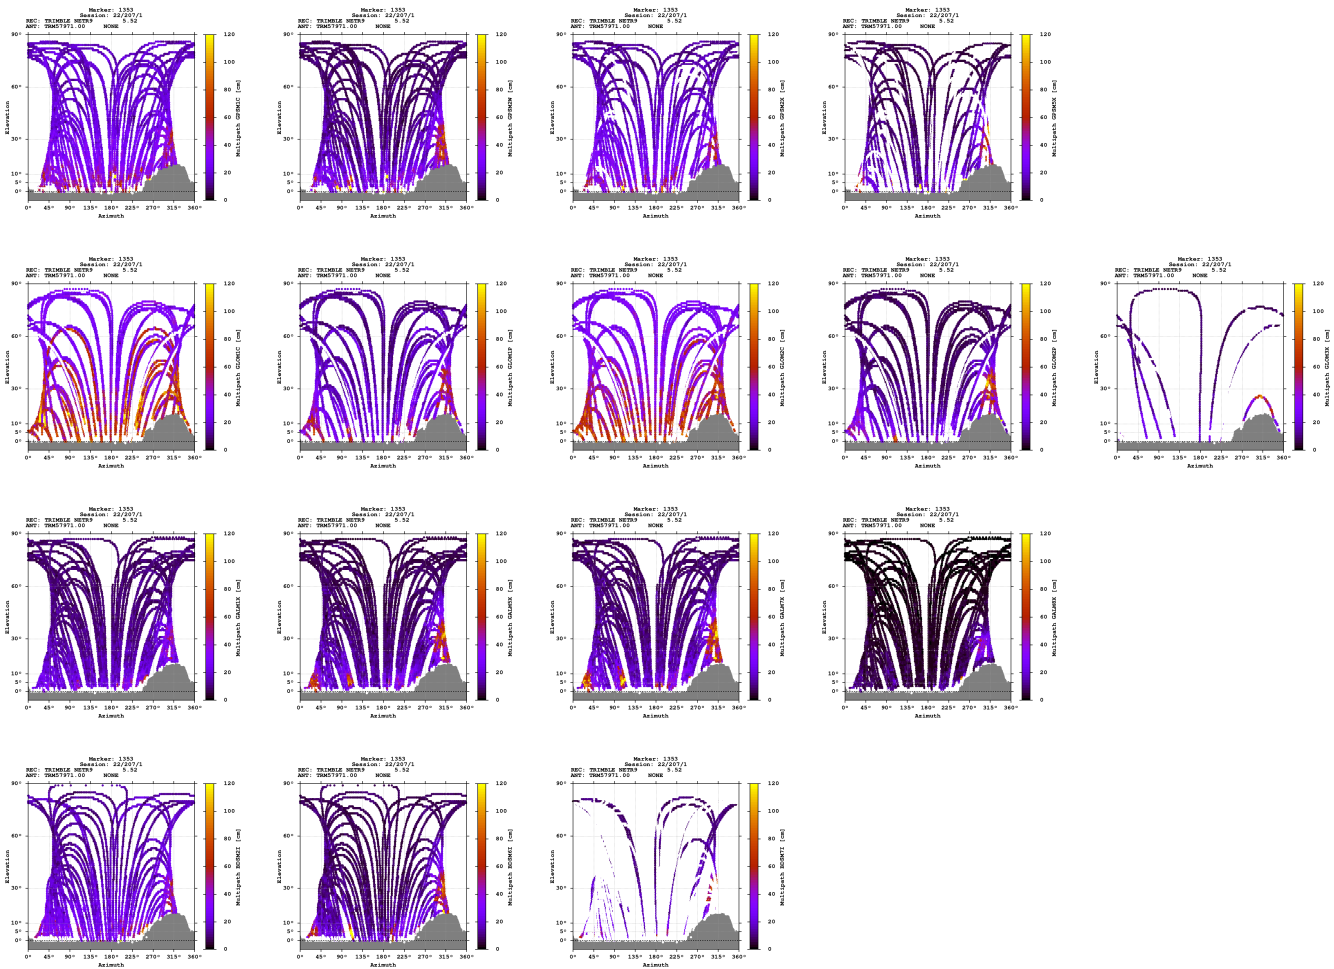


Signal-to-noise ratio



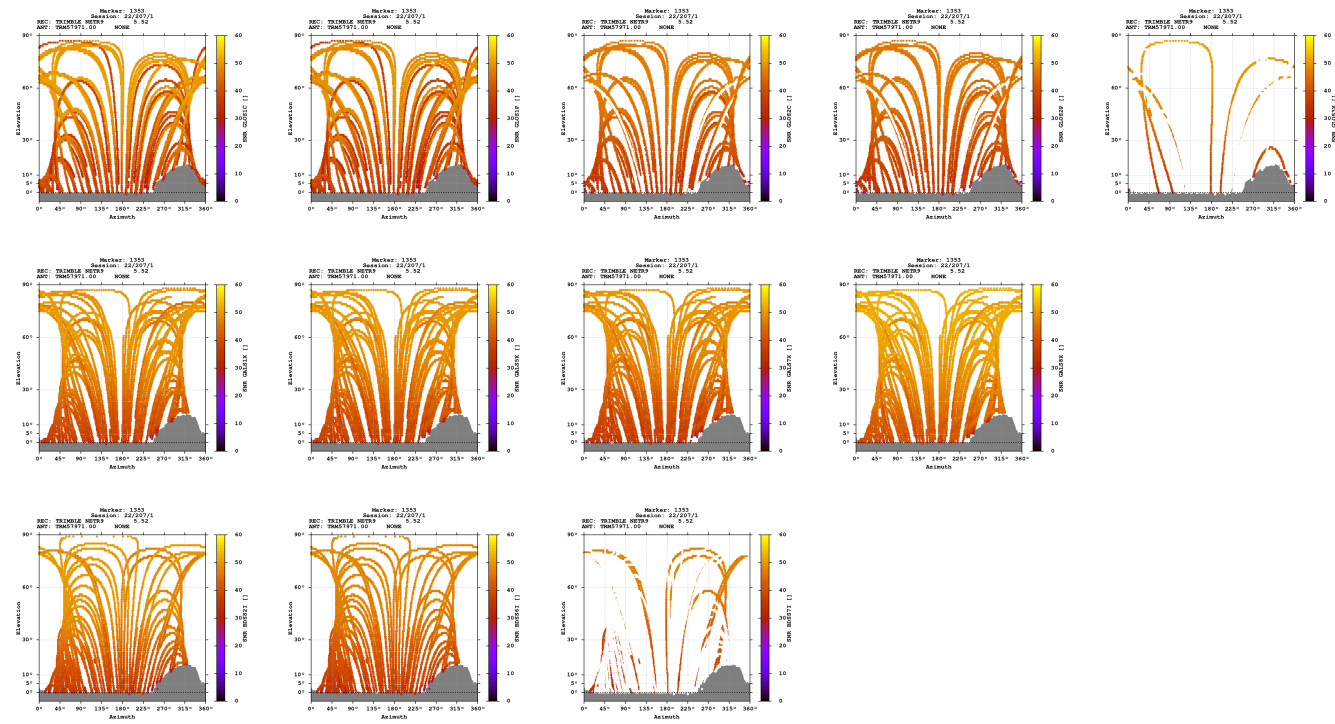

Estimates

2022-07-26 07:27:30	GPS	4390157.1906	697000.0931	4560995.8301	45.929295753	9.021228714	1685.4590
2022-07-26 07:27:30	GLO	4390157.8313	696999.6012	4560994.9086	45.929286398	9.021221156	1685.1834
2022-07-26 07:27:30	GAL	4390157.4253	696999.9859	4560995.5027	45.929292316	9.021226874	1685.3733
2022-07-26 07:27:30	BDS	4390156.5003	697001.0828	4560996.4757	45.929303195	9.021242708	1685.5566

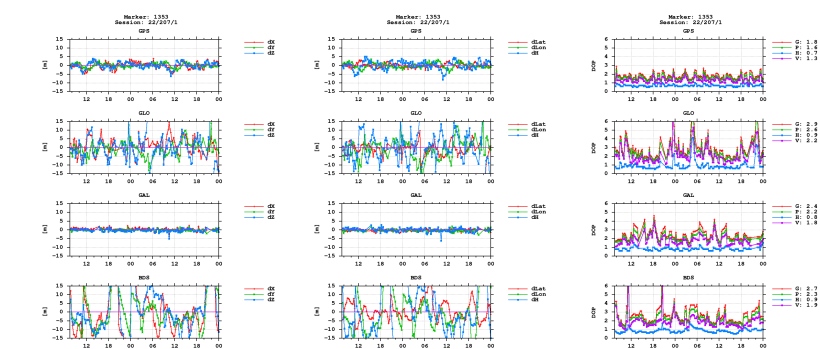

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)