


GNSS observation file monitoring for 0515


Last RINEX file: 05152061.22O
RINEX version: 3.02
Marker: 1255
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites


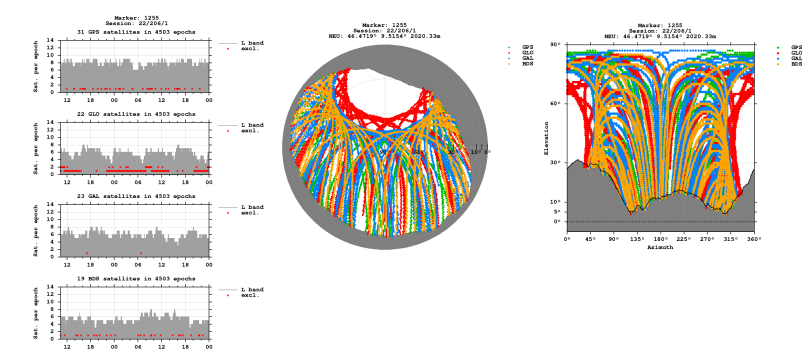


Bands

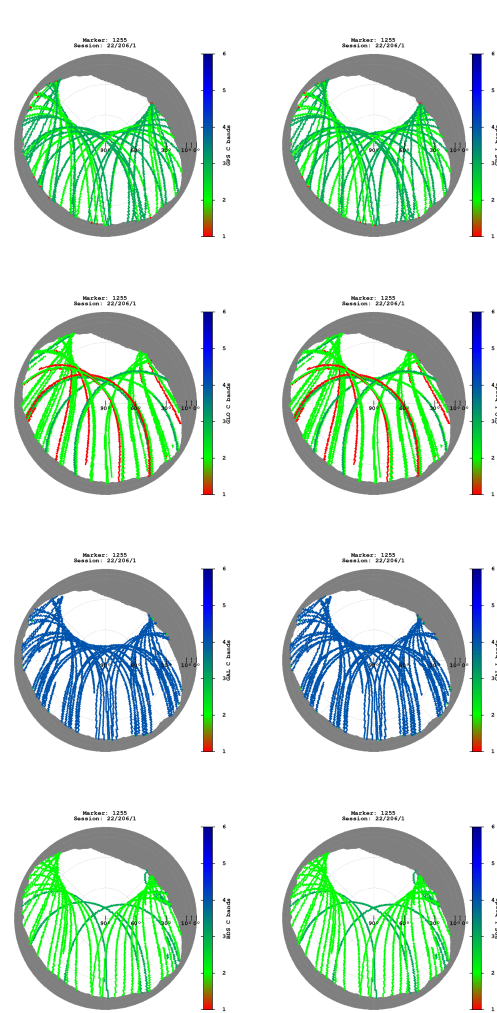

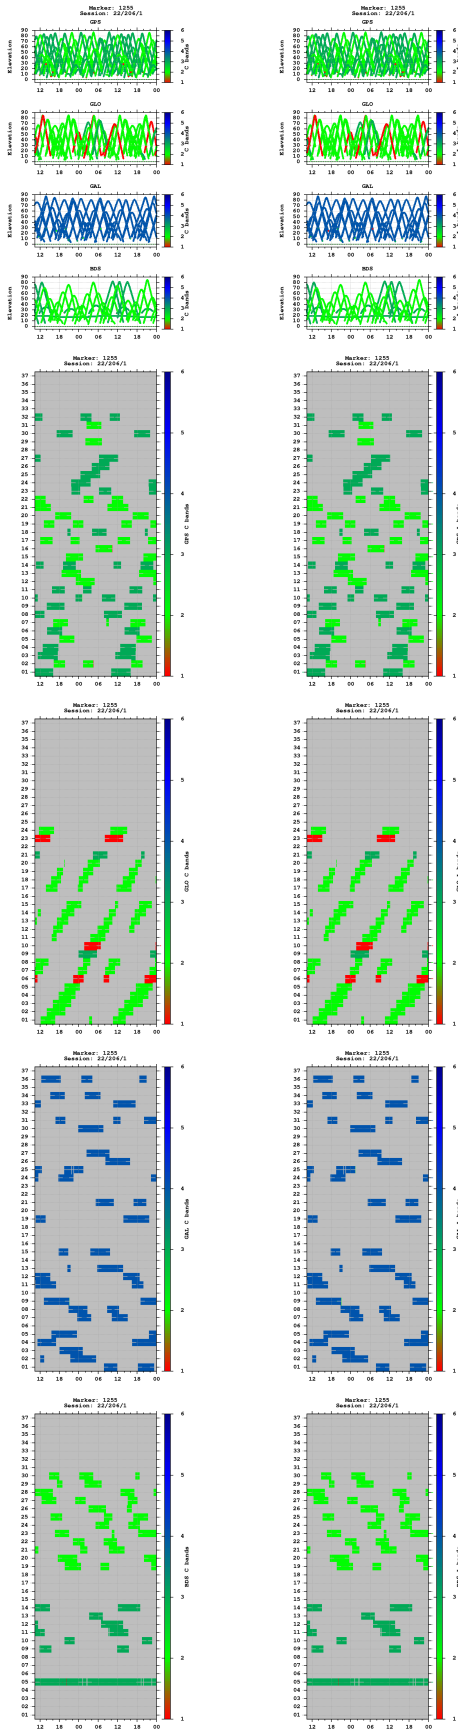



Multipath

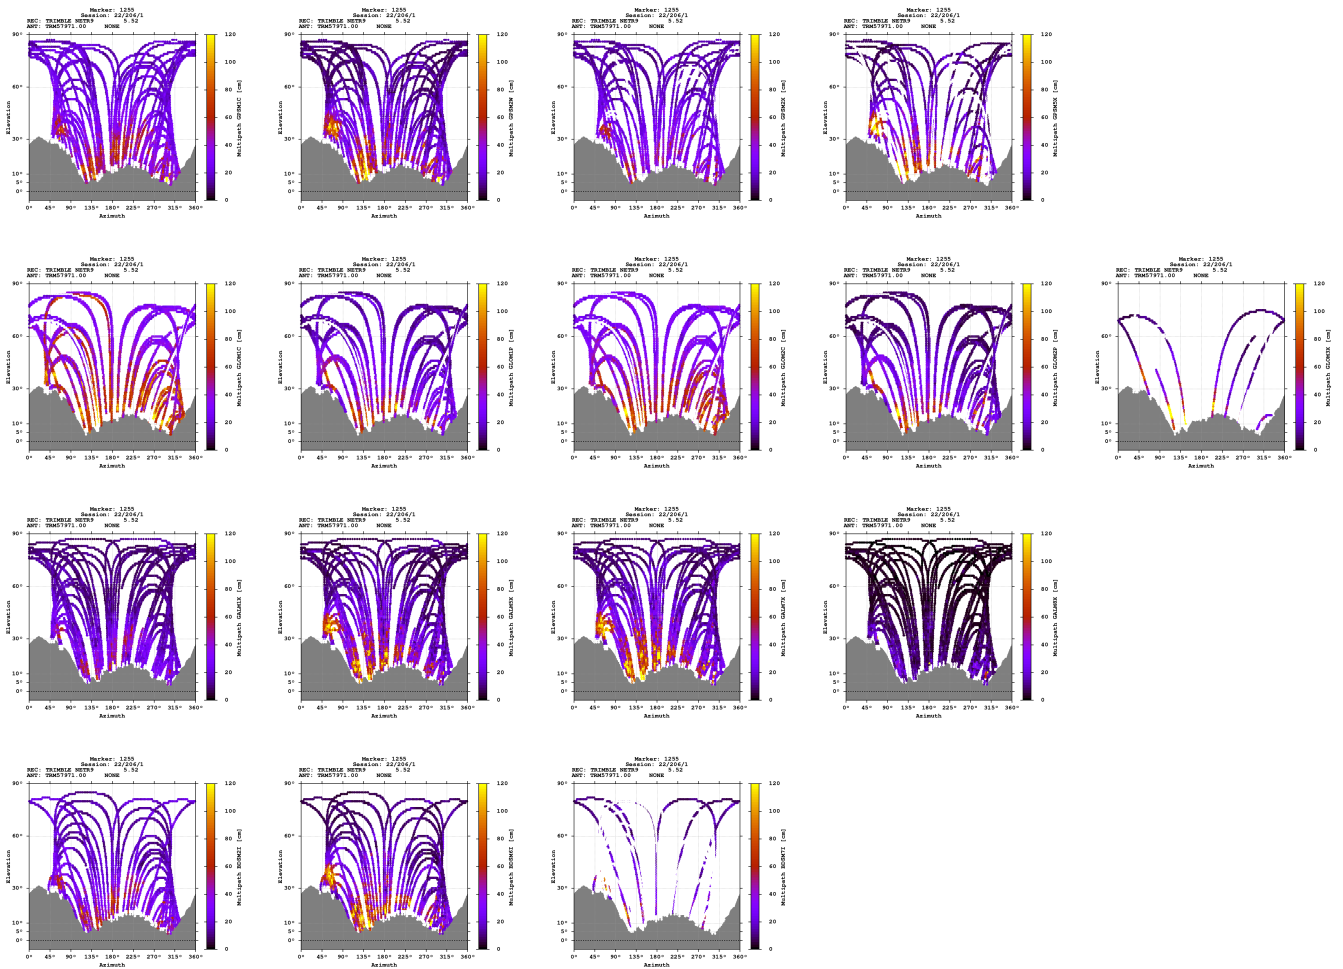

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

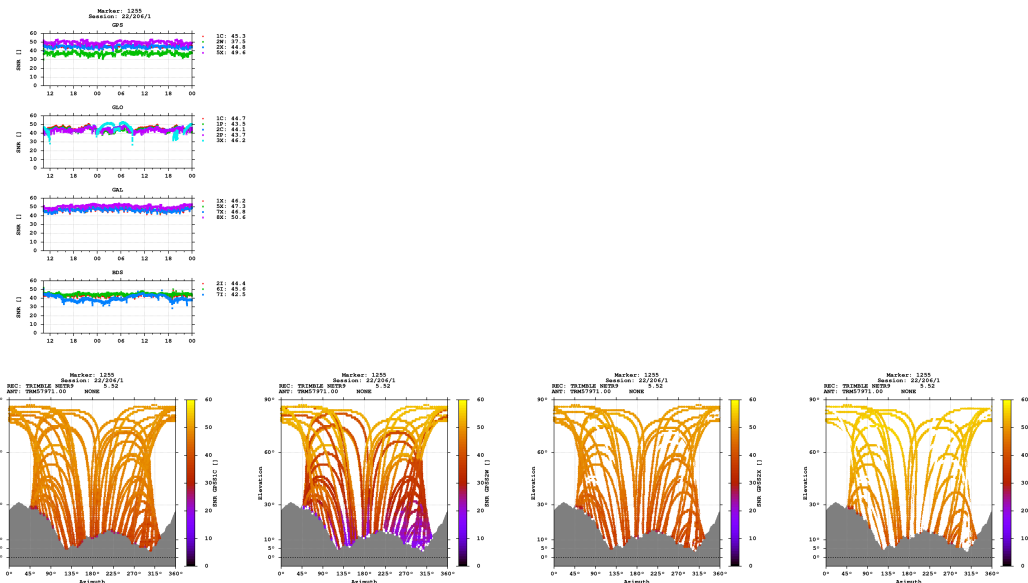

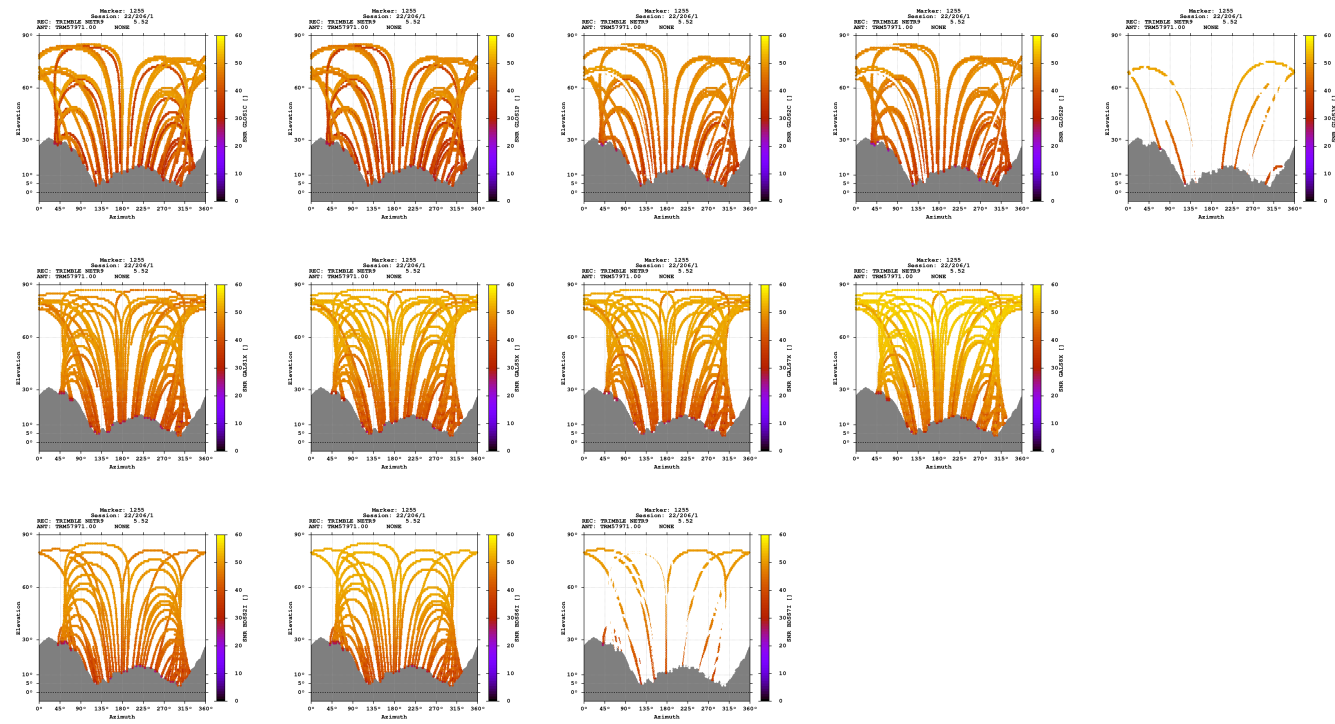

Estimates

2022-07-25 10:25:30	GPS	4341263.2539	727675.4445	4602996.9773	46.471932386	9.515368514	2020.3271
2022-07-25 10:25:30	GLO	4341262.3021	727675.2413	4602995.6937	46.471930776	9.515367952	2018.7268
2022-07-25 10:25:30	GAL	4341263.0432	727675.4117	4602996.2051	46.471928994	9.515368546	2019.6204
2022-07-25 10:25:30	BDS	4341259.8804	727673.3281	4602994.7706	46.471942694	9.515348603	2016.1948

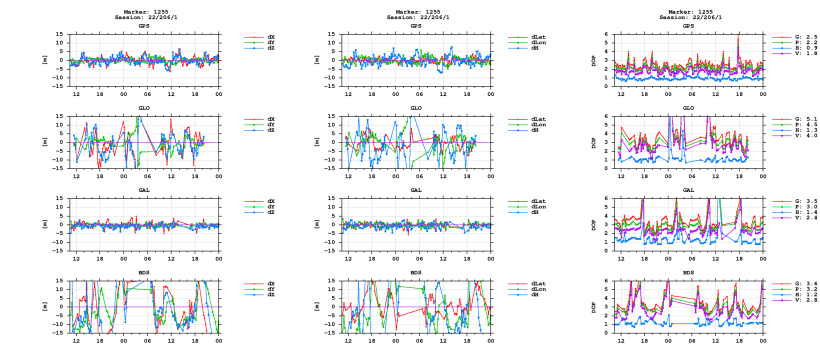

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)