


GNSS observation file monitoring for 0515


Last RINEX file: 05152071.220
RINEX version: 3.02
Marker: 1255
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE

Epochs

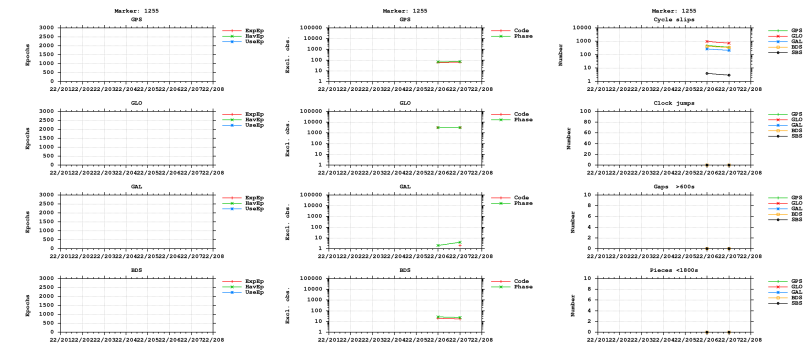



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

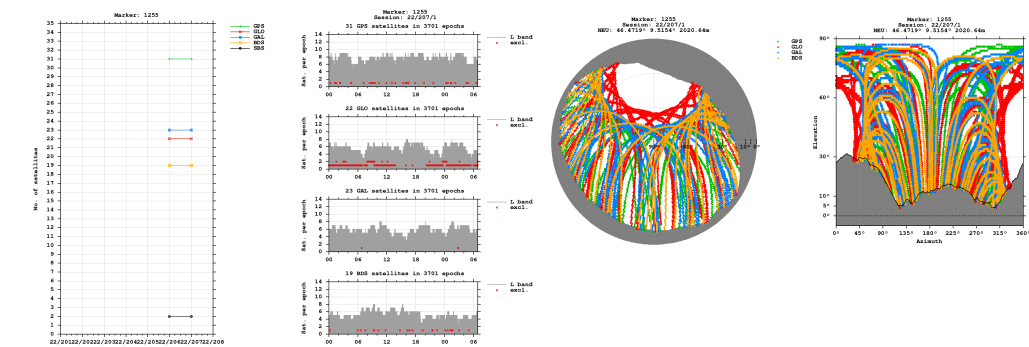


Bands

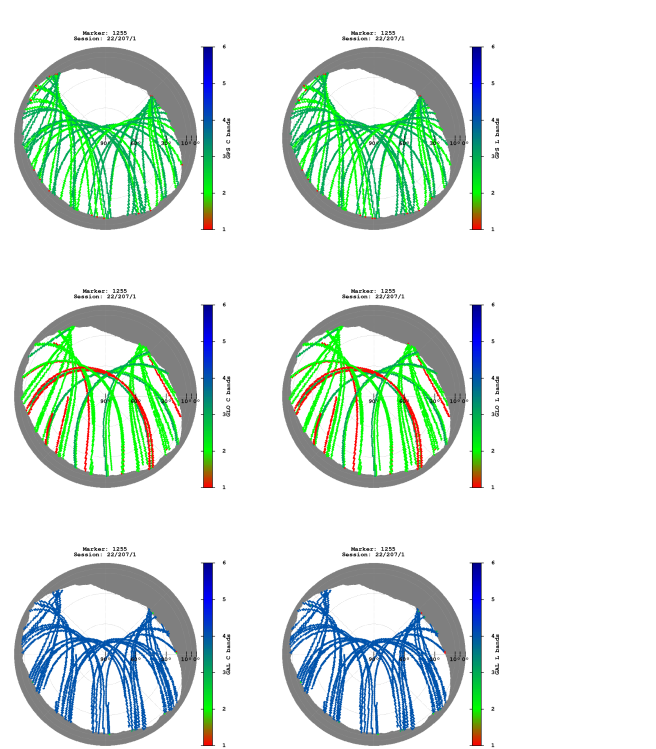


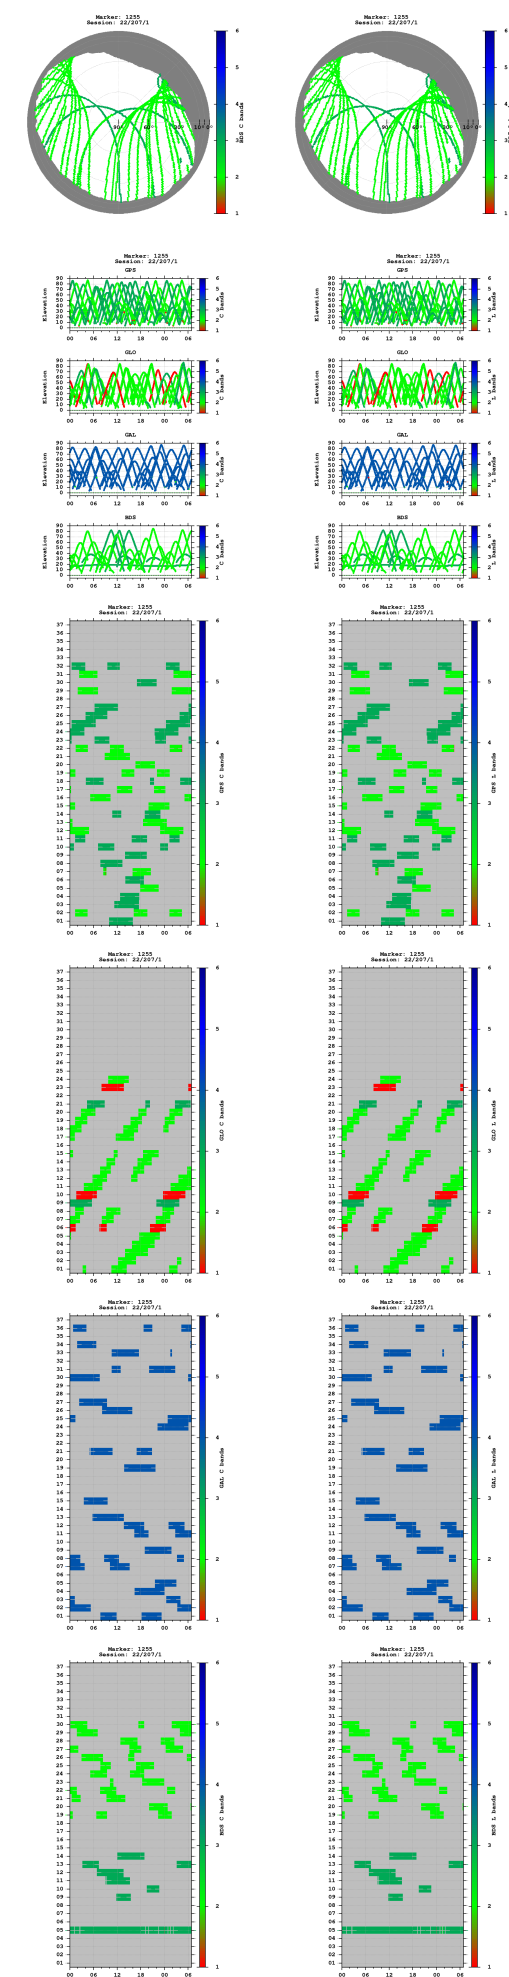


Observations

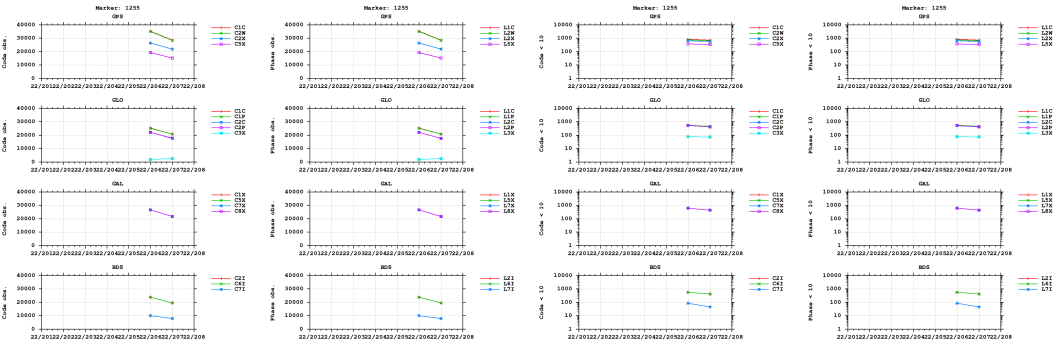


Multipath

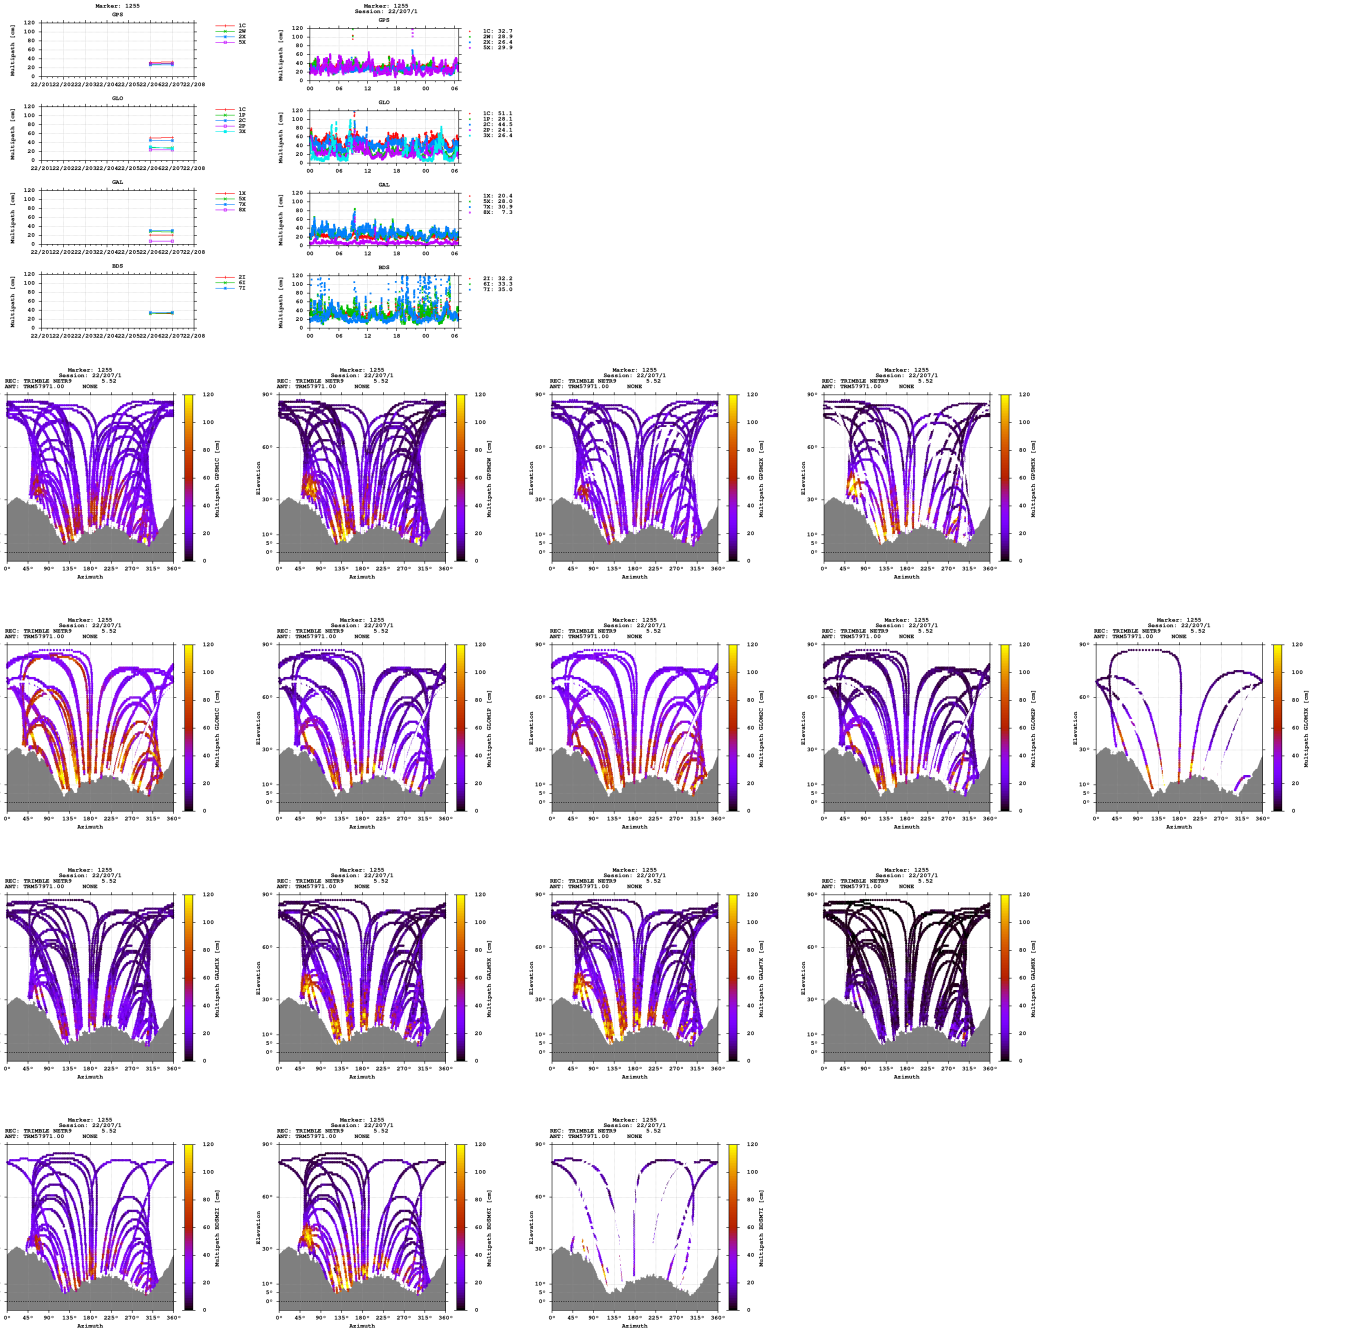


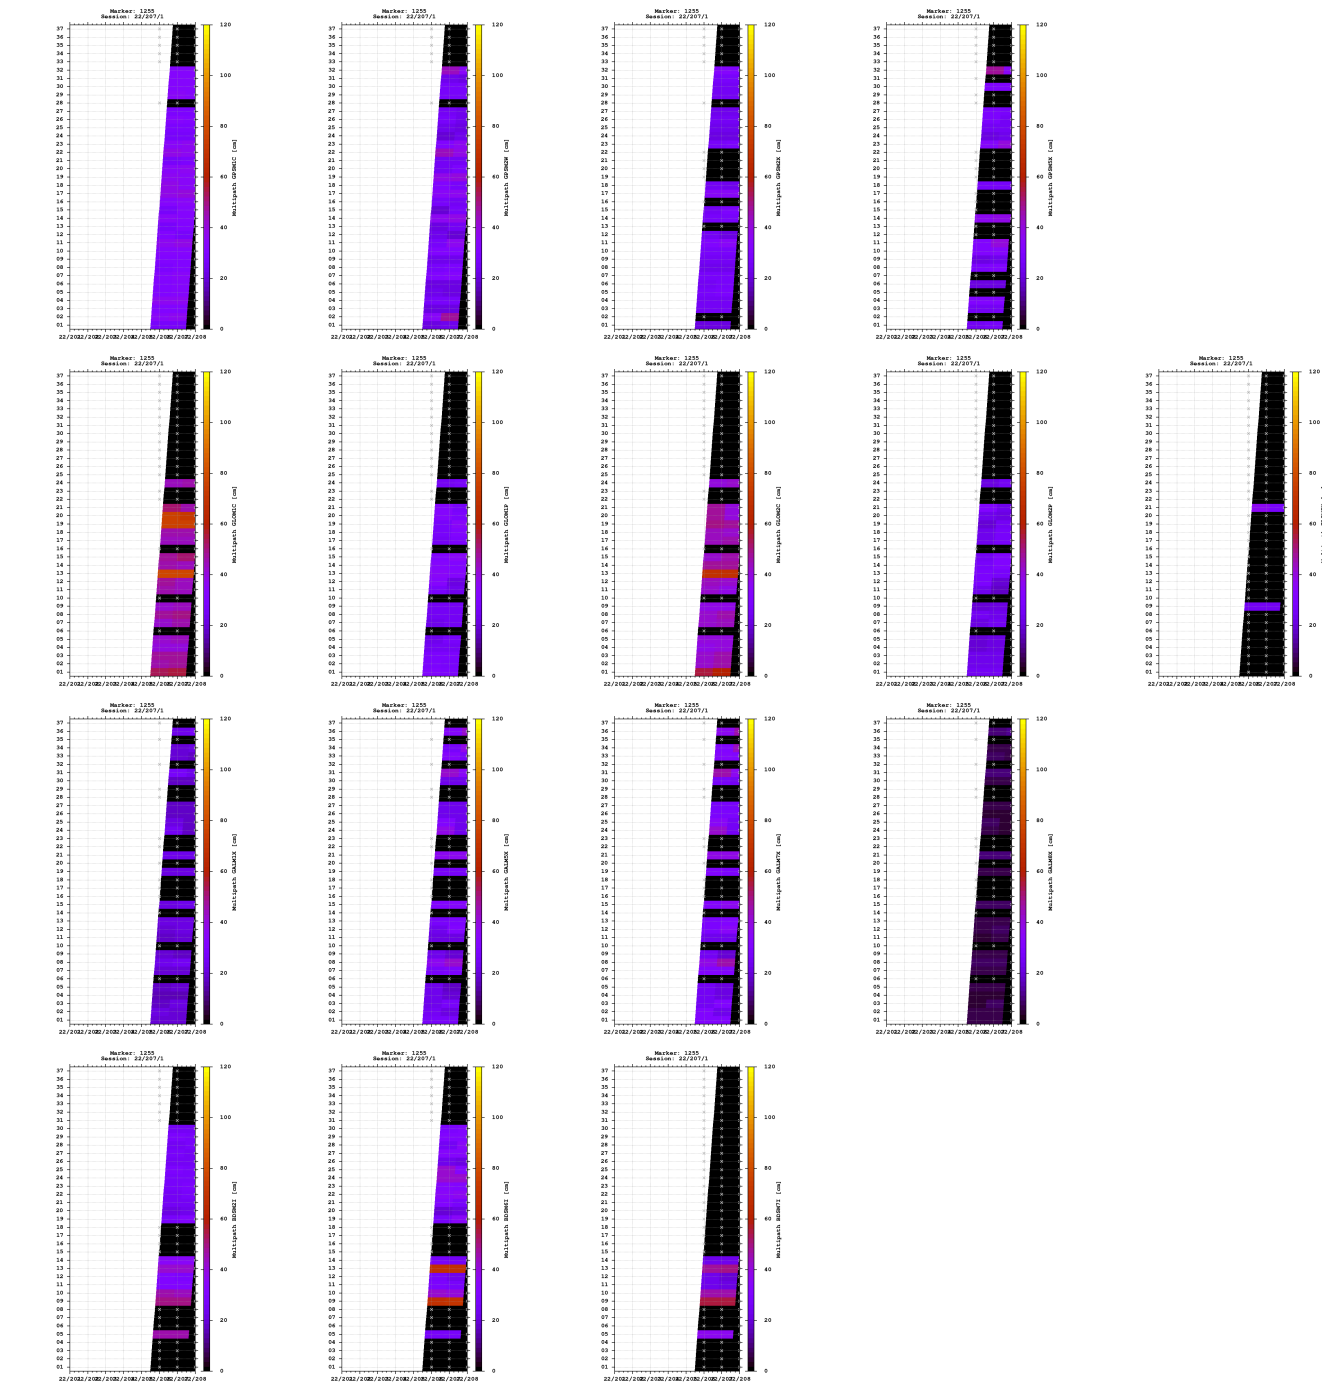


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

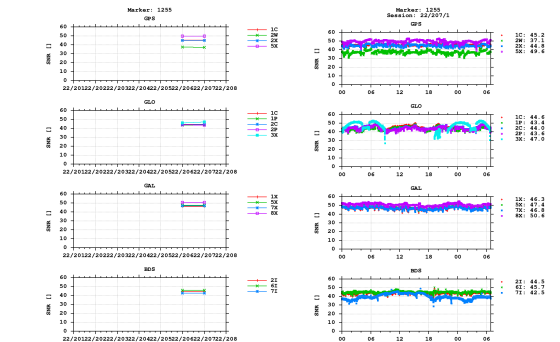


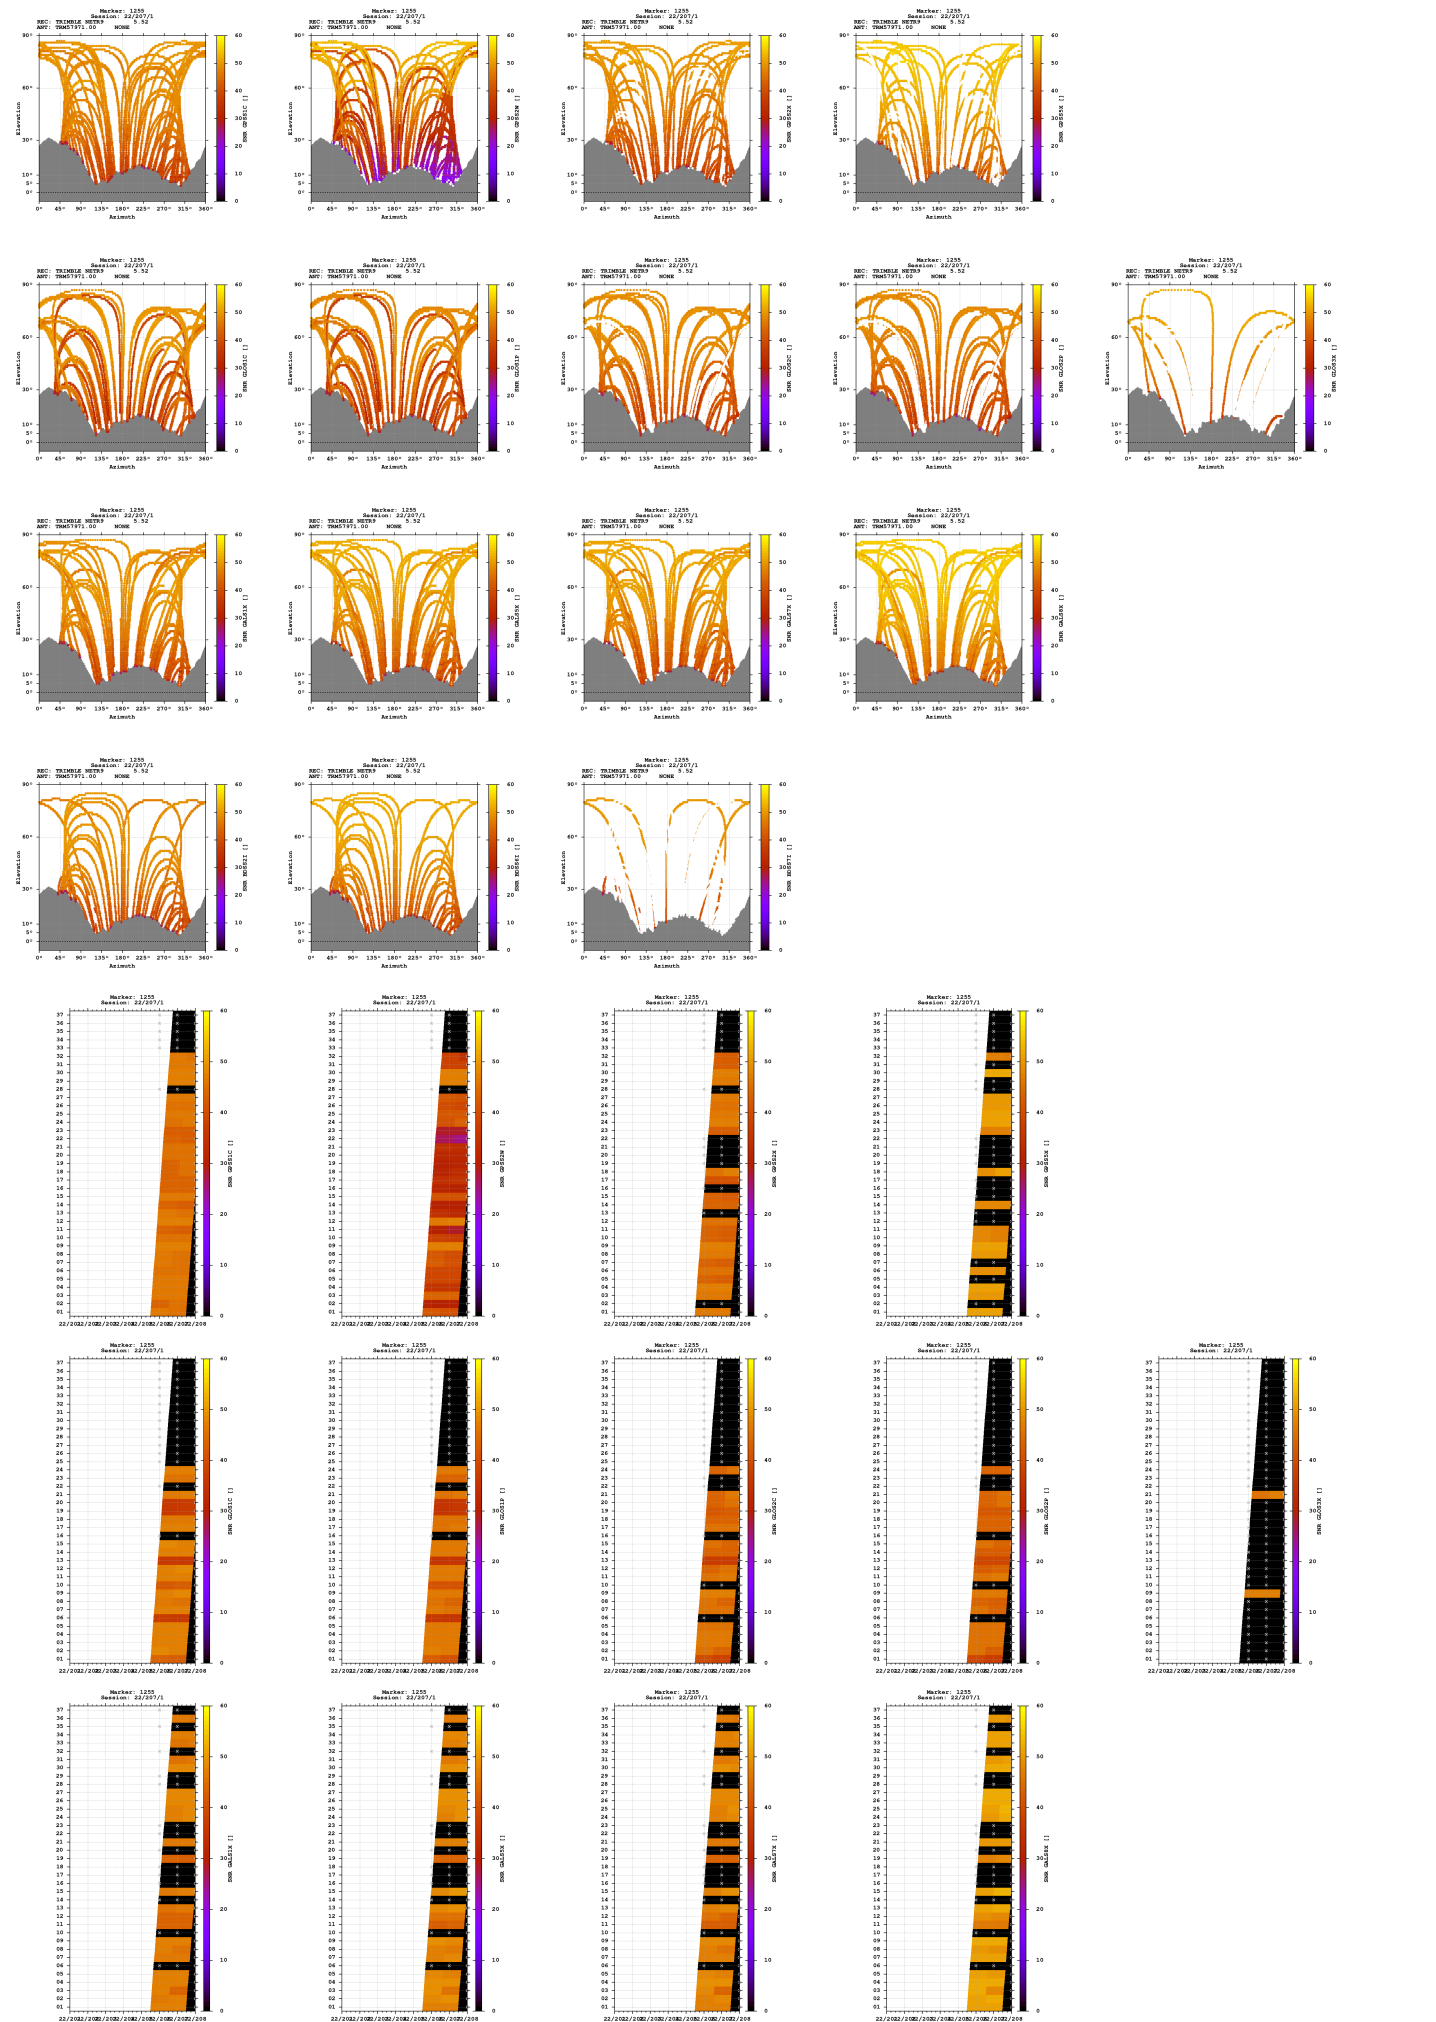

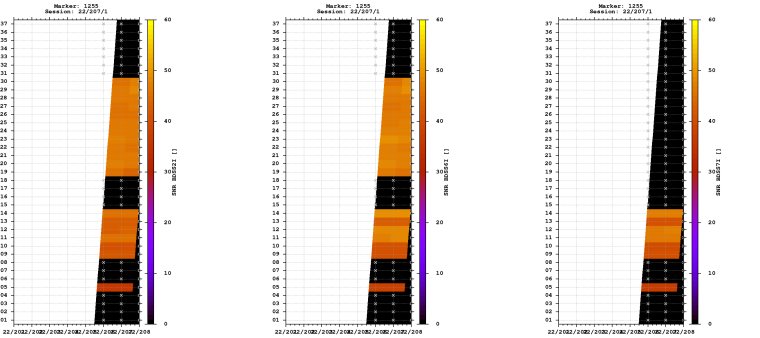



Estimates

2022-07-25 10:25:30	GPS	4341263.6307	727675.4595	4602997.0571	46.471930441	9.515367895	2020.6426
2022-07-25 10:25:30	GLO	4341262.6411	727675.2615	4602995.5448	46.471927651	9.515367483	2018.8514
2022-07-25 10:25:30	GAL	4341263.4199	727675.3472	4602996.8433	46.471930594	9.515366906	2020.3316
2022-07-25 10:25:30	BDS	4341261.3616	727675.2045	4602996.1809	46.471939881	9.515369504	2018.4370

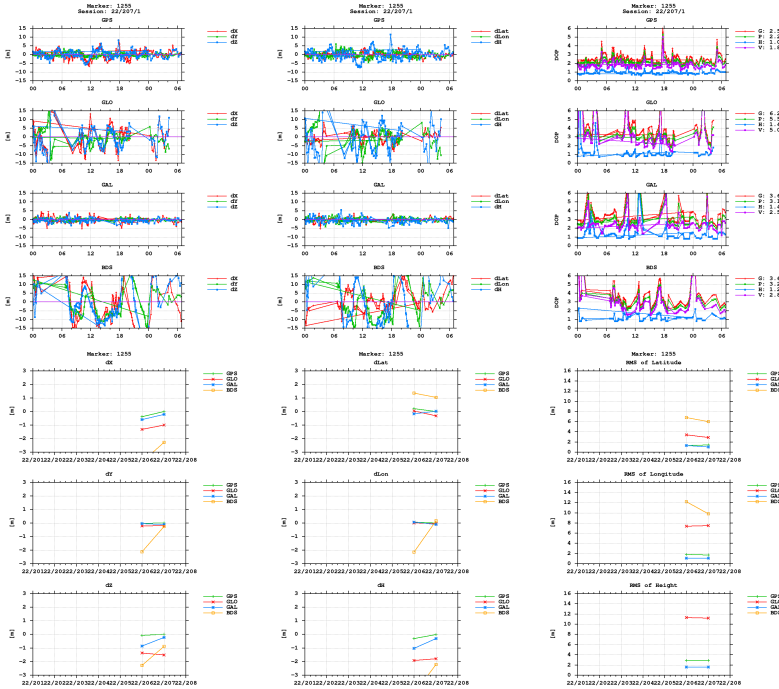

BNC

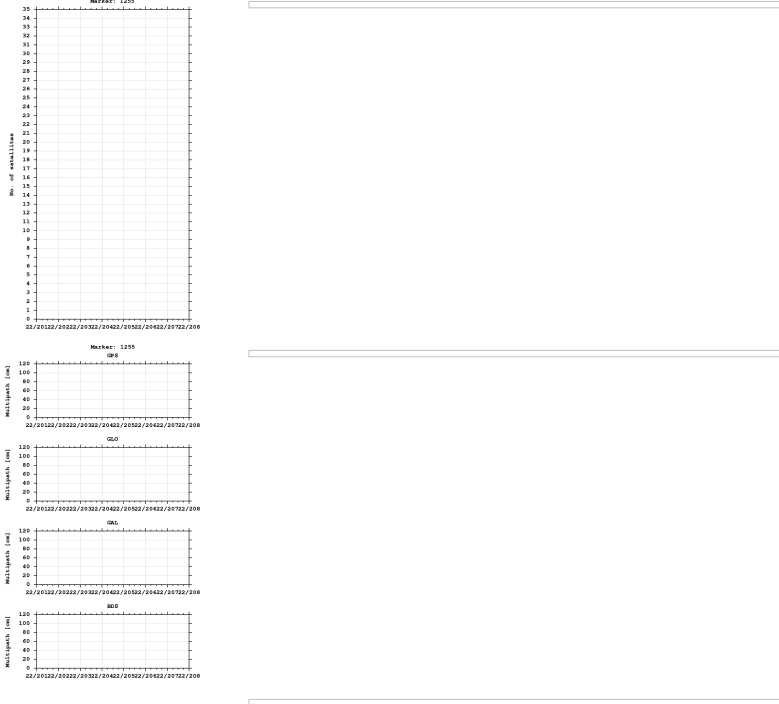

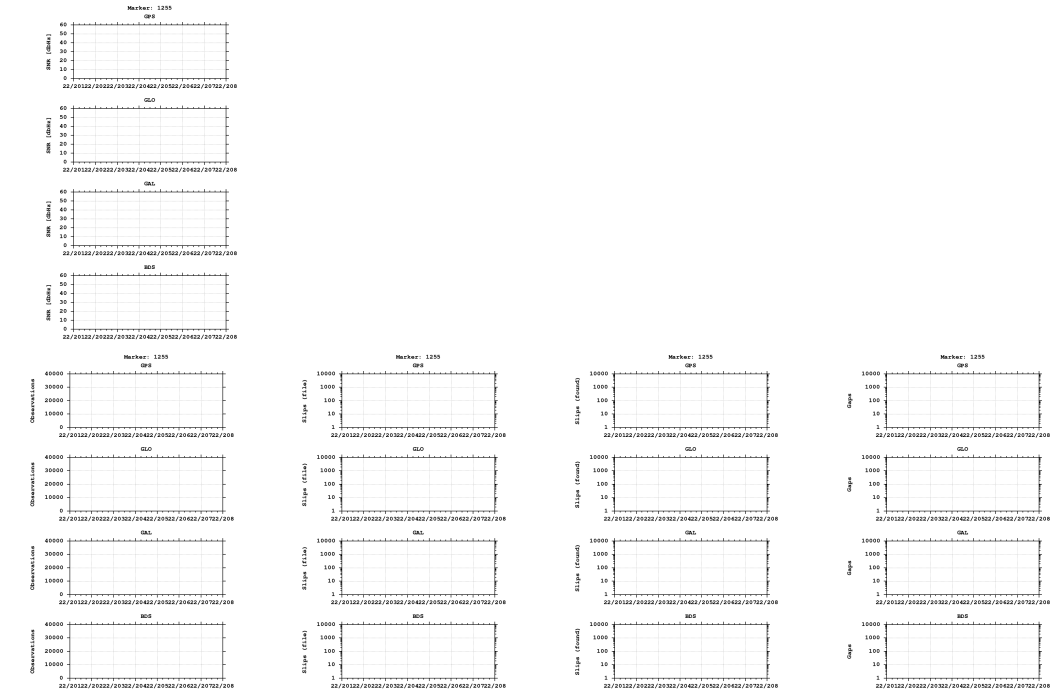

Equipment

2022-07-25 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)