


GNSS observation file monitoring for 0516


Last RINEX file: 05162061.22O
RINEX version: 3.02
Marker: 1235
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

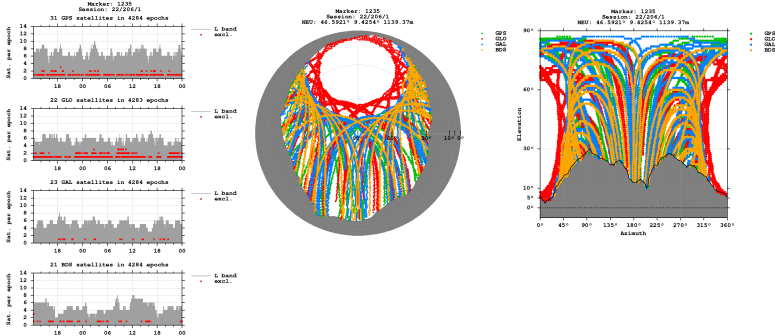


Bands

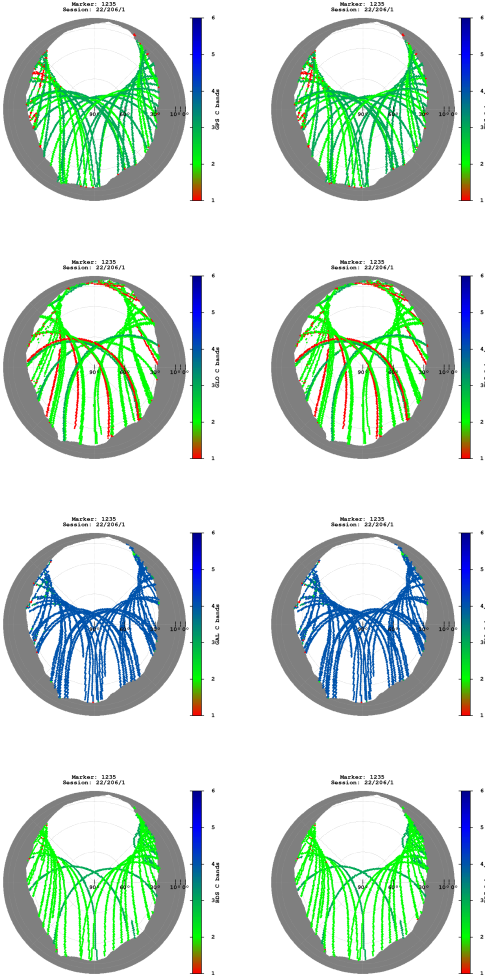

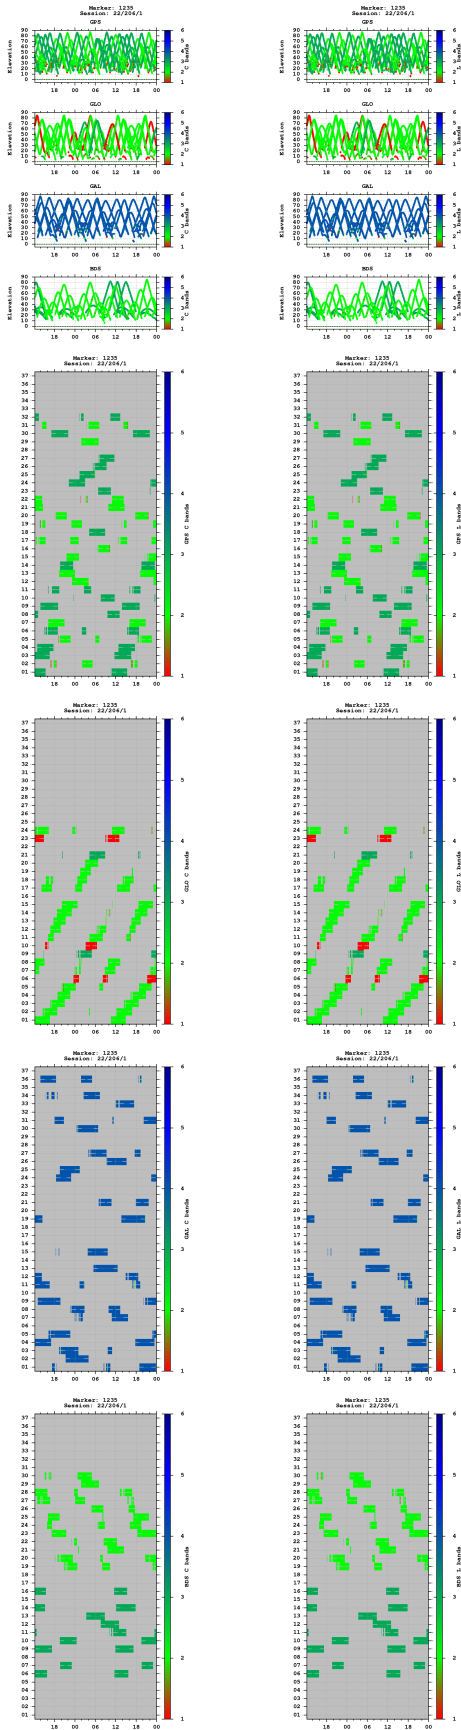


Multipath

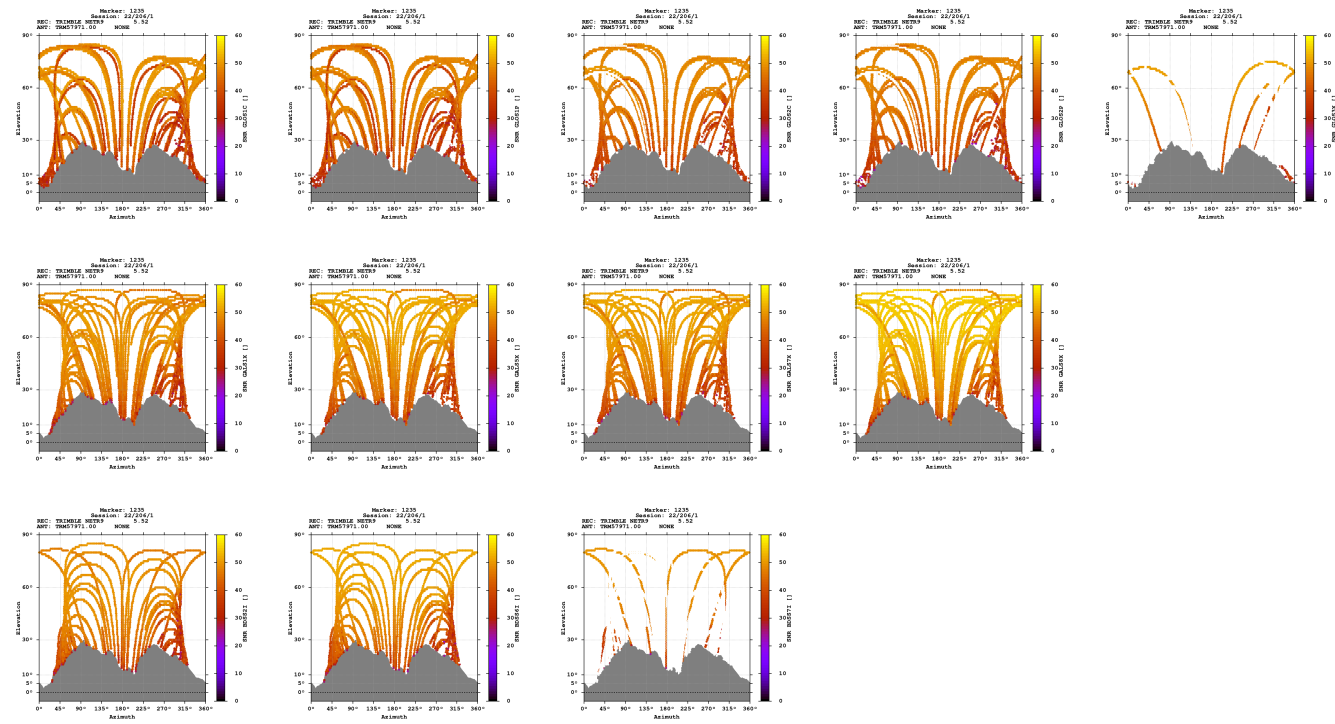

Estimates

2022-07-25 12:15:30	GPS	4332240.3848	719167.7708	4611546.2848	46.592057370	9.425357584	1139.3681
2022-07-25 12:15:30	GLO	4332241.5303	719168.7823	4611545.4752	46.592043900	9.425368156	1139.6703
2022-07-25 12:15:30	GAL	4332240.3269	719167.6762	4611546.2278	46.592057493	9.425356491	1139.2768
2022-07-25 12:15:30	BDS	4332236.0860	719164.1291	4611541.6735	46.592060475	9.425319897	1132.6941

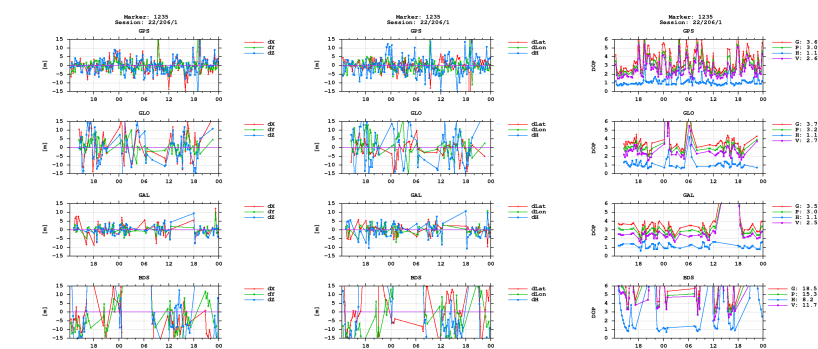

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)