


GNSS observation file monitoring for 0516


Last RINEX file: 05162071.220
RINEX version: 3.02
Marker: 1235
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

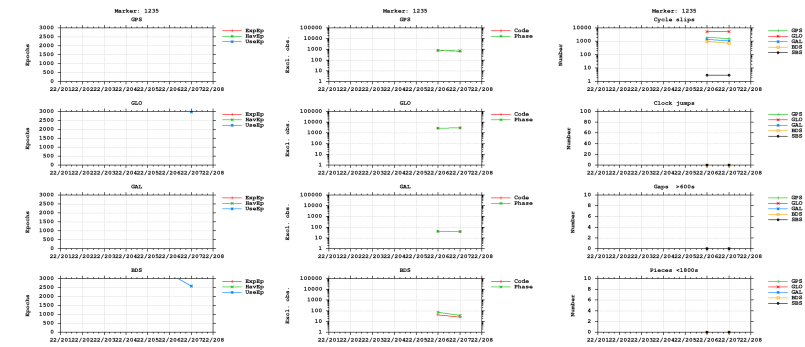



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

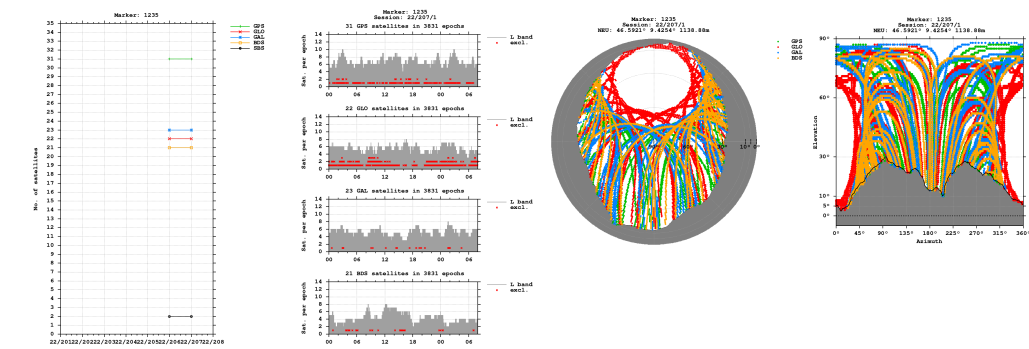


Bands

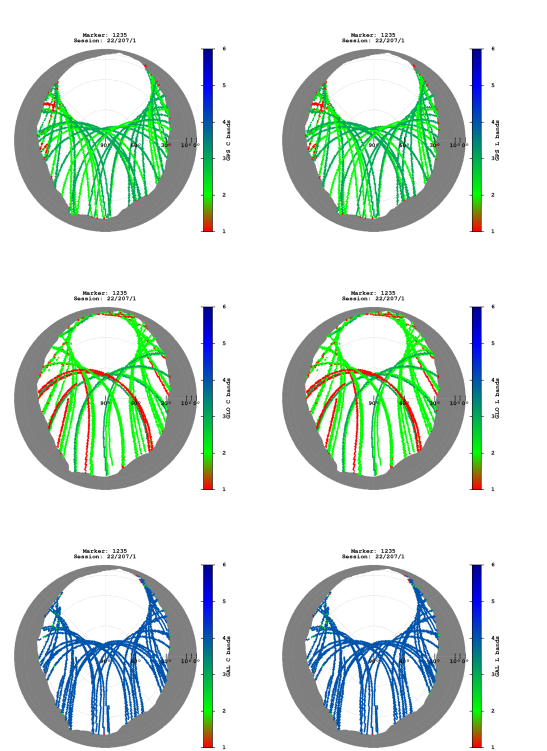


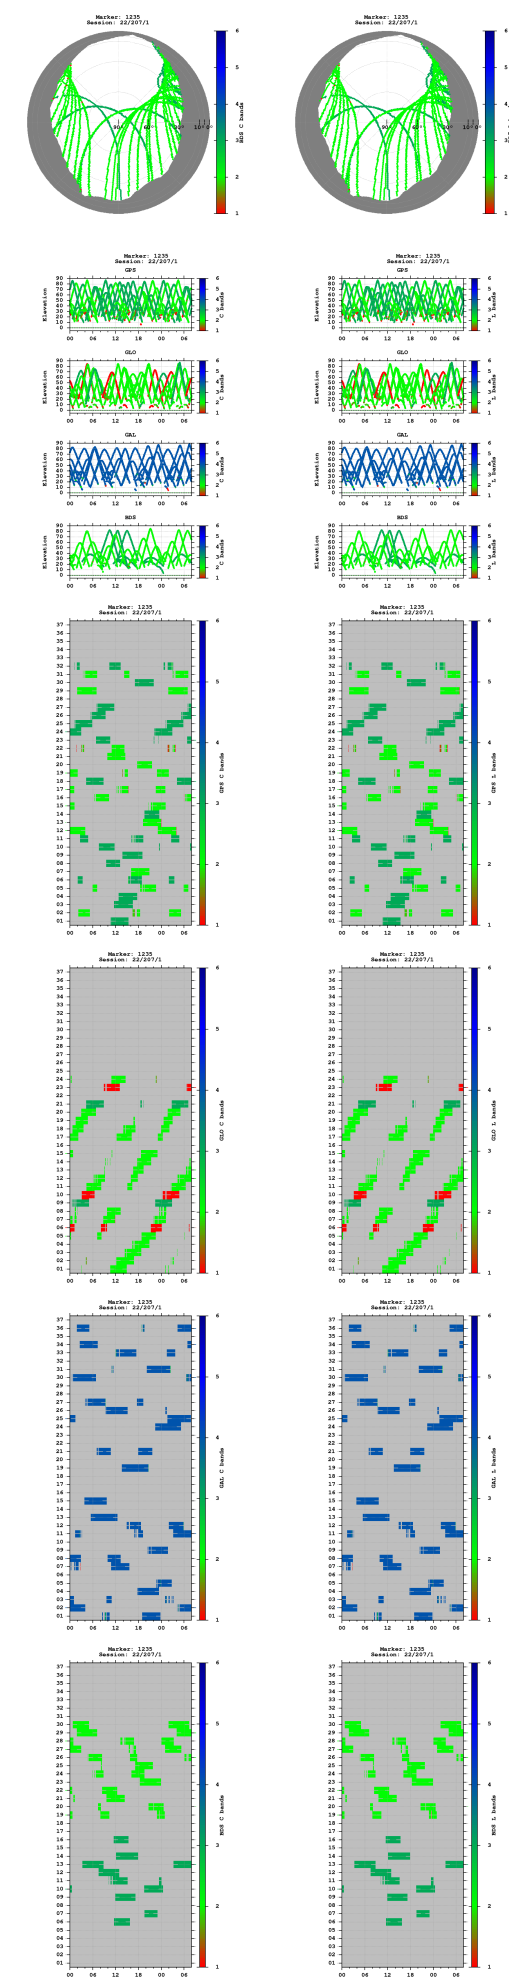


Observations

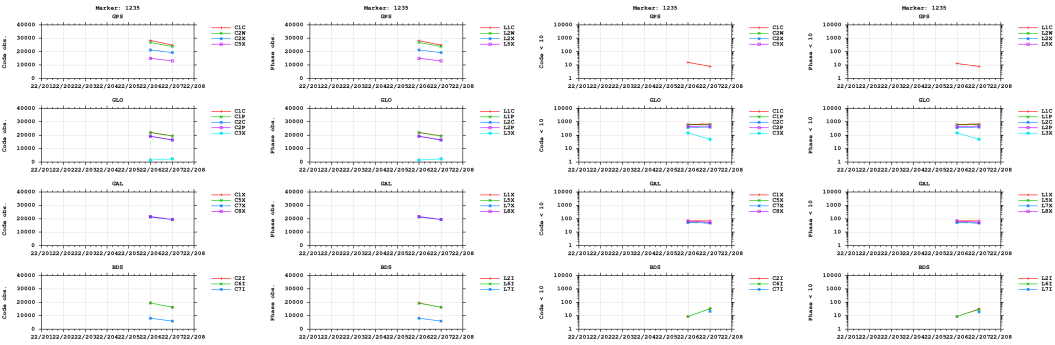


Multipath

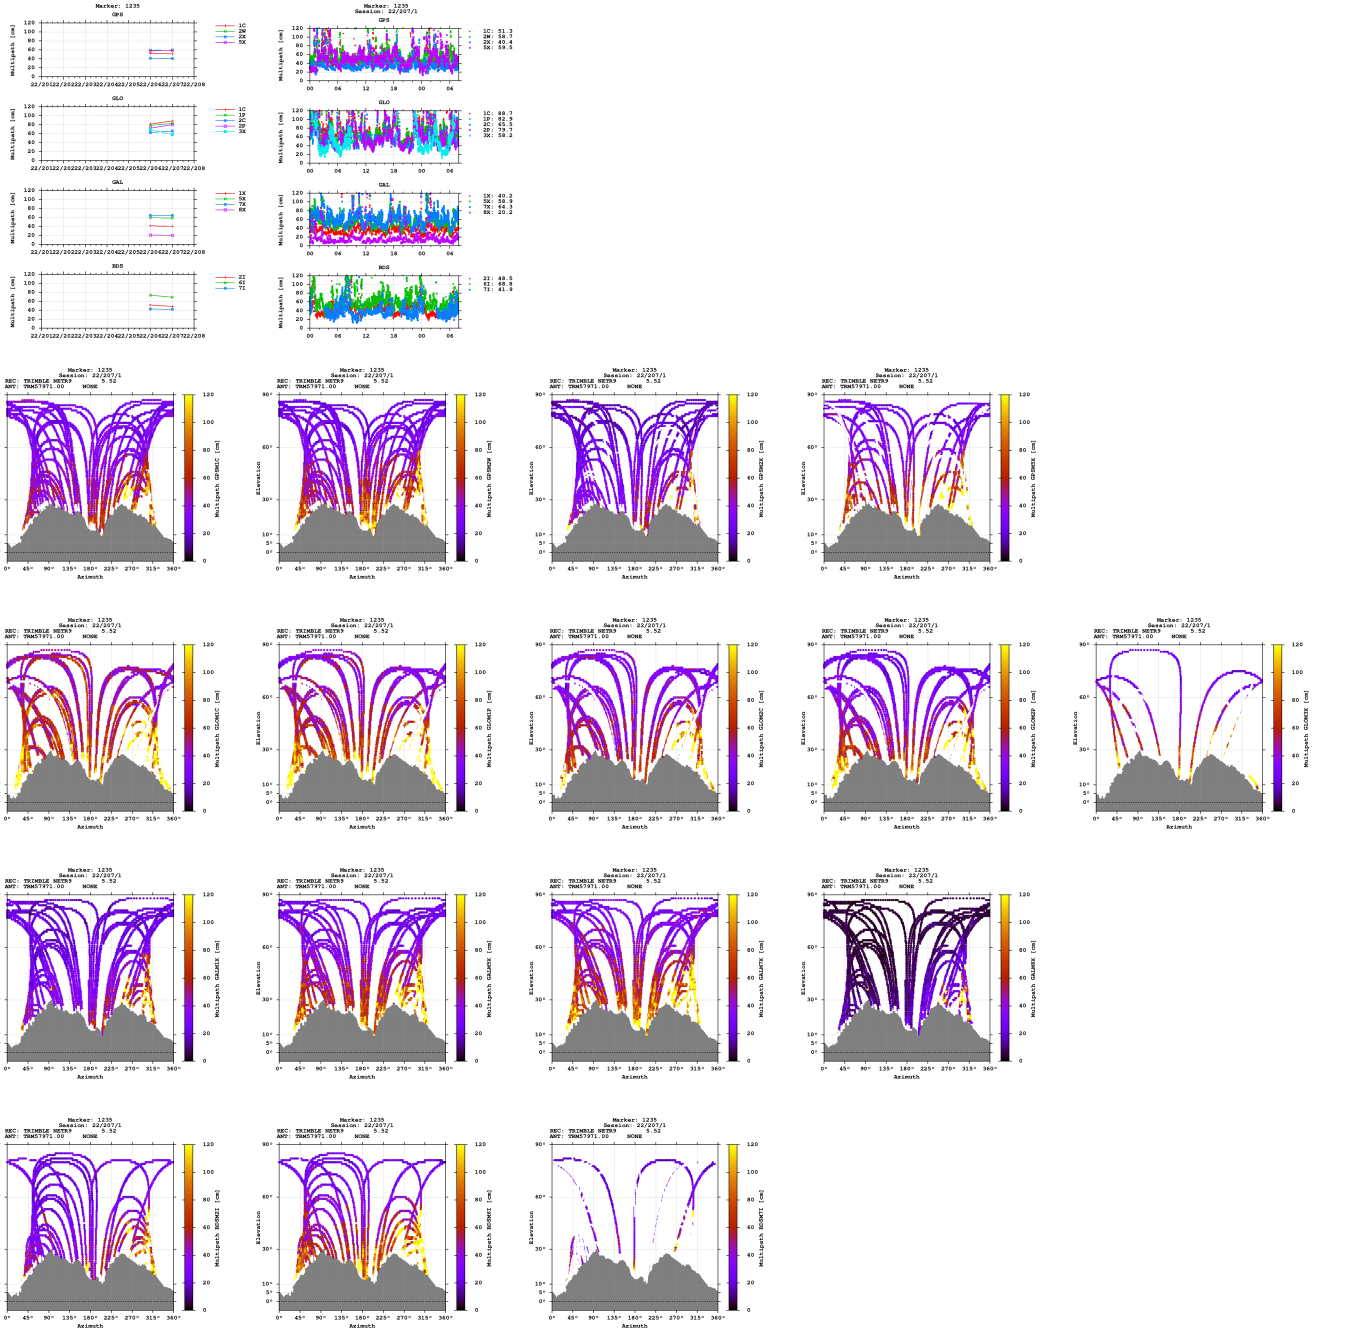


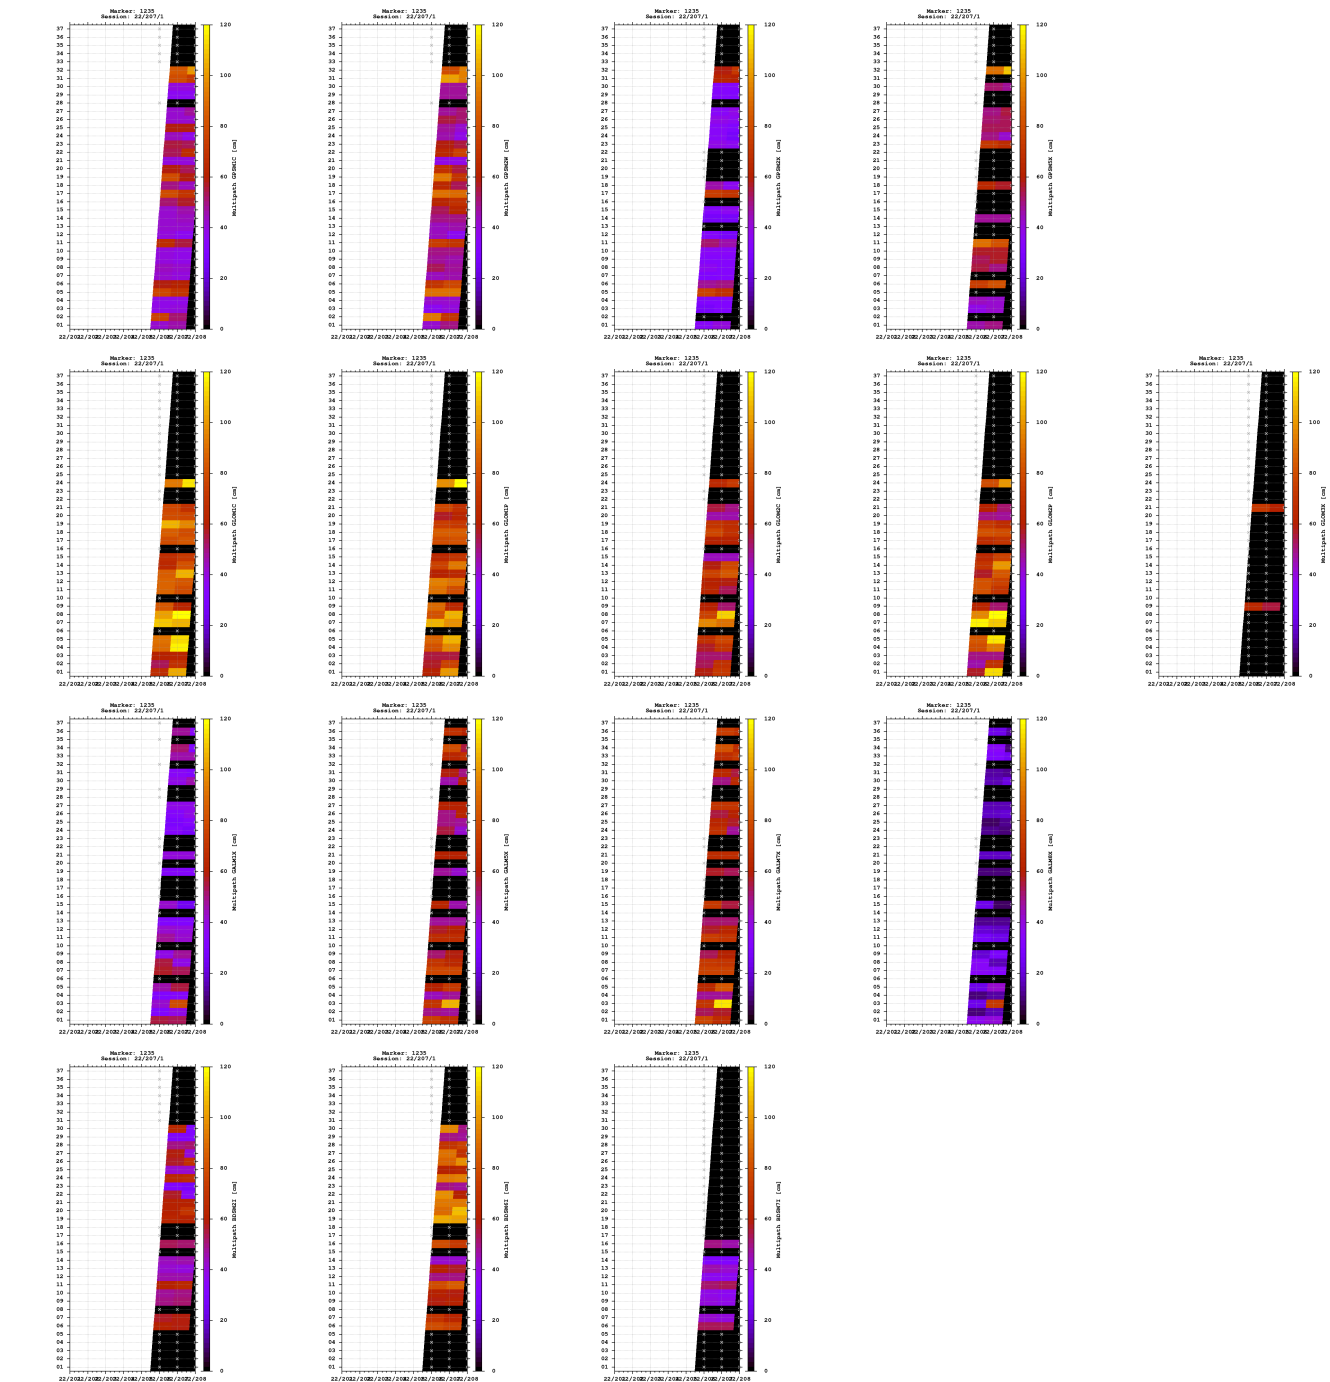


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

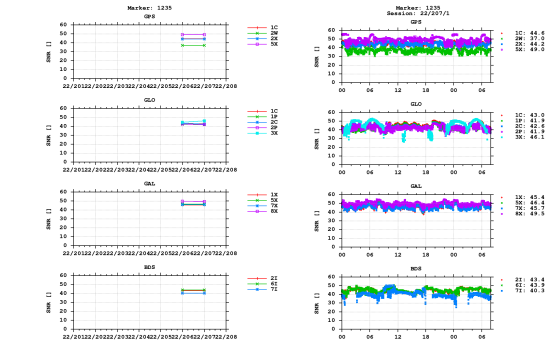


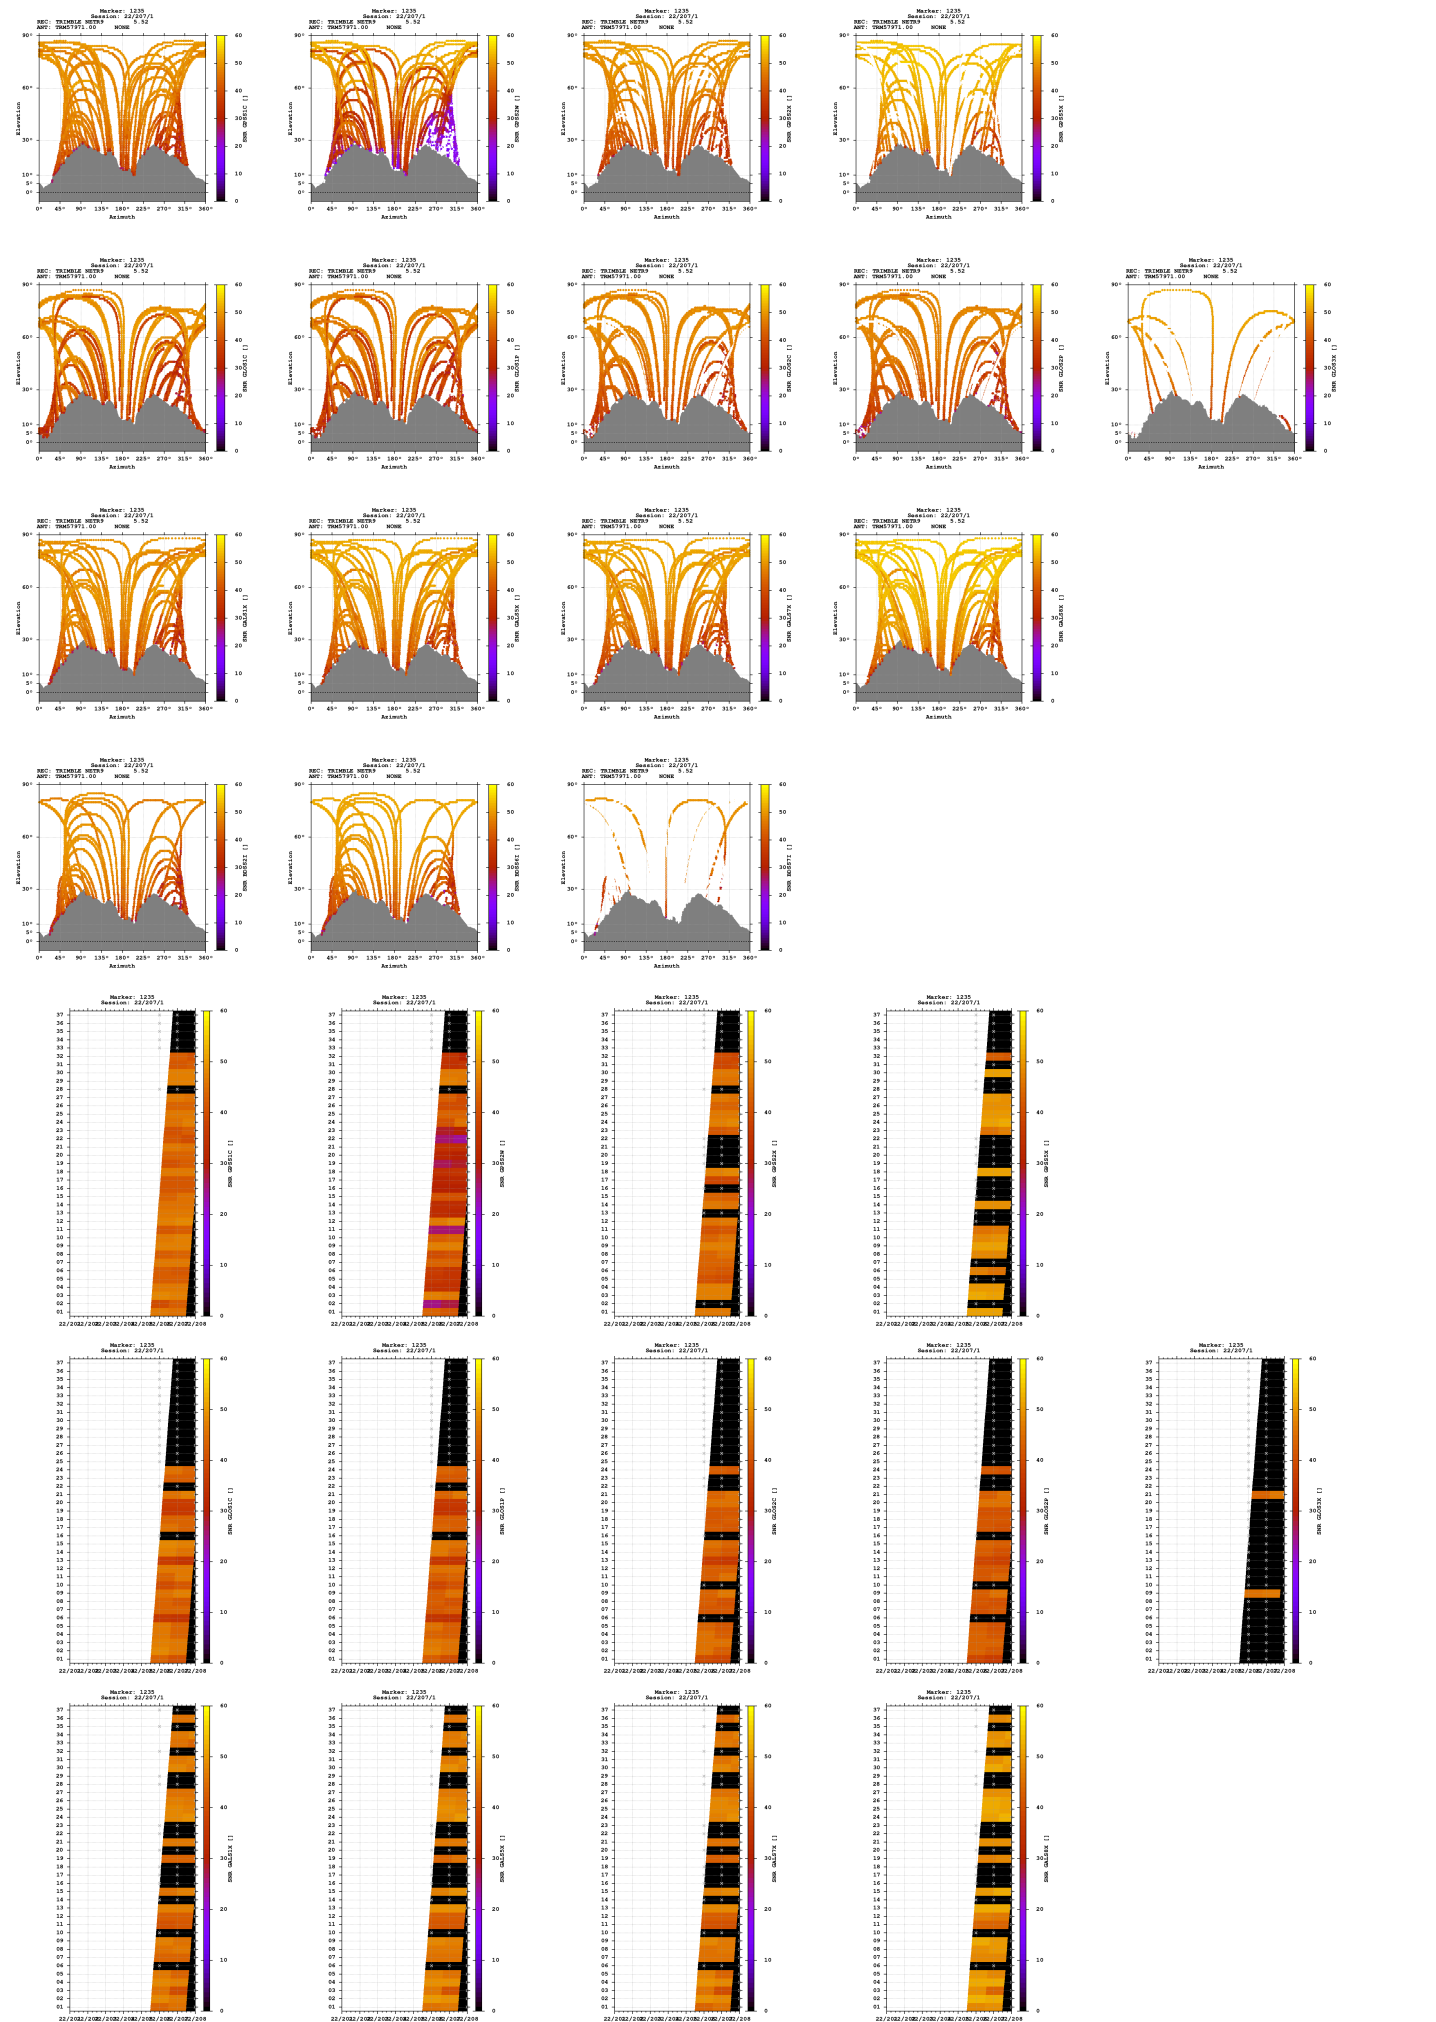

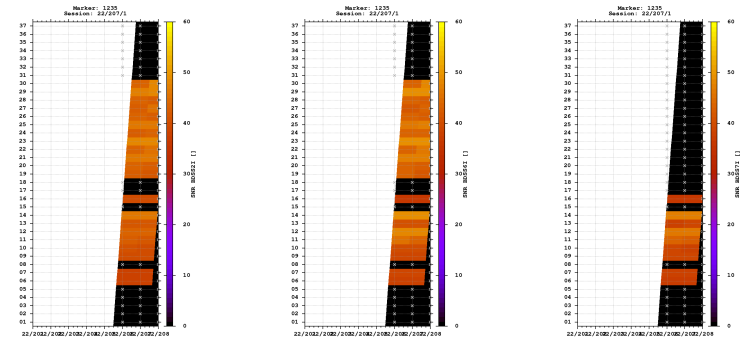



Estimates

2022-07-25 12:15:30	GPS	4332240.0580	719167.6673	4611545.9346	46.592057423	9.425356950	1138.8806
2022-07-25 12:15:30	GLO	4332240.8401	719166.7524	4611545.3757	46.592049907	9.425343504	1138.9017
2022-07-25 12:15:30	GAL	4332240.9263	719168.3271	4611546.5749	46.592055077	9.425363588	1140.0086
2022-07-25 12:15:30	BDS	4332234.3554	719166.5617	4611544.1082	46.592084075	9.425354905	1133.5635

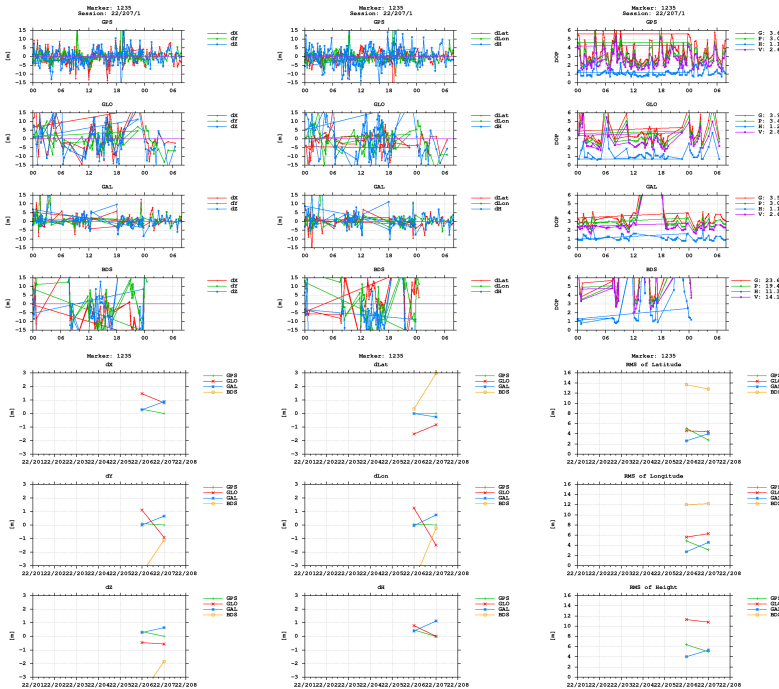

BNC

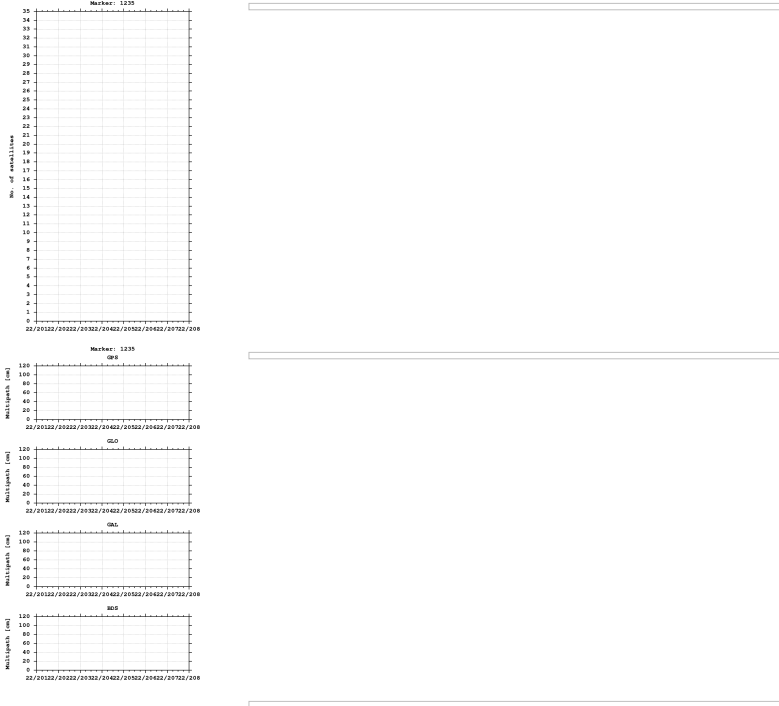

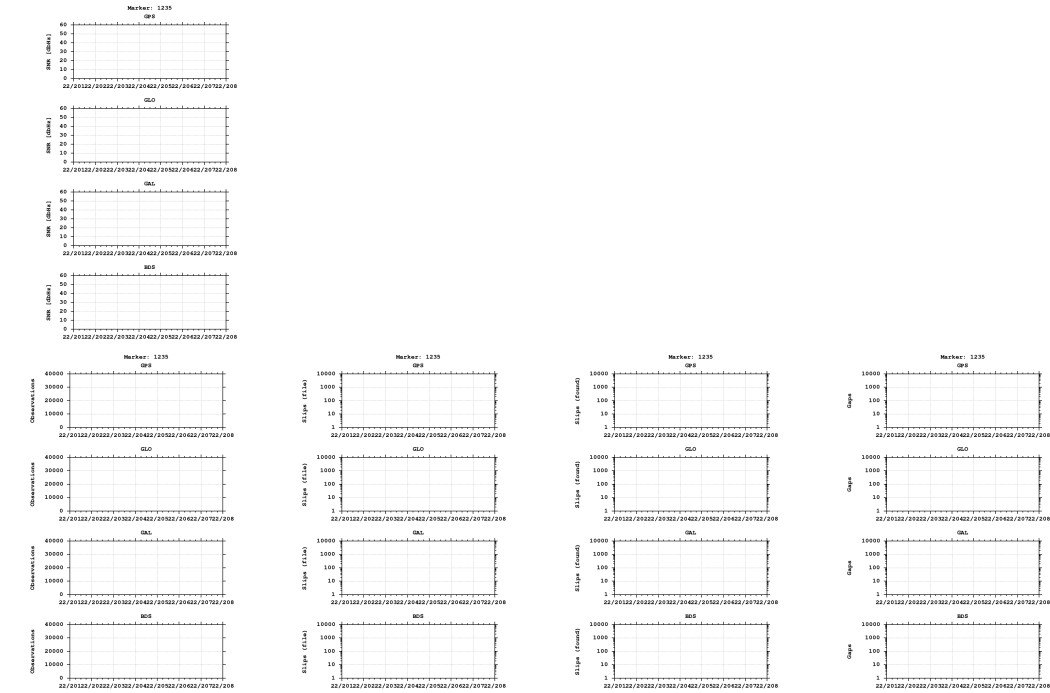

Equipment

2022-07-25 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)