


GNSS observation file monitoring for 0516


Last RINEX file: 05162091.220
RINEX version: 3.02
Marker: 1253
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

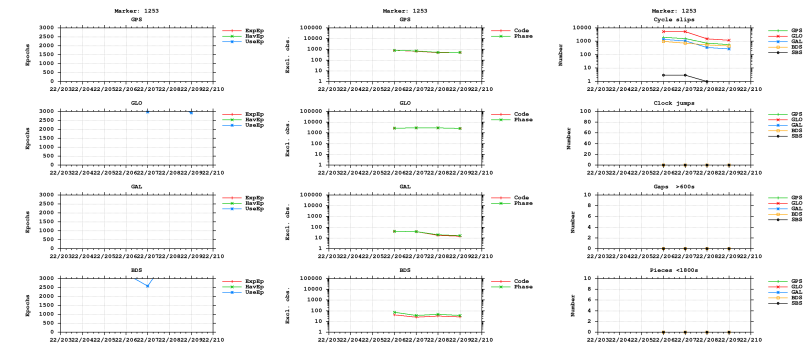



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

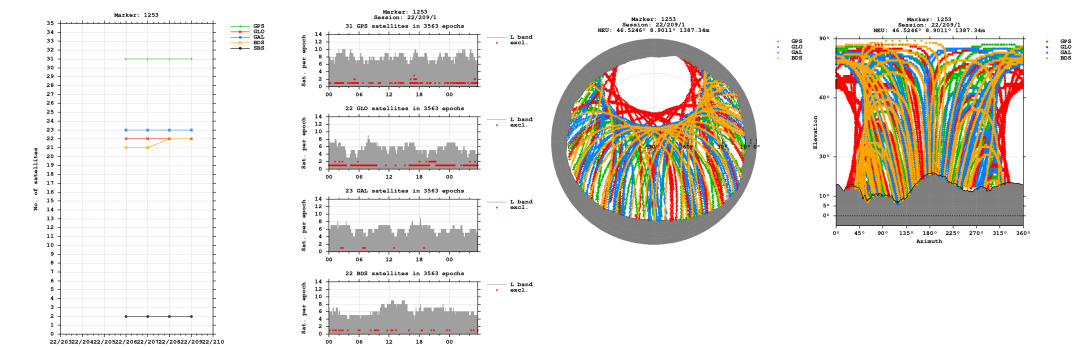


Bands


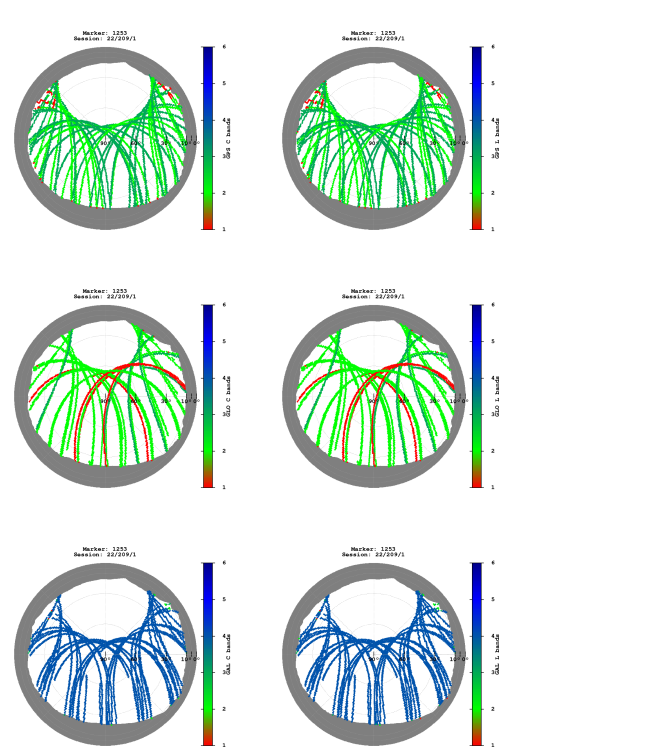


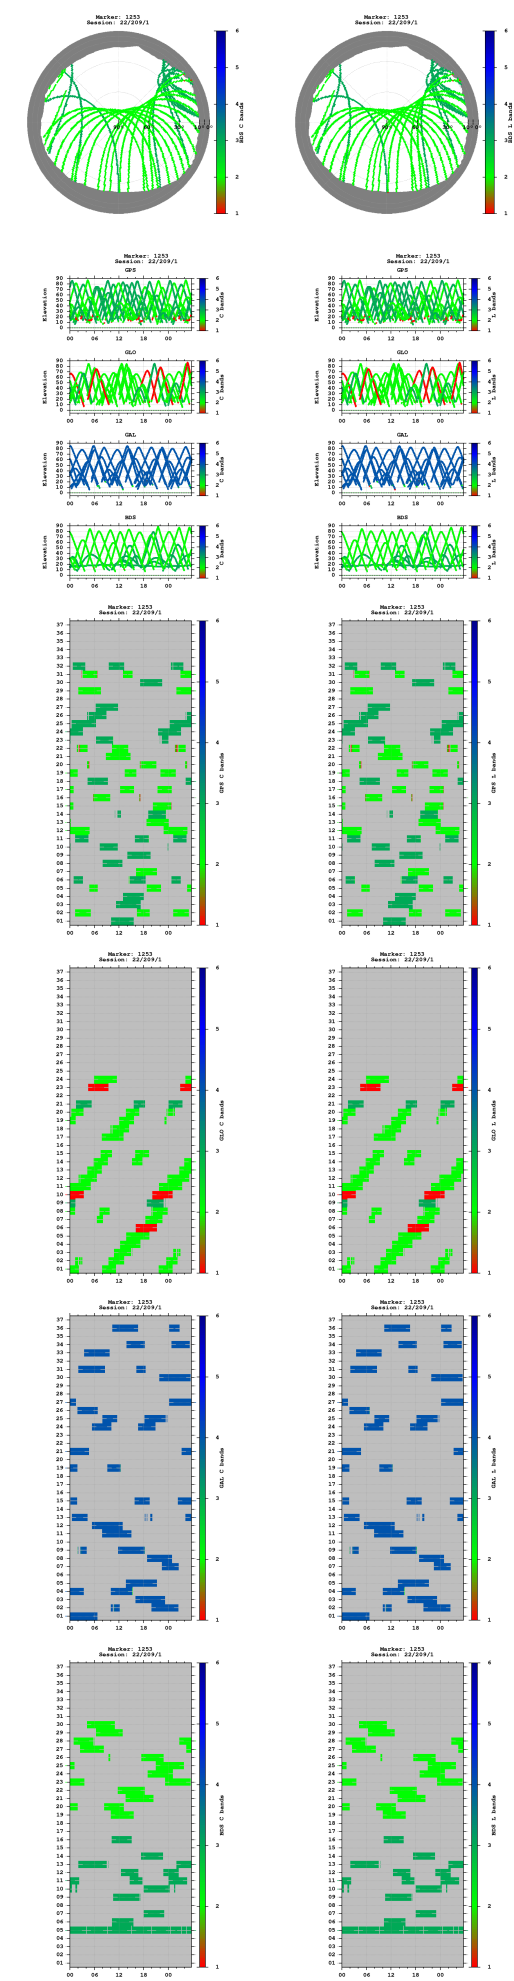


Observations

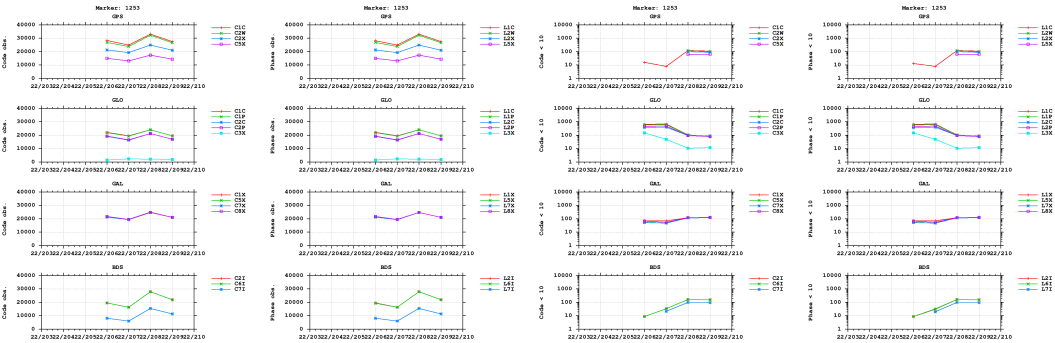



Multipath

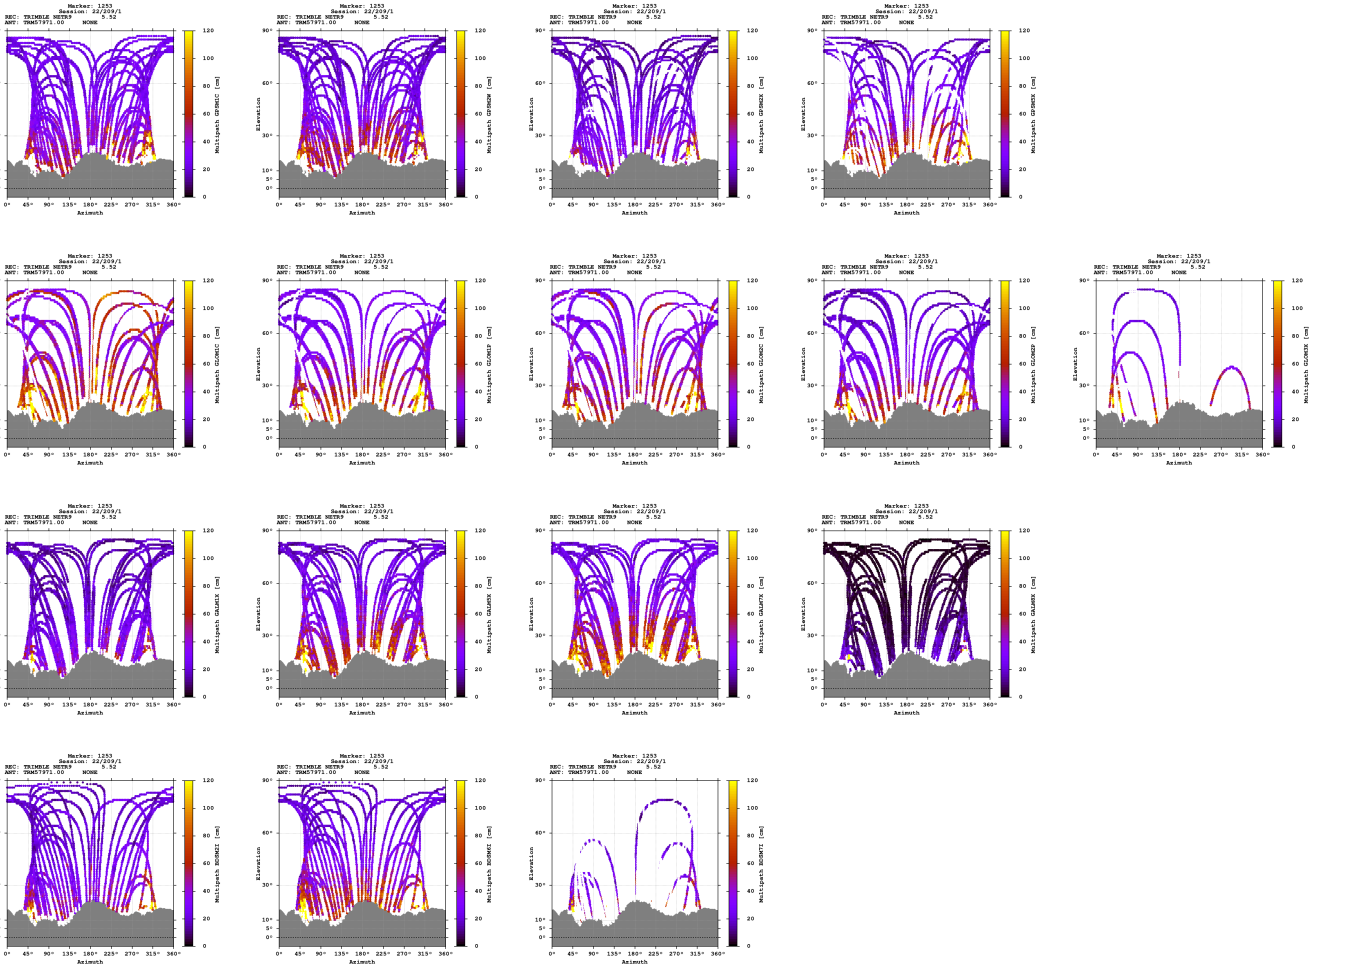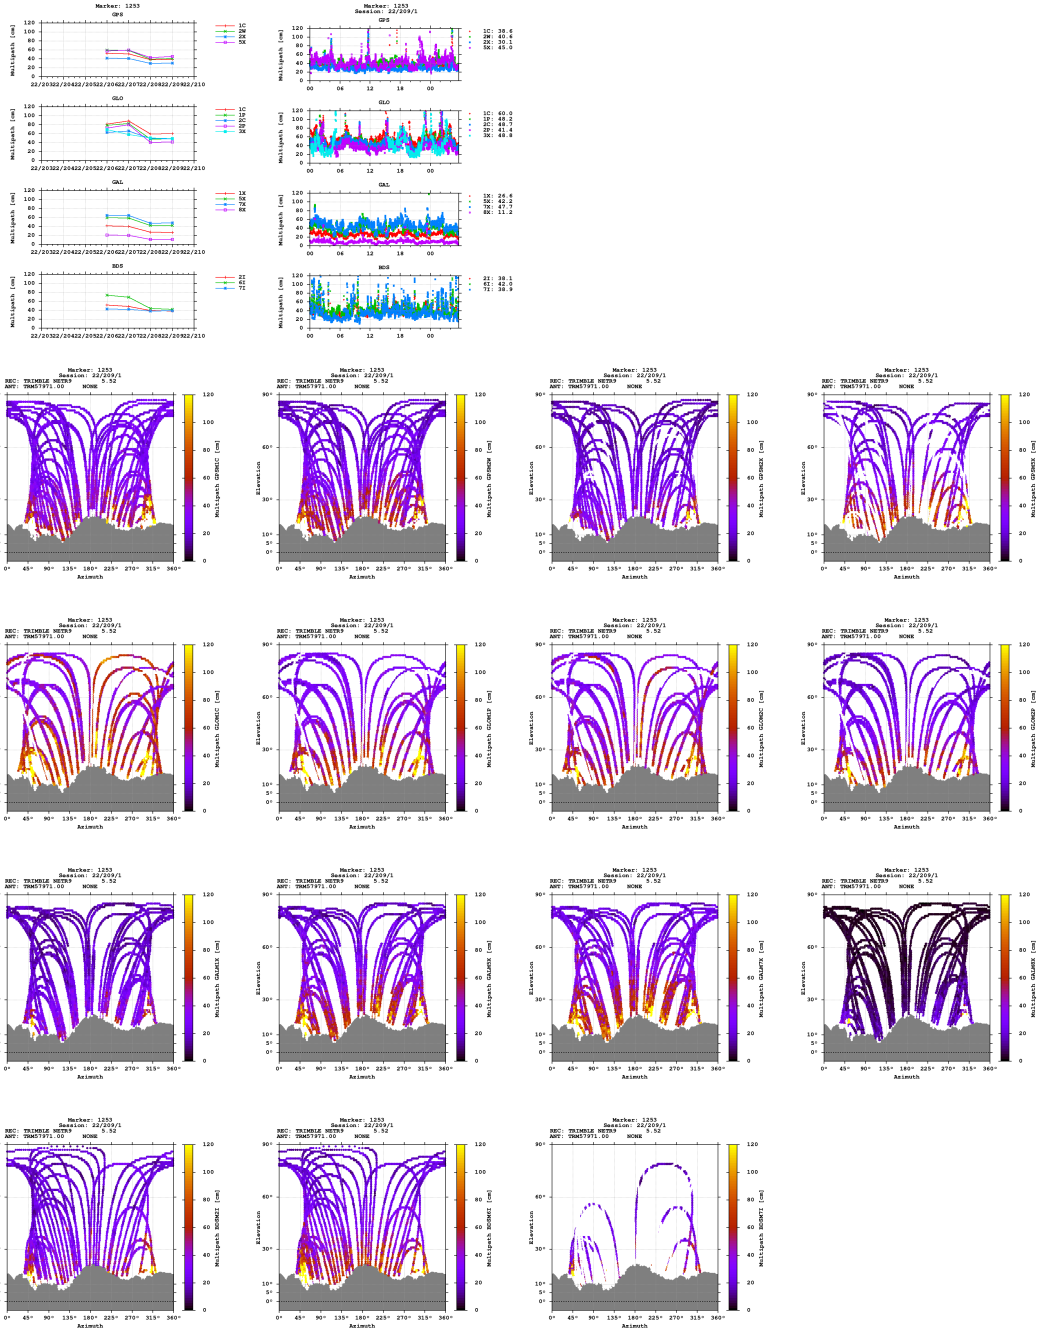


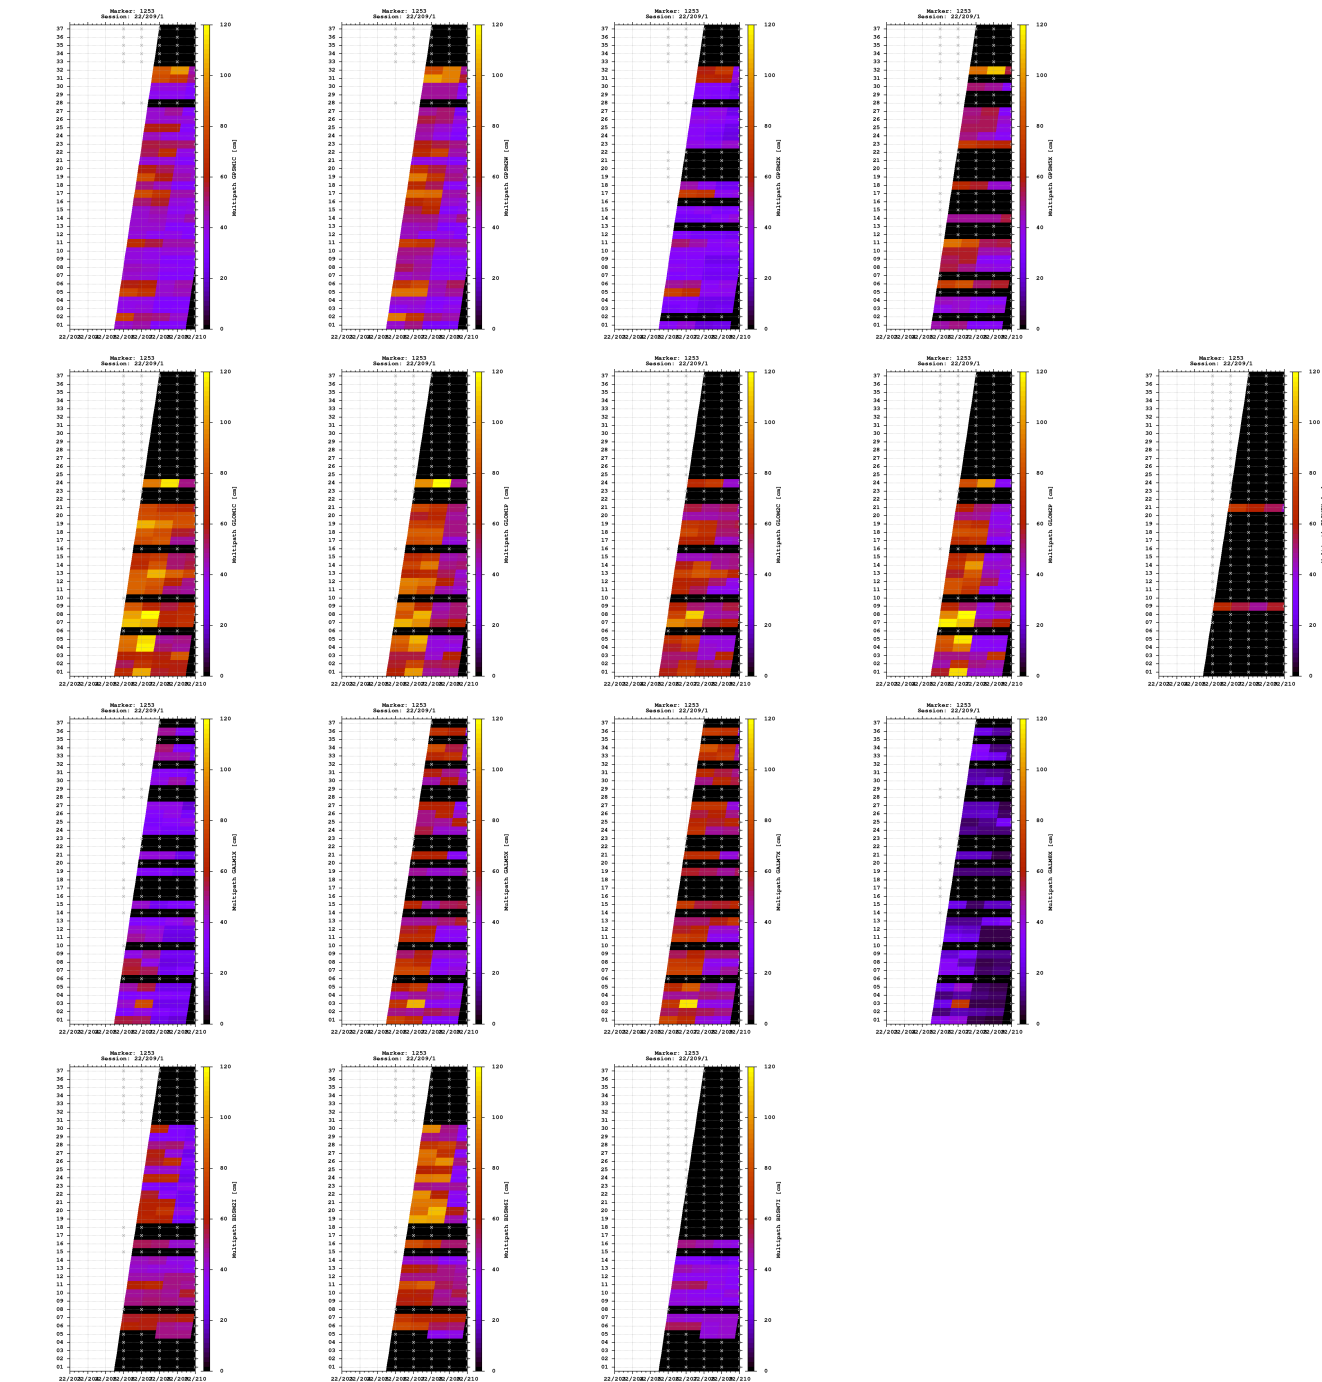


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

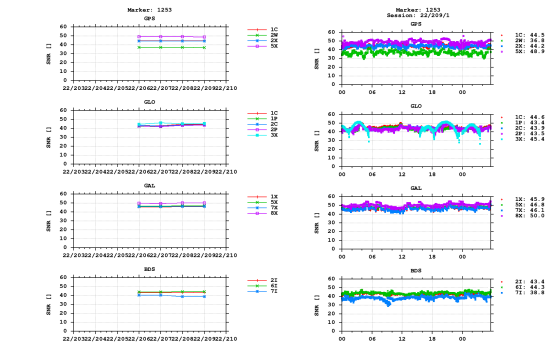


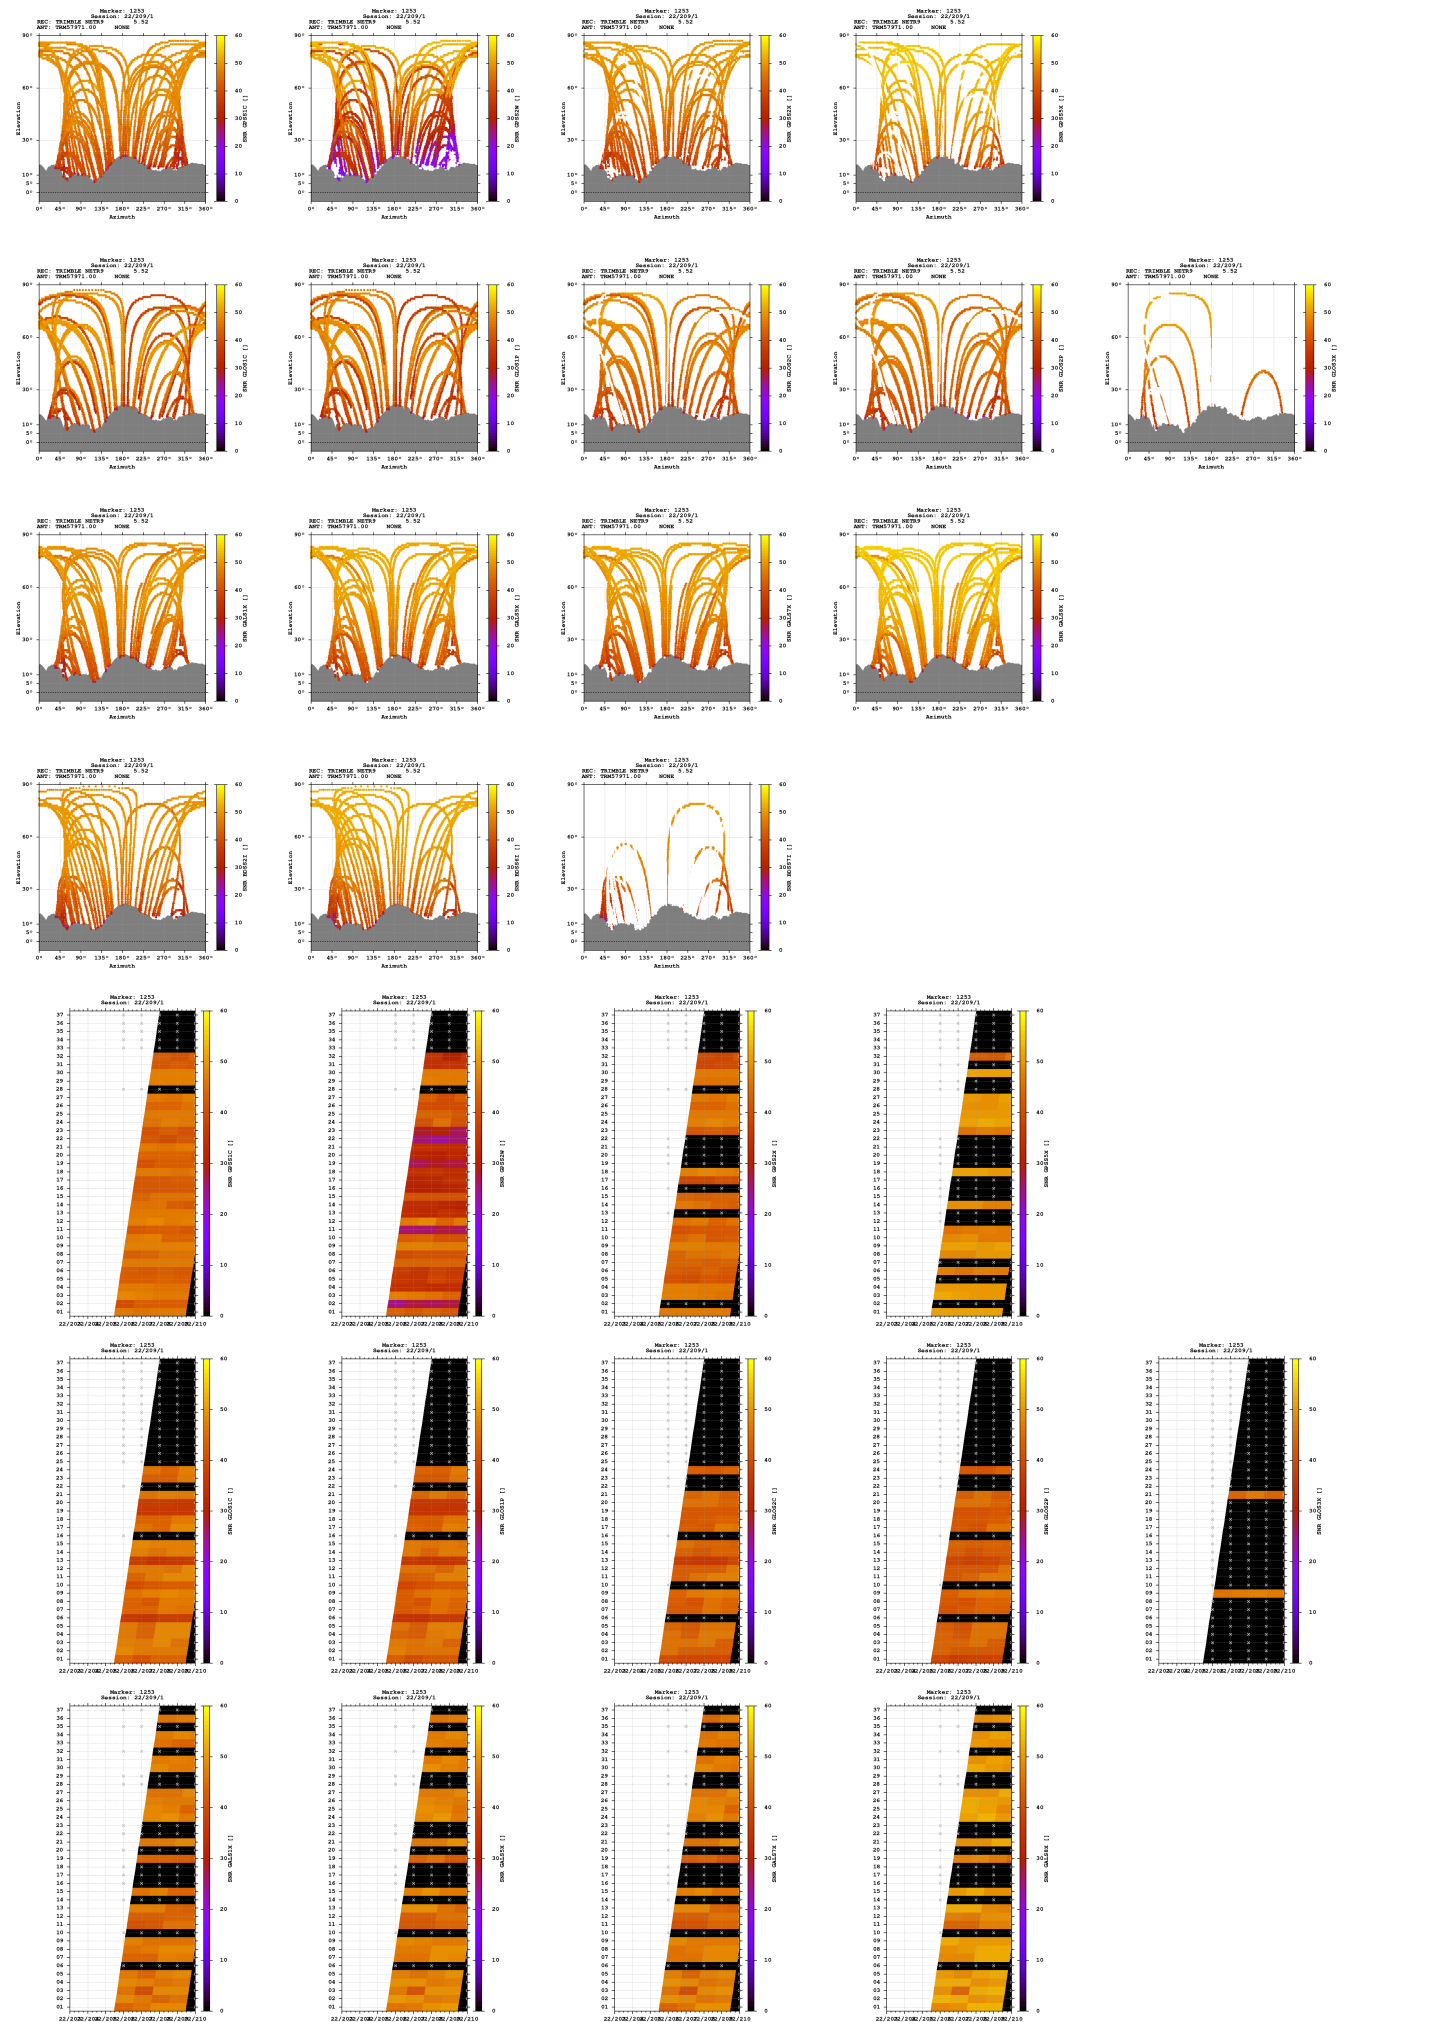

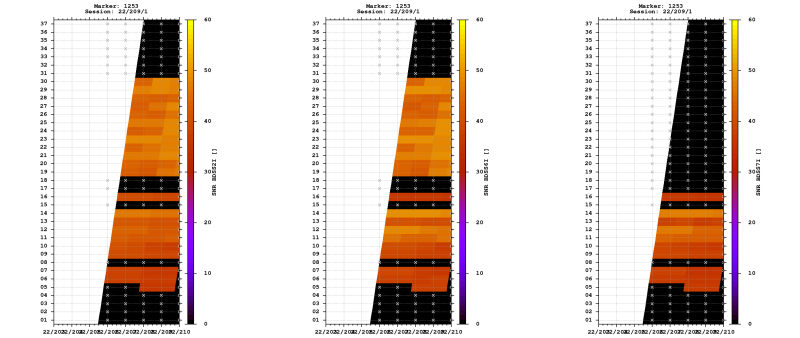


Estimates

2022-07-27 12:06:30	GPS	4344191.5671	680369.4274	4606565.3178	46.524550882	8.901122327	1387.3386
2022-07-27 12:06:30	GLO	4344191.7686	680369.3498	4606565.1042	46.524548339	8.901120922	1387.3123
2022-07-27 12:06:30	GAL	4344191.6511	680369.3539	4606565.3853	46.524550832	8.901121212	1387.4368
2022-07-27 12:06:30	BDS	4344186.3475	680367.1057	4606566.9739	46.524597131	8.901102962	1384.7452

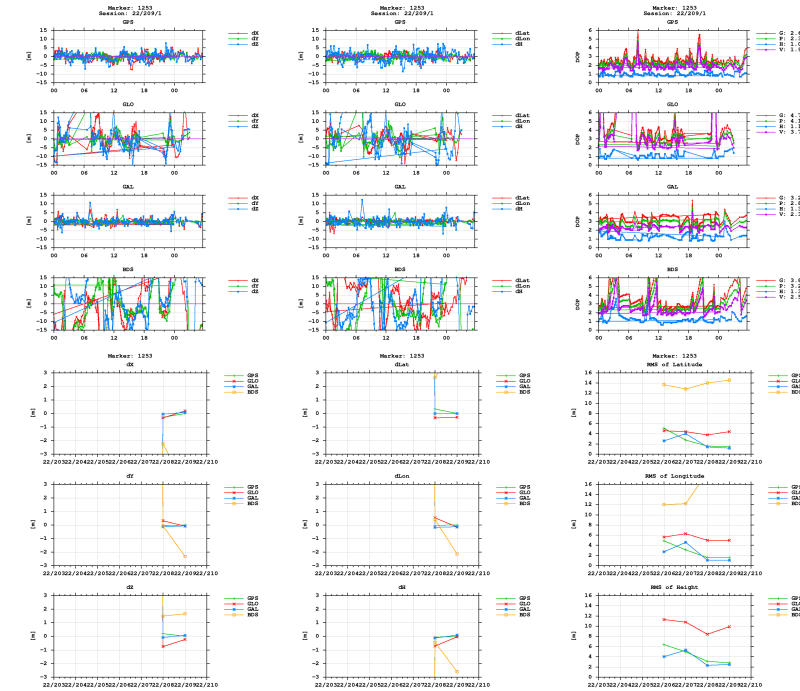

BNC



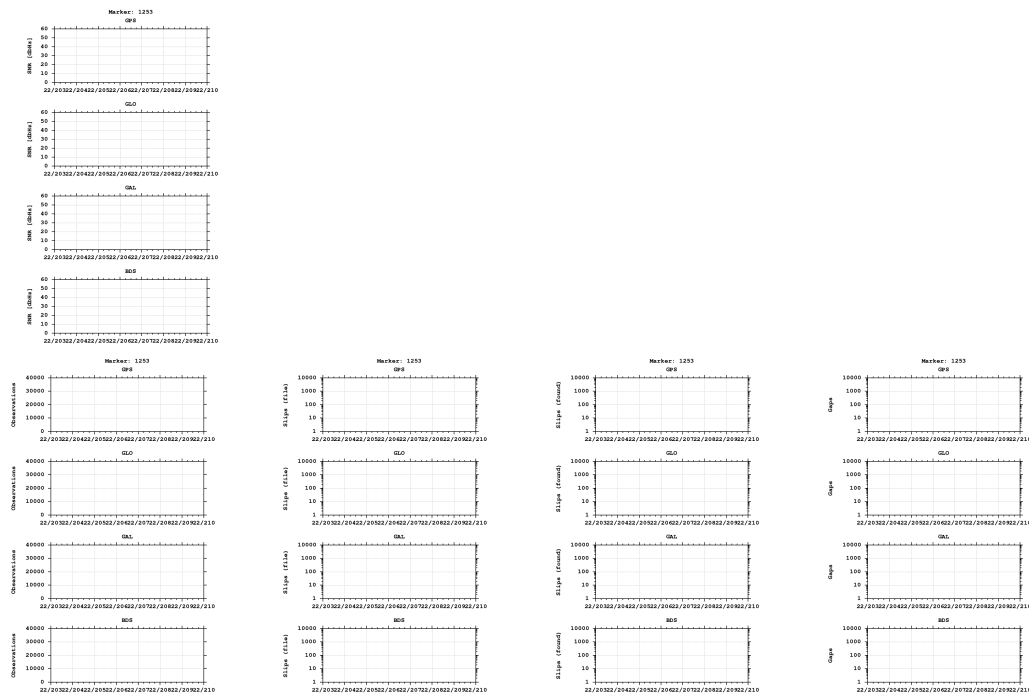

Equipment

2022-07-25 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)