

GNSS observation file monitoring for 0517

Last RINEX file: 05172081.220


RINEX version: 3.02

Marker: GR1_549

Receiver: 517 TRIMBLE NETR9 5.52

Antenna: 517 TRM57971.00 NONE


Epochs

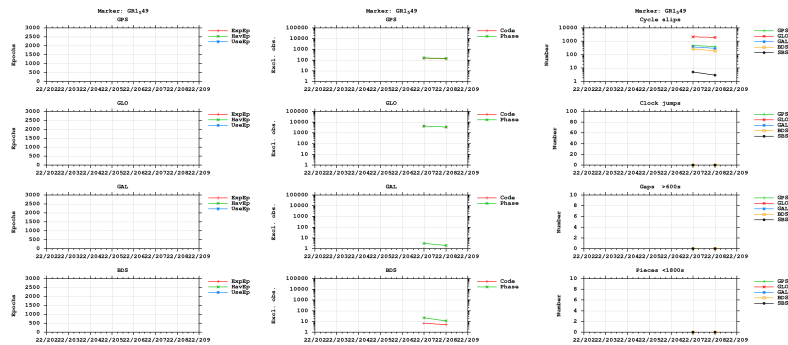


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

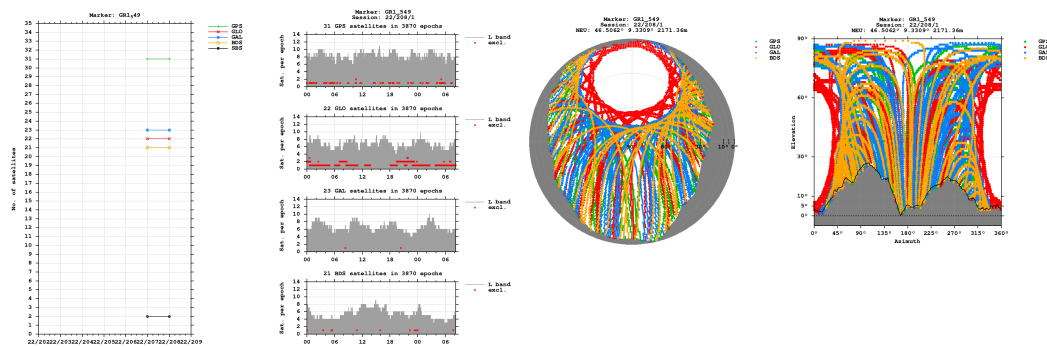


Bands

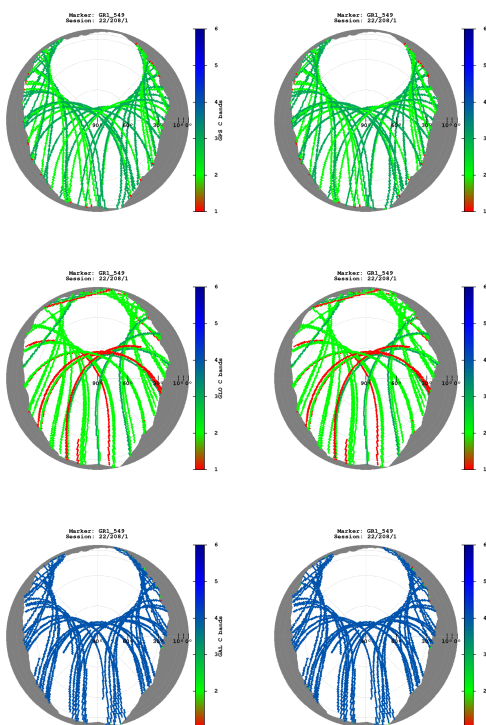


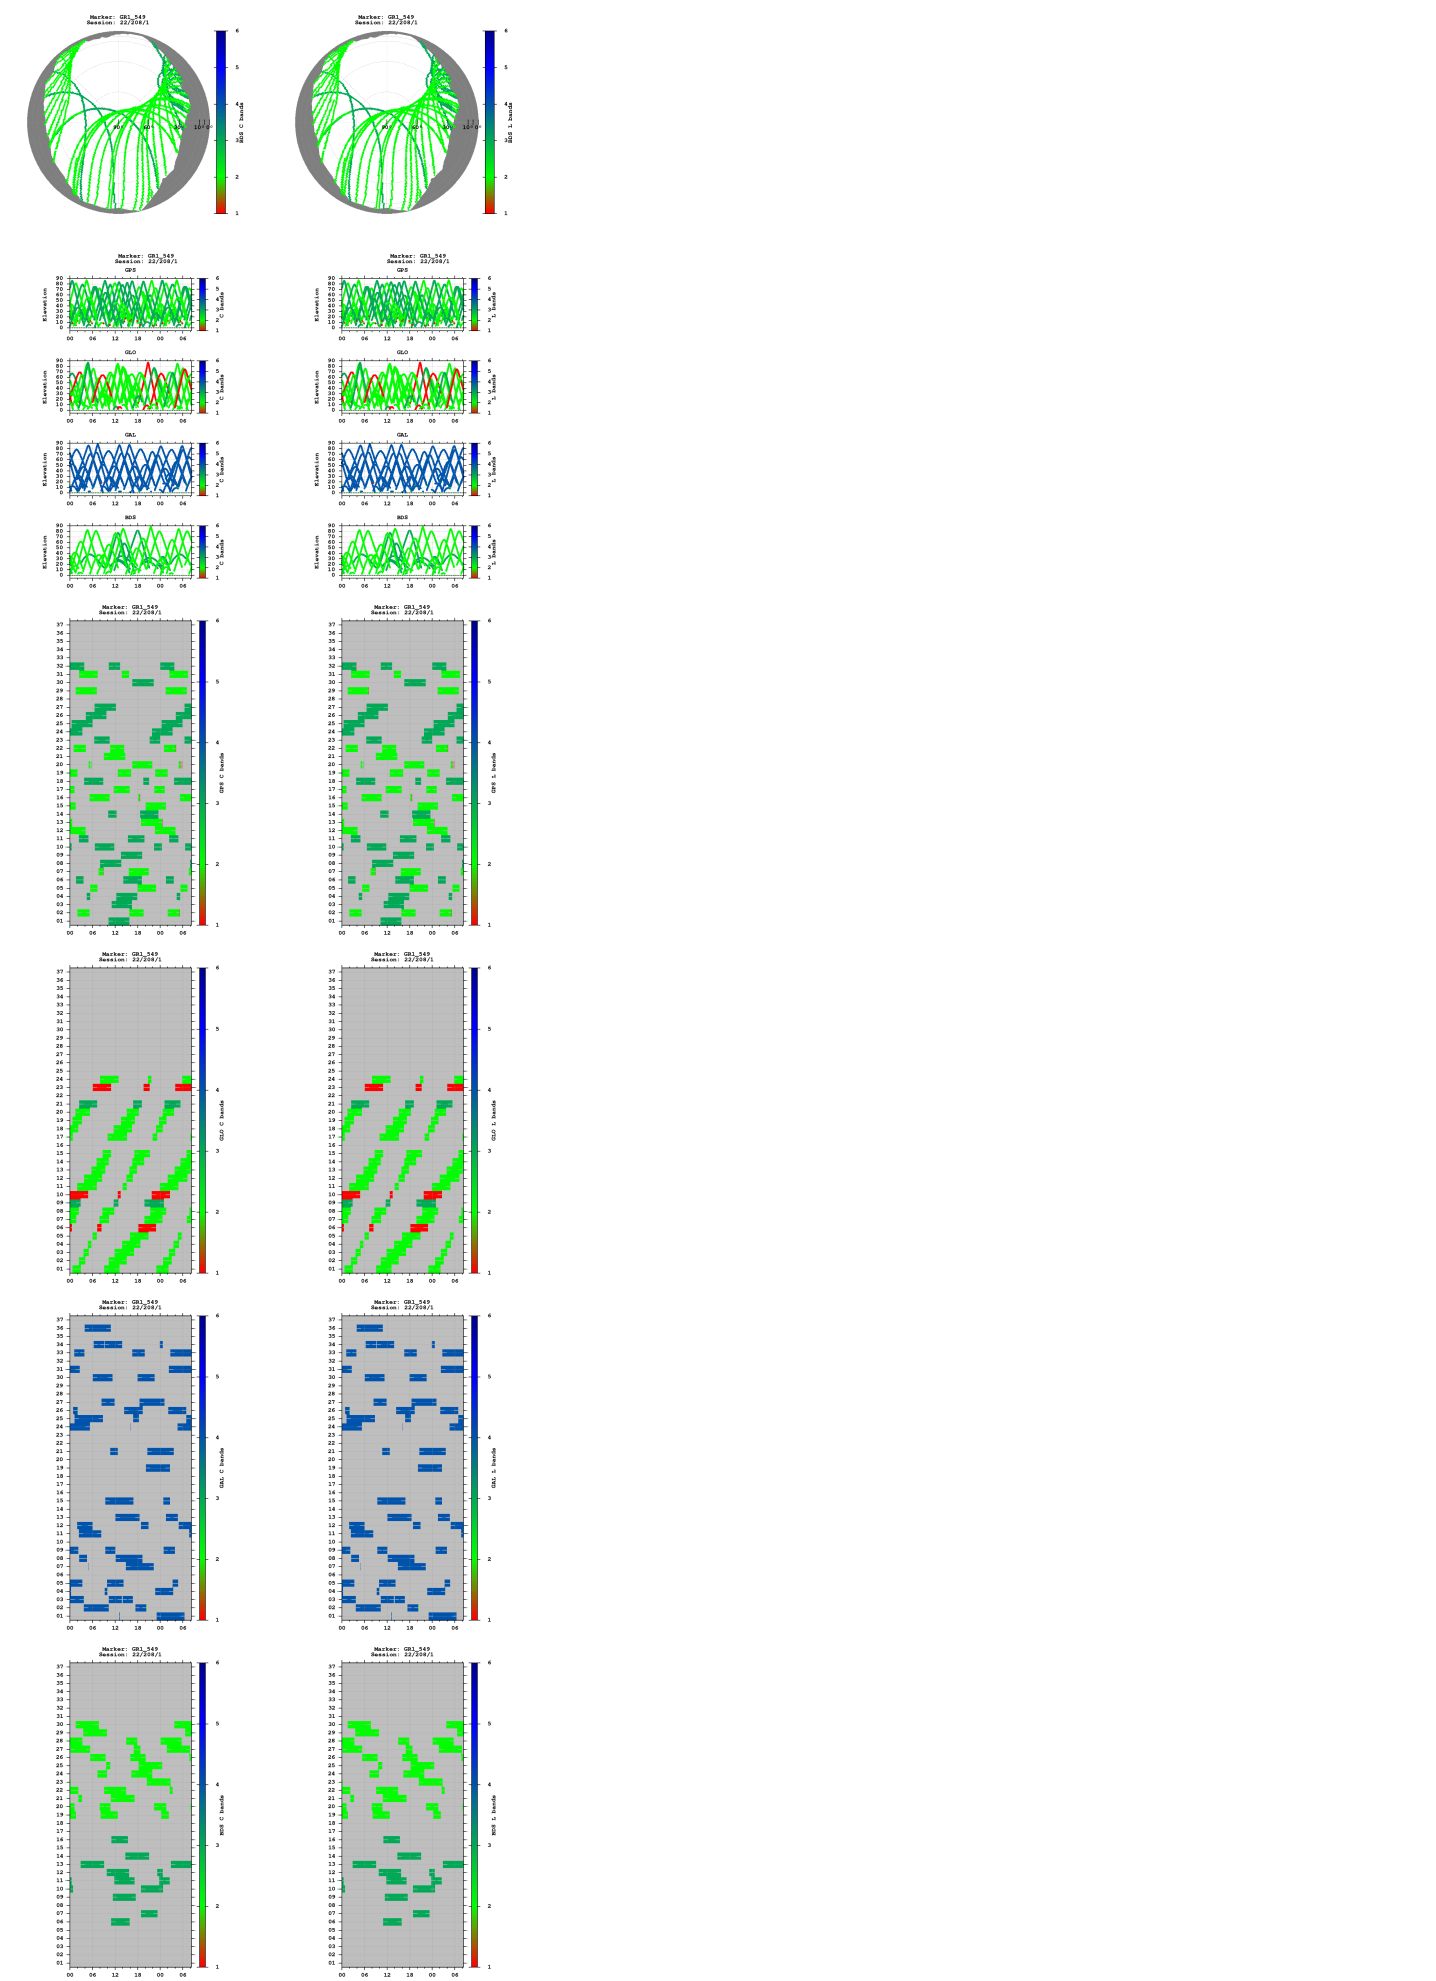

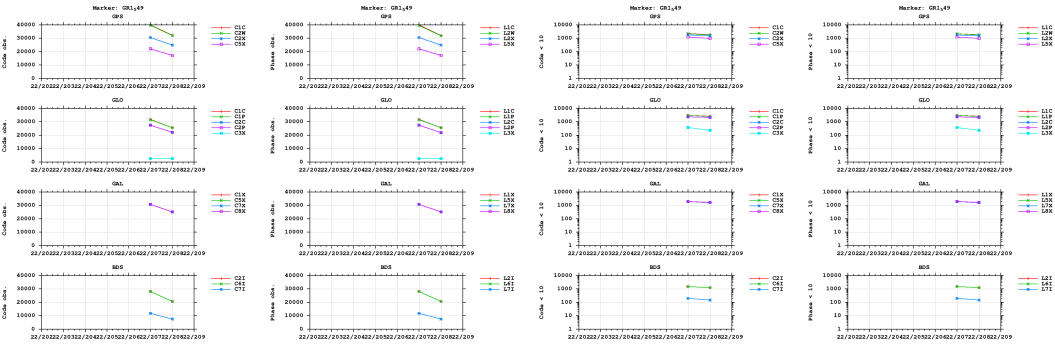



Multipath

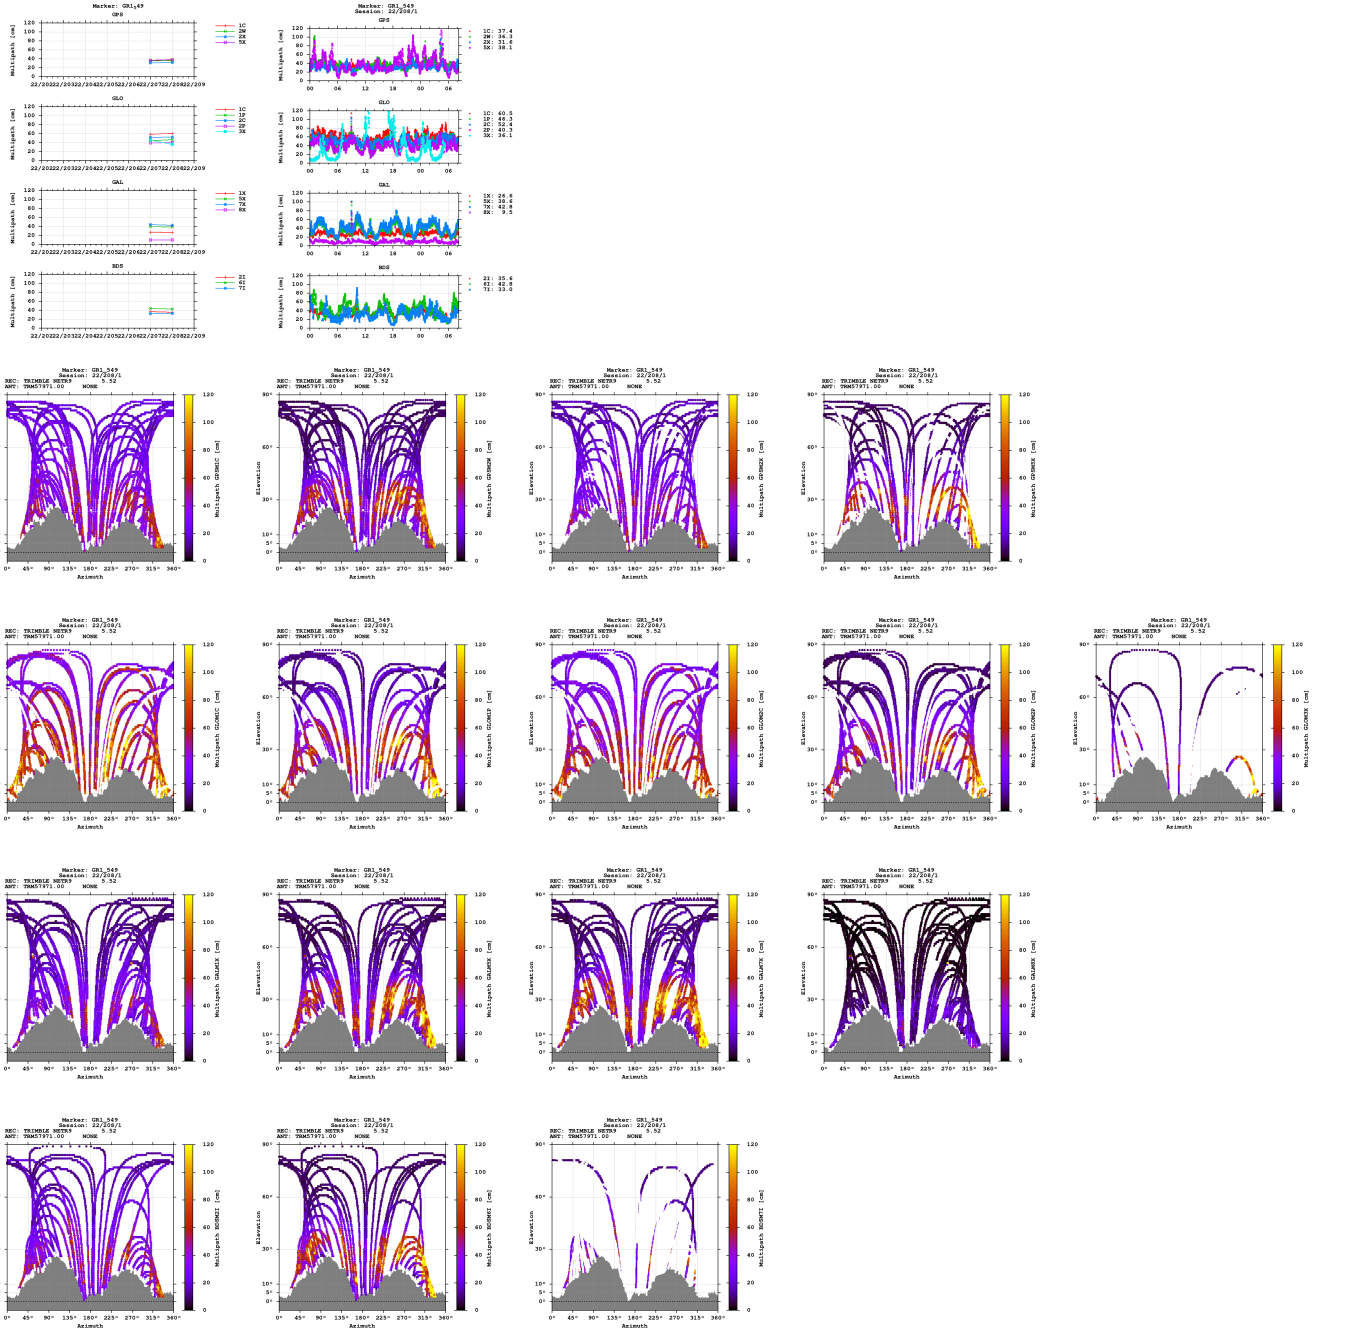


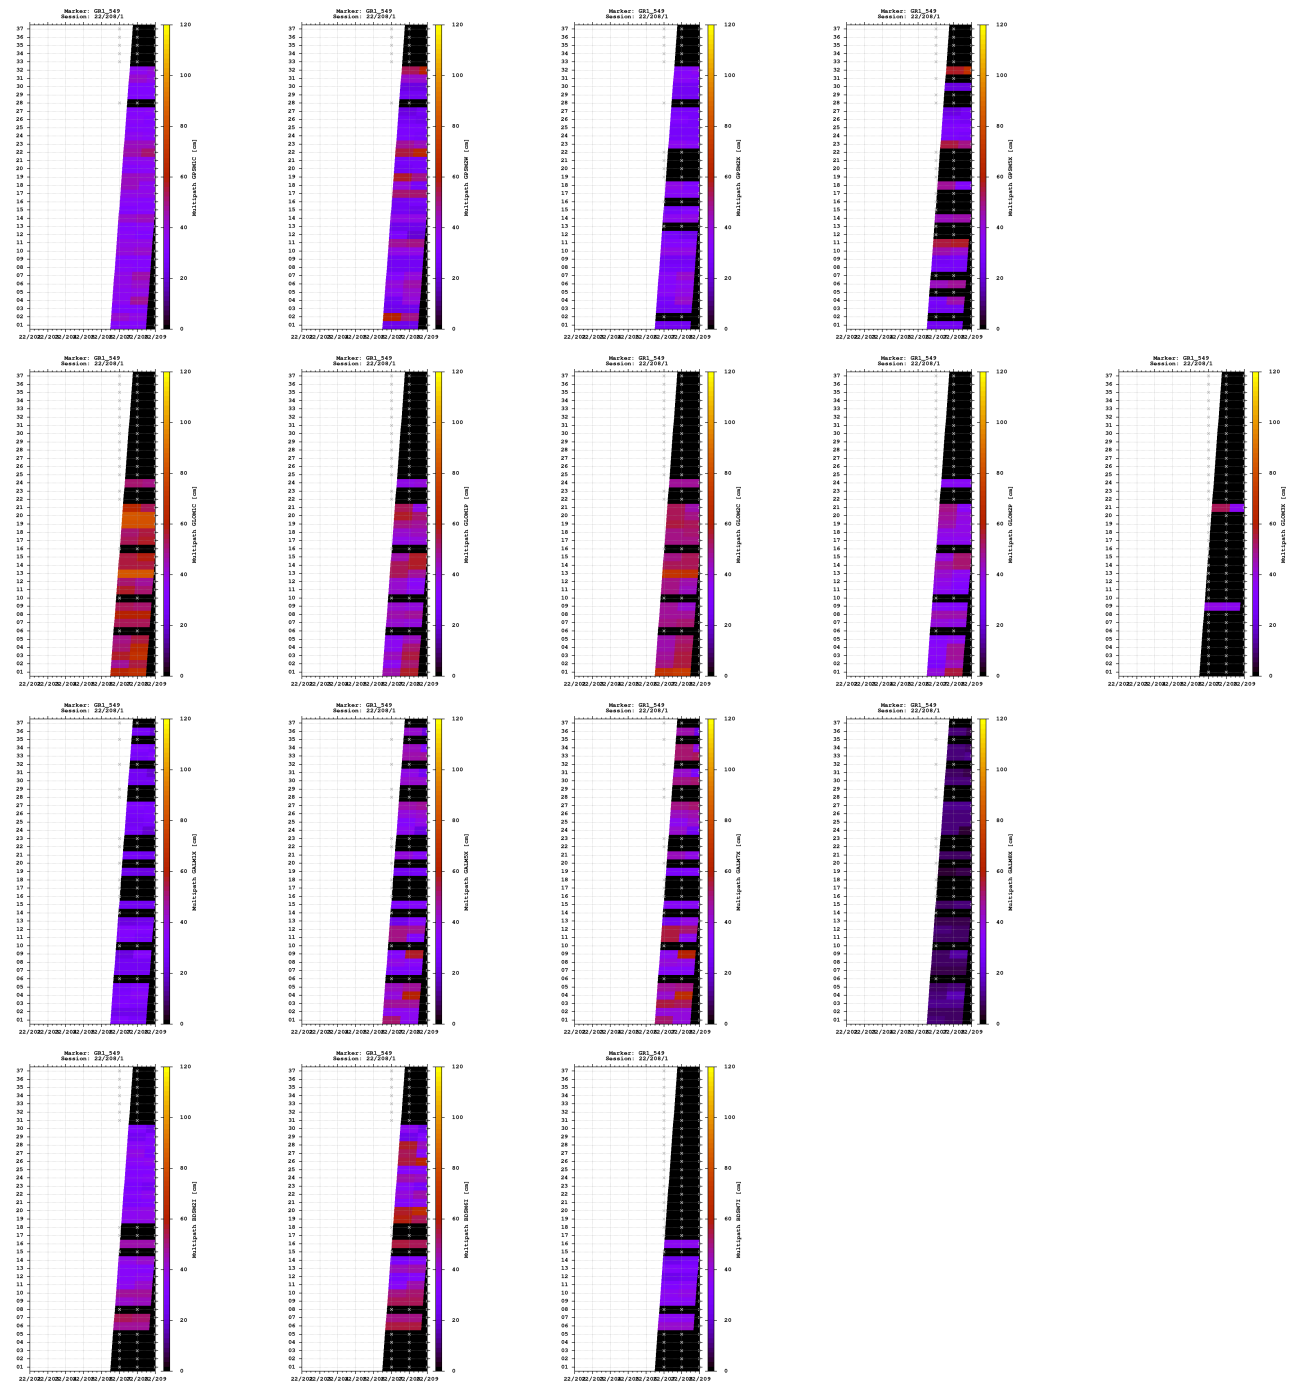


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

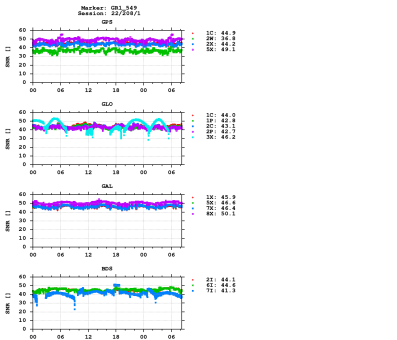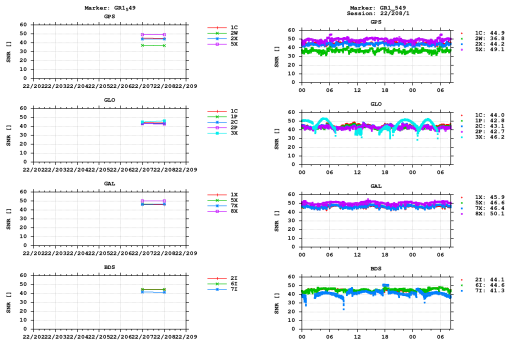


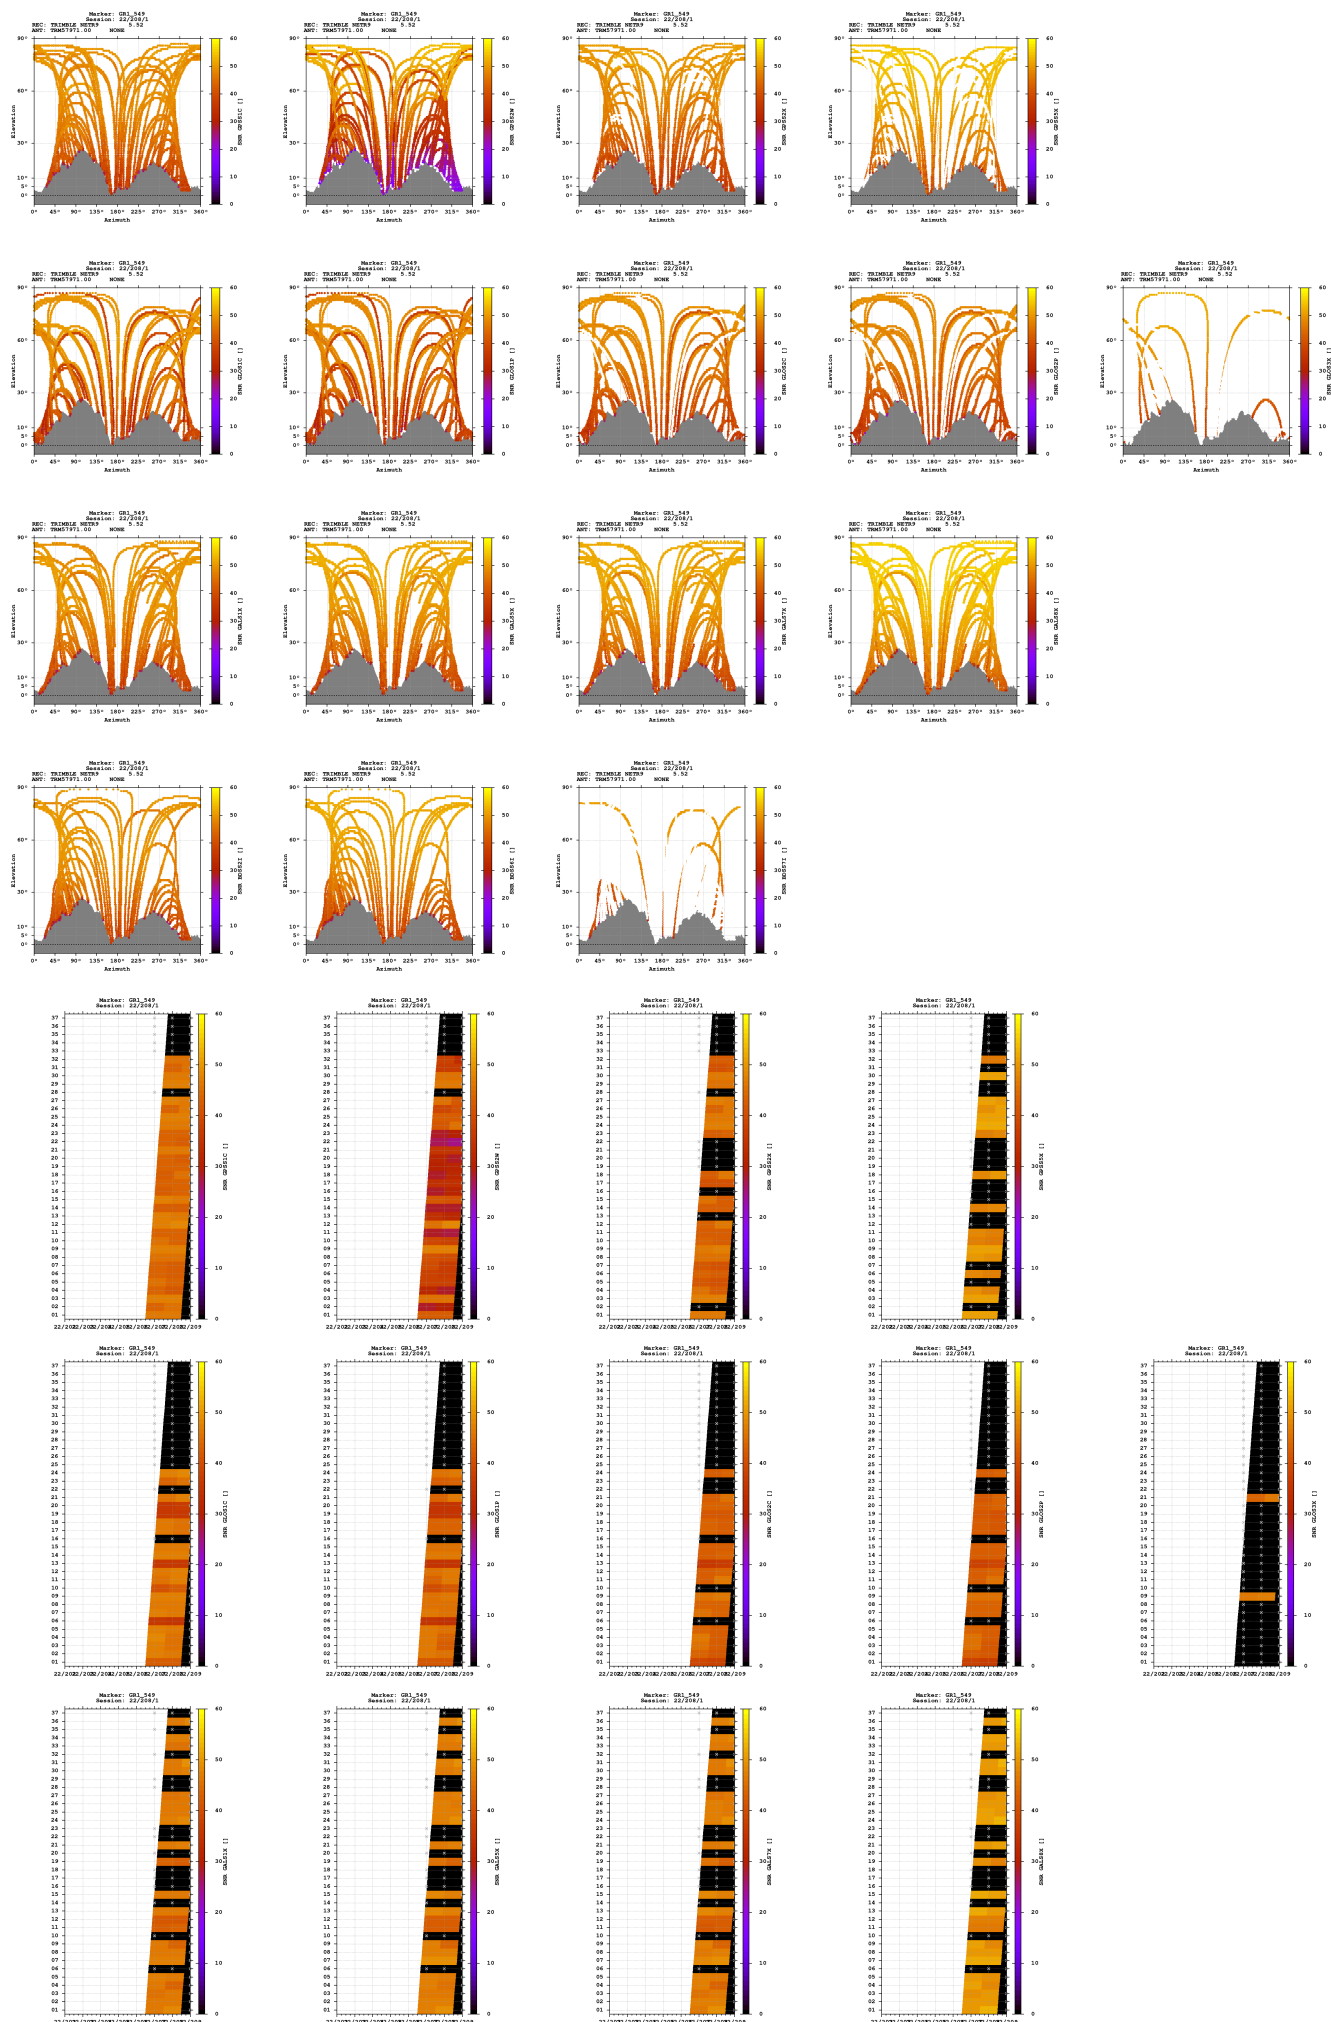

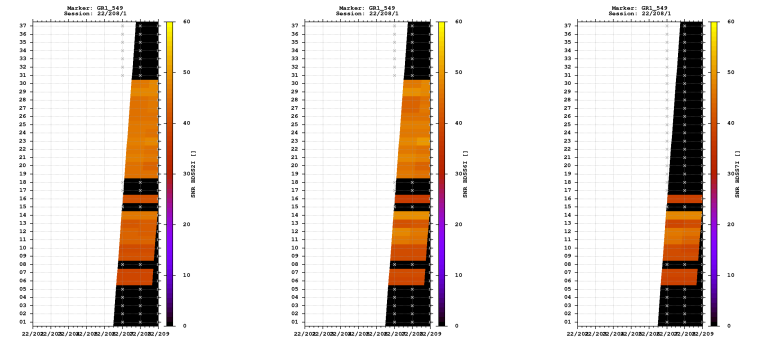



Estimates

2022-07-26 08:08:00	GPS	4340955.0142	713265.6206	4605733.5934	46.506247022	9.330936978	2171.3585
2022-07-26 08:08:00	GLO	4340956.0952	713265.1063	4605733.7119	46.506241341	9.330928085	2172.1213
2022-07-26 08:08:00	GAL	4340954.7945	713265.6377	4605733.3610	46.506246979	9.330937662	2171.0427
2022-07-26 08:08:00	BDS	4340954.4953	713265.6911	4605733.8212	46.506251698	9.330938980	2171.1793

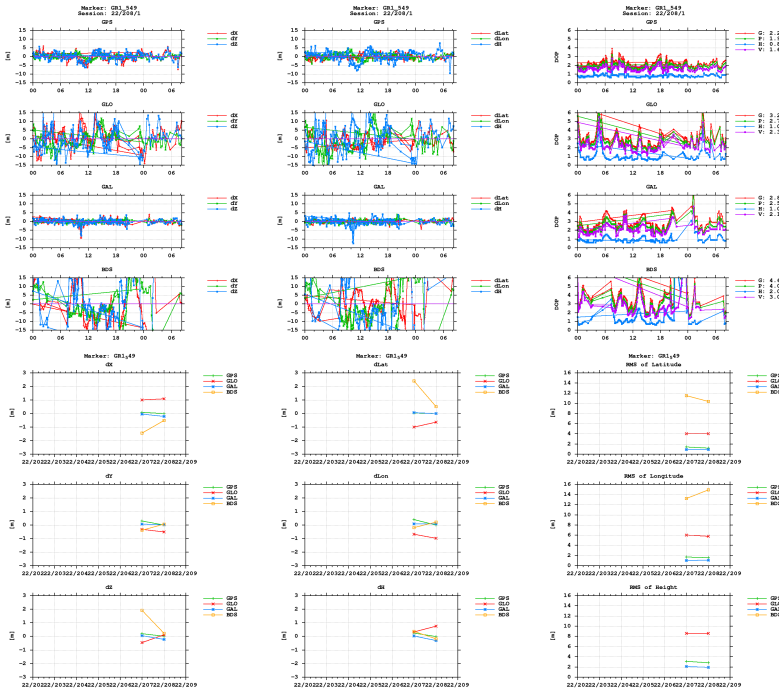

BNC

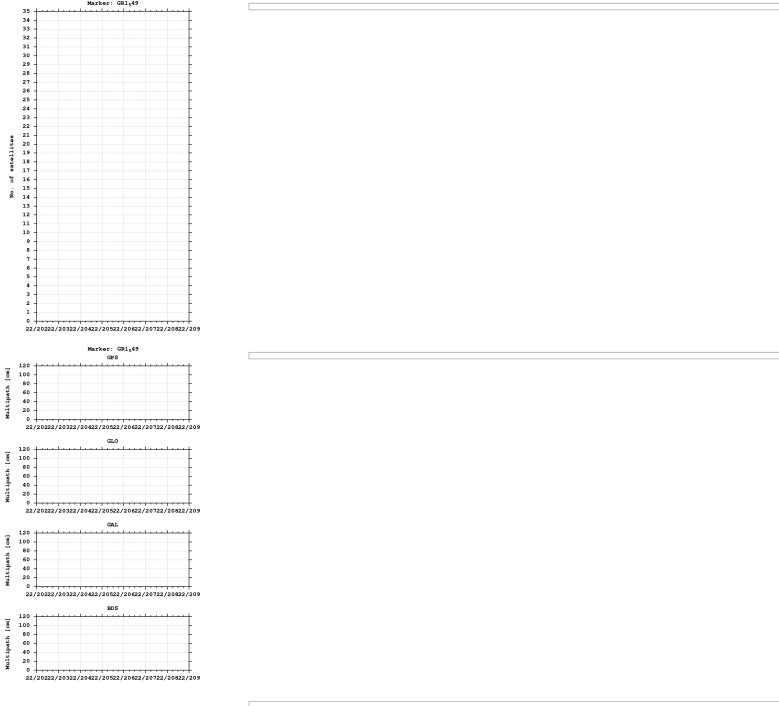

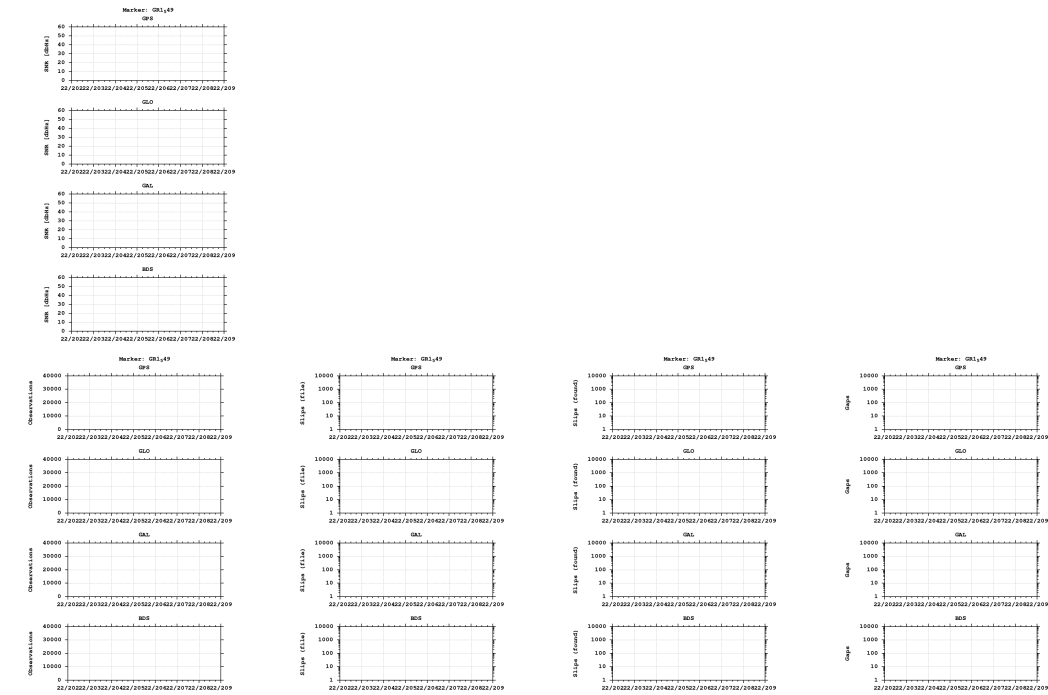

Equipment

2022-07-26 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 517

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)