


GNSS observation file monitoring for 0518


Last RINEX file: 05182071.22O
RINEX version: 3.02
Marker: 1294
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

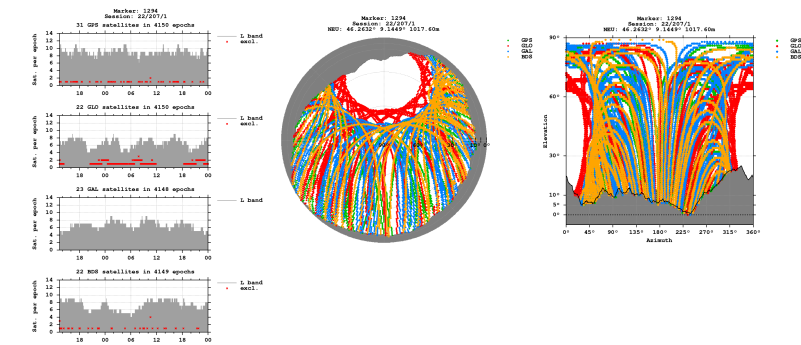


Bands

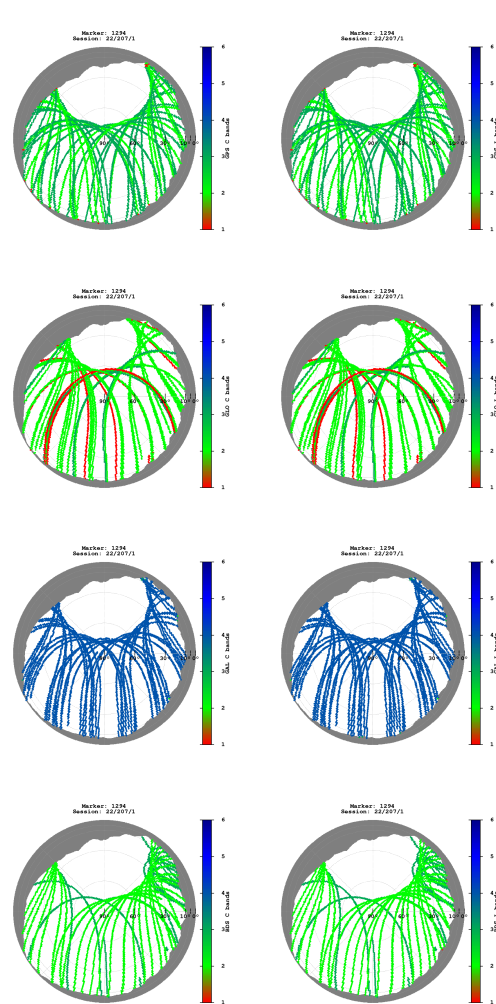

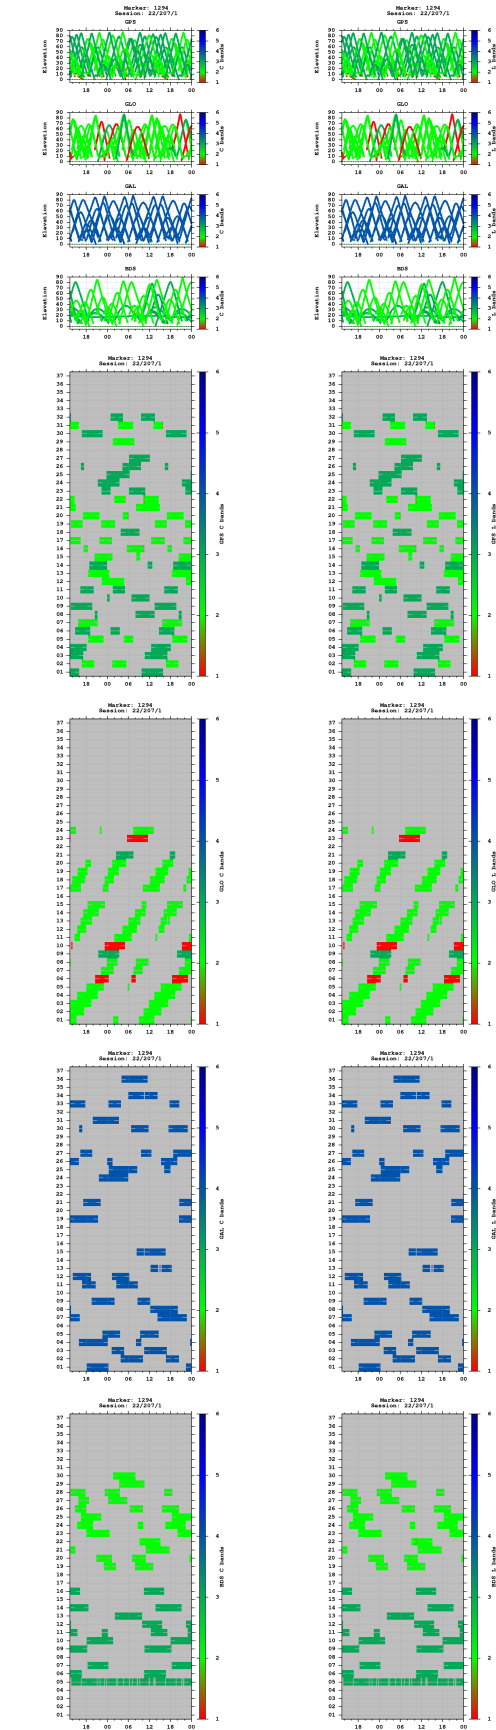



Multipath

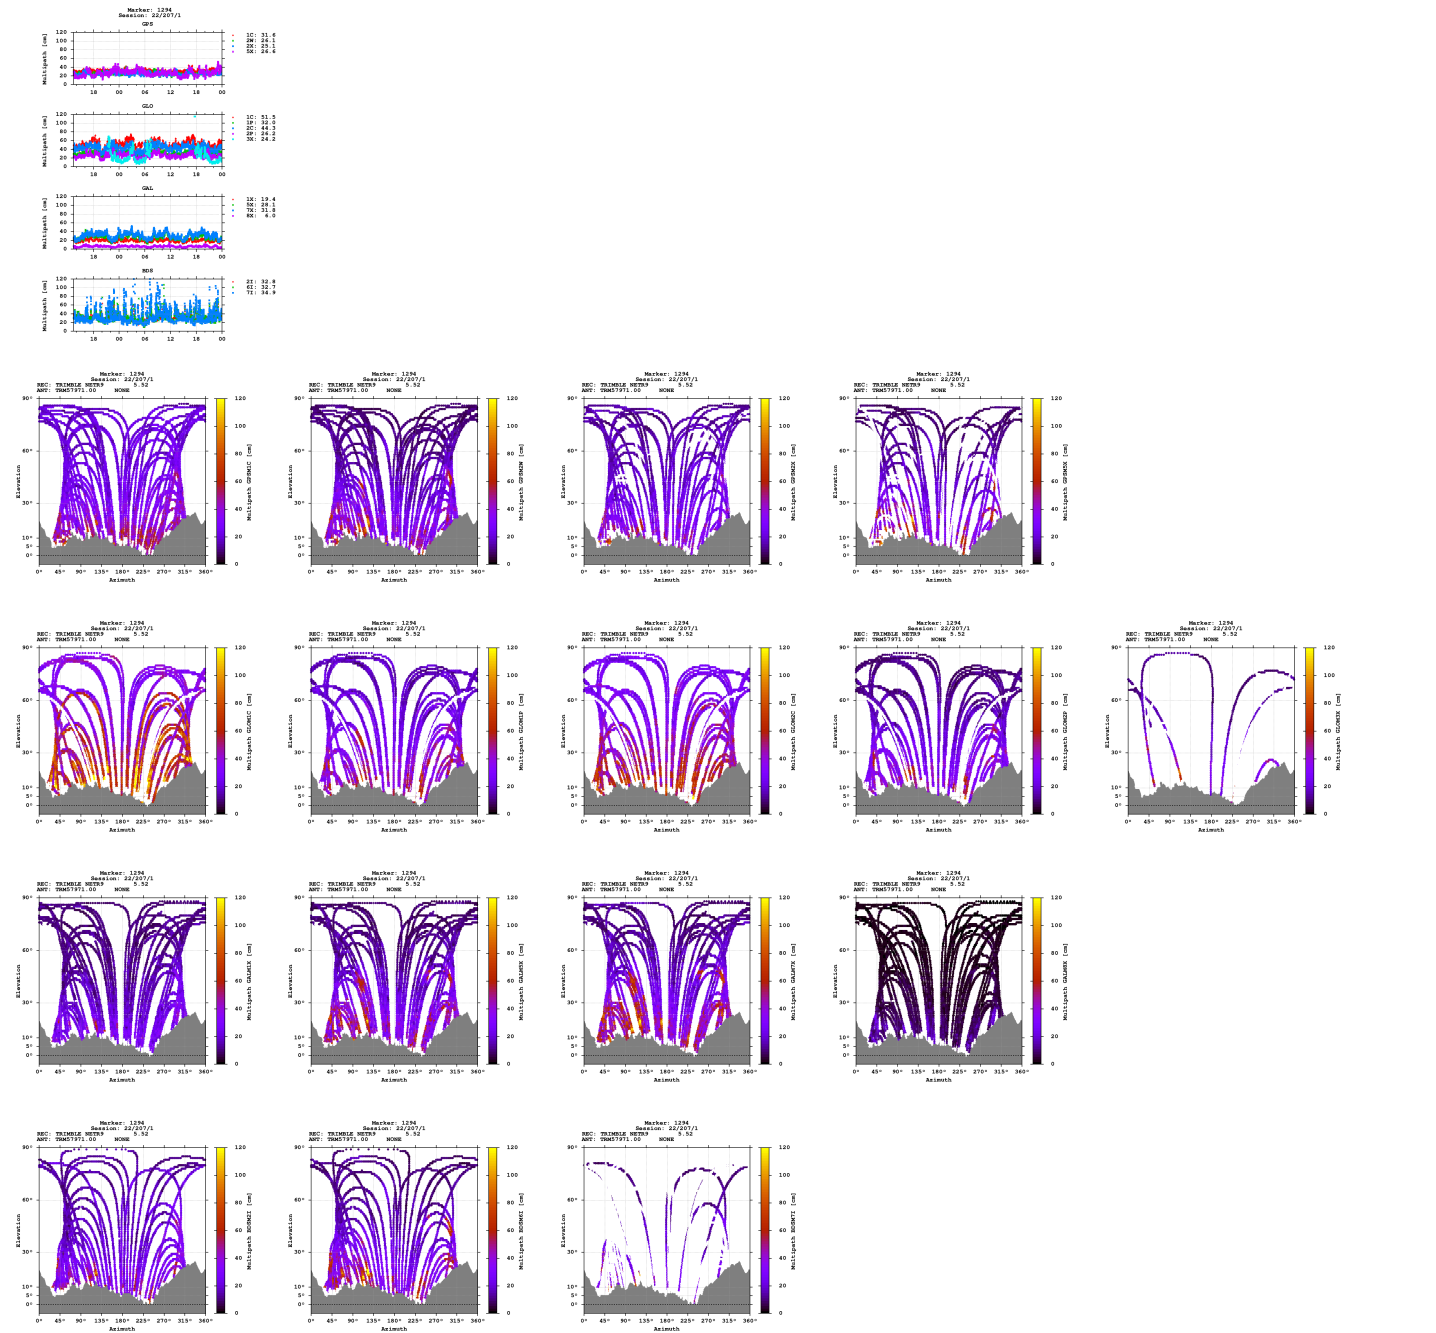

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

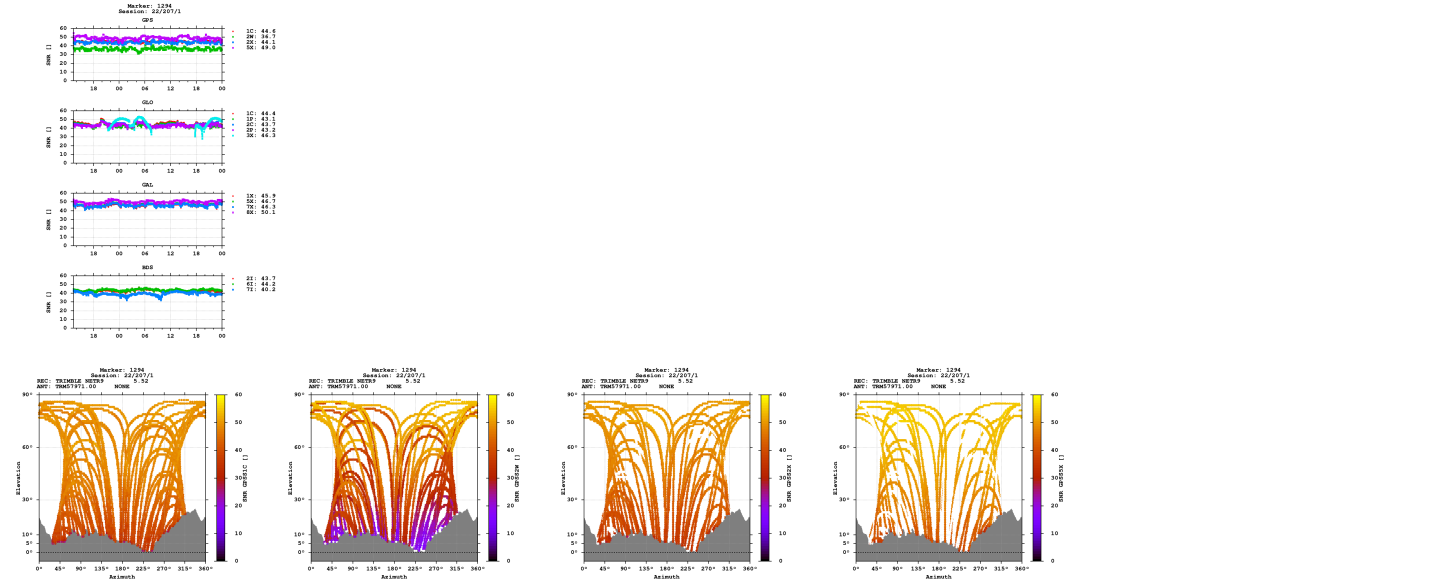

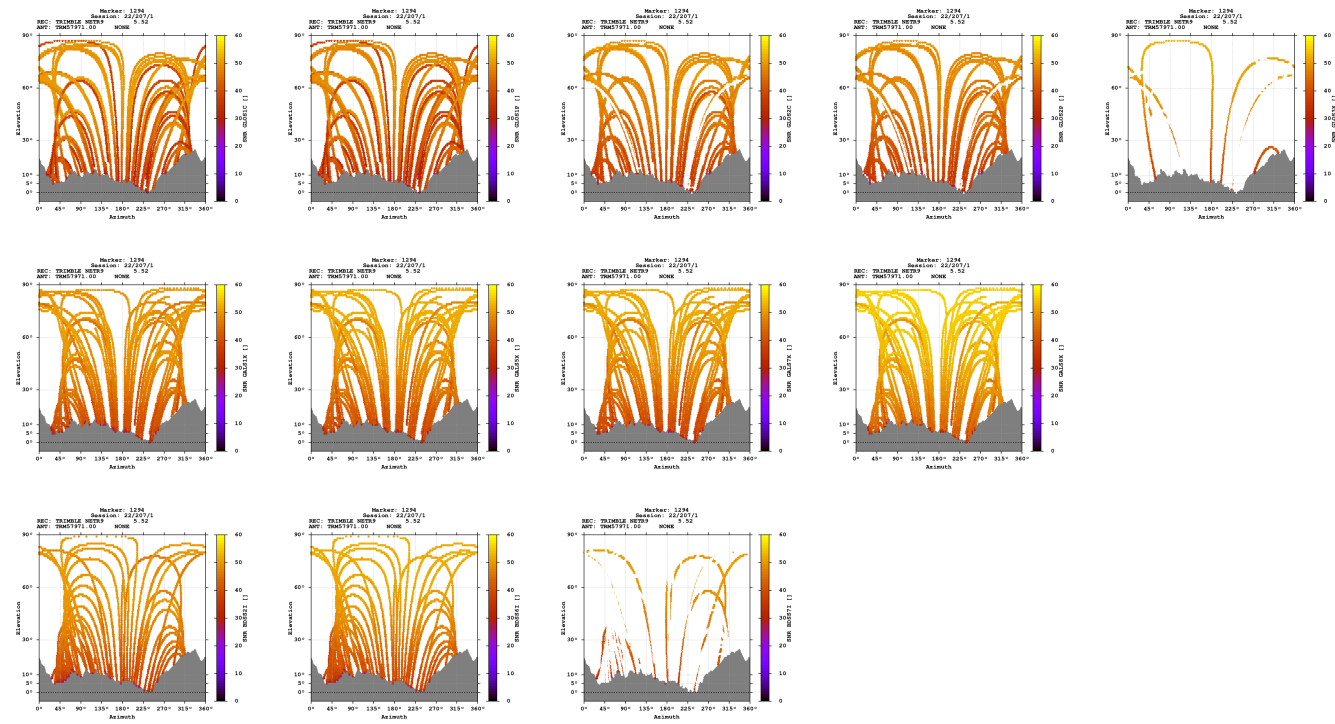

Estimates

2022-07-26 13:22:30	GPS	4361779.4856	702149.1547	4586256.1581	46.263187881	9.144887434	1017.5974
2022-07-26 13:22:30	GLO	4361780.4981	702149.5472	4586256.1990	46.263181234	9.144890372	1018.3613
2022-07-26 13:22:30	GAL	4361779.8474	702149.1026	4586255.8287	46.263183566	9.144886021	1017.6007
2022-07-26 13:22:30	BDS	4361779.7211	702150.7224	4586257.5004	46.263193099	9.144907020	1018.9003

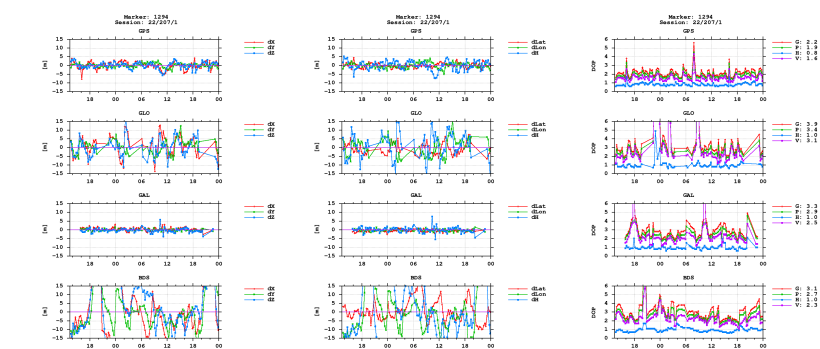

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)