

GNSS observation file monitoring for 0518

Last RINEX file: 05182081.220

RINEX version: 3.02

Marker: 1294

Receiver: 518

Antenna: 518


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

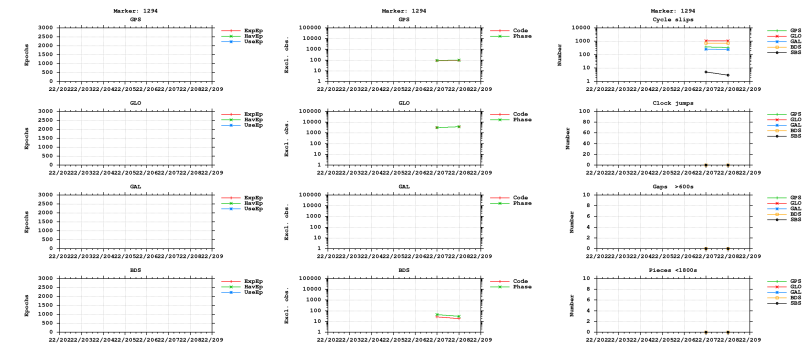



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

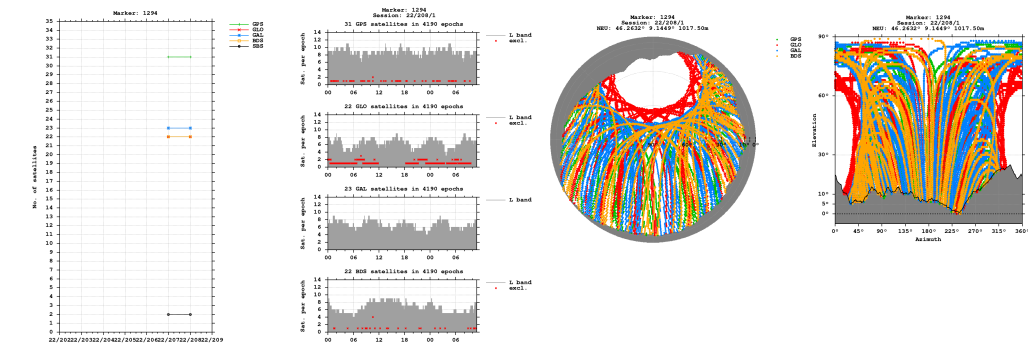


Bands

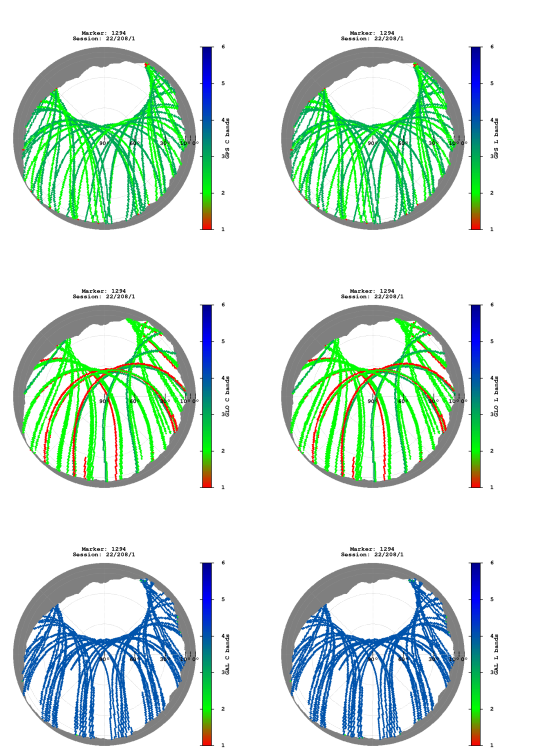


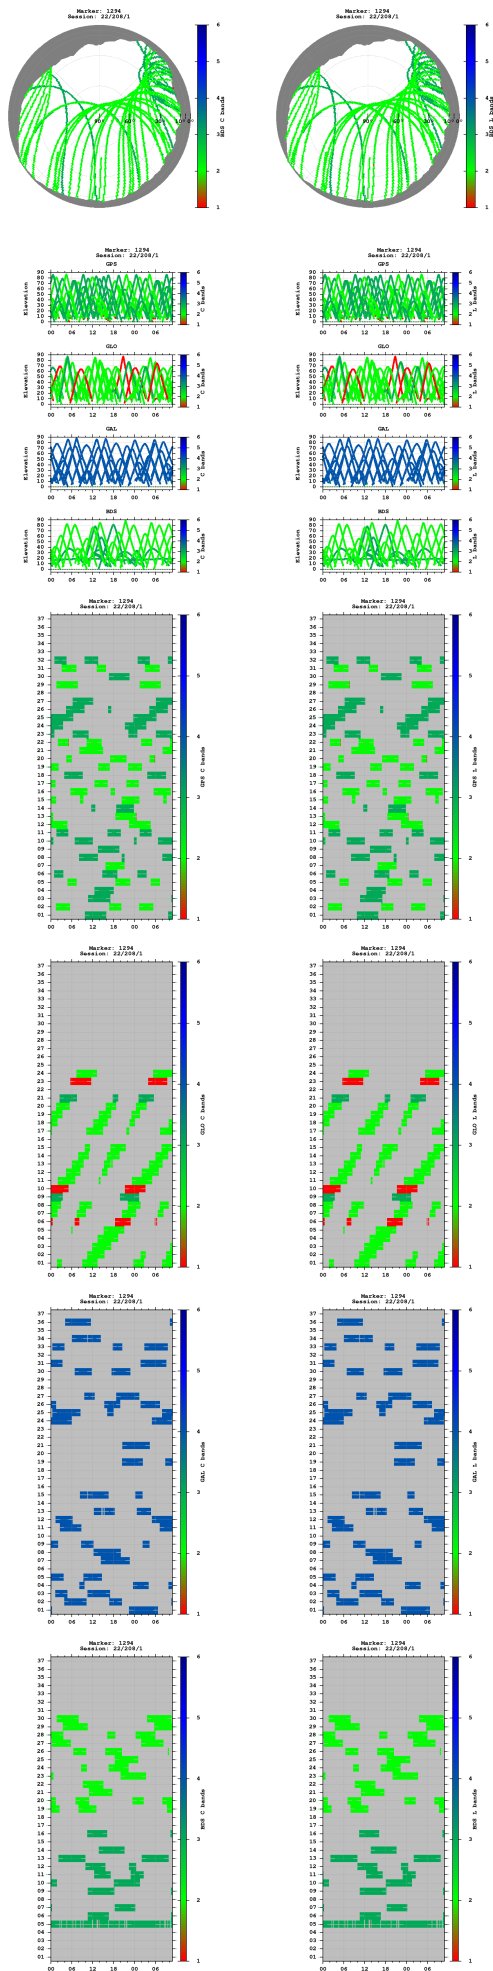


Observations

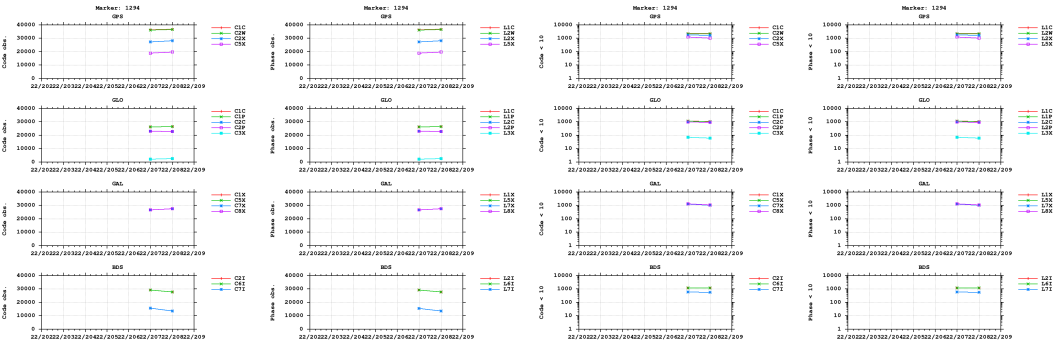



Multipath

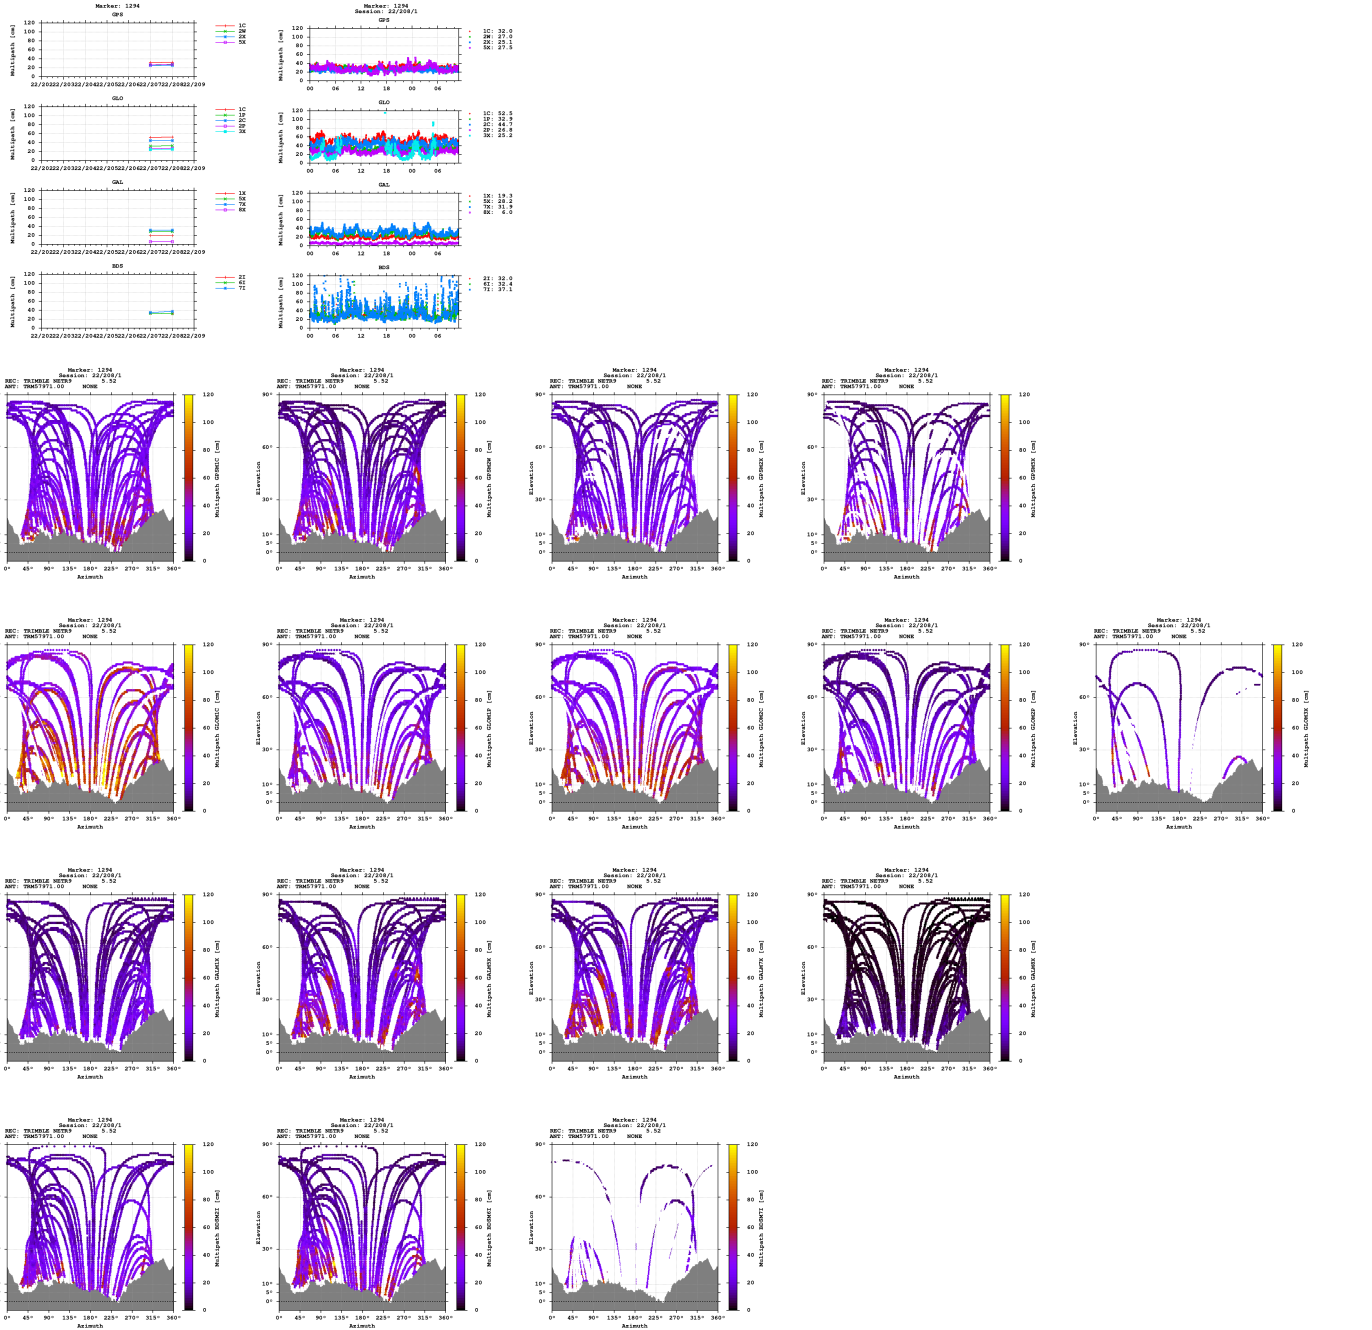


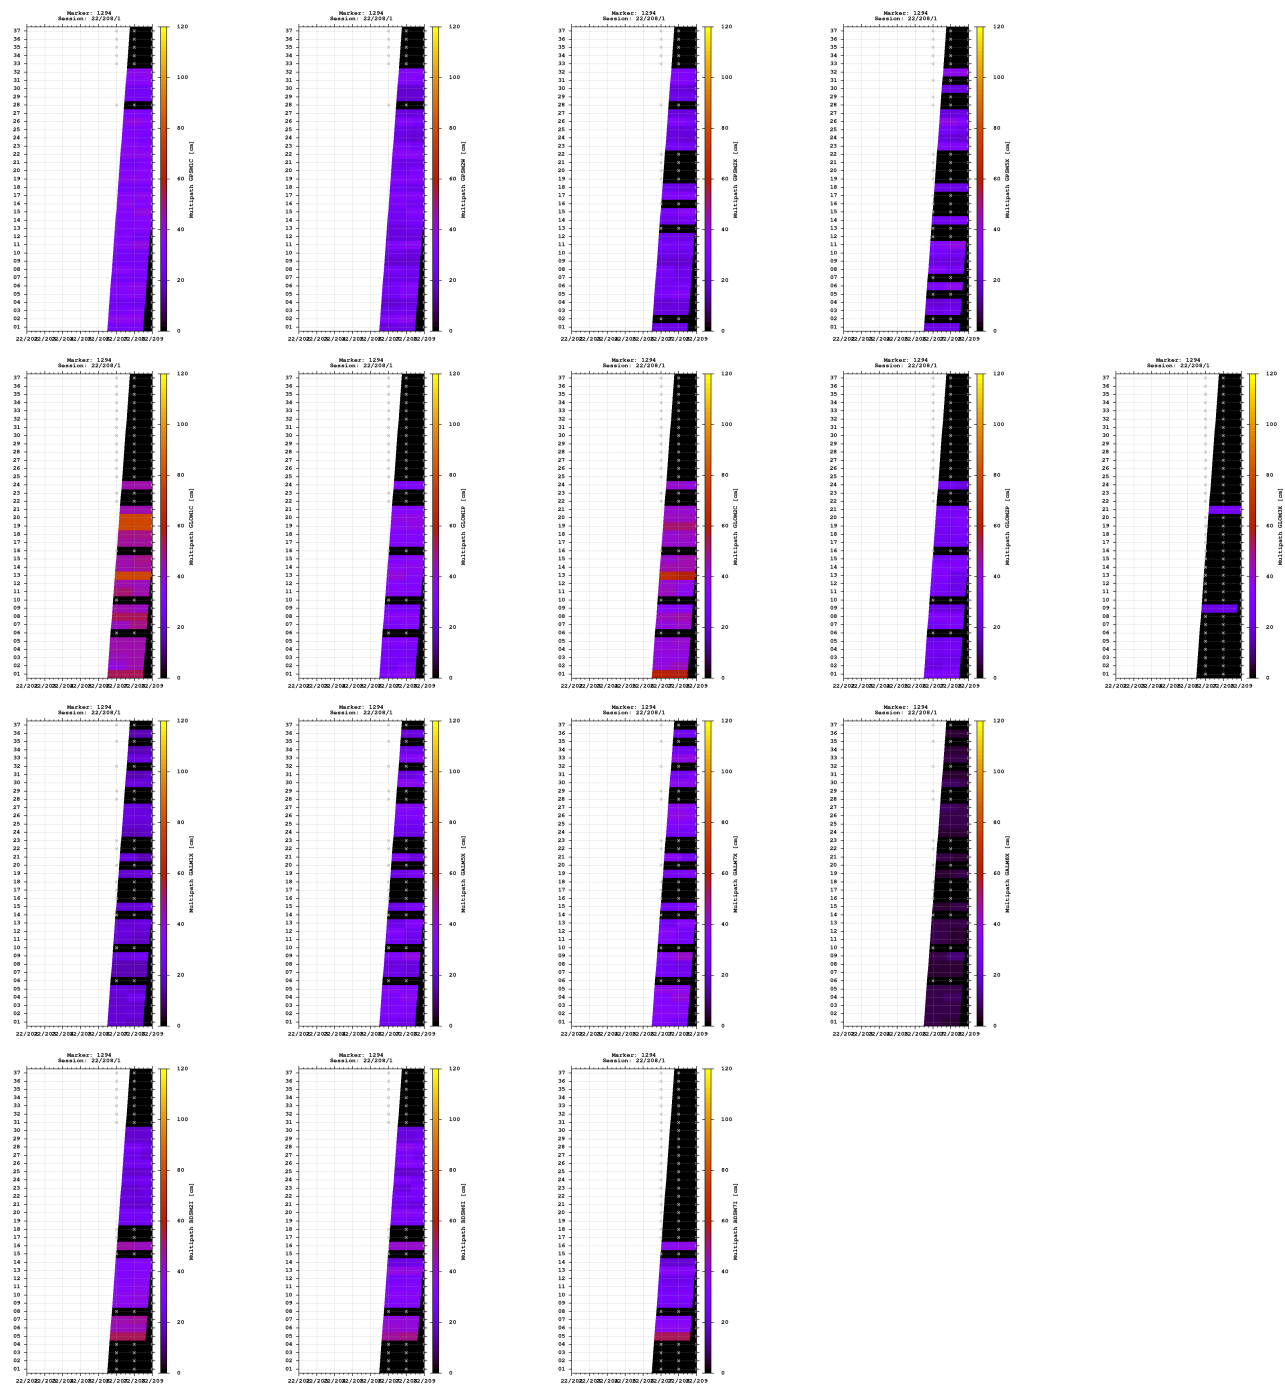


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

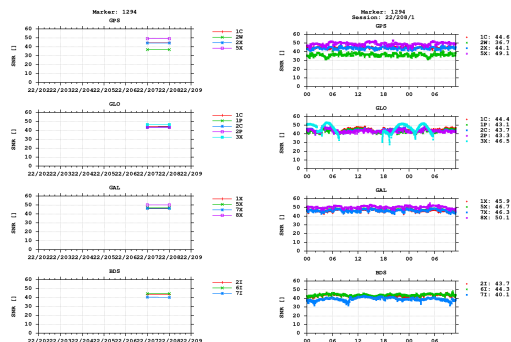


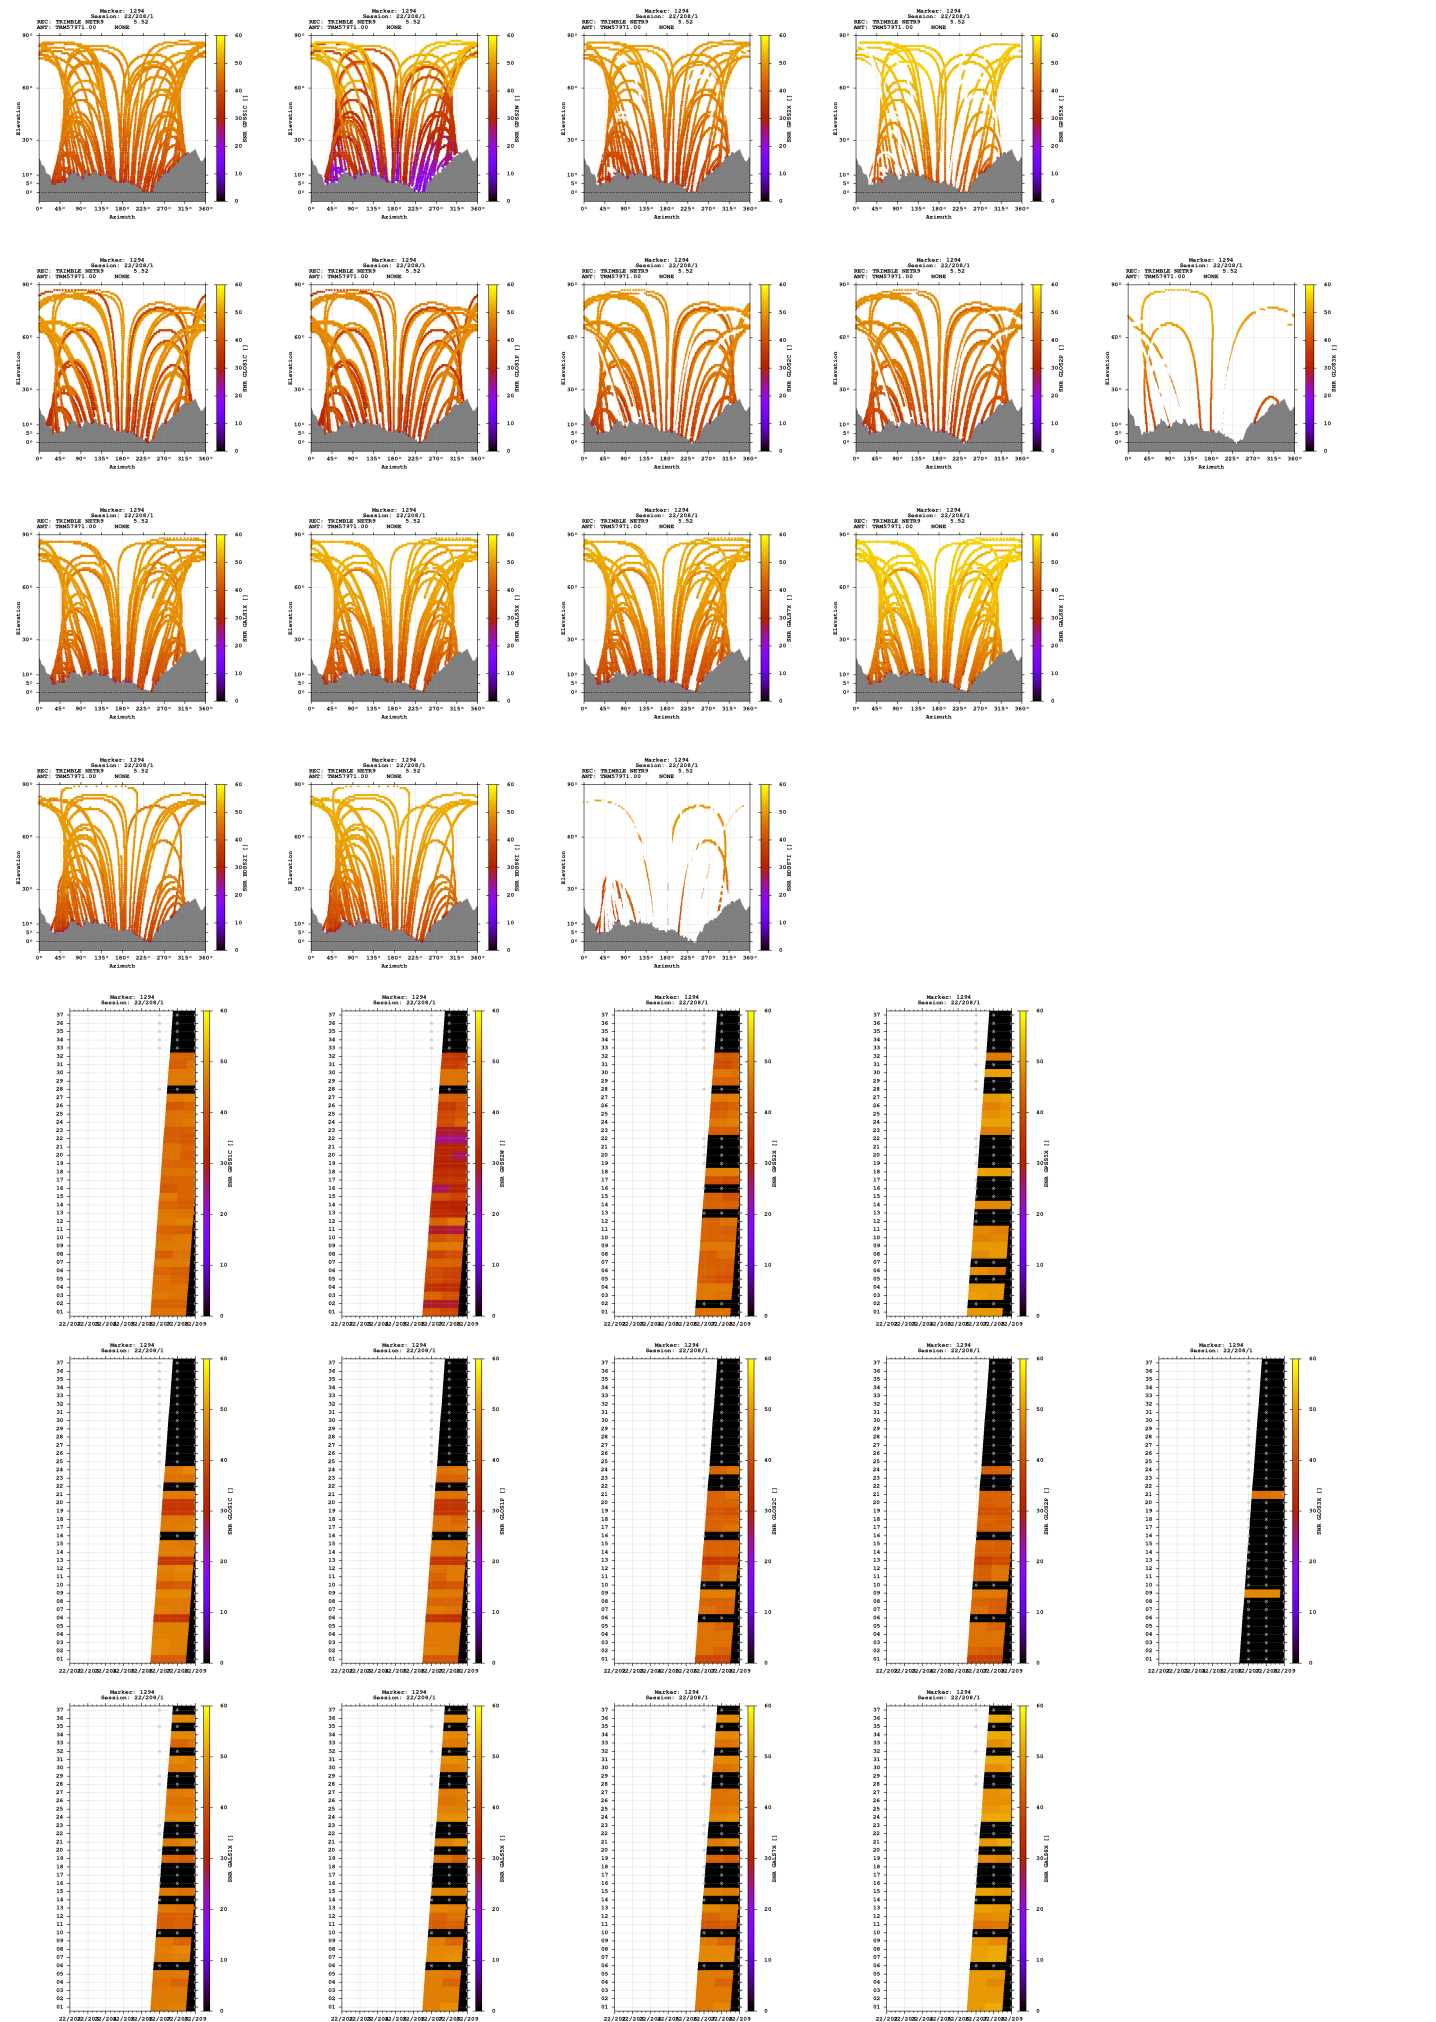

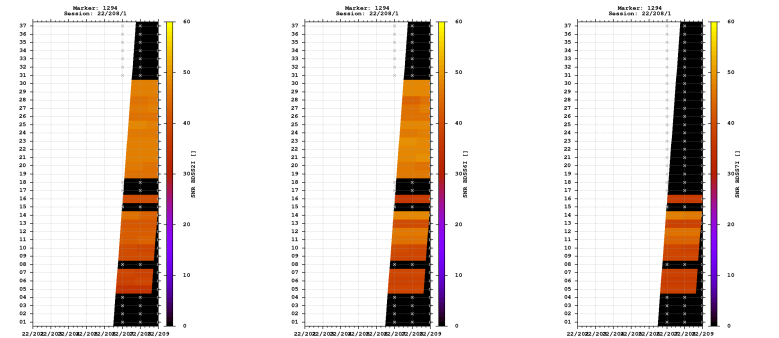



Estimates

2022-07-26 13:22:30	GPS	4361779.5005	702149.2648	4586255.9875	46.263186611	9.144888813	1017.4965
2022-07-26 13:22:30	GLO	4361780.8711	702149.2188	4586256.9397	46.263183785	9.144885398	1019.1149
2022-07-26 13:22:30	GAL	4361779.4897	702149.0153	4586255.7788	46.263185640	9.144885639	1017.3109
2022-07-26 13:22:30	BDS	4361777.3856	702148.2699	4586259.5336	46.263223261	9.144880433	1018.5057

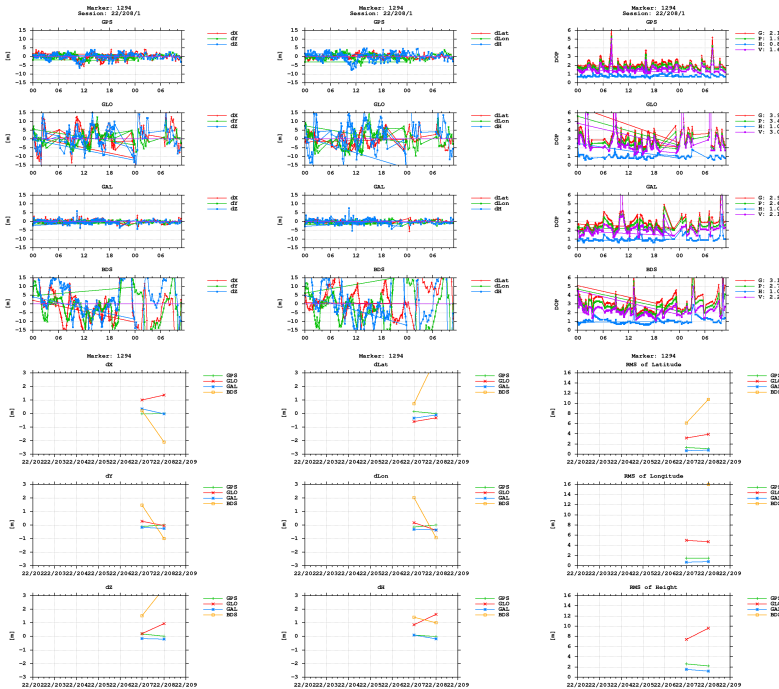

BNC

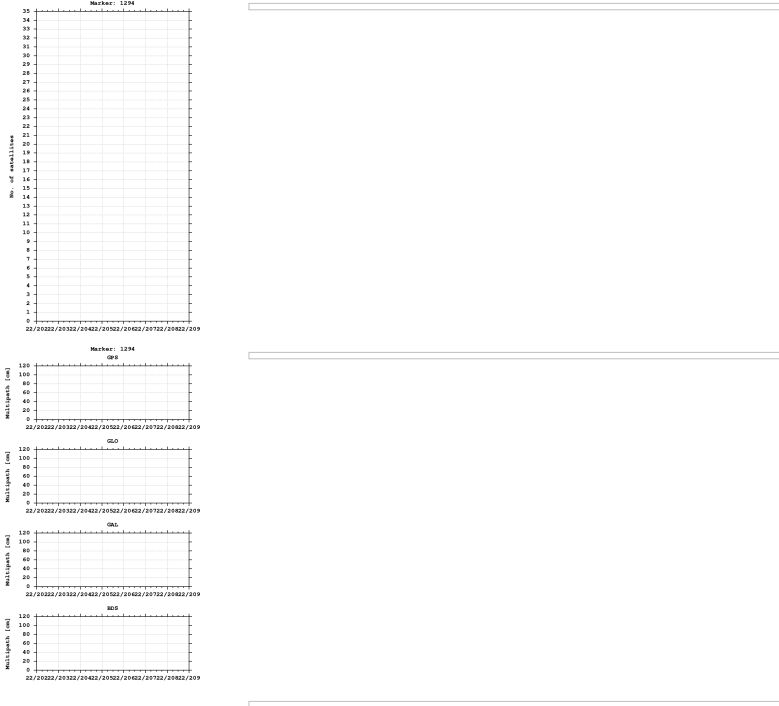

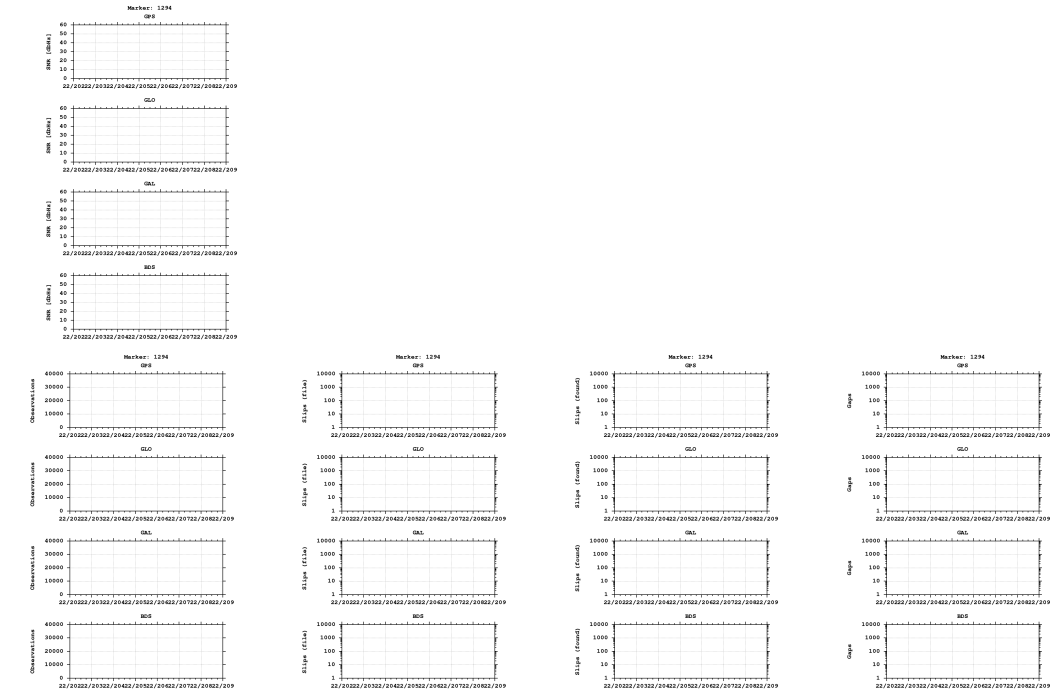

Equipment

2022-07-26 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)