


GNSS observation file monitoring for 0511


Last RINEX file: 05112201.22O
RINEX version: 3.02
Marker: 1314
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites


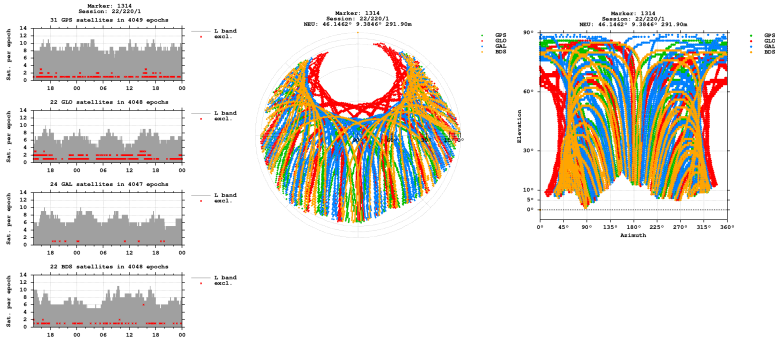


Bands

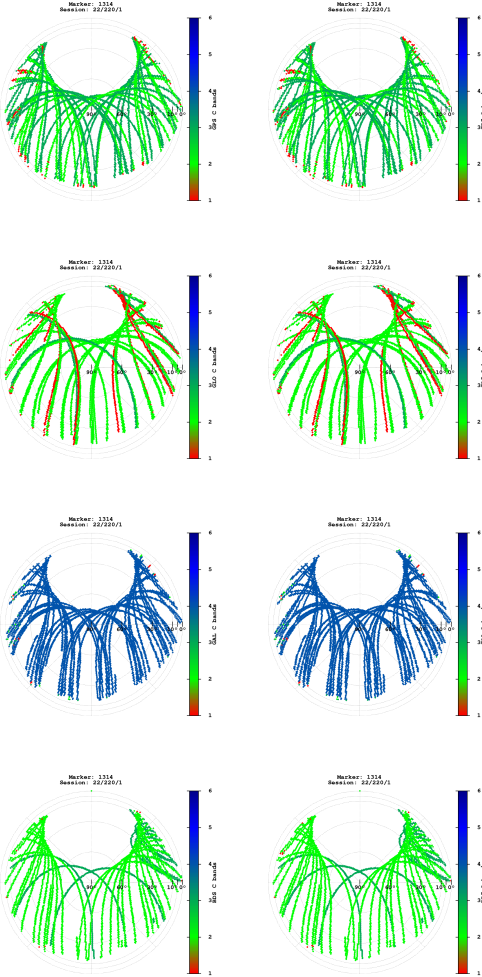

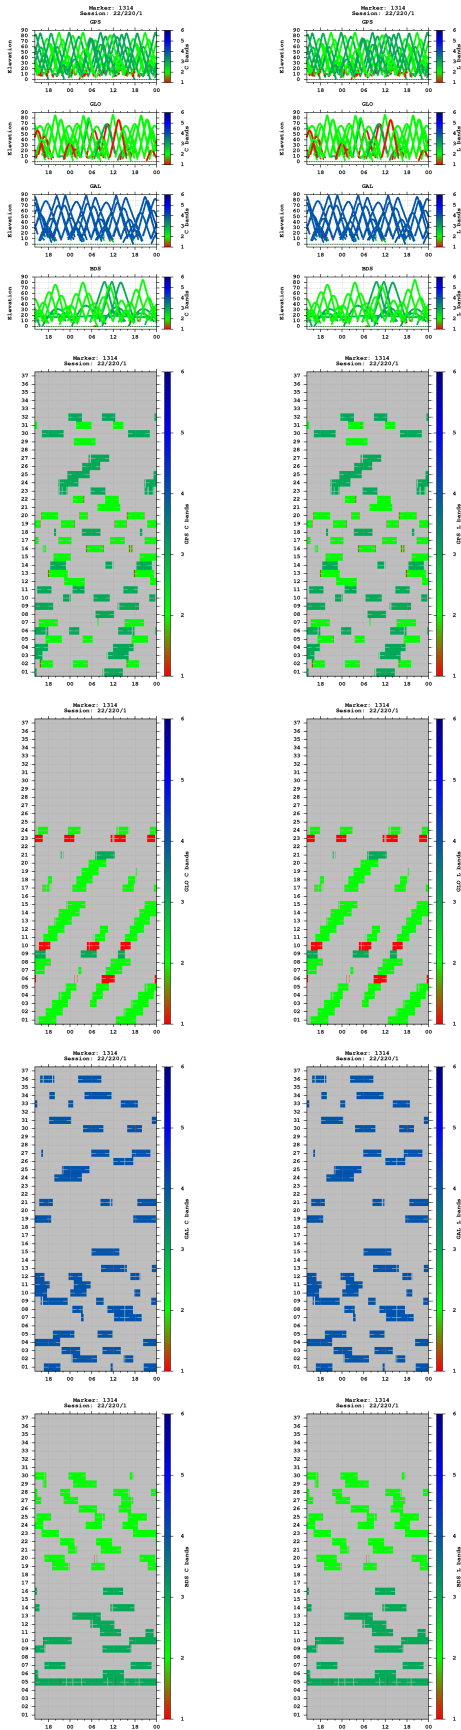



Multipath

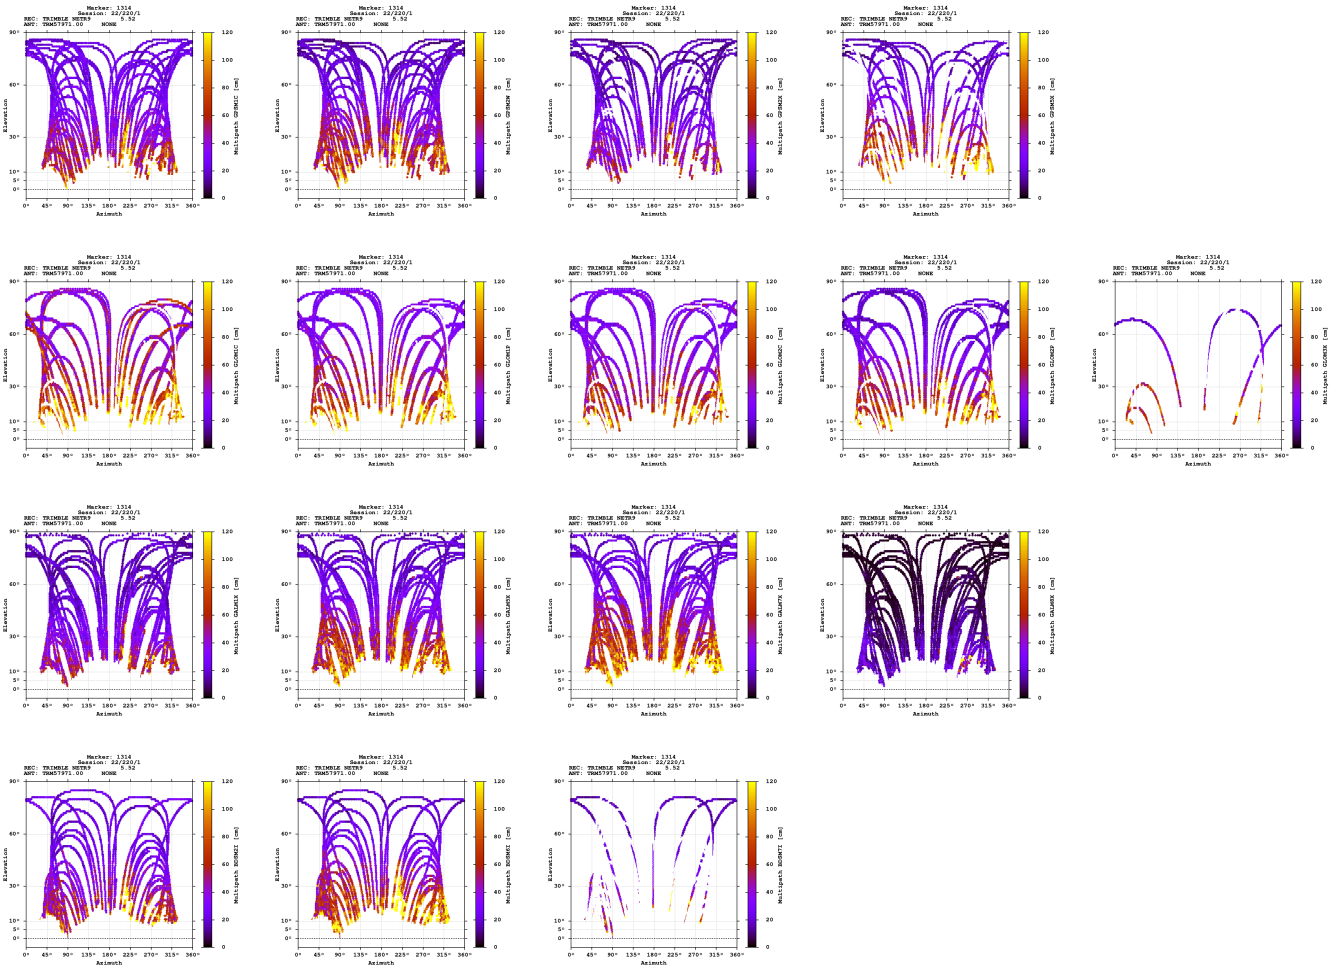

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

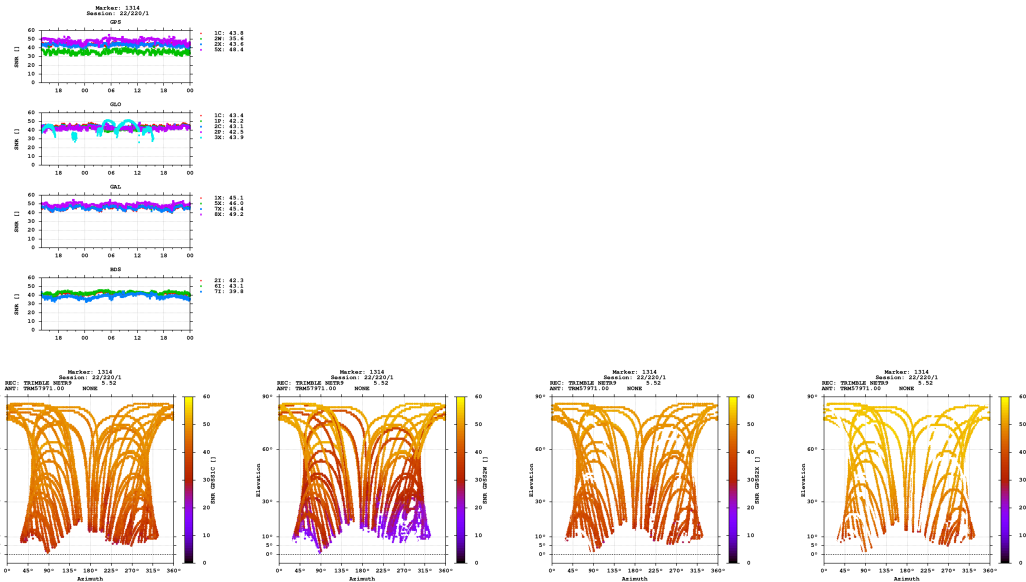

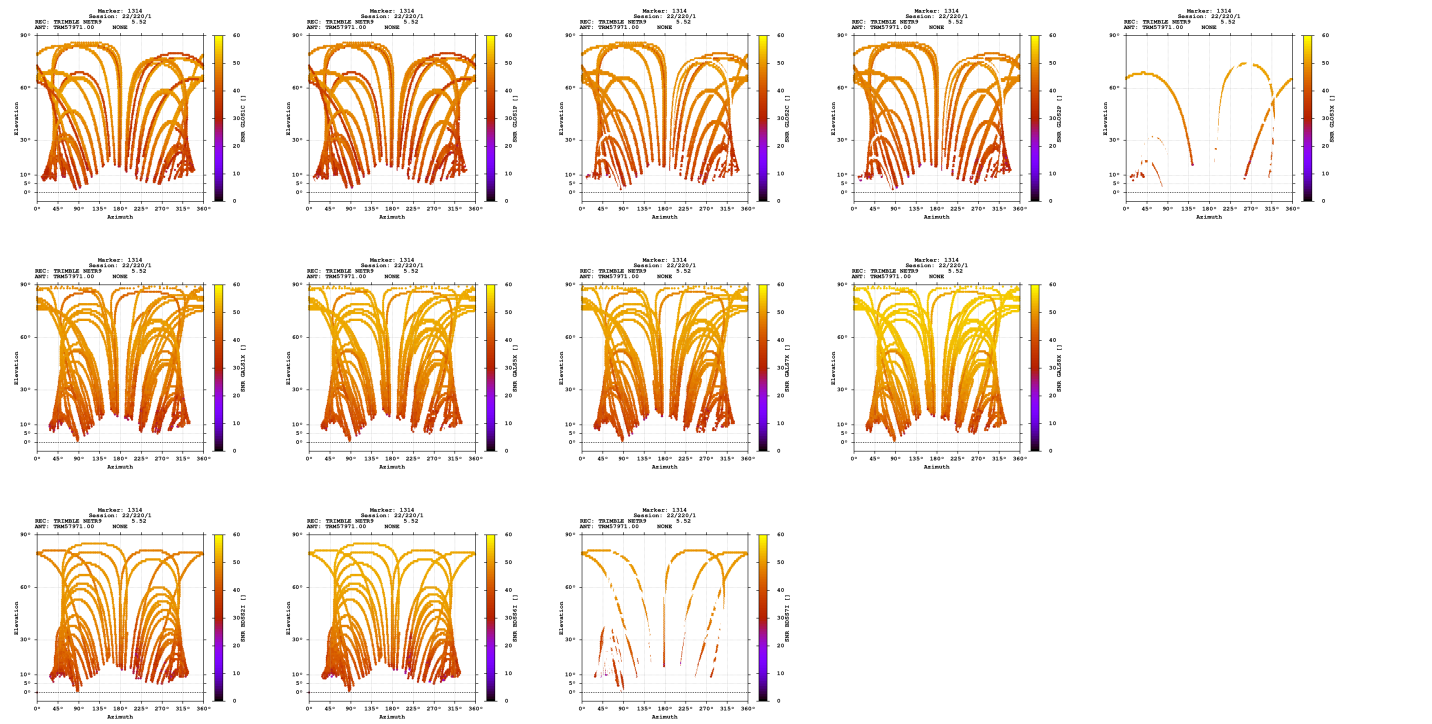

Estimates

2022-08-08 14:12:30	GPS	4367570.5868	721842.8055	4576730.6348	46.146186459	9.384628368	291.9048
2022-08-08 14:12:30	GLO	4367571.6264	721842.7922	4576731.2905	46.146183906	9.384626004	293.0867
2022-08-08 14:12:30	GAL	4367570.3287	721842.5487	4576730.4717	46.146187366	9.384625635	291.5817
2022-08-08 14:12:30	BDS	4367570.2864	721843.1281	4576733.1191	46.146203524	9.384633122	293.5273

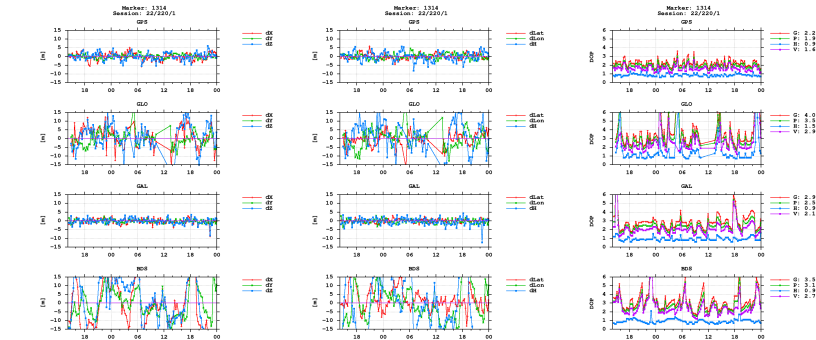

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)