


GNSS observation file monitoring for 0511


Last RINEX file: 05112211.220
RINEX version: 3.02
Marker: 1314
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE

Epochs

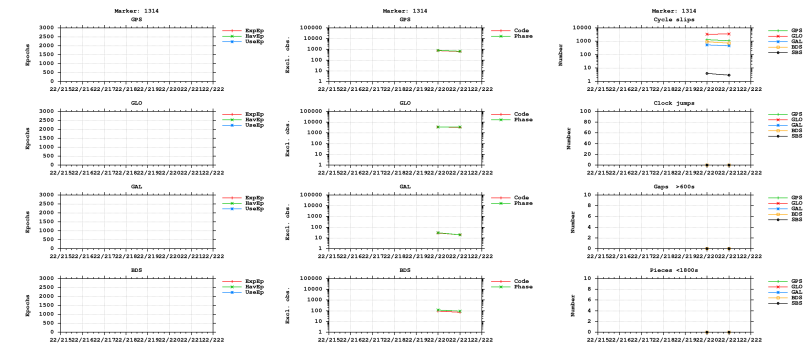



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

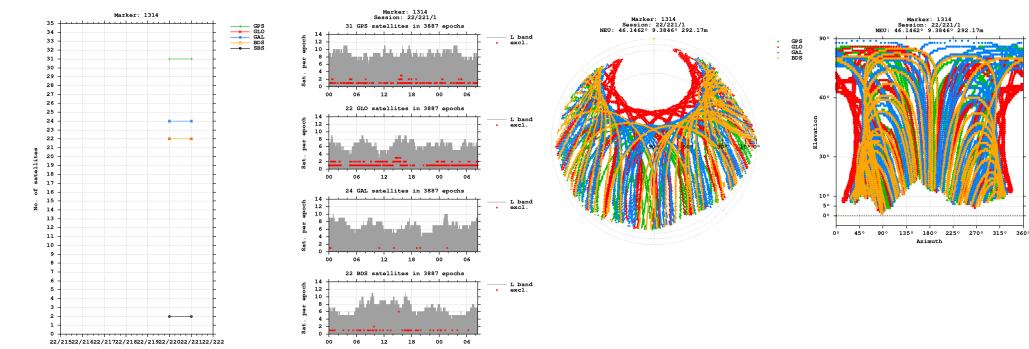


Bands

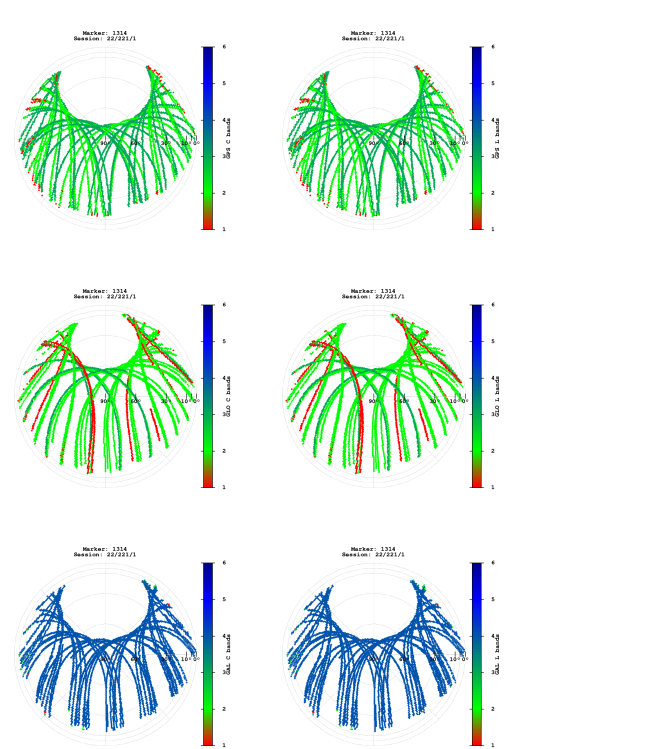


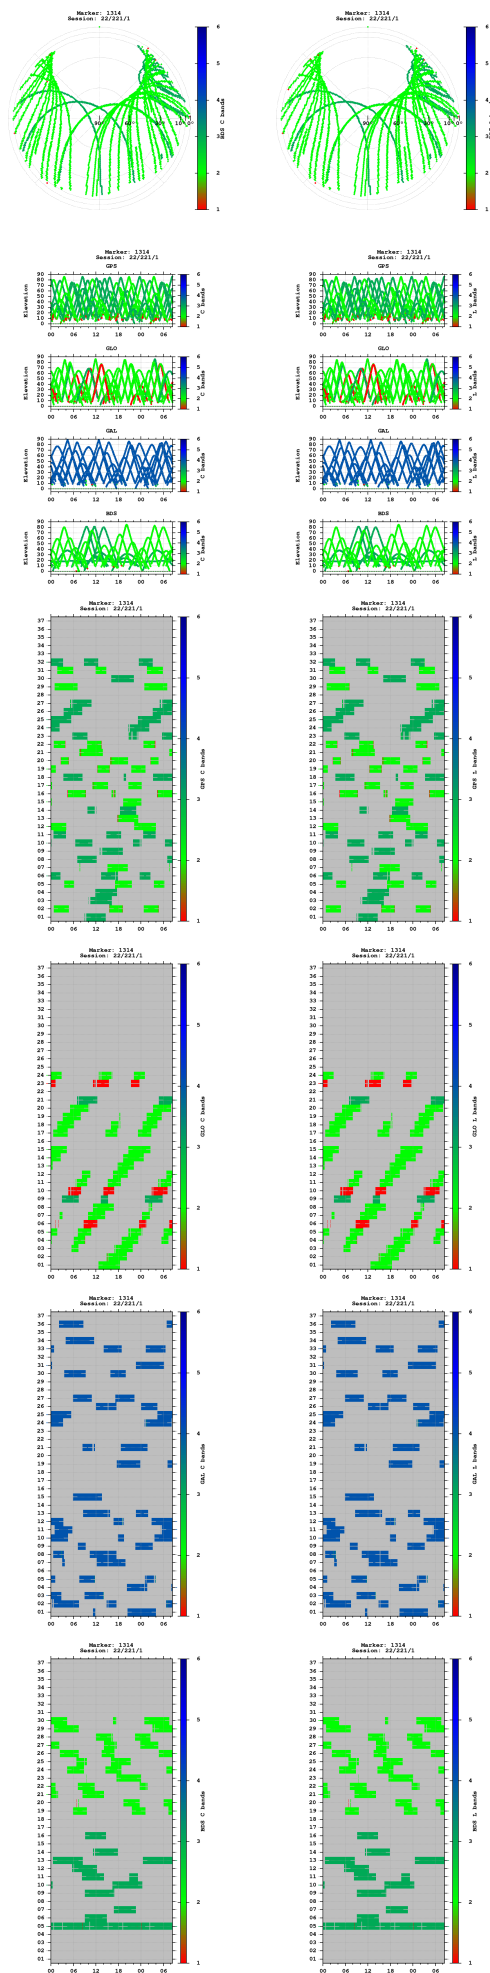


Observations

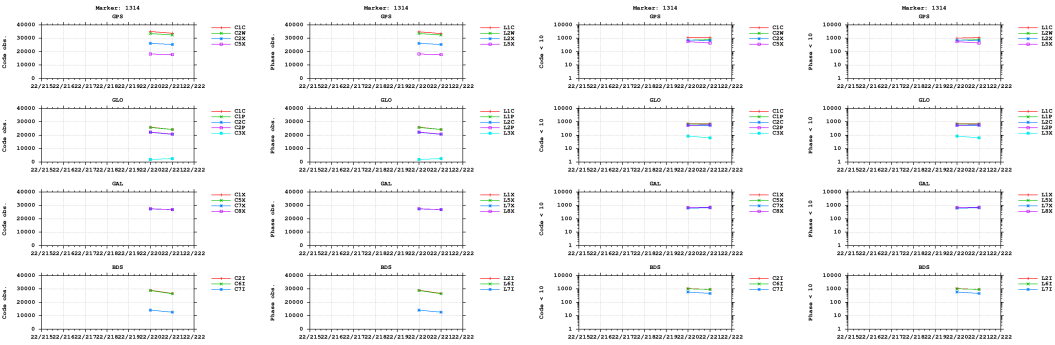



Multipath

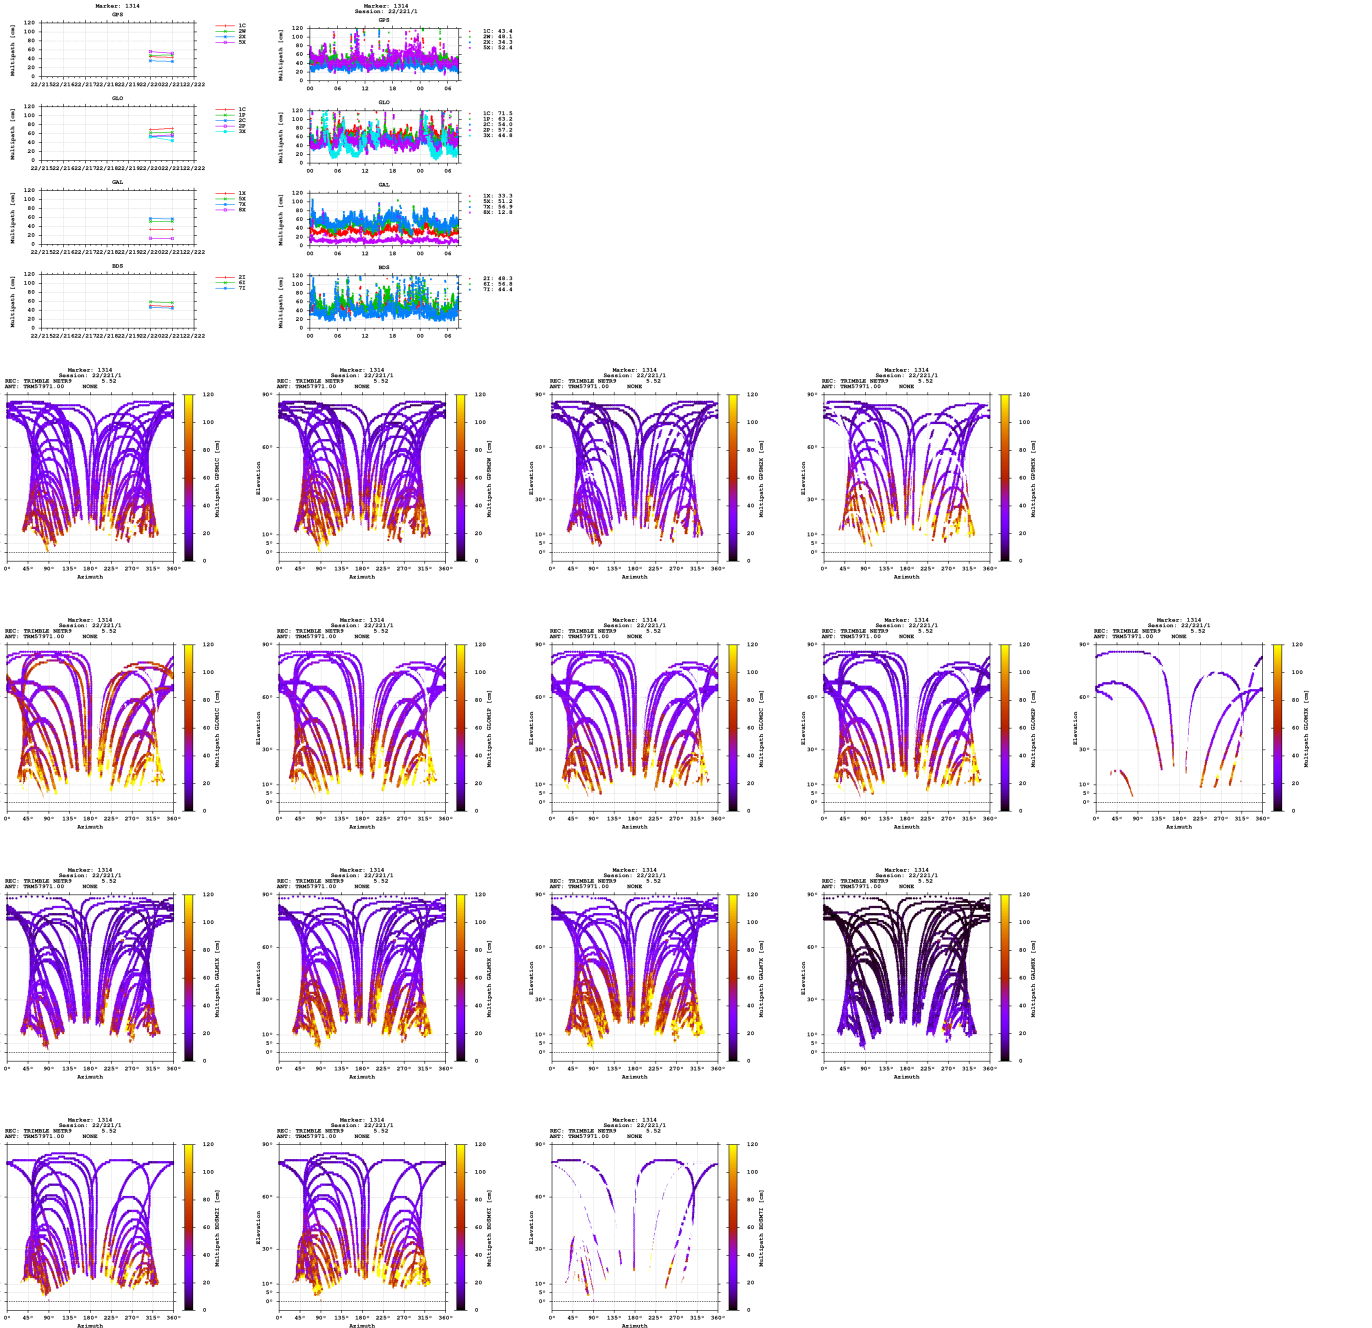


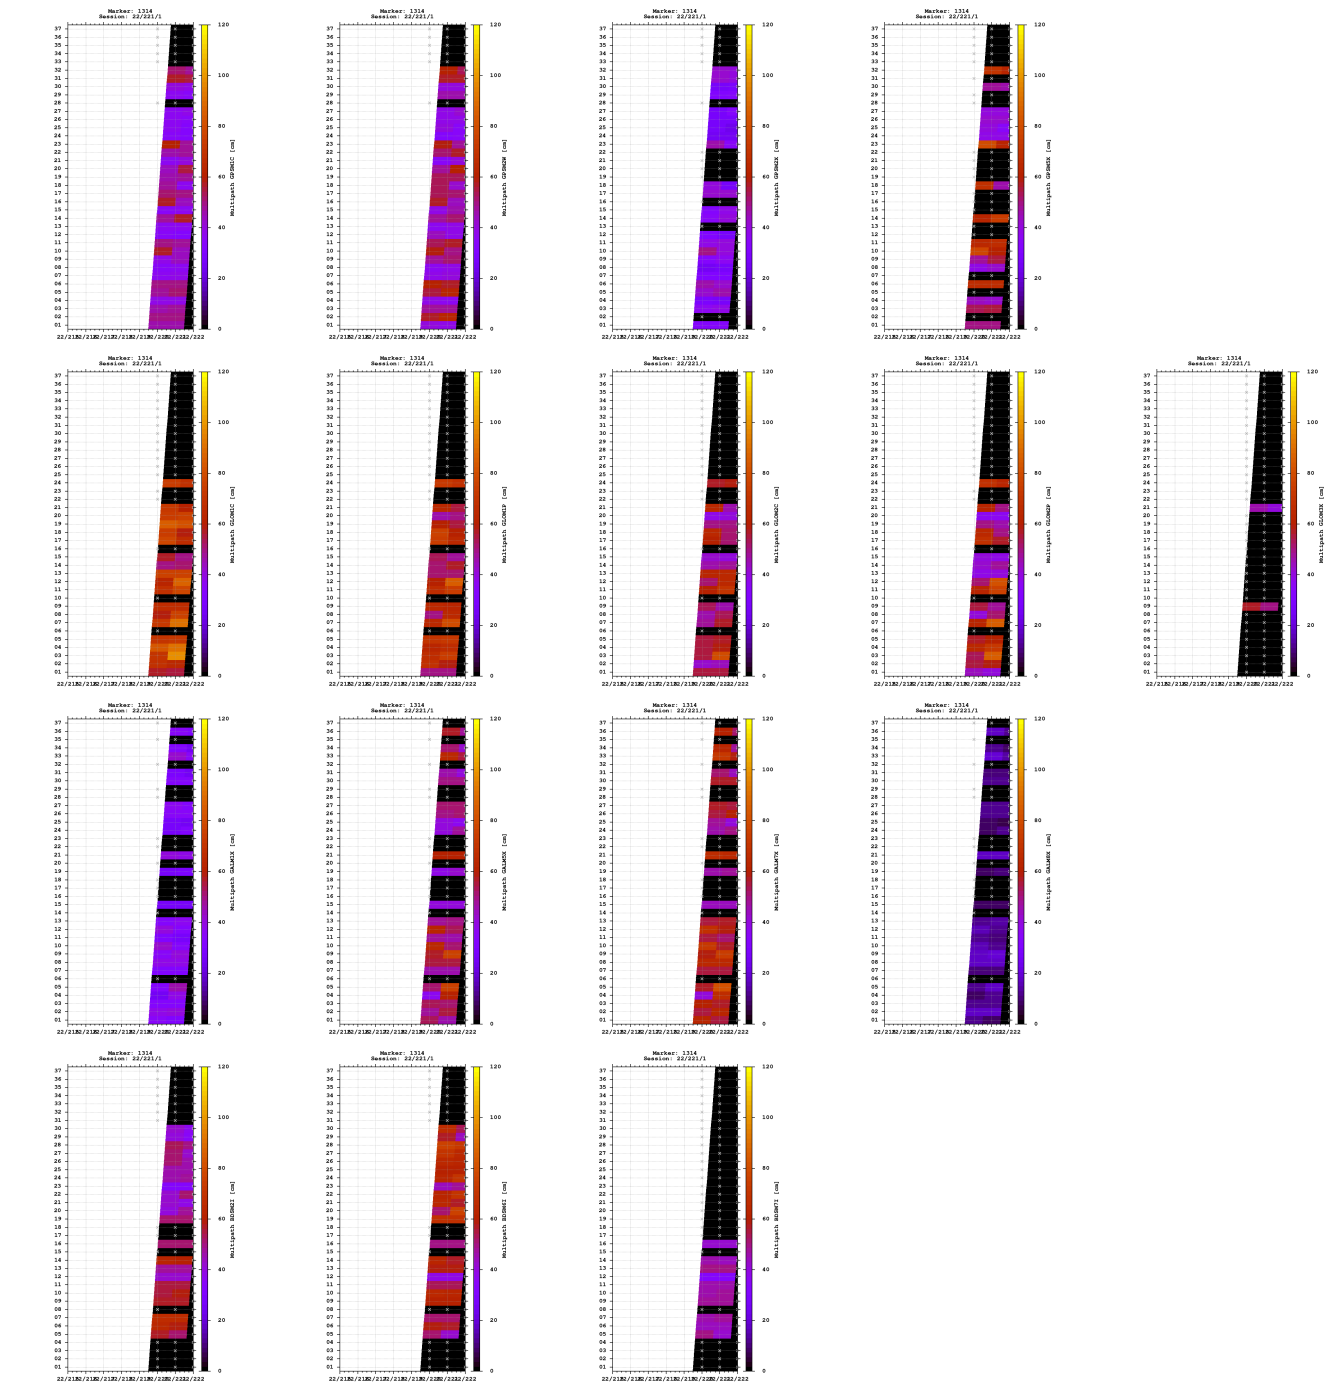

Signal-to-noise ratio

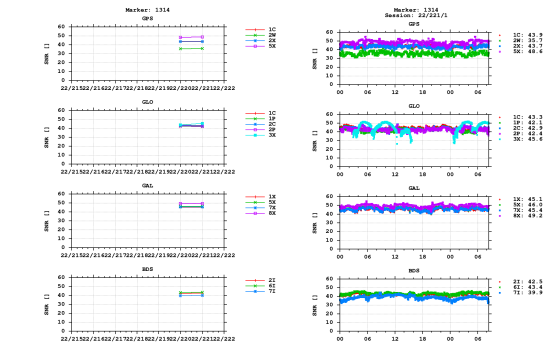


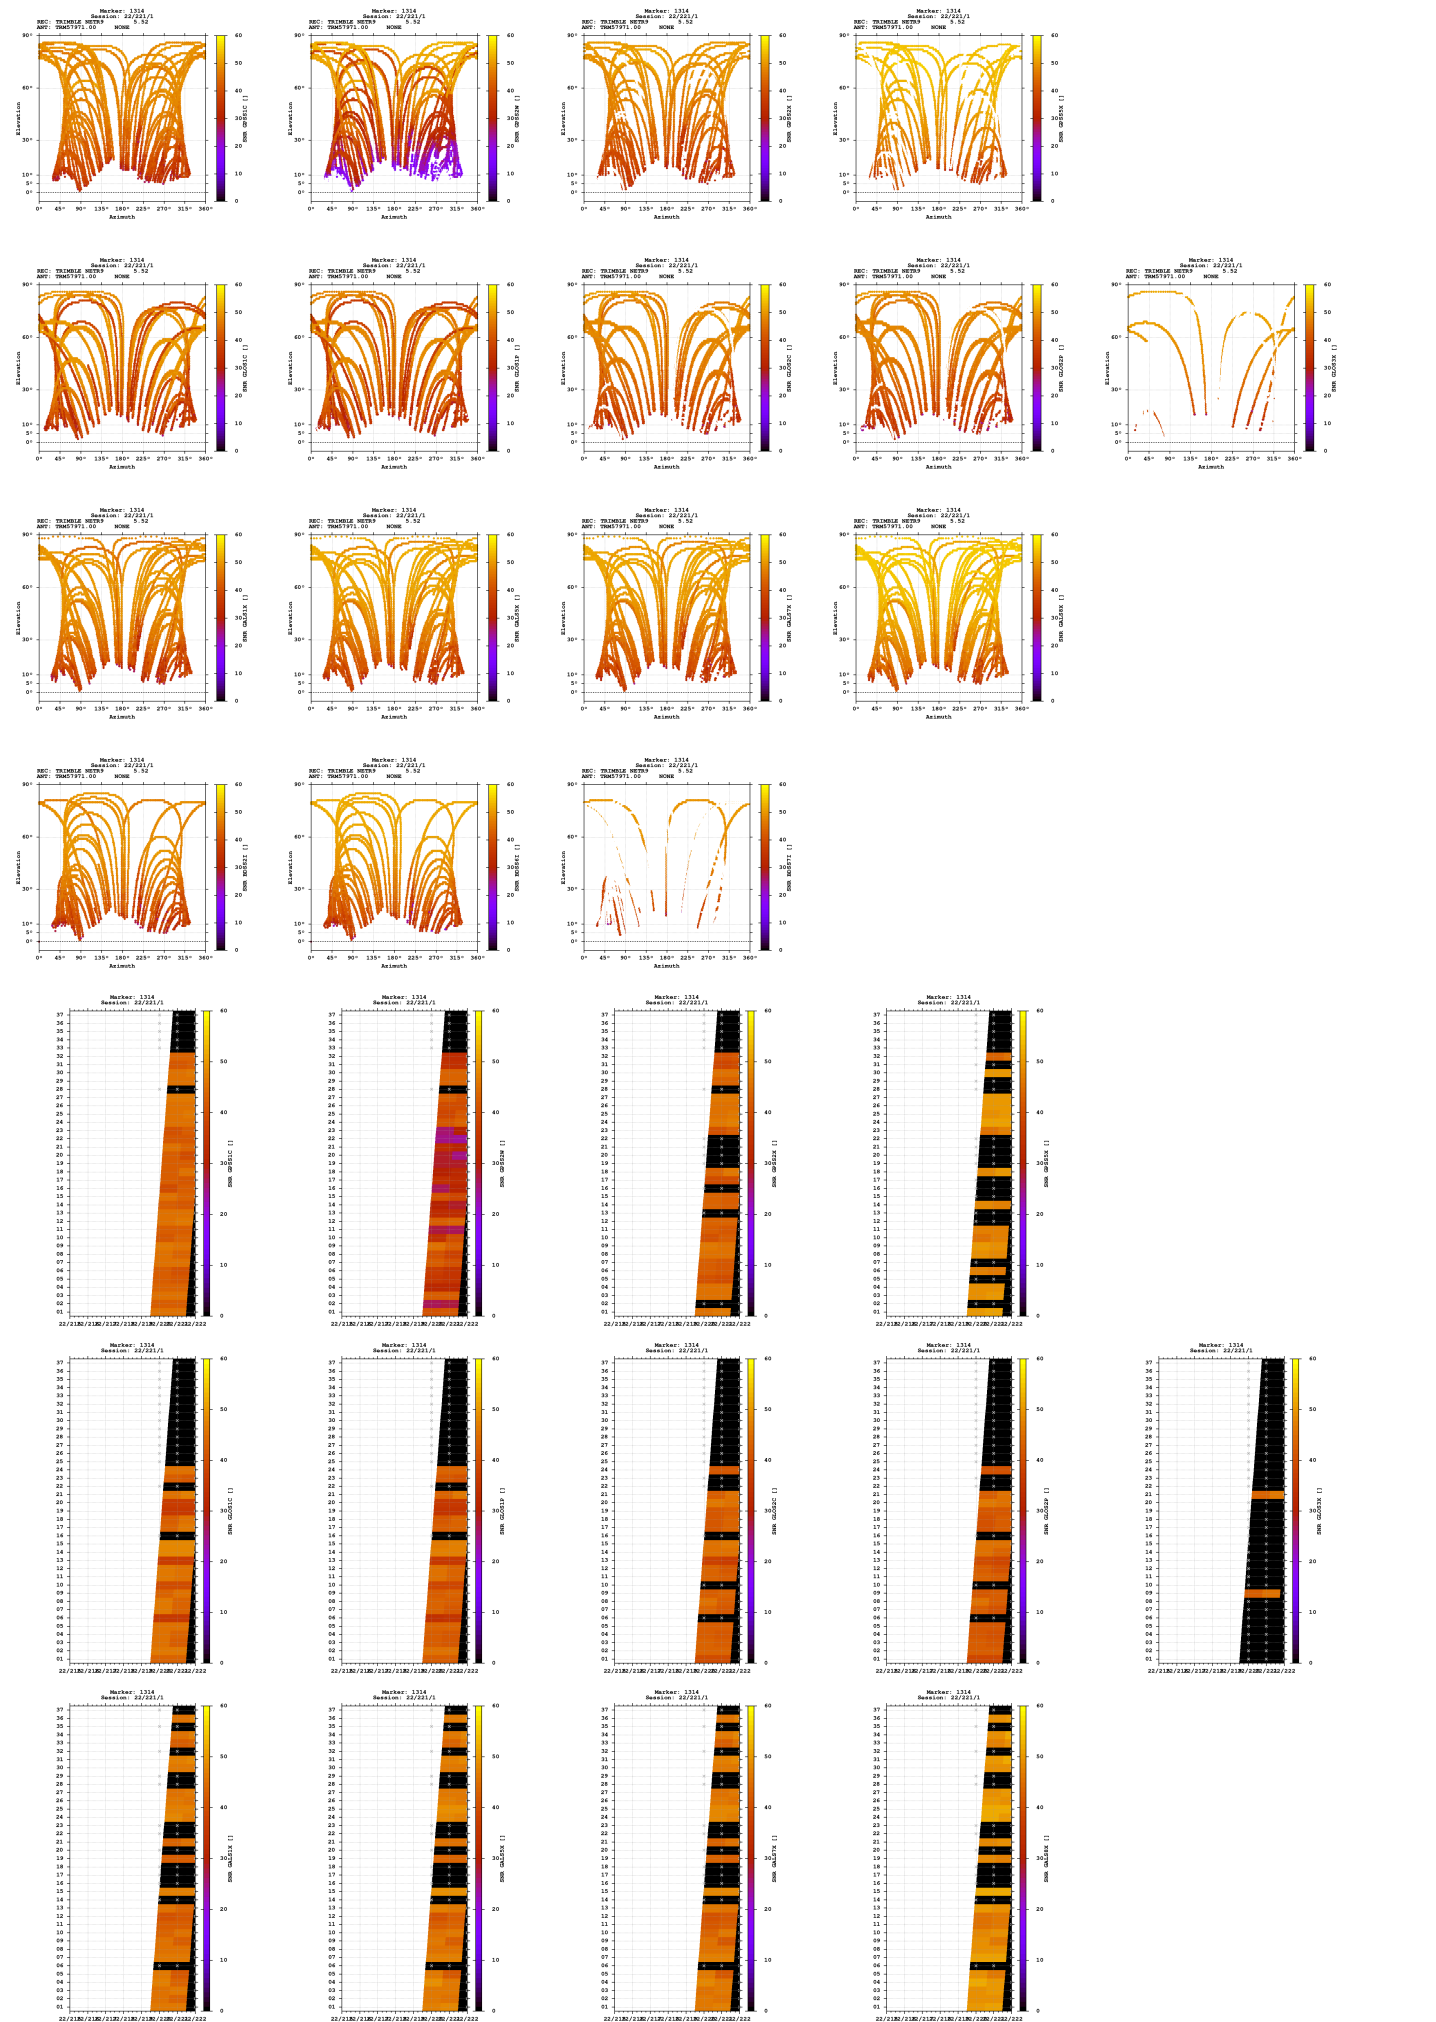

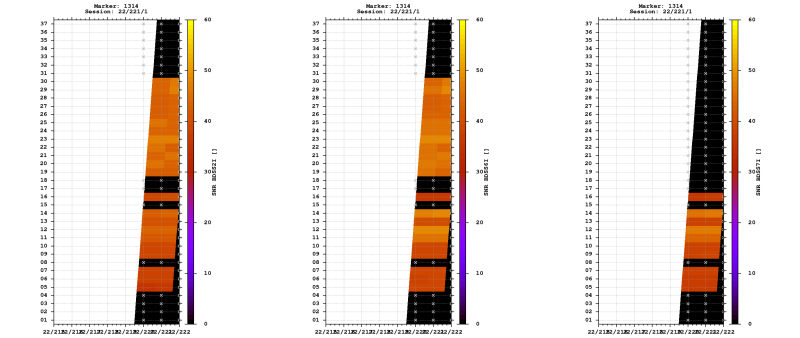


Estimates

2022-08-08 14:12:30	GPS	4367570.6996	721842.8737	4576730.8844	46.146187221	9.384629002	292.1695
2022-08-08 14:12:30	GLO	4367571.4272	721843.4289	4576732.0235	46.146189076	9.384634556	293.5510
2022-08-08 14:12:30	GAL	4367570.3585	721842.5012	4576730.4503	46.146187092	9.384624964	291.5813
2022-08-08 14:12:30	BDS	4367571.2182	721843.4070	4576734.7146	46.146207210	9.384634717	295.3463

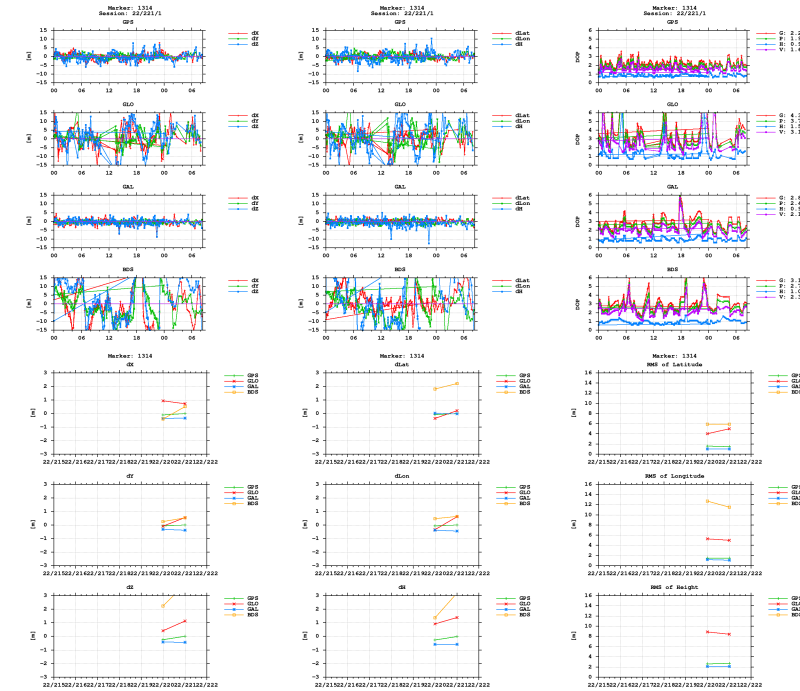

BNC



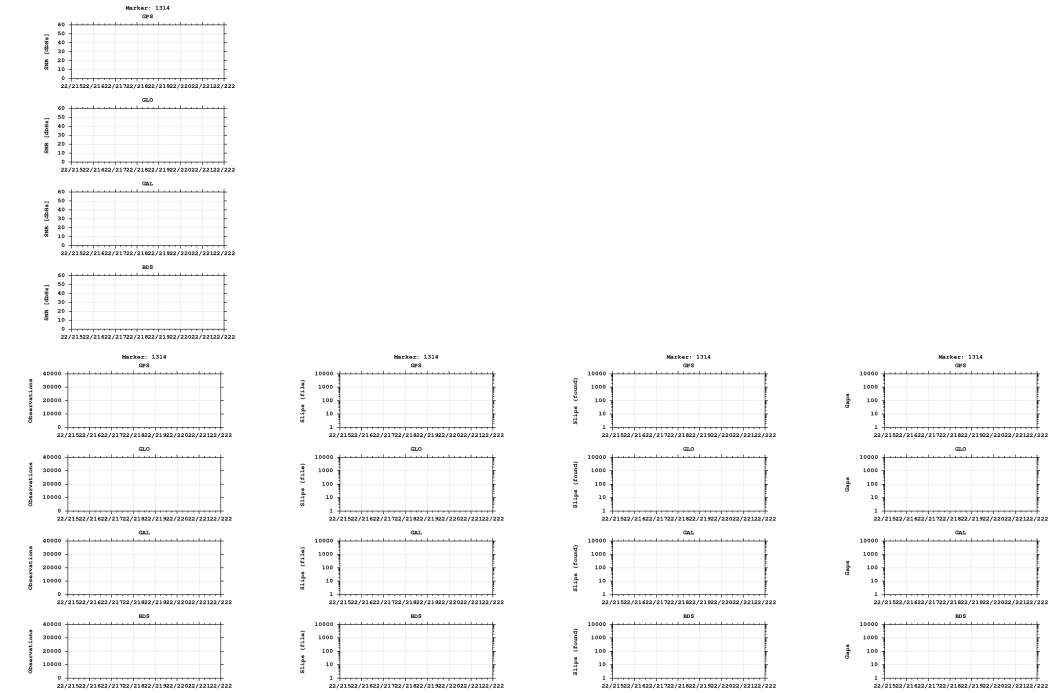

Equipment

2022-08-08 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)