


GNSS observation file monitoring for 0511


Last RINEX file: 05112281.220
RINEX version: 3.02
Marker: 1076
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE

Epochs

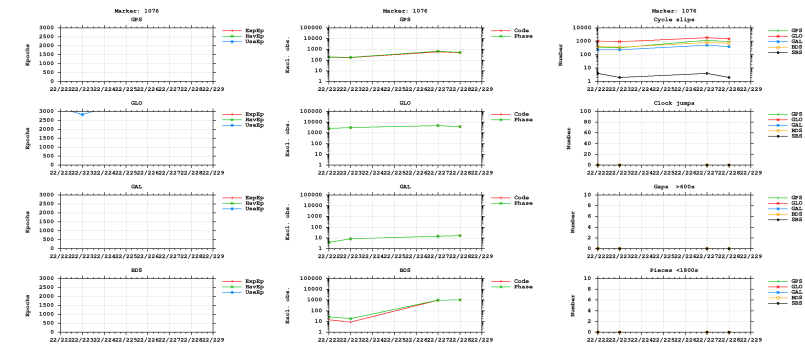



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

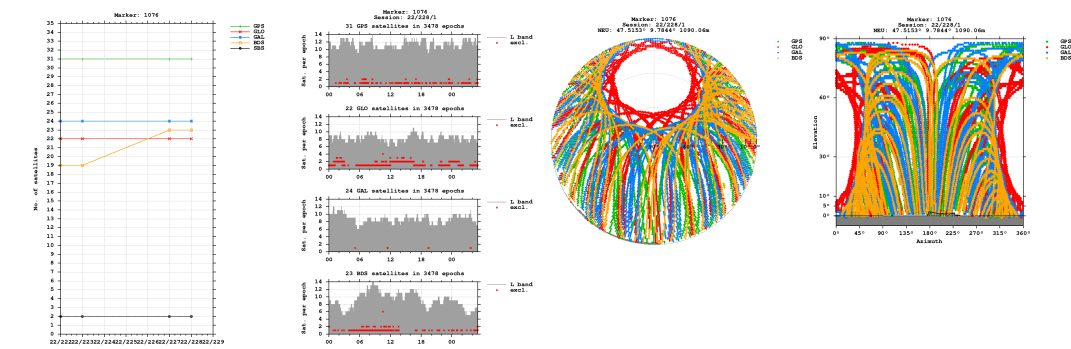


Bands

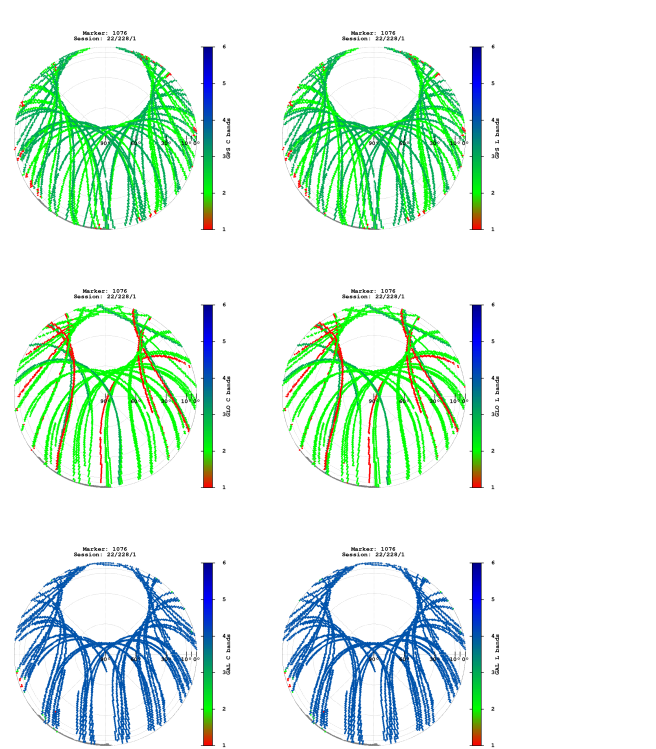


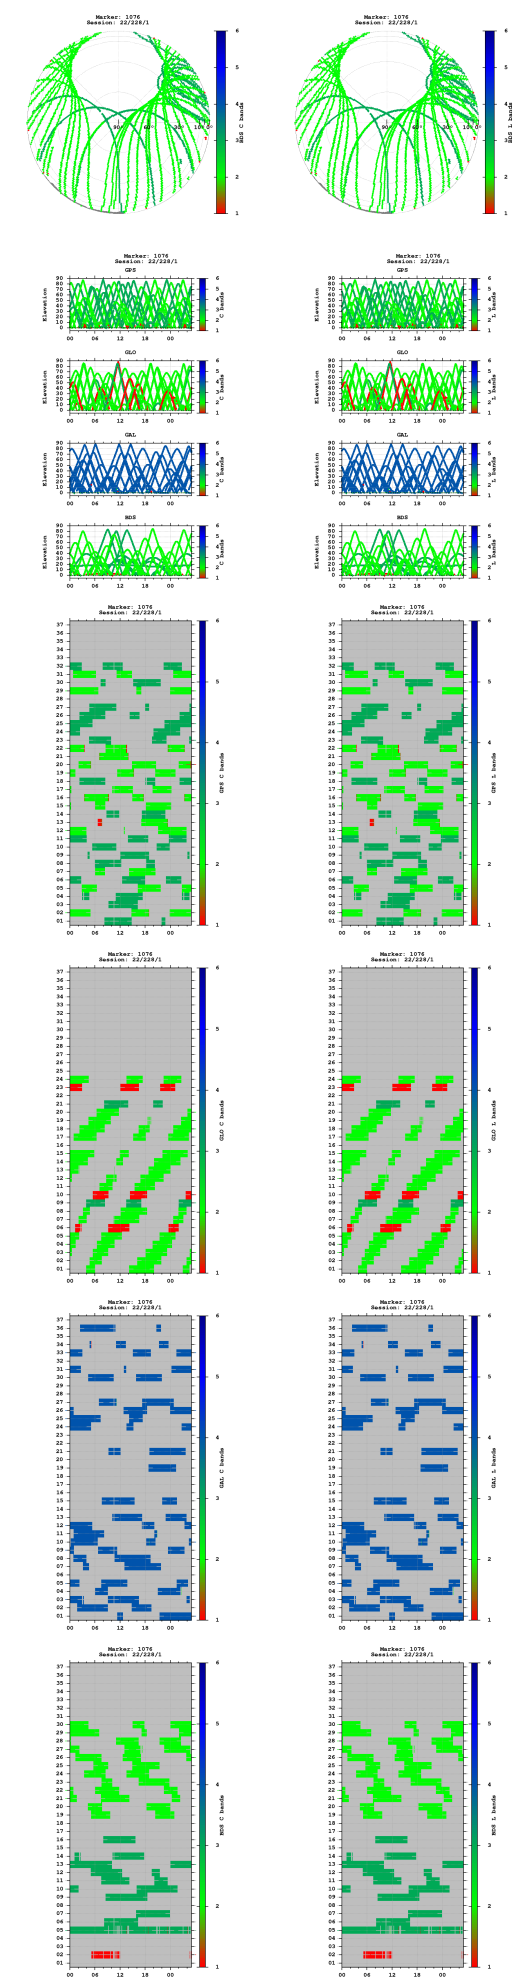


Observations

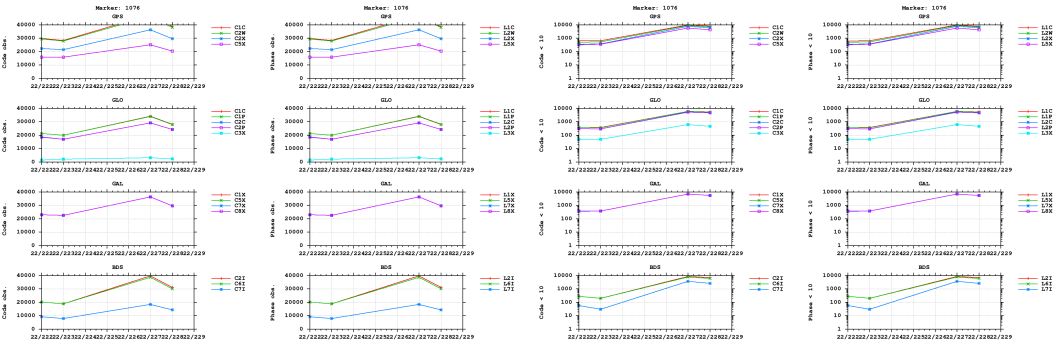


Multipath

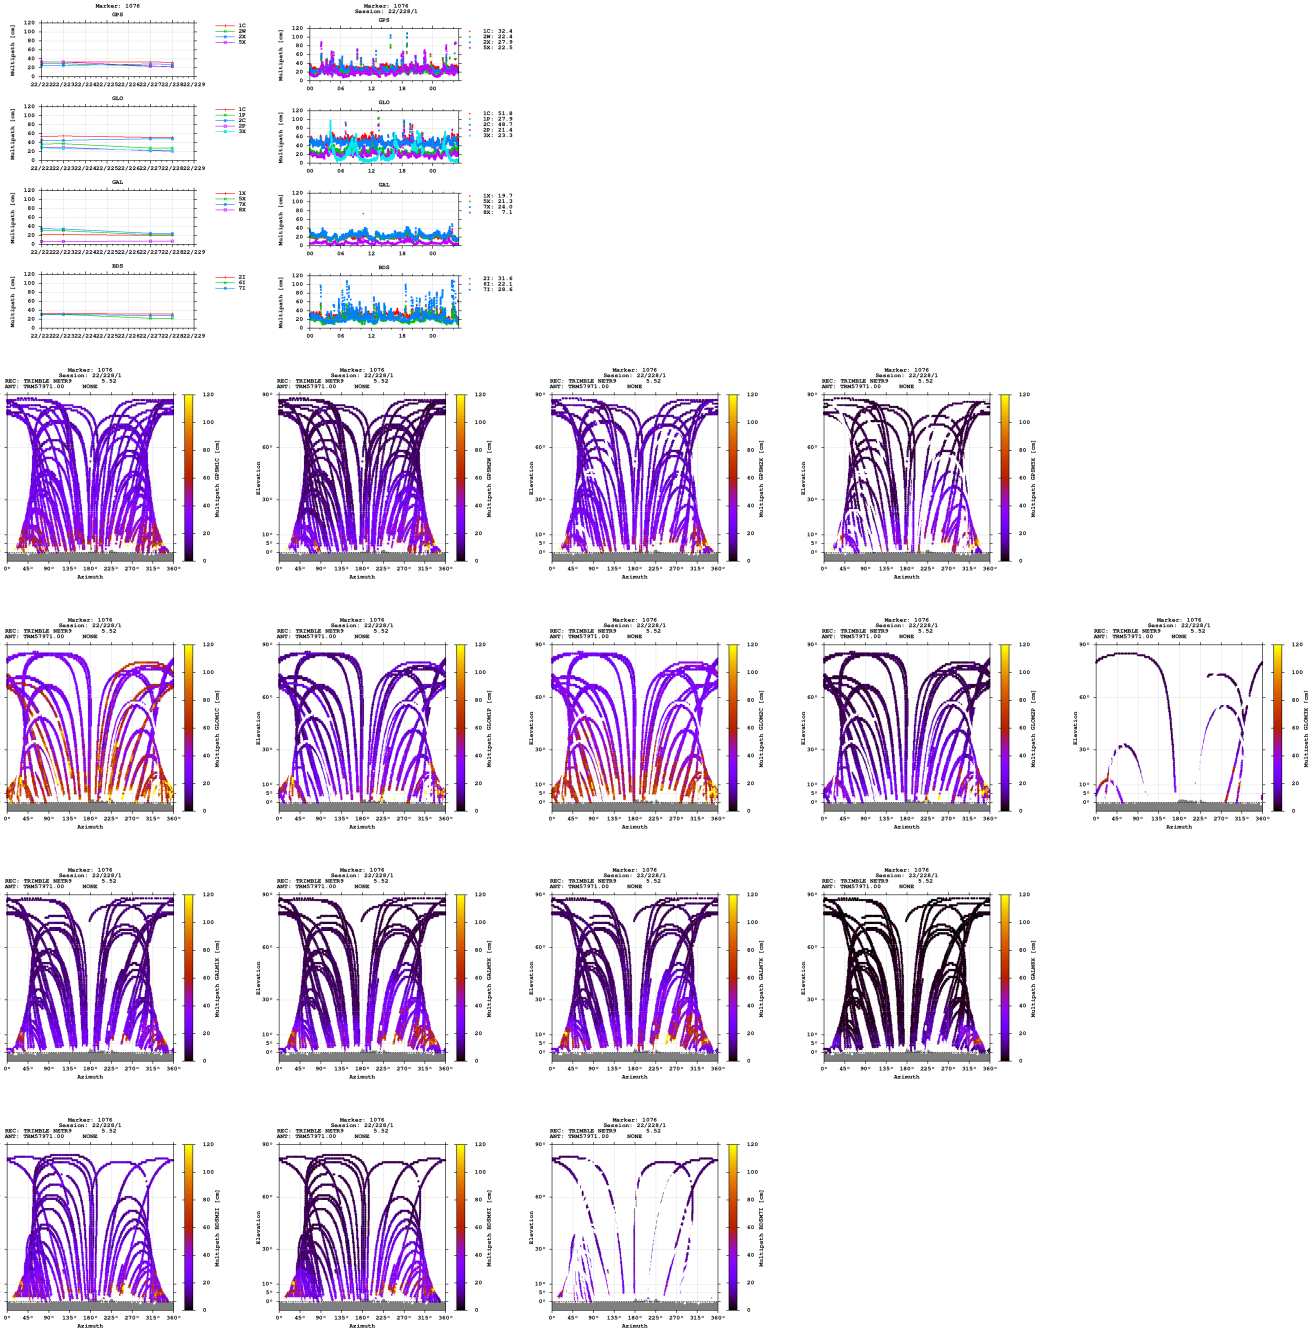


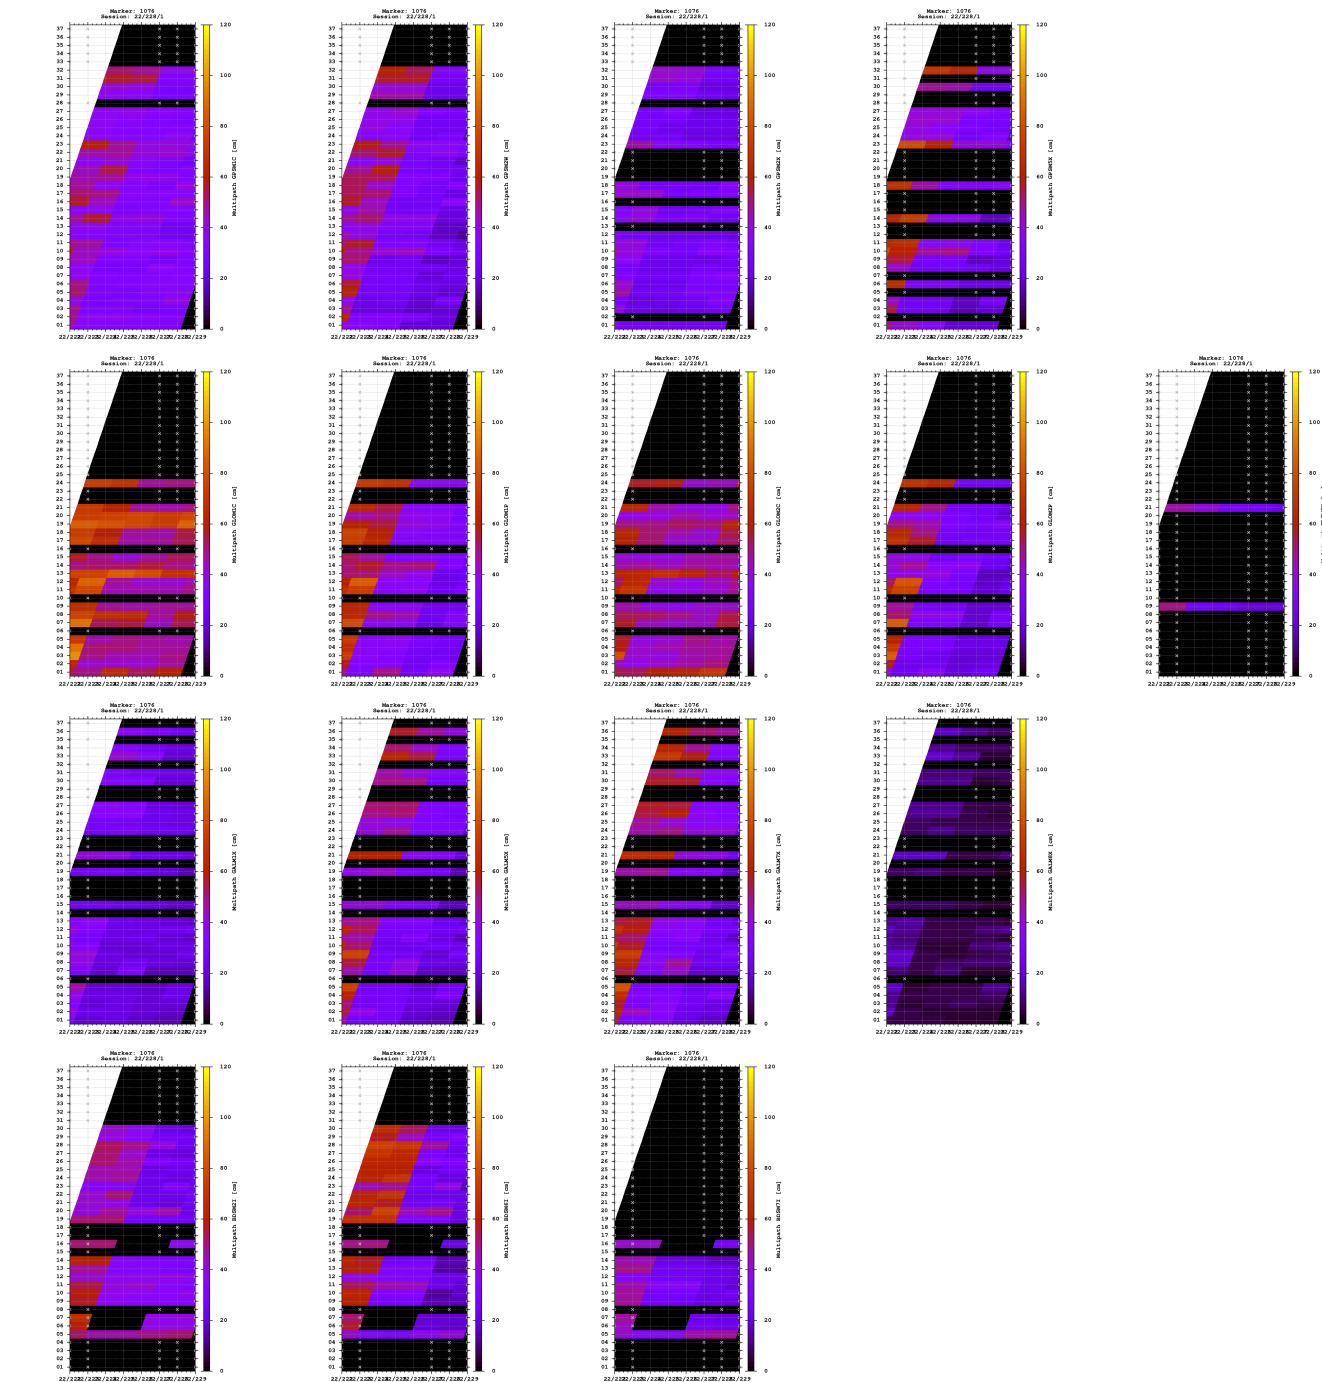


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

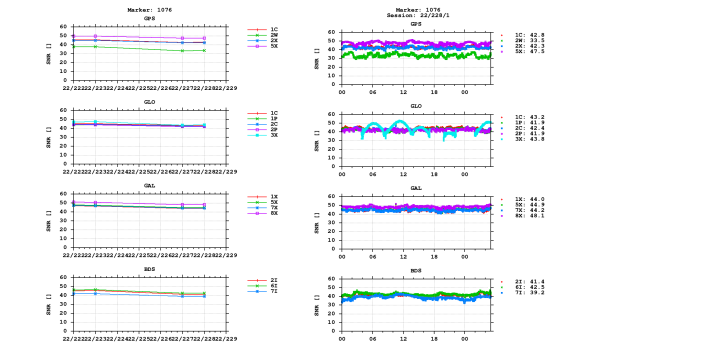


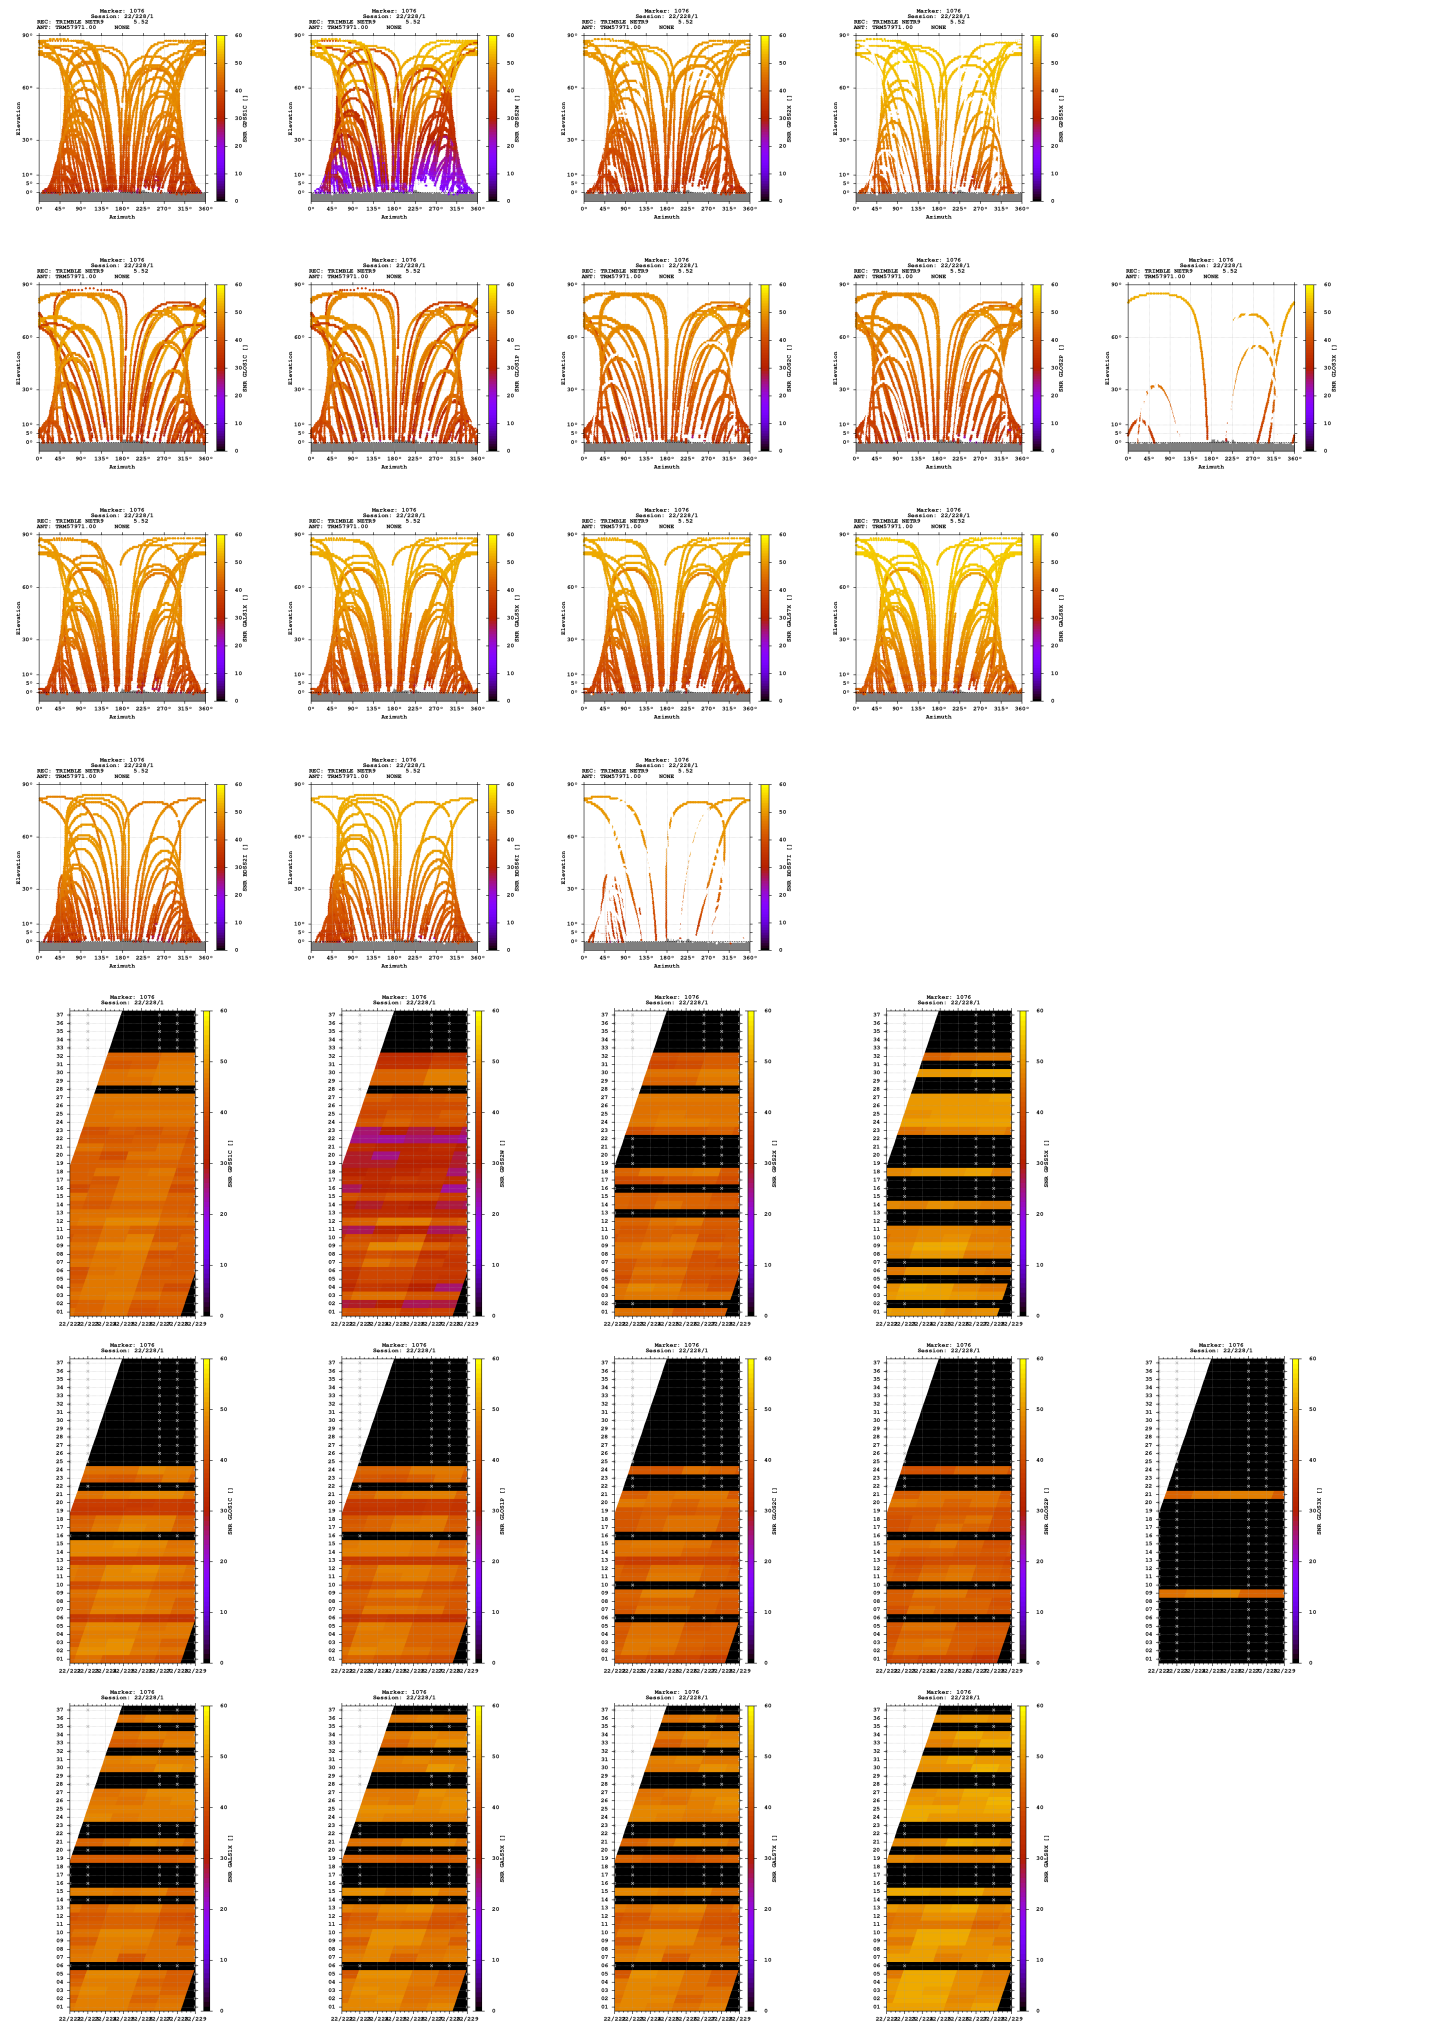

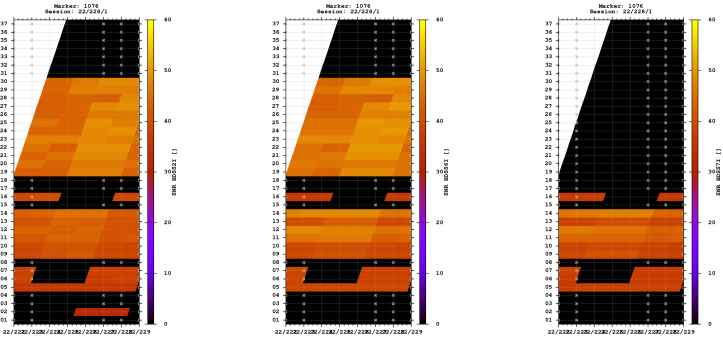



Estimates

2022-08-15 12:24:30	GPS	4253563.5552	733523.0210	4681452.9322	47.515330020	9.784369126	1090.0638
2022-08-15 12:24:30	GLO	4253564.1859	733523.9939	4681453.2057	47.515326463	9.784380430	1090.7970
2022-08-15 12:24:30	GAL	4253563.1240	733522.8886	4681452.6674	47.515331379	9.784368367	1089.5664
2022-08-15 12:24:30	BDS	4253563.8022	733523.3428	4681456.6318	47.515350514	9.784372778	1092.9935

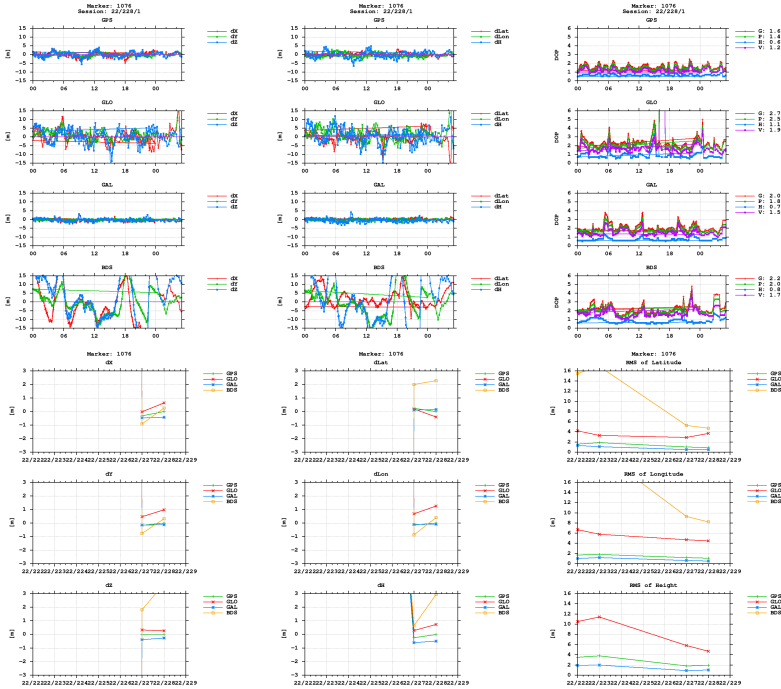

BNC

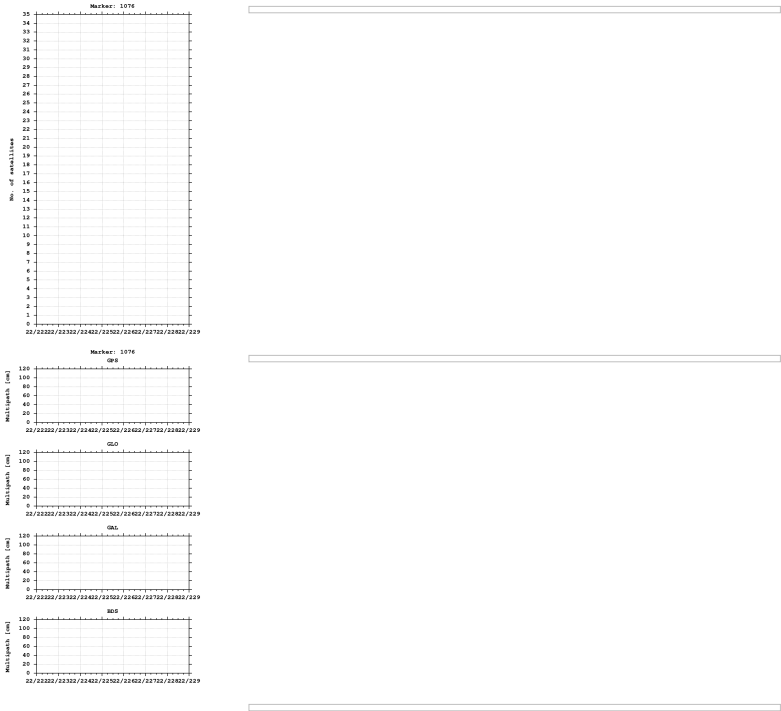

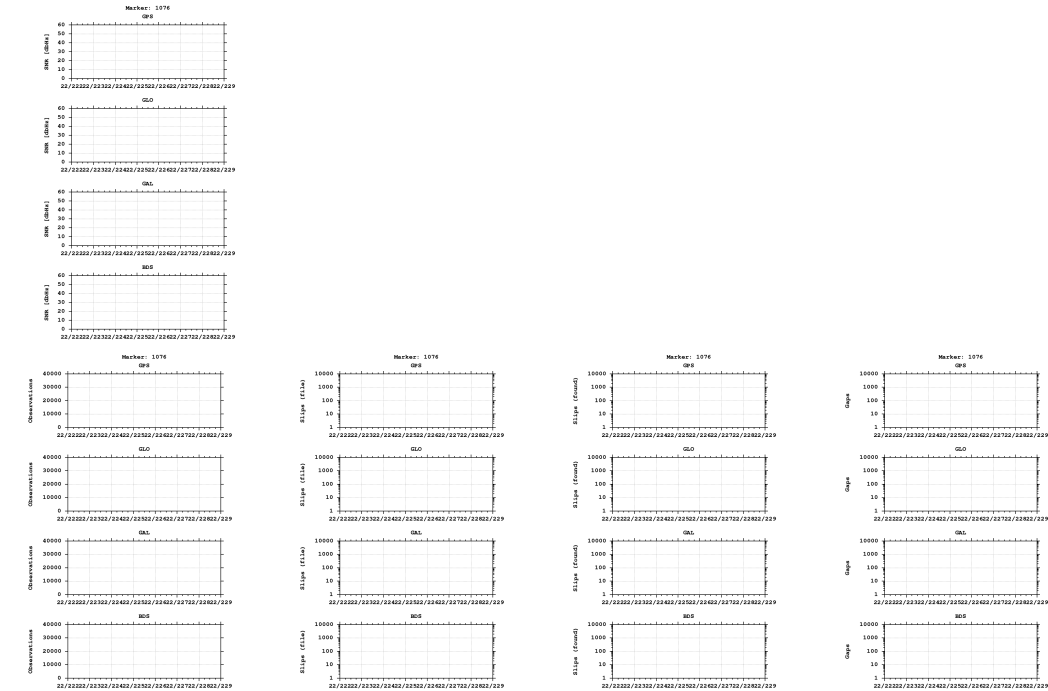

Equipment

2022-08-08 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)