

GNSS observation file monitoring for 0511

Last RINEX file: 05112291.220


RINEX version: 3.02

Marker: 1075

Receiver: 511 TRIMBLE NETR9 5.52


Antenna: 511 TRM57971.00 NONE

Epochs

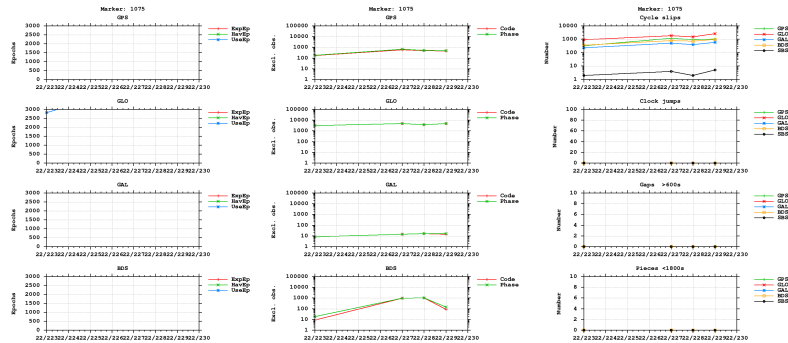



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

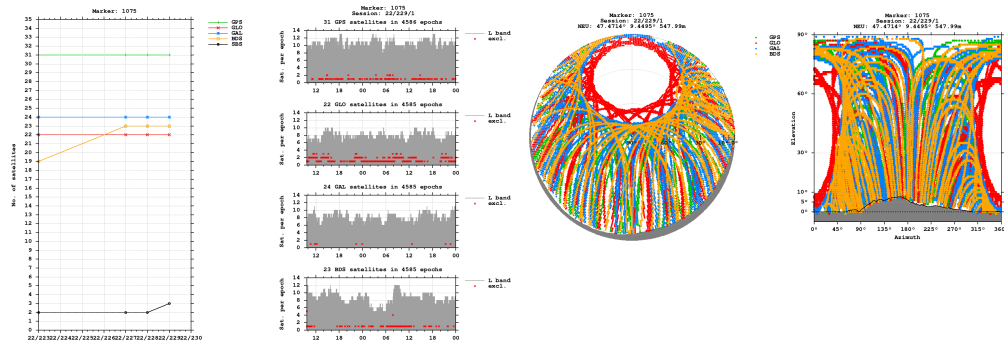


Bands

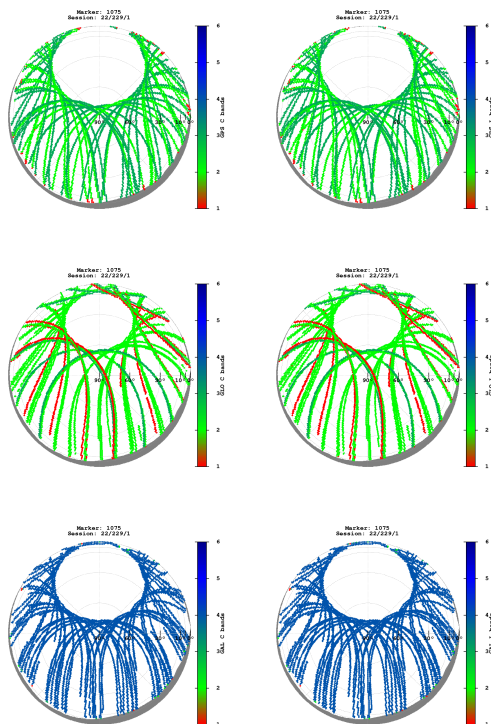


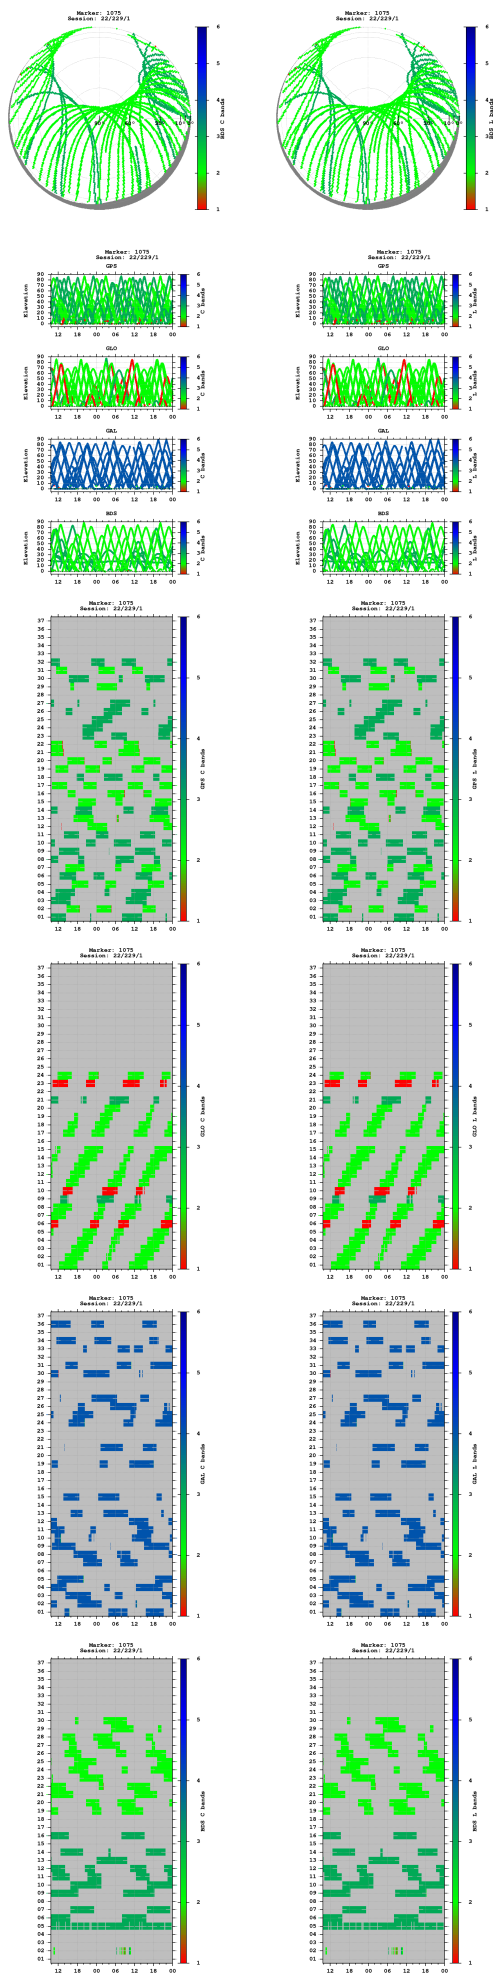


Observations

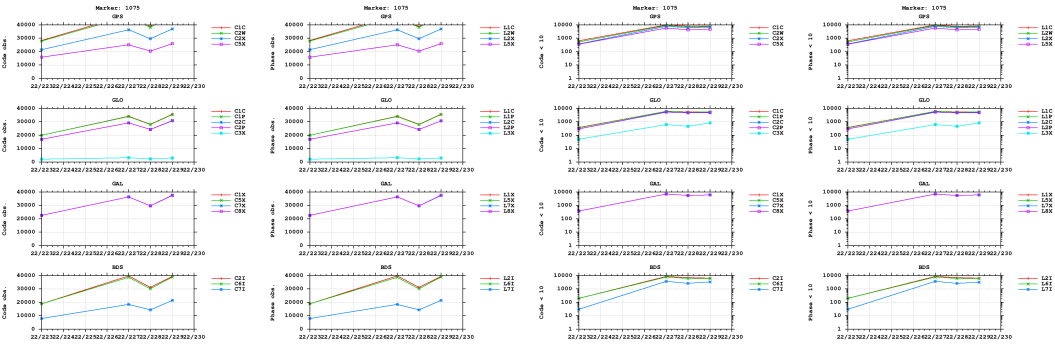


Multipath

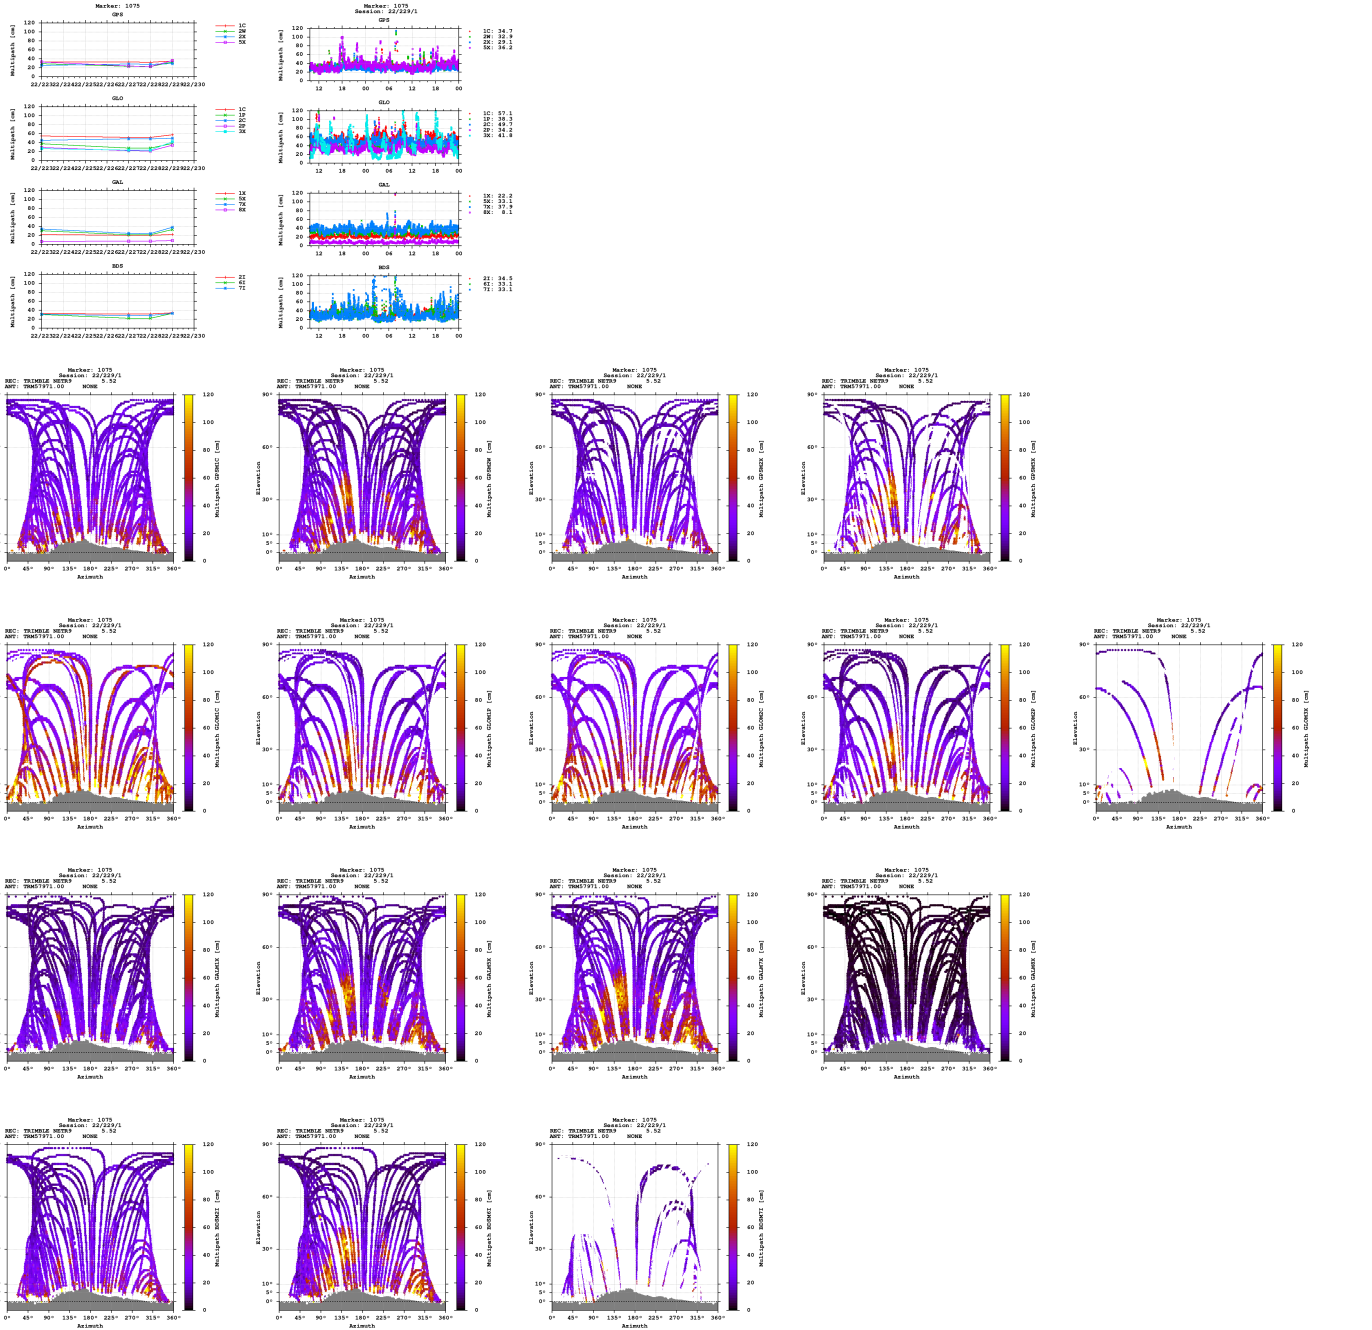


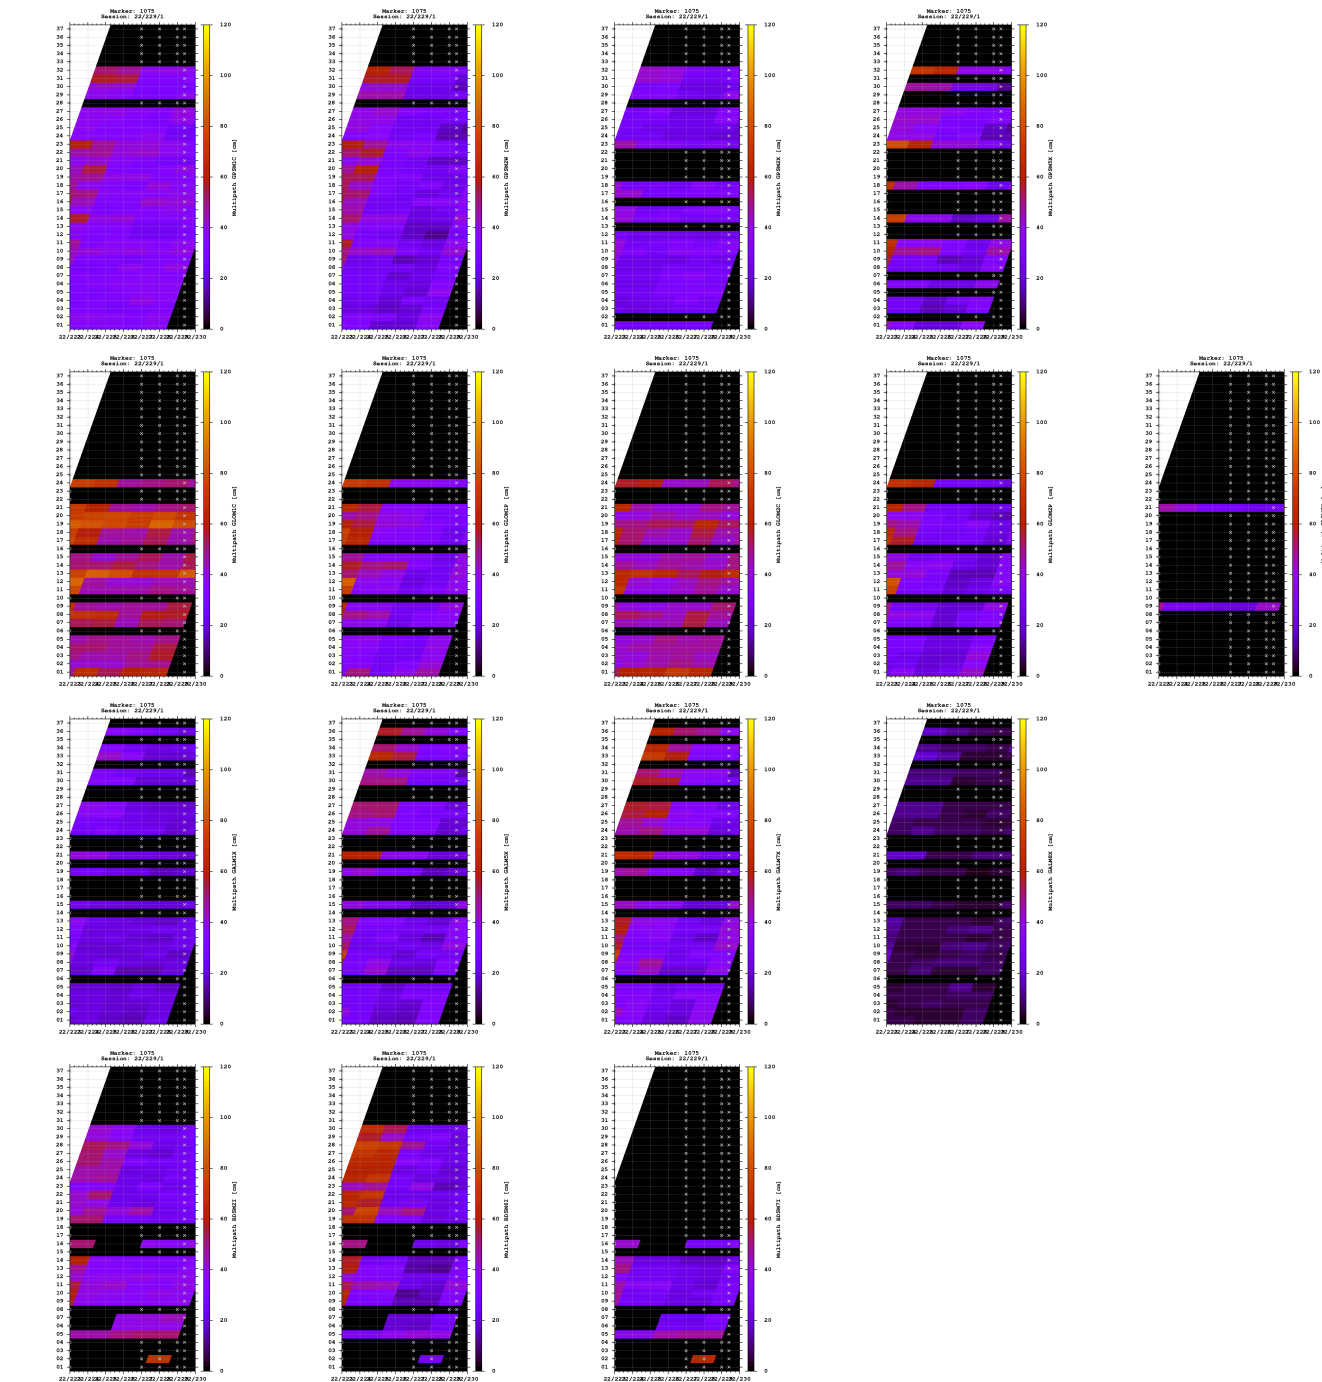


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

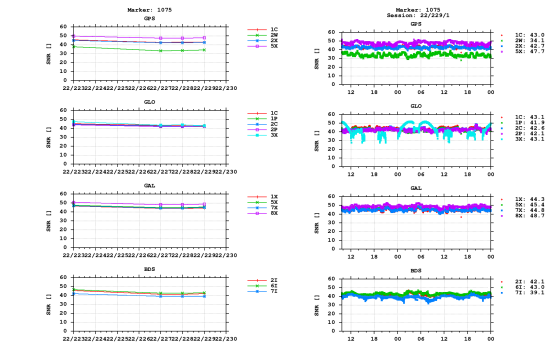


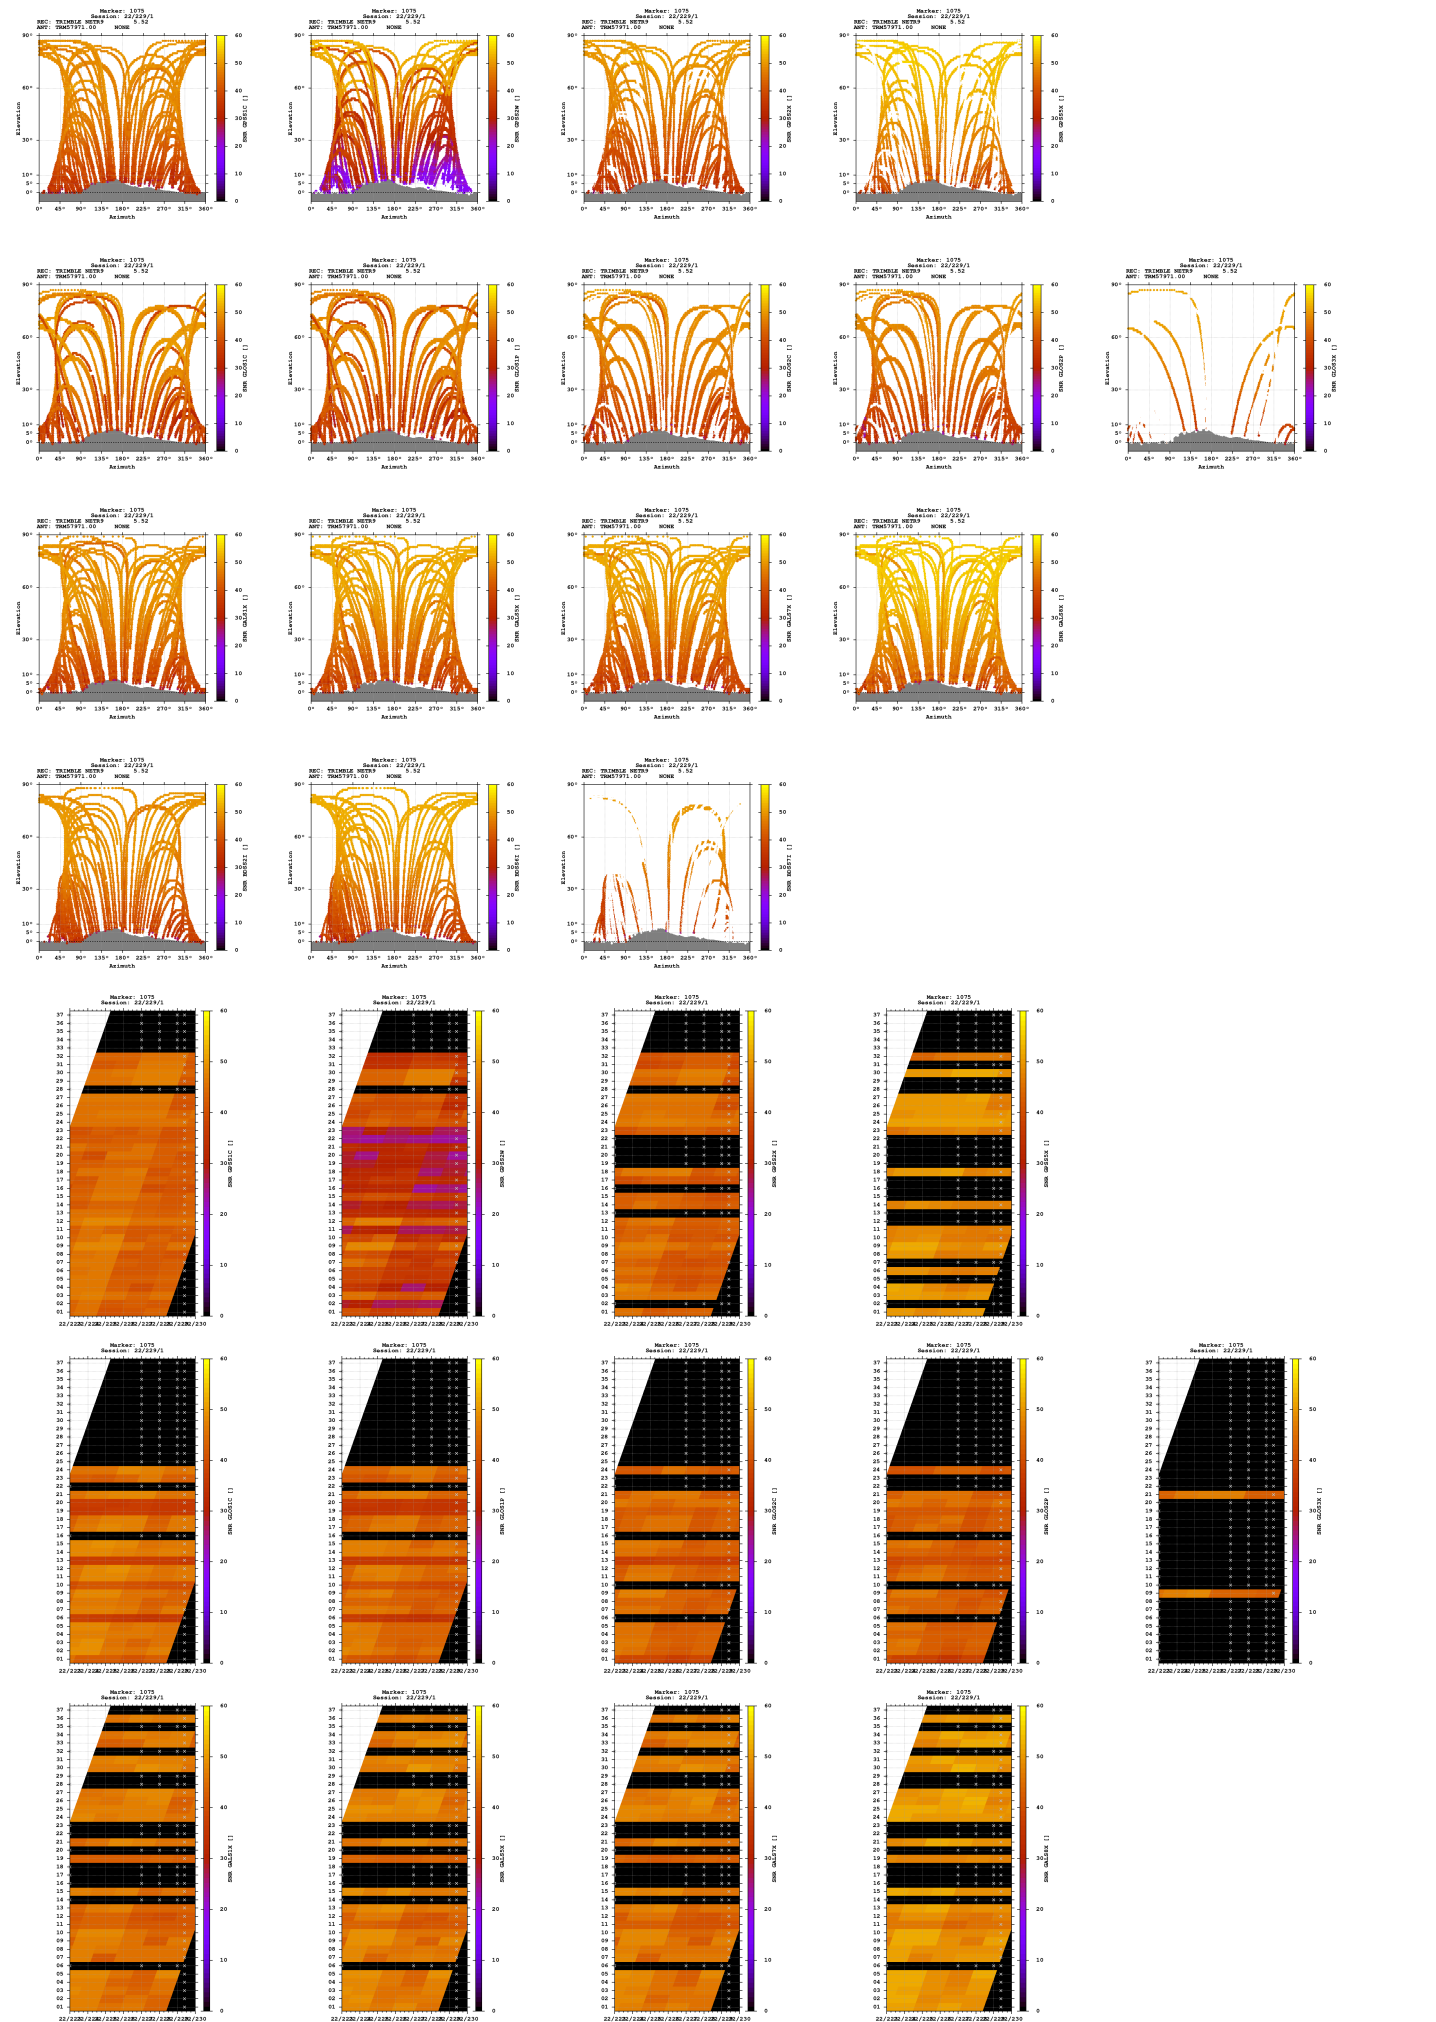

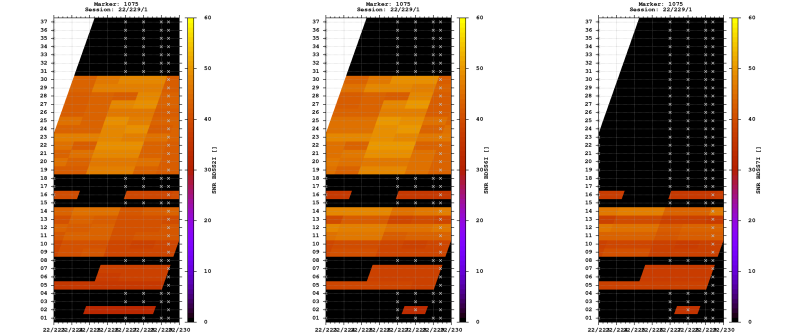


Estimates

2022-08-17 09:41:30	GPS	4260972.5309	709184.5370	4677749.0453	47.471350258	9.449532211	547.9897
2022-08-17 09:41:30	GLO	4260972.6268	709184.1344	4677748.6476	47.471347651	9.449526734	547.7159
2022-08-17 09:41:30	GAL	4260972.5238	709184.5594	4677748.4608	47.471346726	9.449532519	547.5568
2022-08-17 09:41:30	BDS	4260973.6947	709185.5502	4677750.9679	47.471353234	9.449542932	550.2950

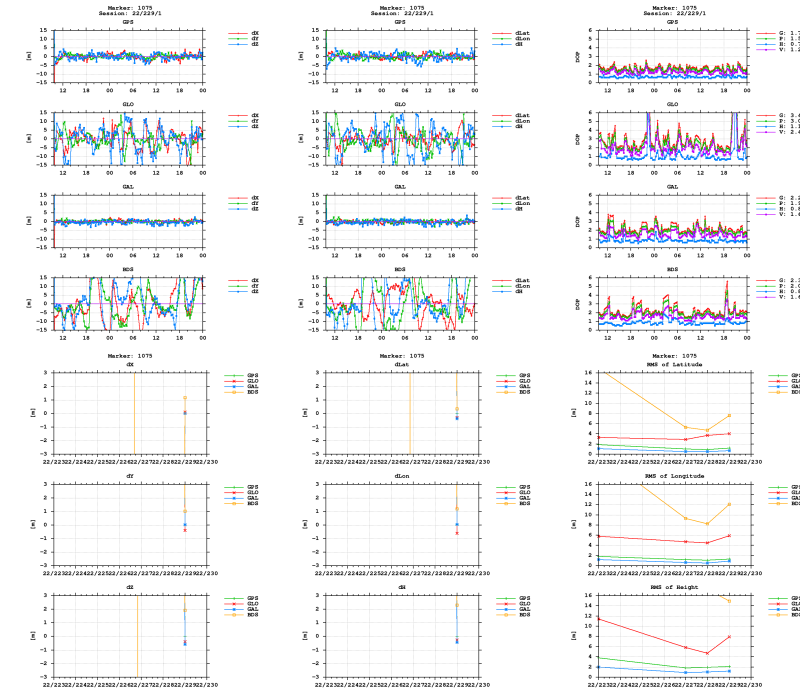

BNC



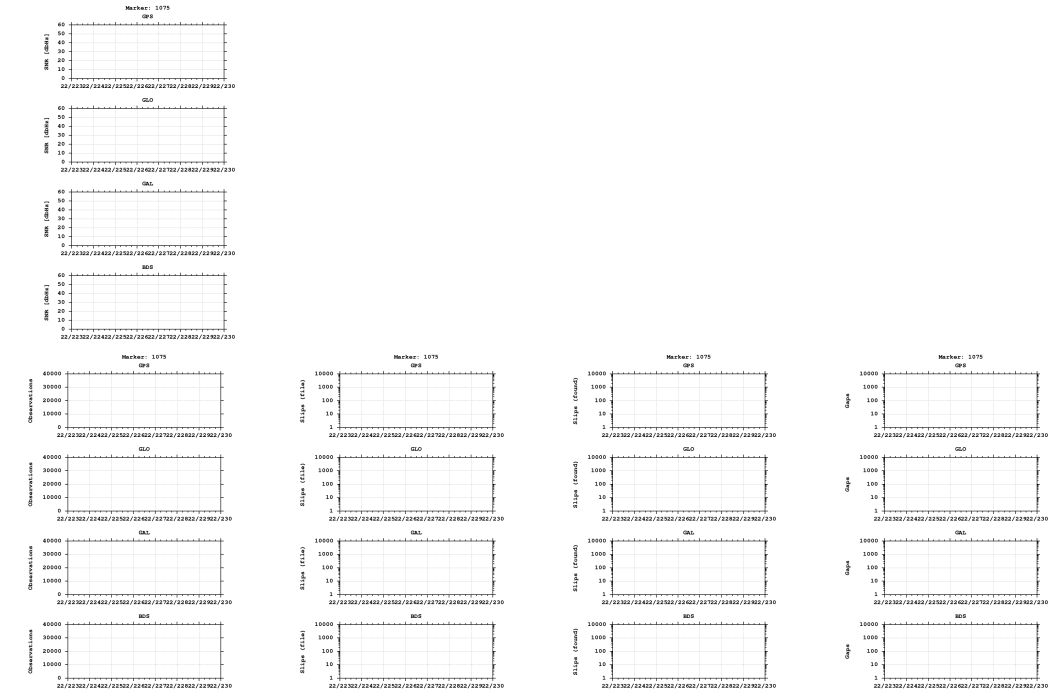

Equipment

2022-08-08 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)