


GNSS observation file monitoring for 0512


Last RINEX file: 05122201.22O
RINEX version: 3.02
Marker: 1296
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

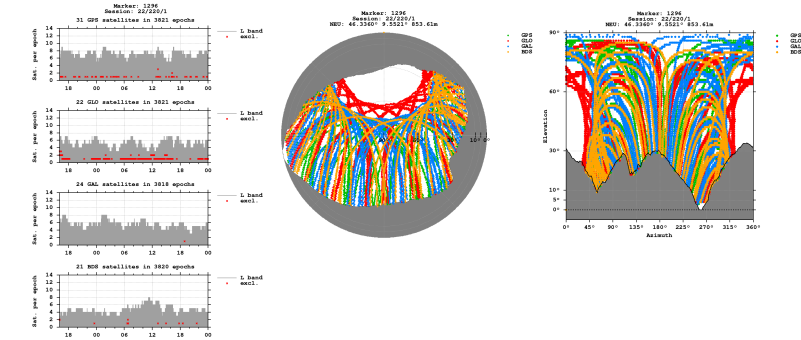

Bands

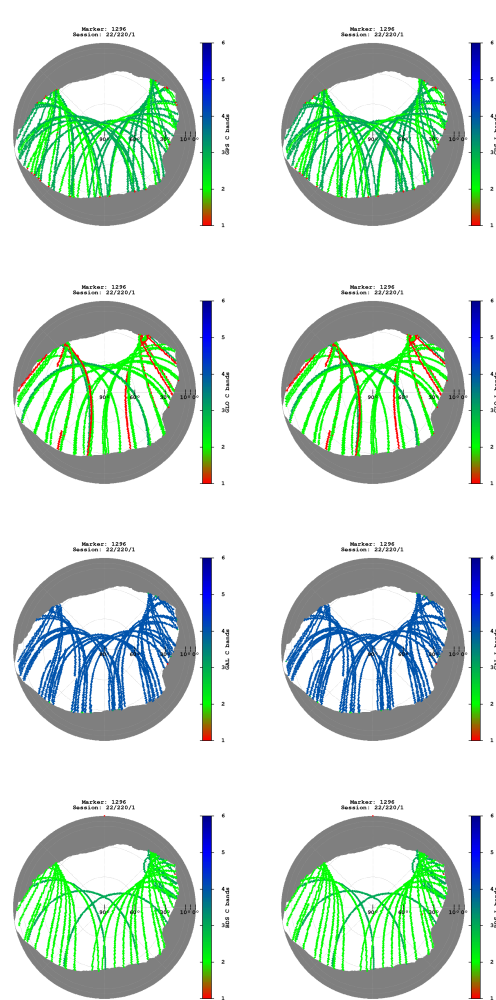

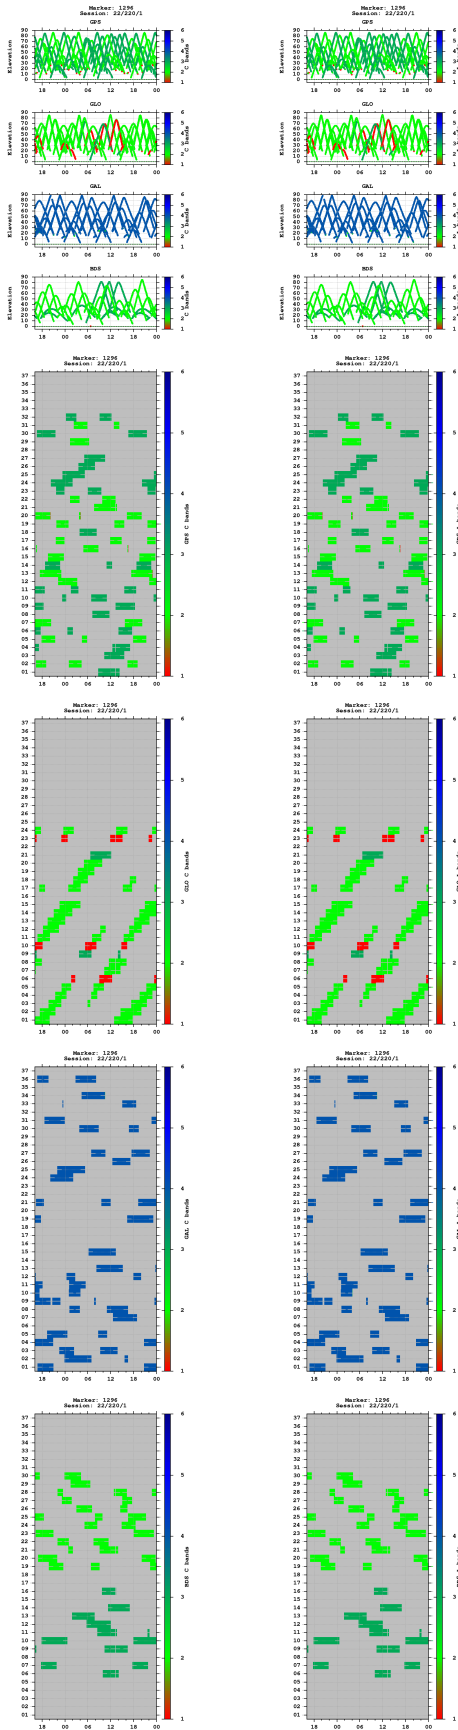



Multipath



- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

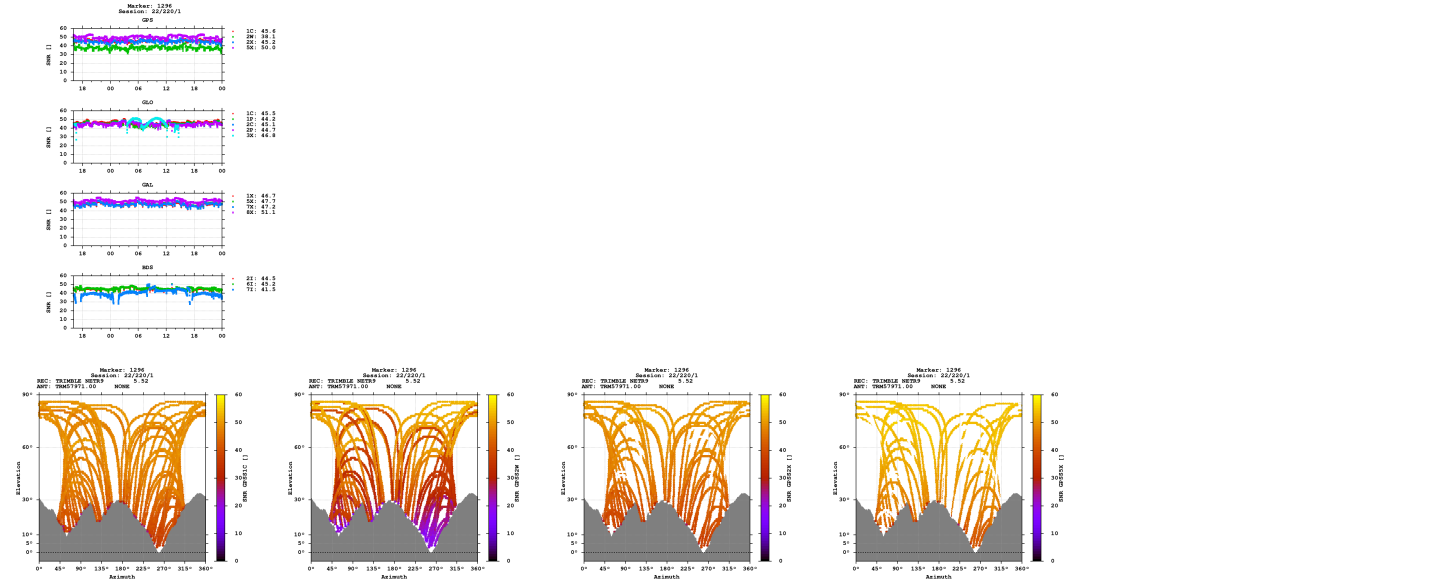

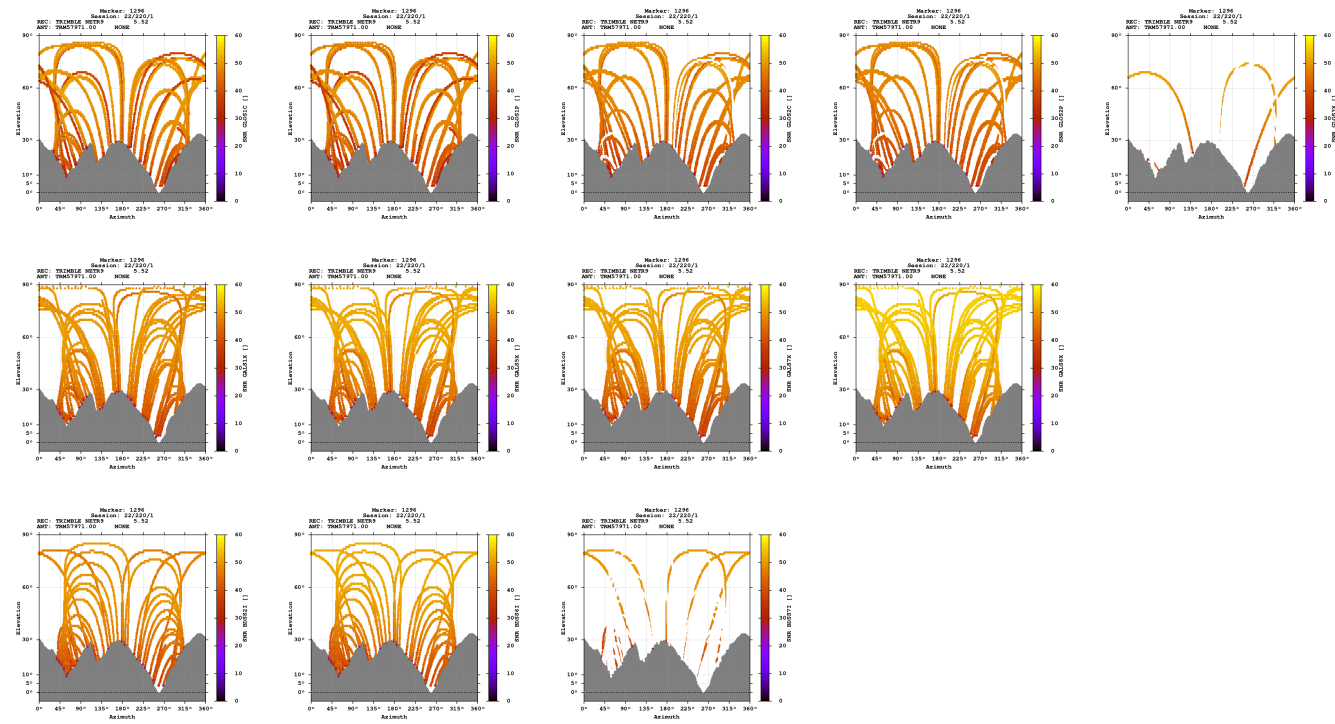

Estimates

2022-08-08 16:07:00	GPS	4350797.3836	732138.4987	4591729.5483	46.335991750	9.552062243	853.6090
2022-08-08 16:07:00	GLO	4350797.5921	732138.2985	4591731.1703	46.336000702	9.552059230	854.9013
2022-08-08 16:07:00	GAL	4350797.2202	732138.6875	4591729.1891	46.335990364	9.552065014	853.2595
2022-08-08 16:07:00	BDS	4350793.0060	732137.2247	4591727.8645	46.336010759	9.552055362	849.2645

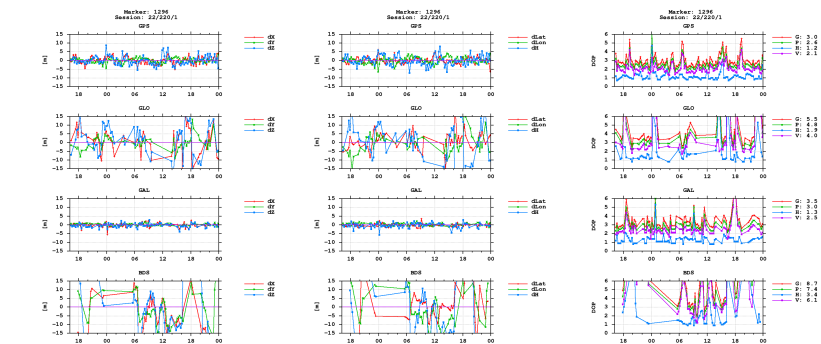

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)