


GNSS observation file monitoring for 0512


Last RINEX file: 05122291.220
RINEX version: 3.02
Marker: 1074
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE

Epochs

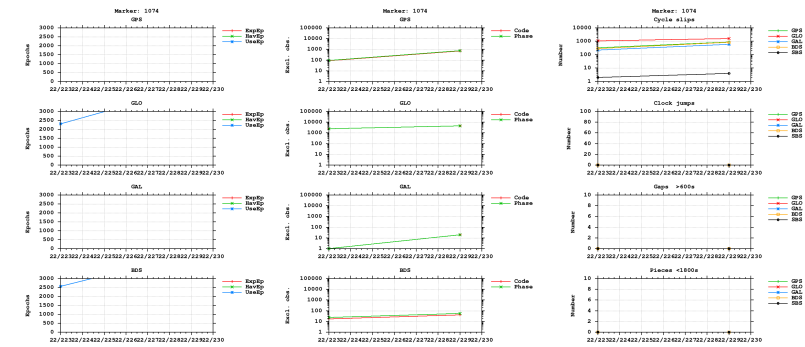



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

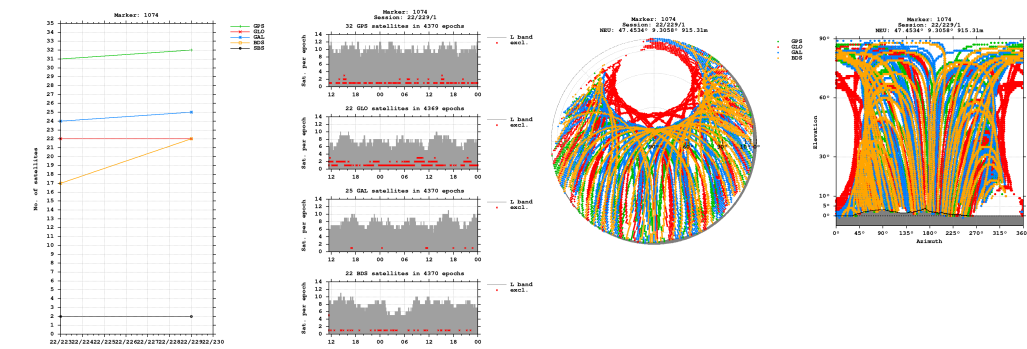


Bands

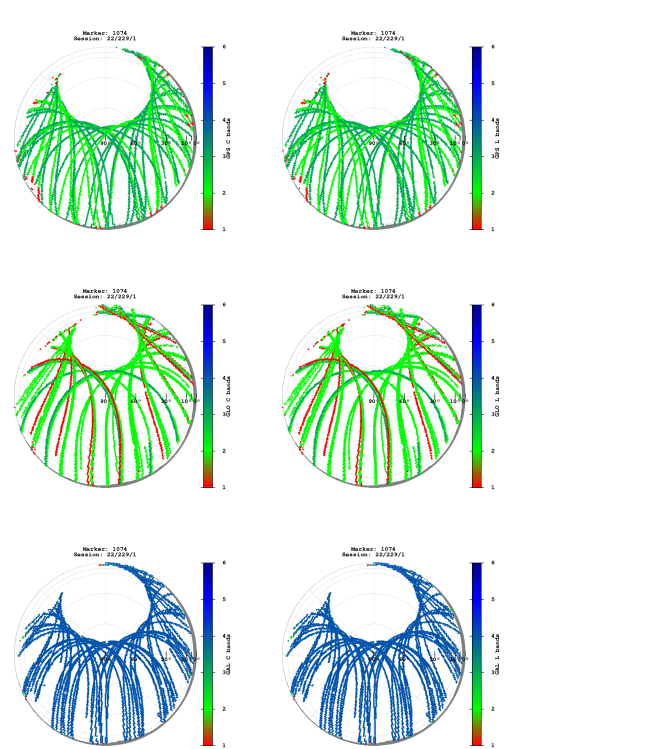

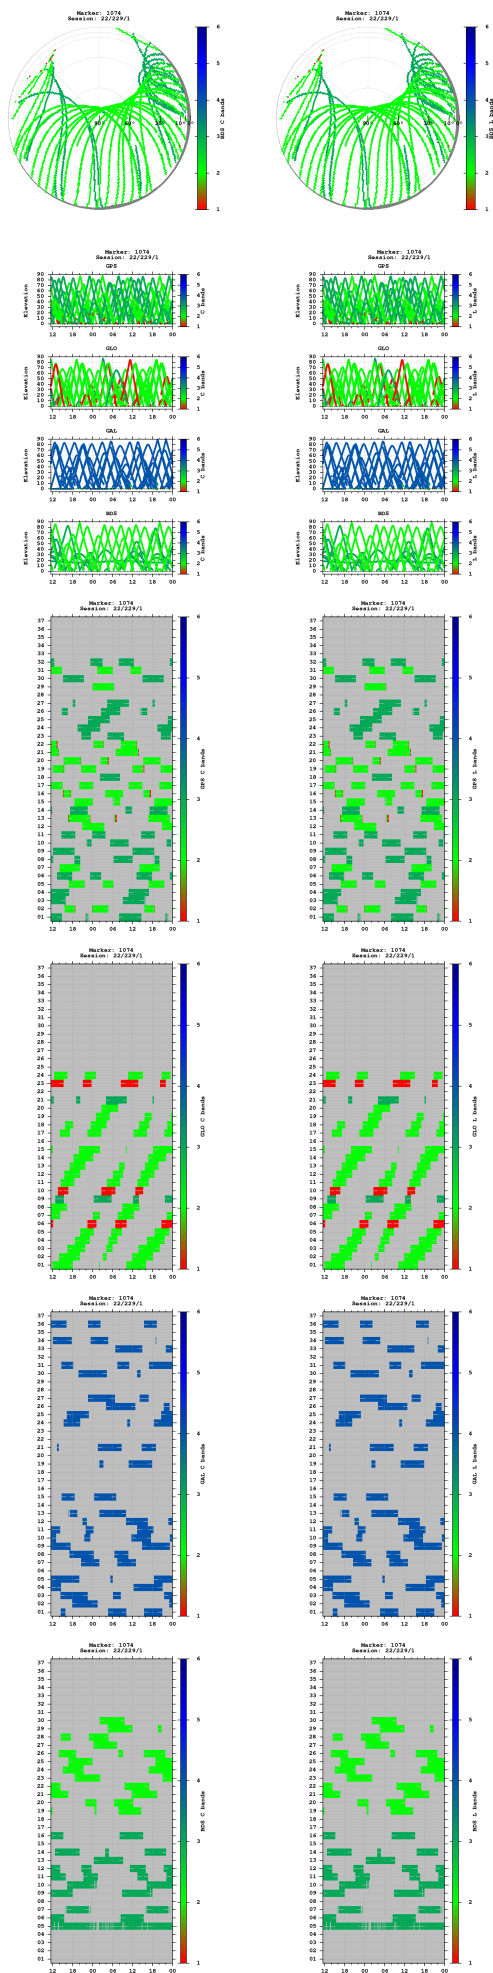


Observations




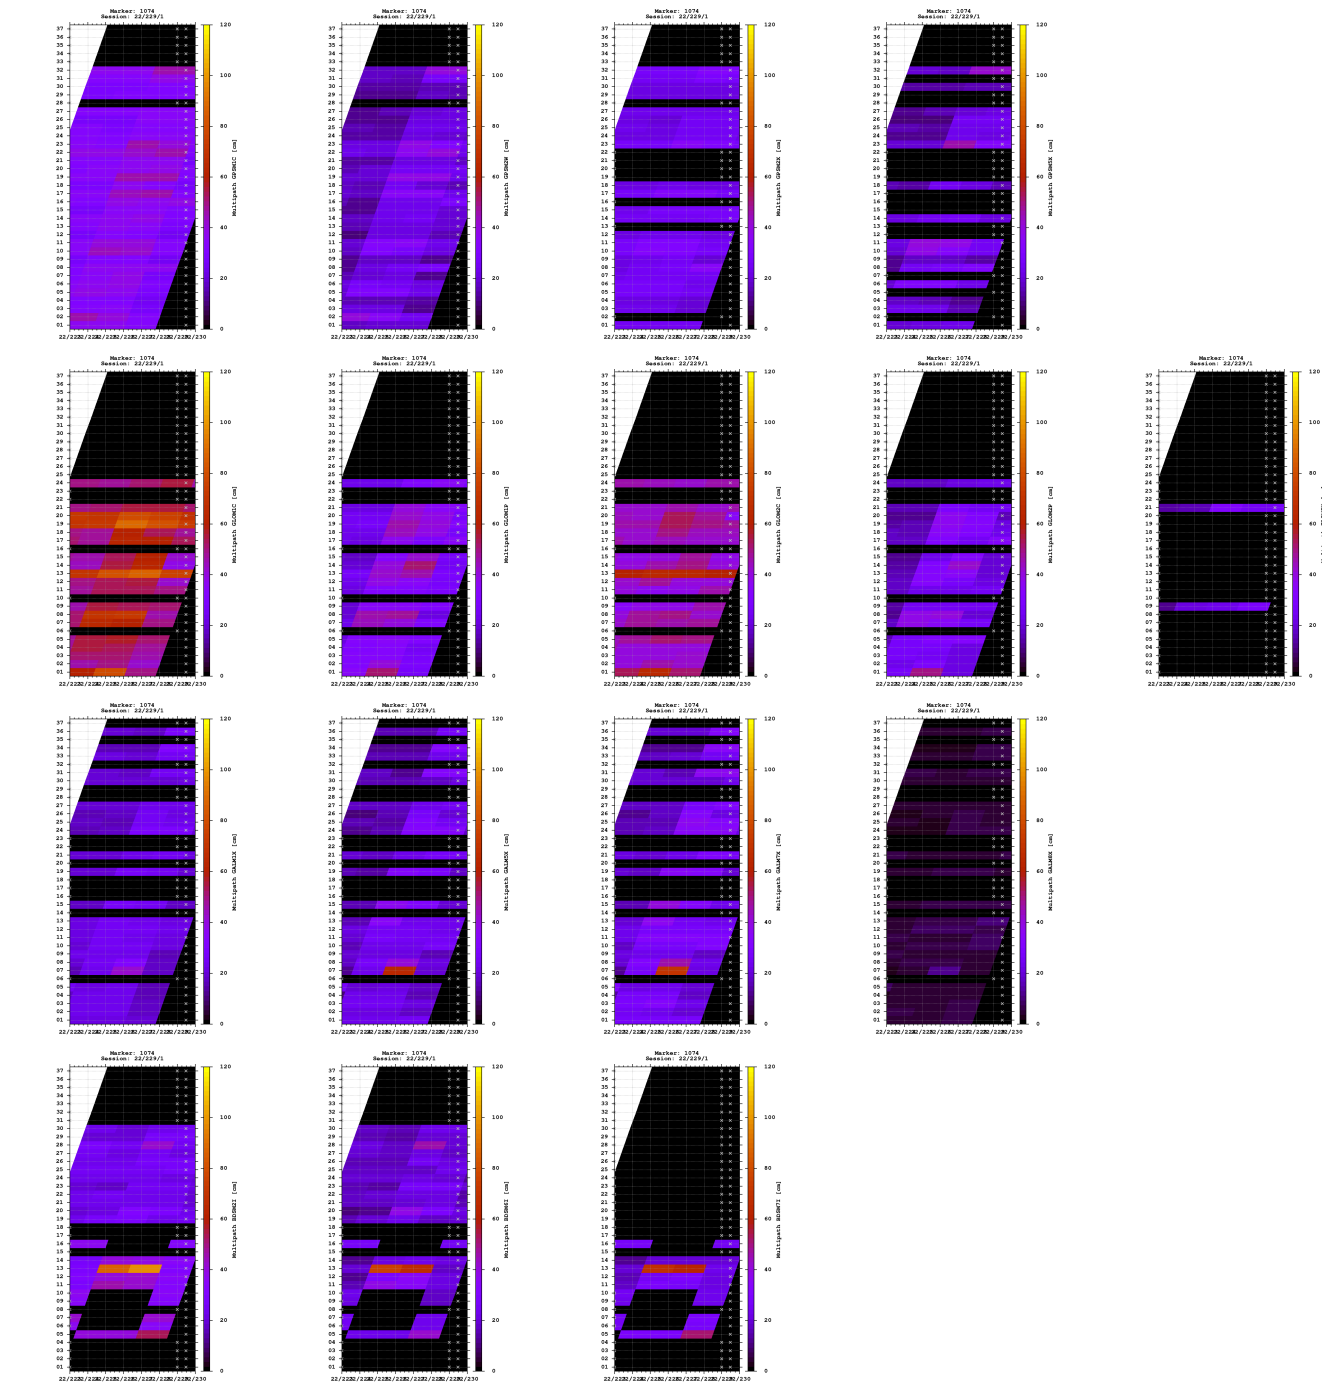


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

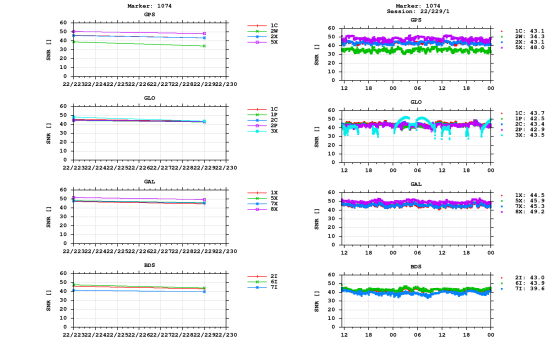


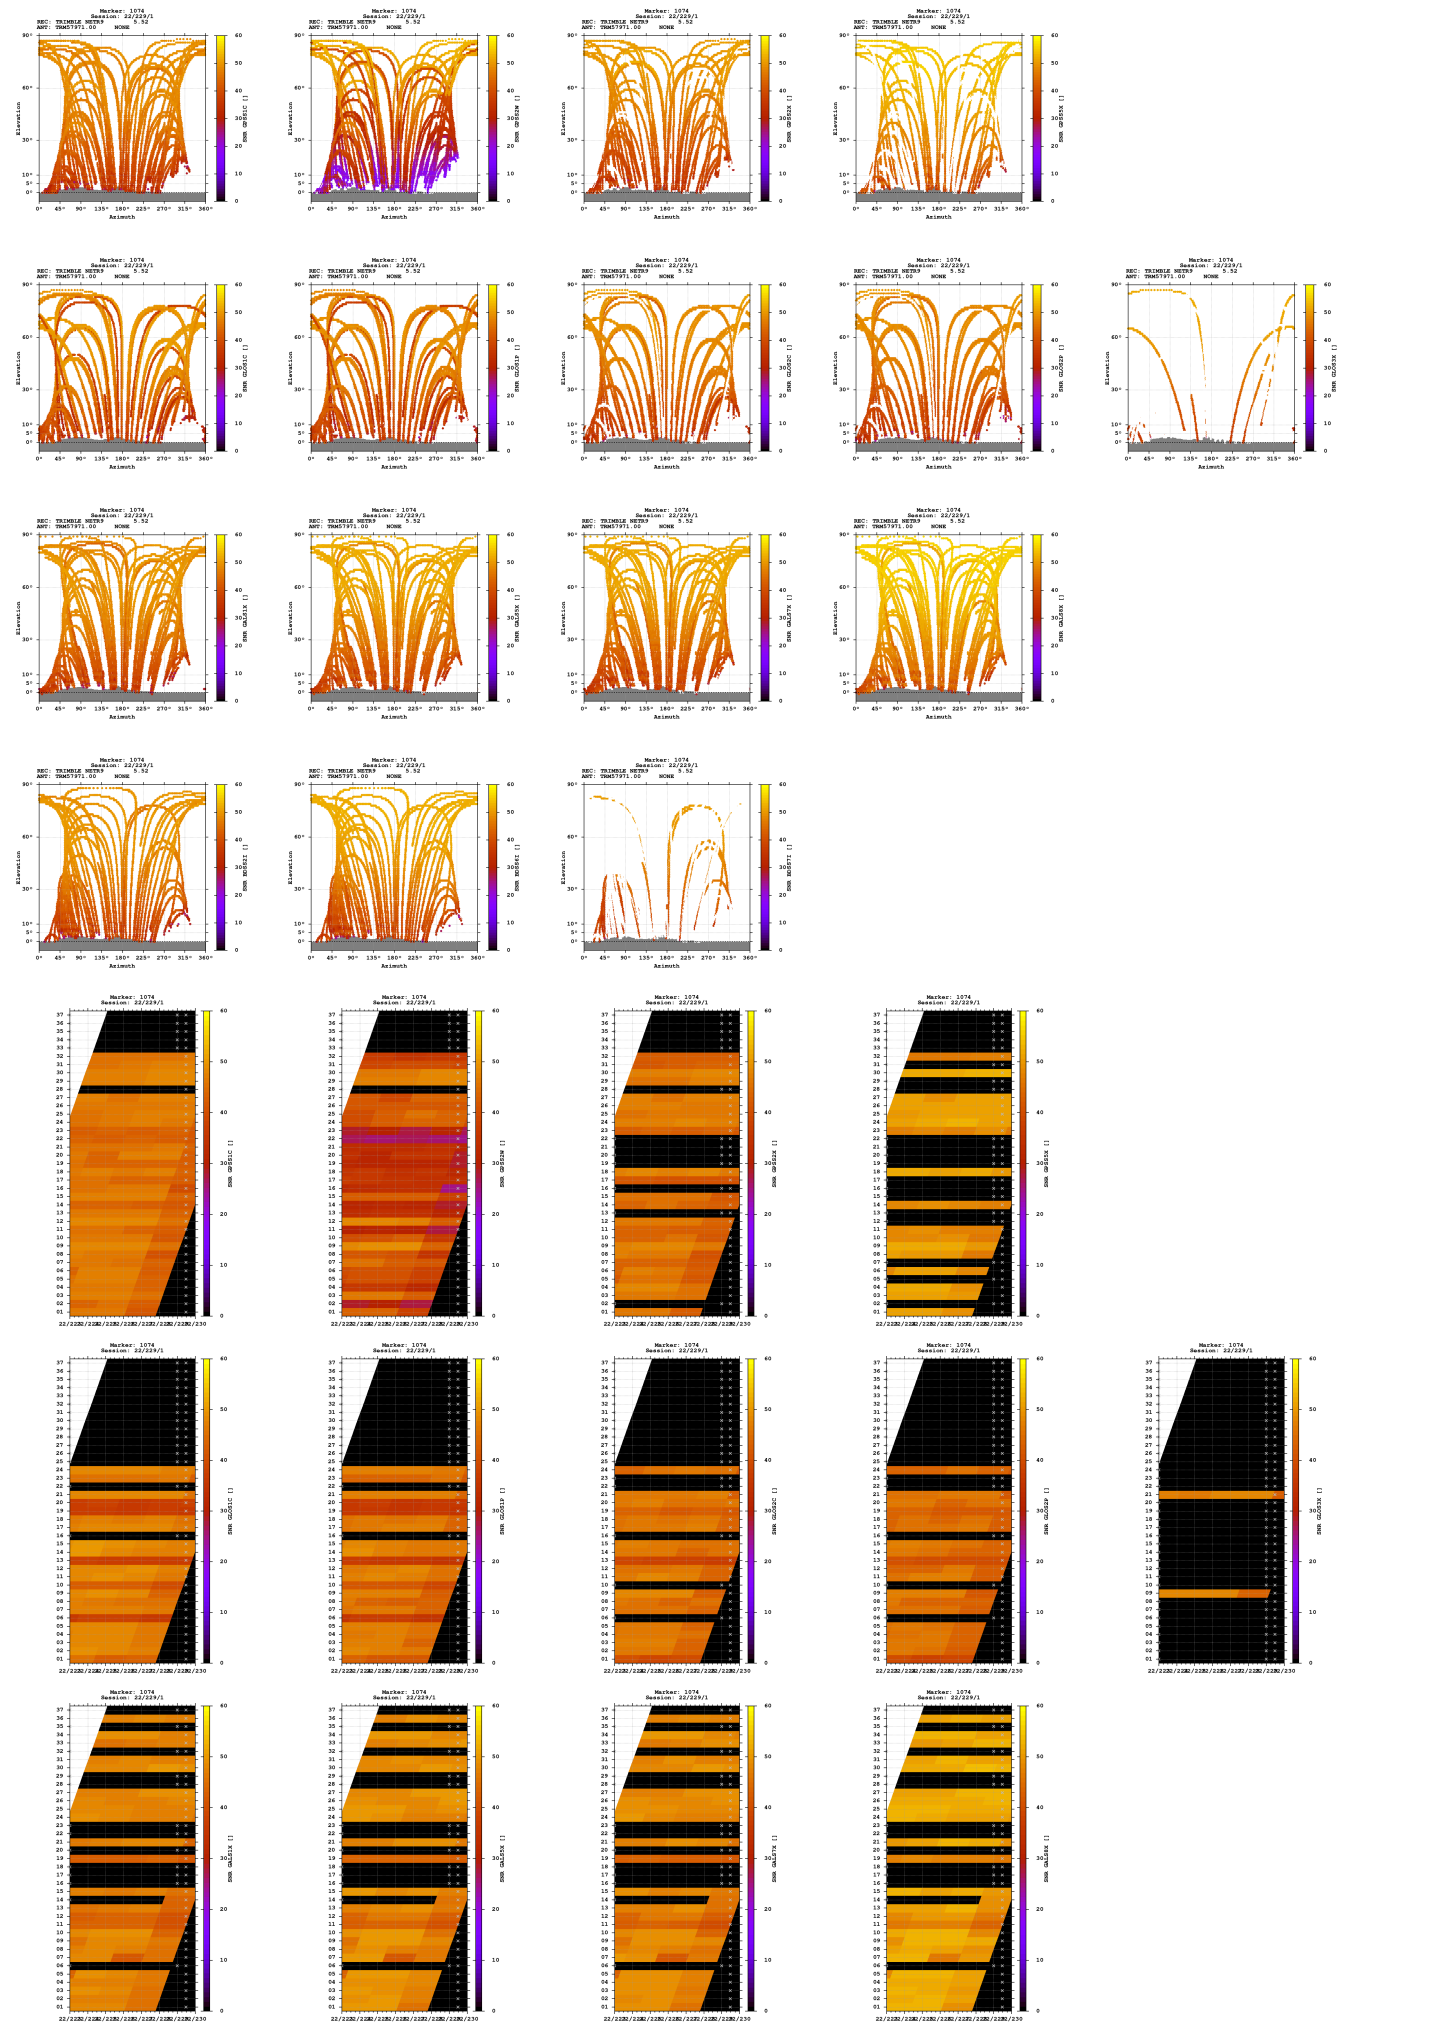

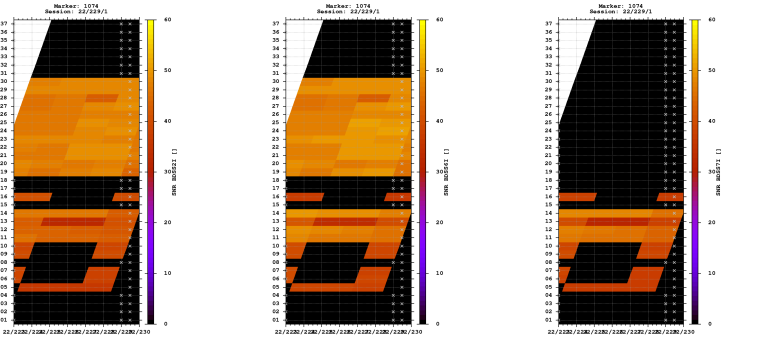



Estimates

2022-08-17 11:27:00	GPS	4264435.3473	698770.3580	4676669.7245	47.453392326	9.305787183	915.3146
2022-08-17 11:27:00	GLO	4264435.4793	698769.5329	4676669.6042	47.453391615	9.305776104	915.2238
2022-08-17 11:27:00	GAL	4264435.3637	698770.4762	4676669.4663	47.453390522	9.305788695	915.1483
2022-08-17 11:27:00	BDS	4264436.7405	698772.0039	4676671.9391	47.453394921	9.305805731	918.0558

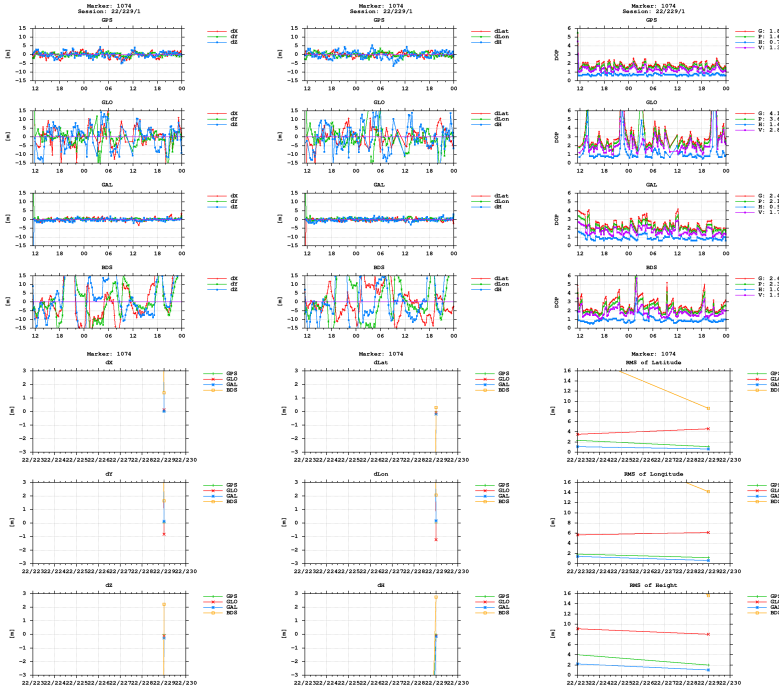

BNC

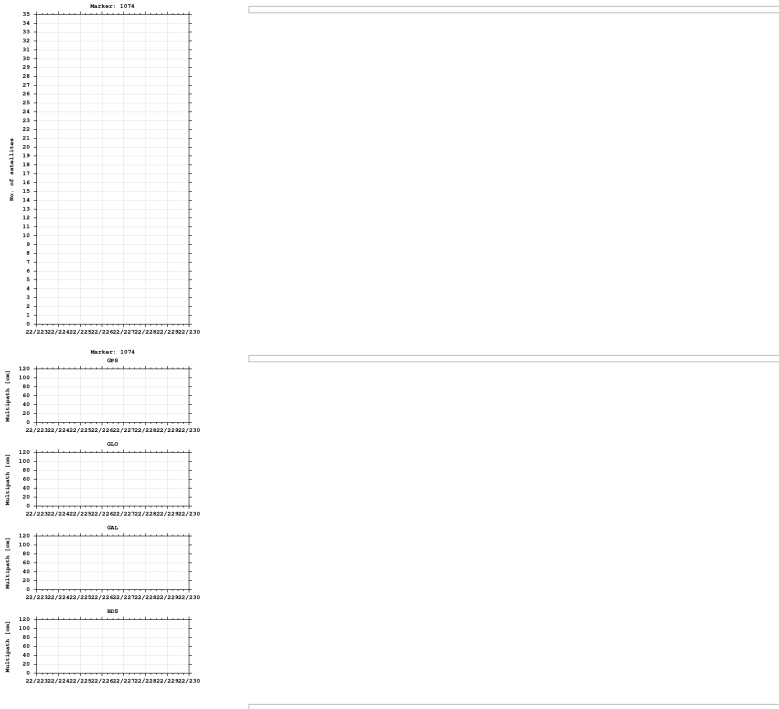

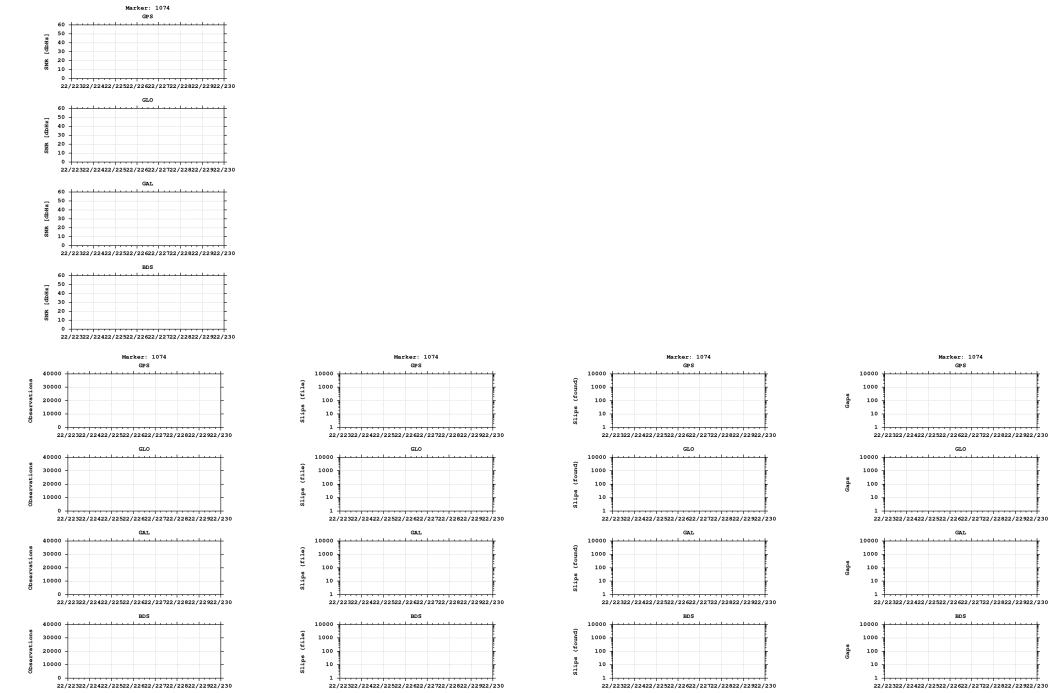

Equipment

2022-08-08 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)