


GNSS observation file monitoring for 0512


Last RINEX file: 05122301.220
RINEX version: 3.02
Marker: 1074
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE

Epochs

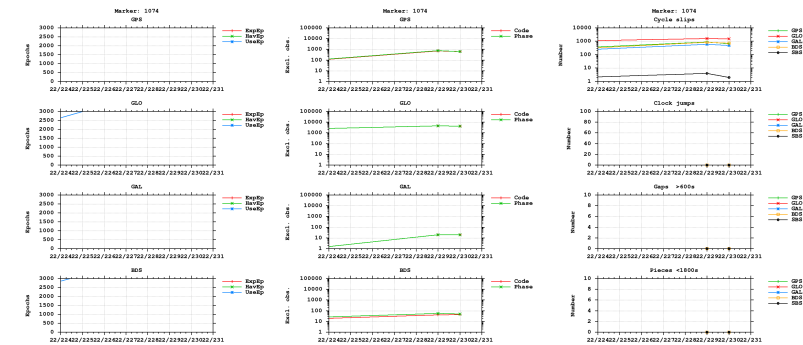



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

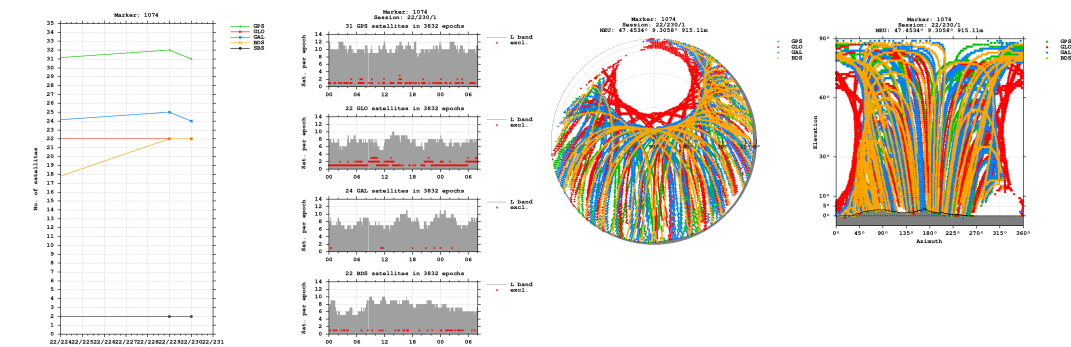


Bands

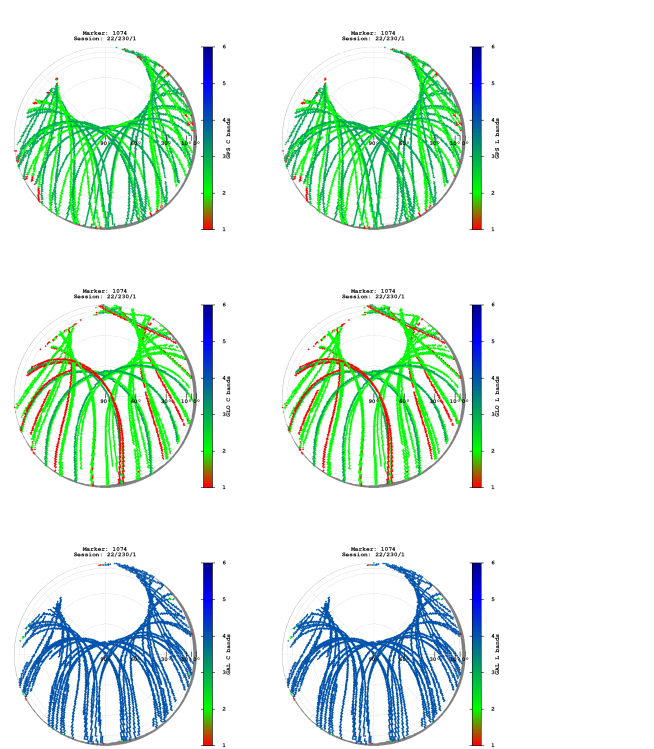

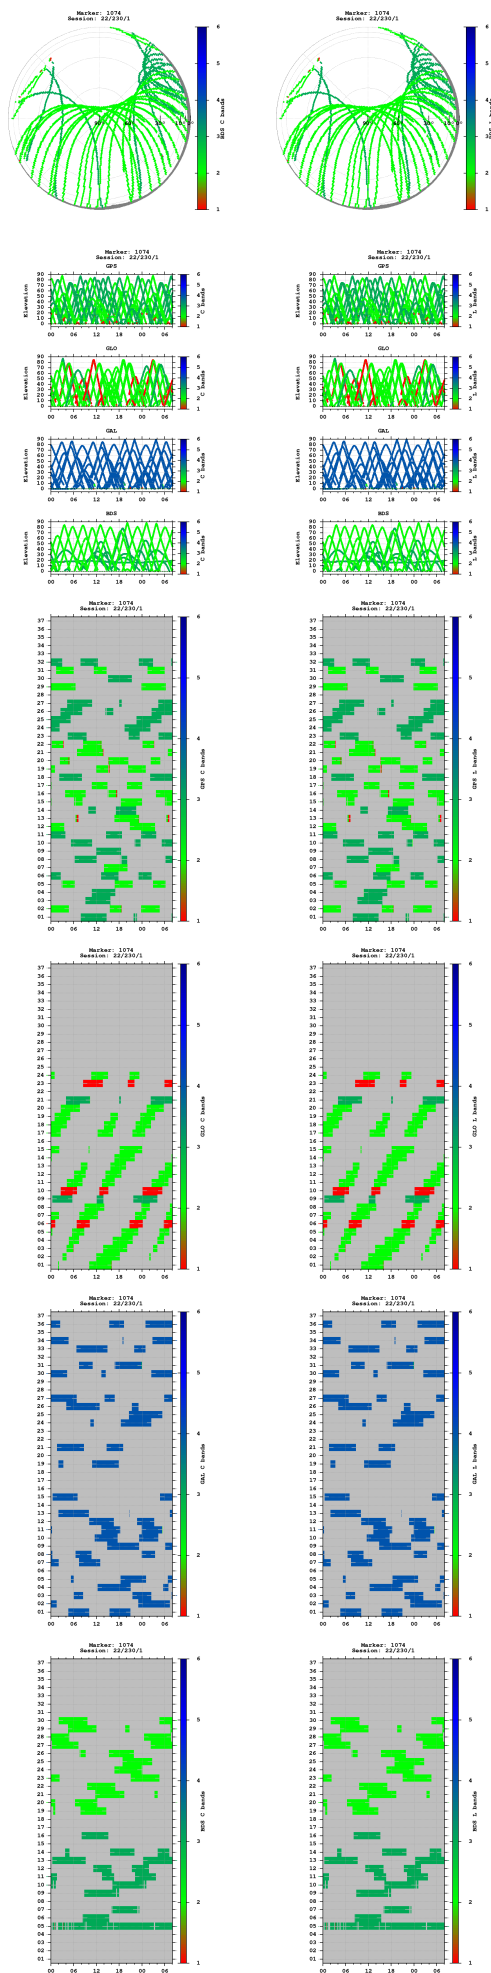


Observations

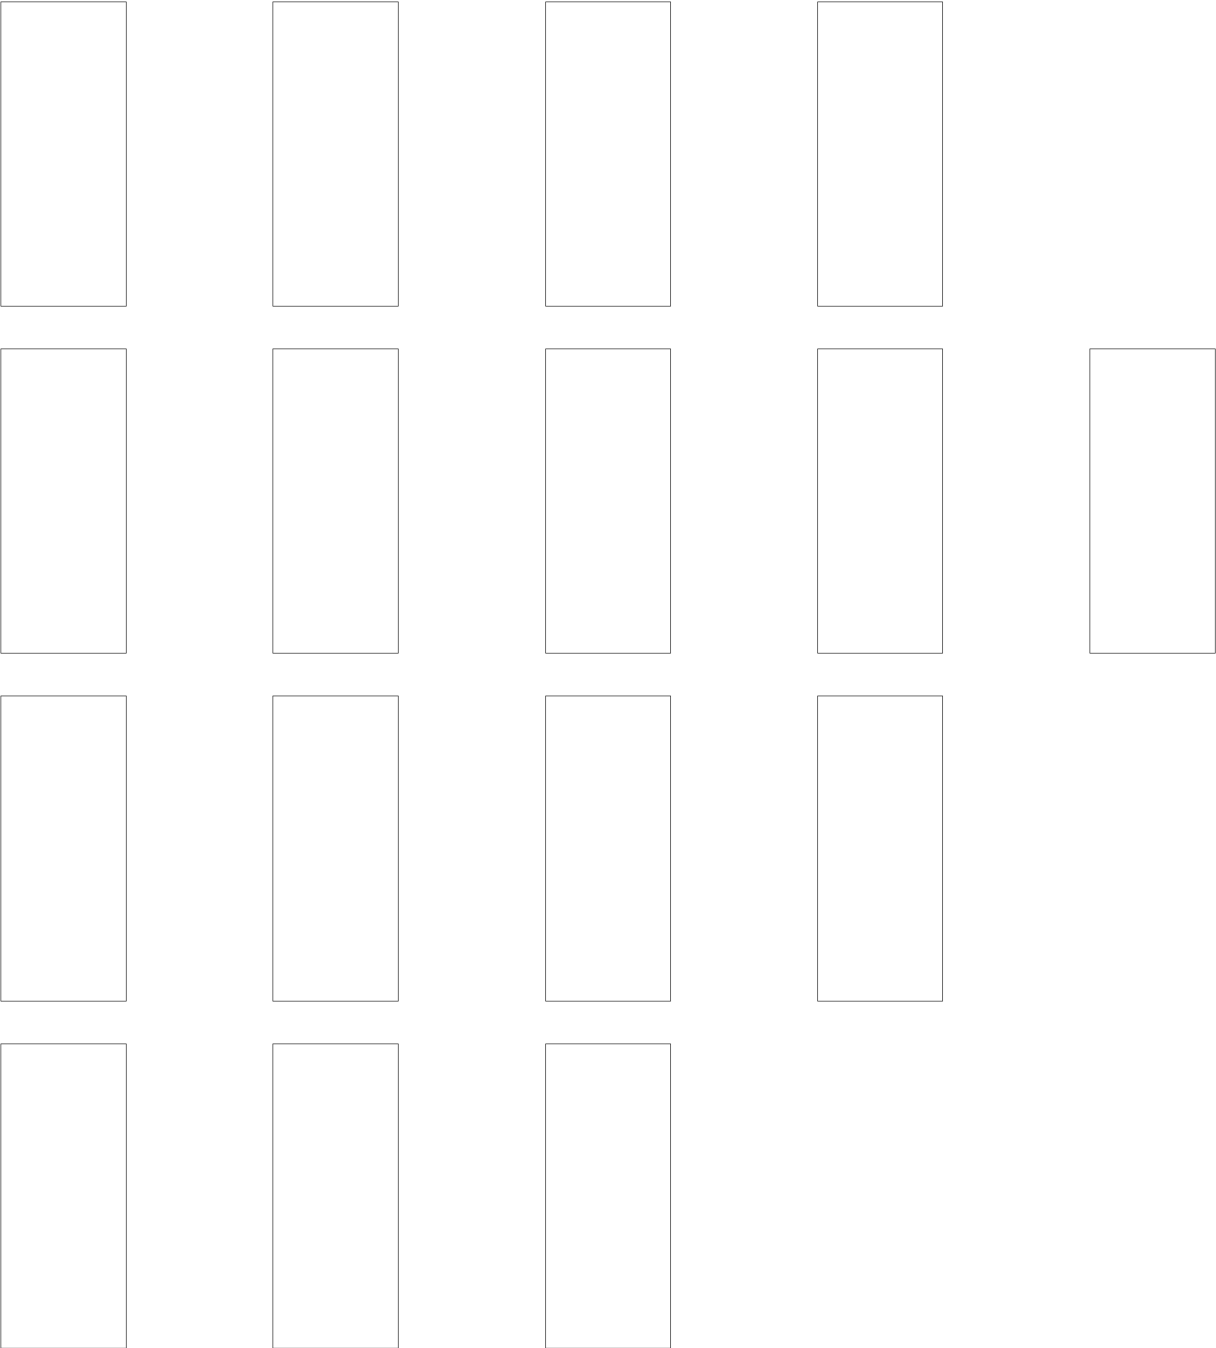


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

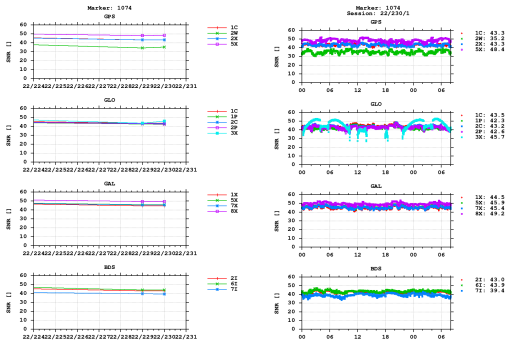




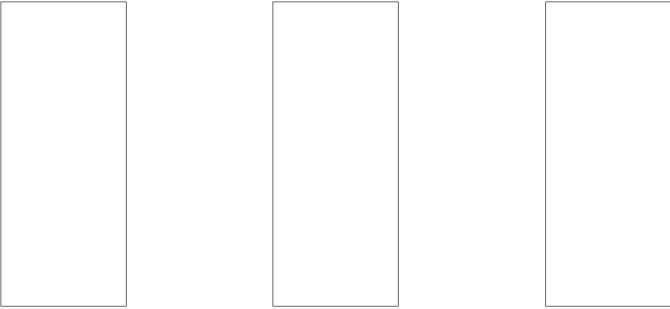


Estimates

2022-08-17 11:27:00	GPS	4264435.3037	698770.3609	4676669.4821	47.453391134	9.305787314	915.1072
2022-08-17 11:27:00	GLO	4264435.4083	698769.7735	4676670.0098	47.453394288	9.305779404	915.5016
2022-08-17 11:27:00	GAL	4264435.3810	698770.3344	4676669.4897	47.453390703	9.305786802	915.1615
2022-08-17 11:27:00	BDS	4264433.8348	698769.1780	4676672.4718	47.453420186	9.305774986	916.2003

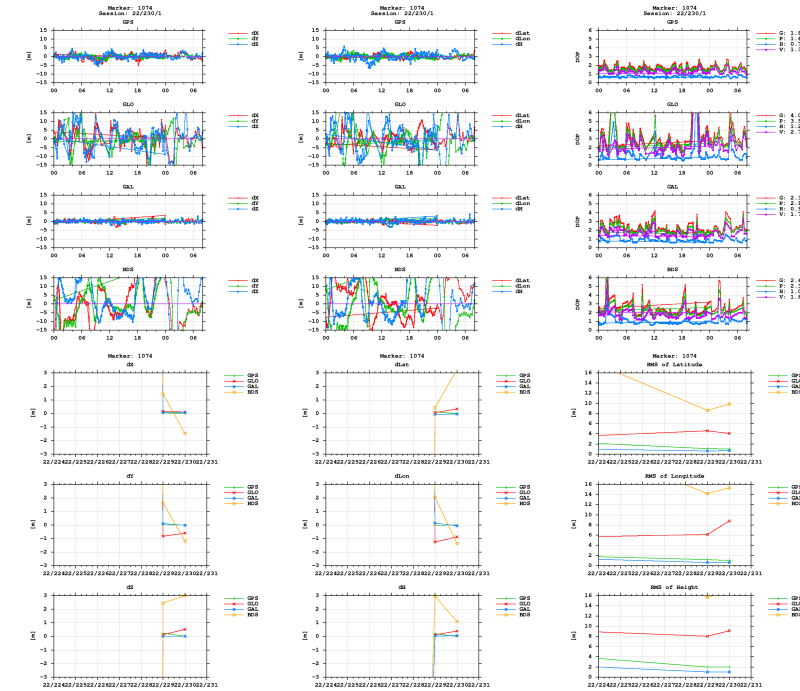

BNC



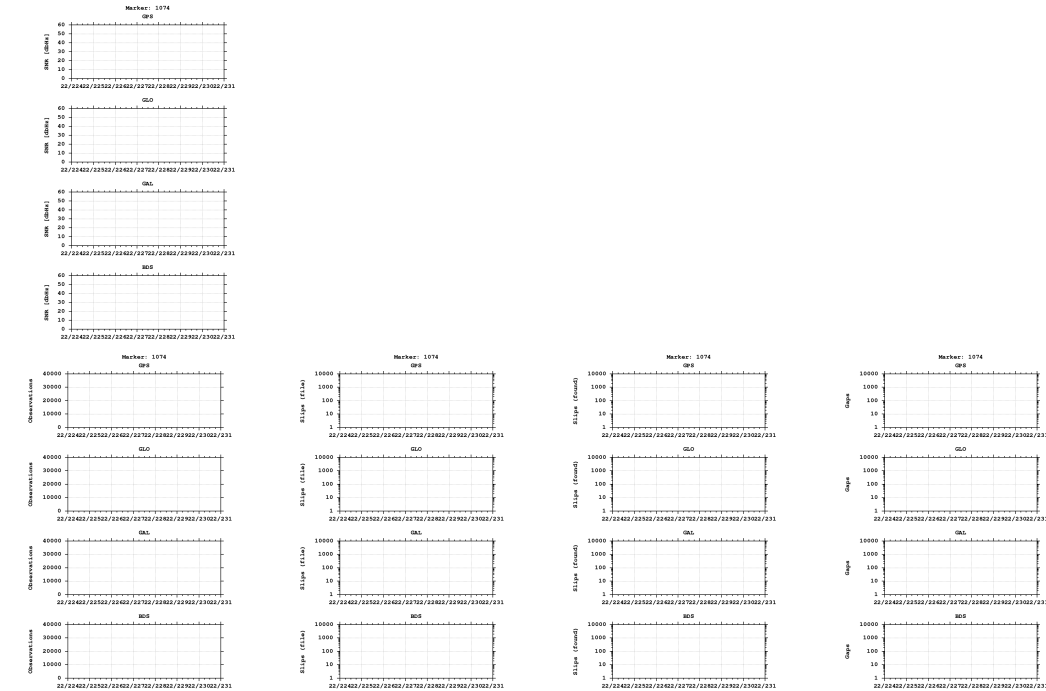

Equipment

2022-08-08 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)