


GNSS observation file monitoring for 0513


Last RINEX file: 05132211.22O
RINEX version: 3.02
Marker: 1278
Receiver: 513 TRIMBLE NETR9 5.52
Antenna: 513 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

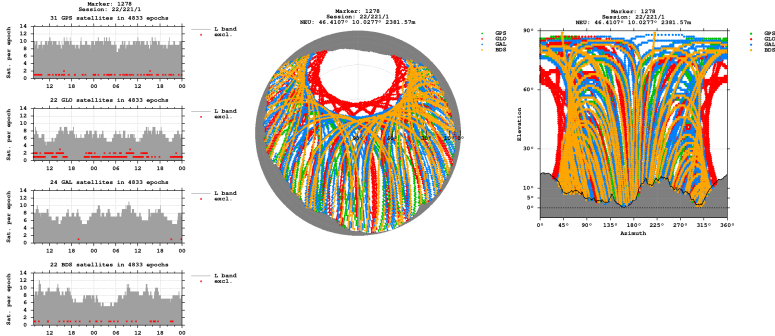


Bands

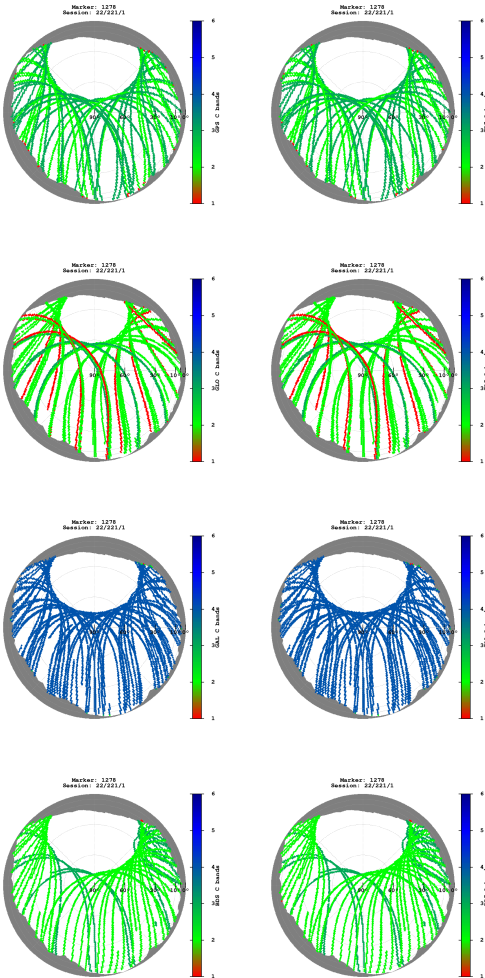

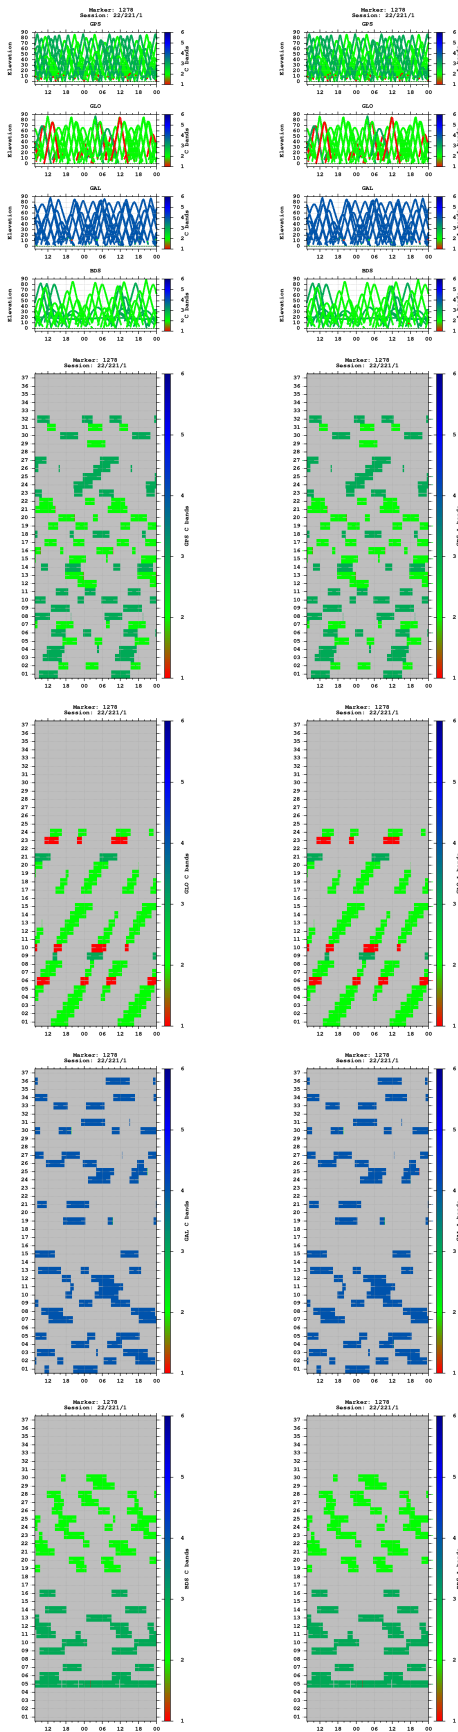



Multipath

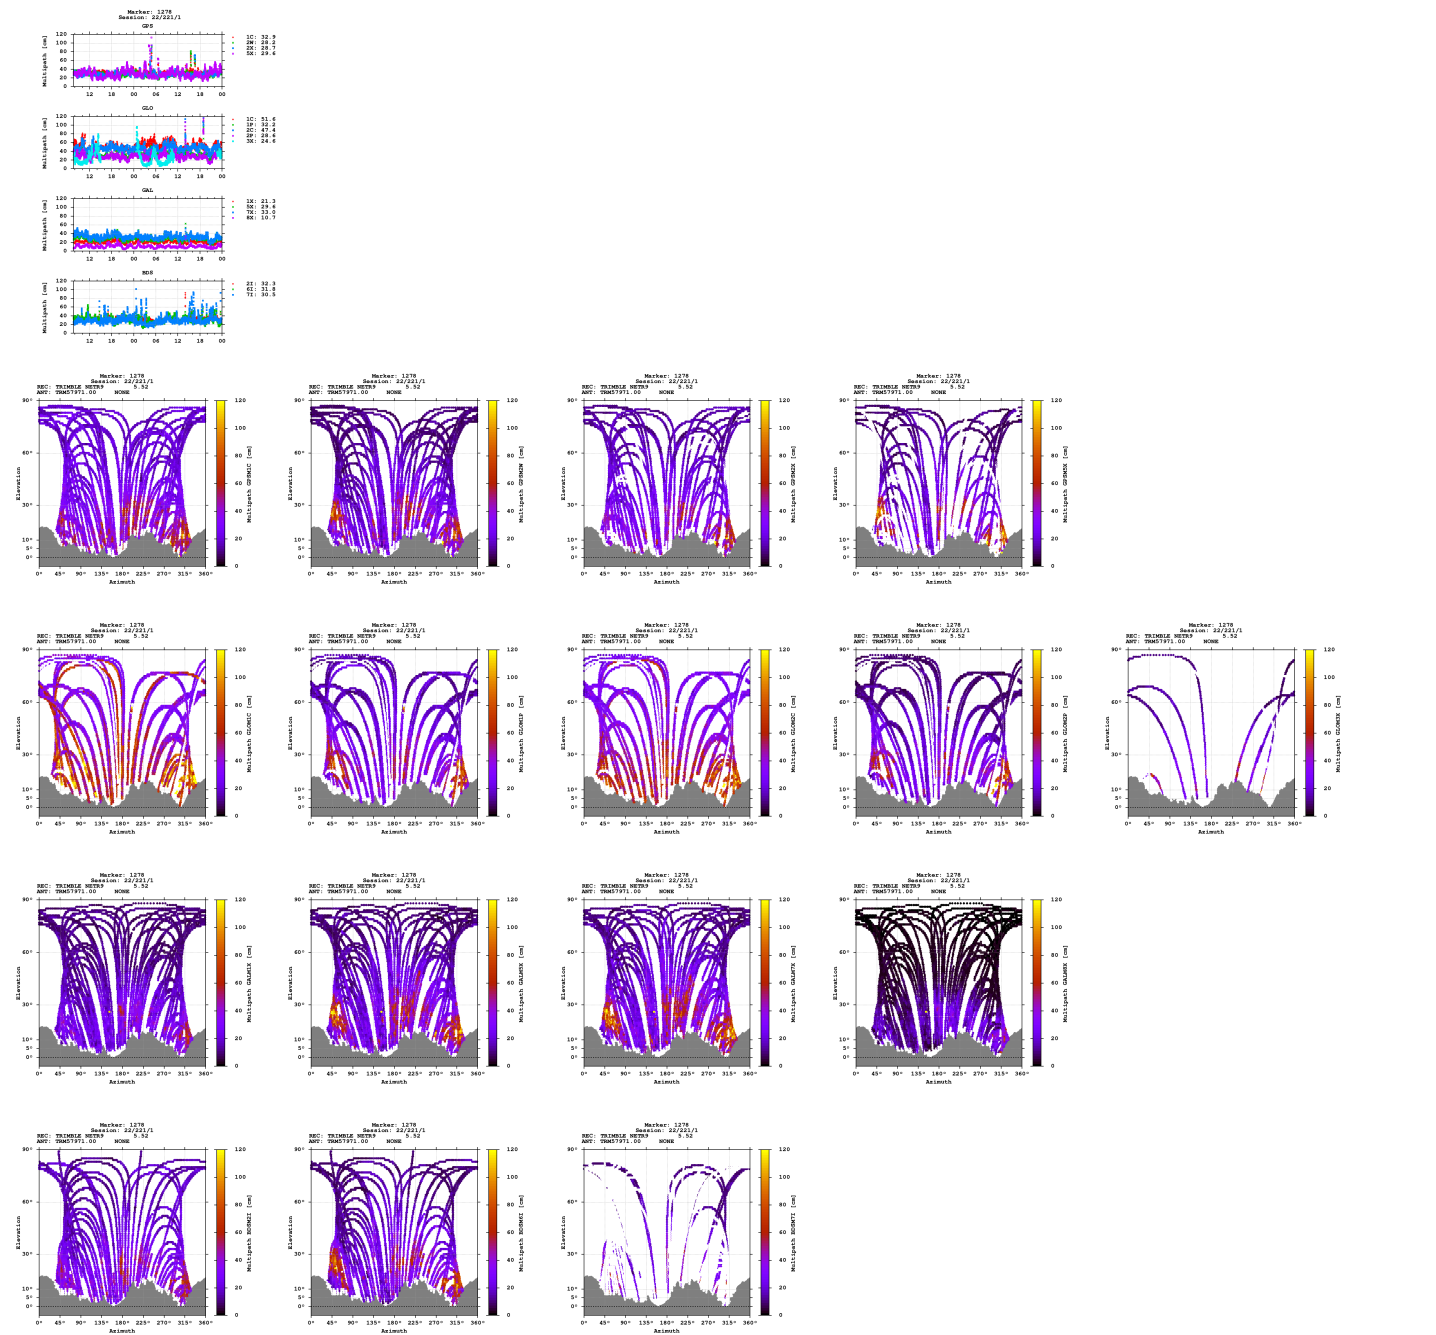

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

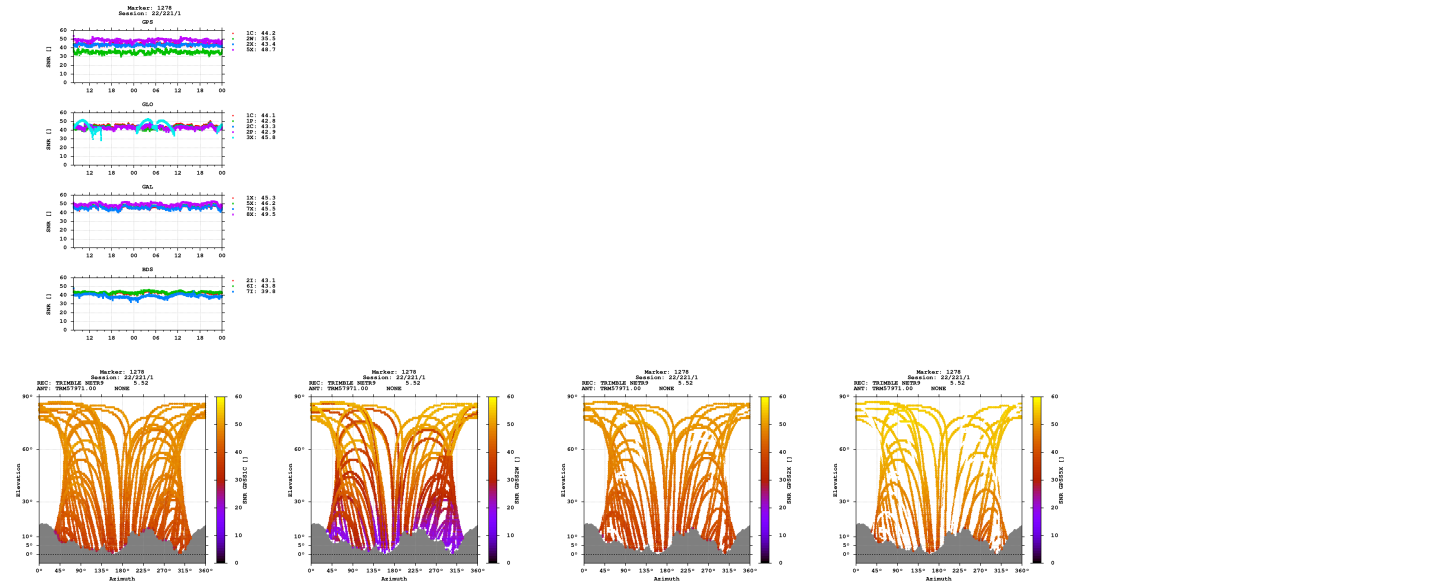

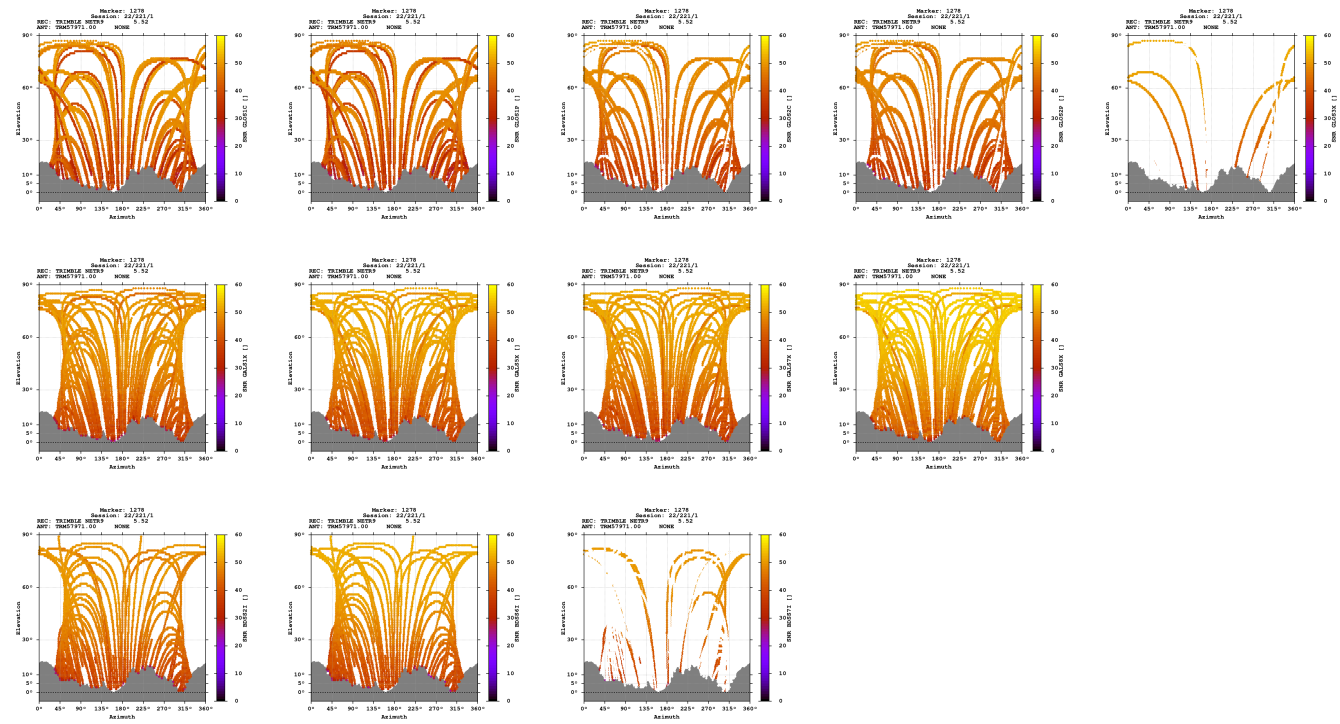

Estimates

2022-08-09 07:40:00	GPS	4339684.2793	767364.9924	4598569.6618	46.410738170	10.027675720	2381.5669
2022-08-09 07:40:00	GLO	4339684.2019	767364.9911	4598569.2961	46.410736401	10.027675878	2381.2492
2022-08-09 07:40:00	GAL	4339684.0826	767364.8841	4598569.3582	46.410737673	10.027674778	2381.2003
2022-08-09 07:40:00	BDS	4339683.6090	767364.9104	4598570.5057	46.410747796	10.027676187	2381.7131

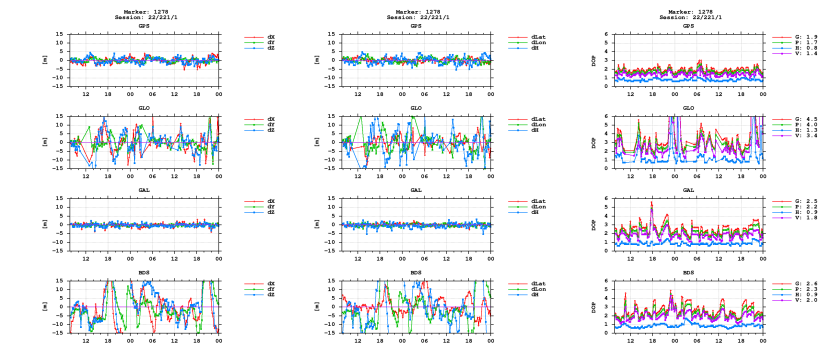

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)