


GNSS observation file monitoring for 0513


Last RINEX file: 05132231.220
RINEX version: 3.02
Marker: 1257
Receiver: 513 TRIMBLE NETR9 5.52
Antenna: 513 TRM57971.00 NONE

Epochs

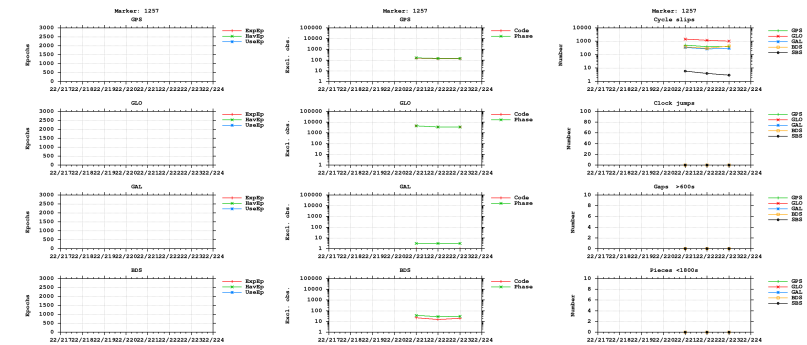



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

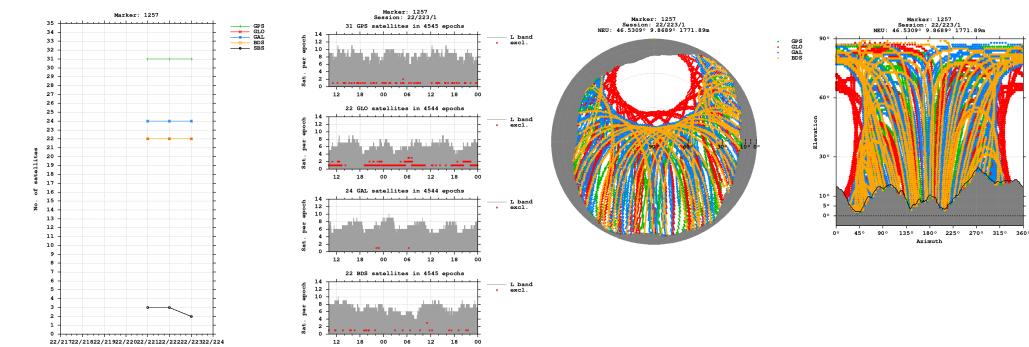


Bands

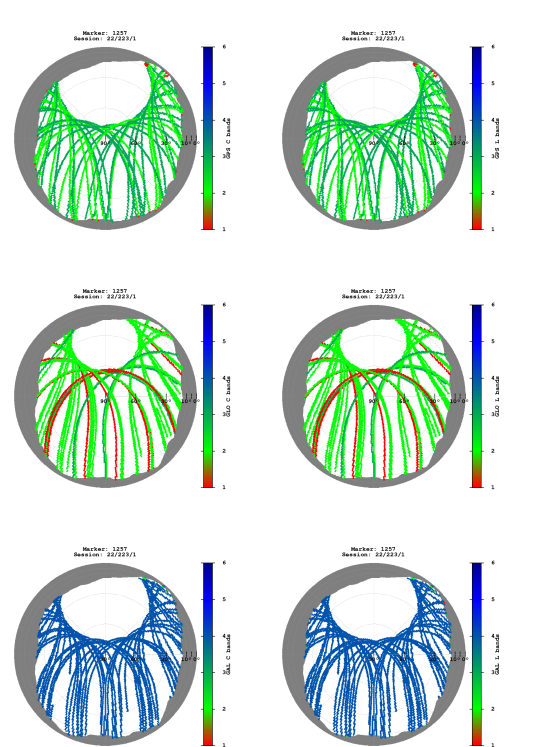


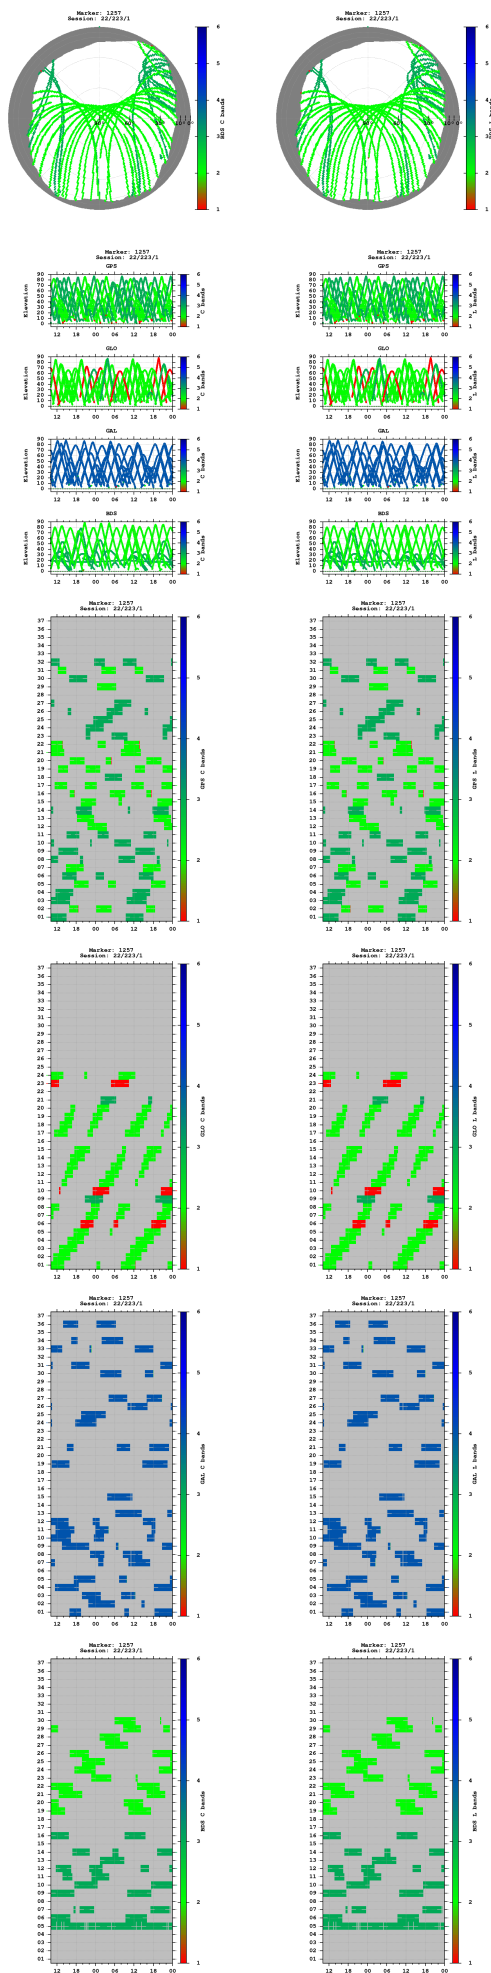


Observations

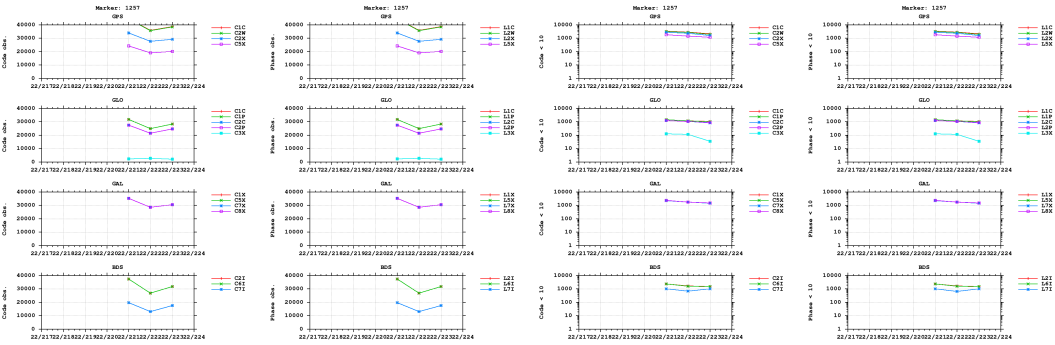


Multipath

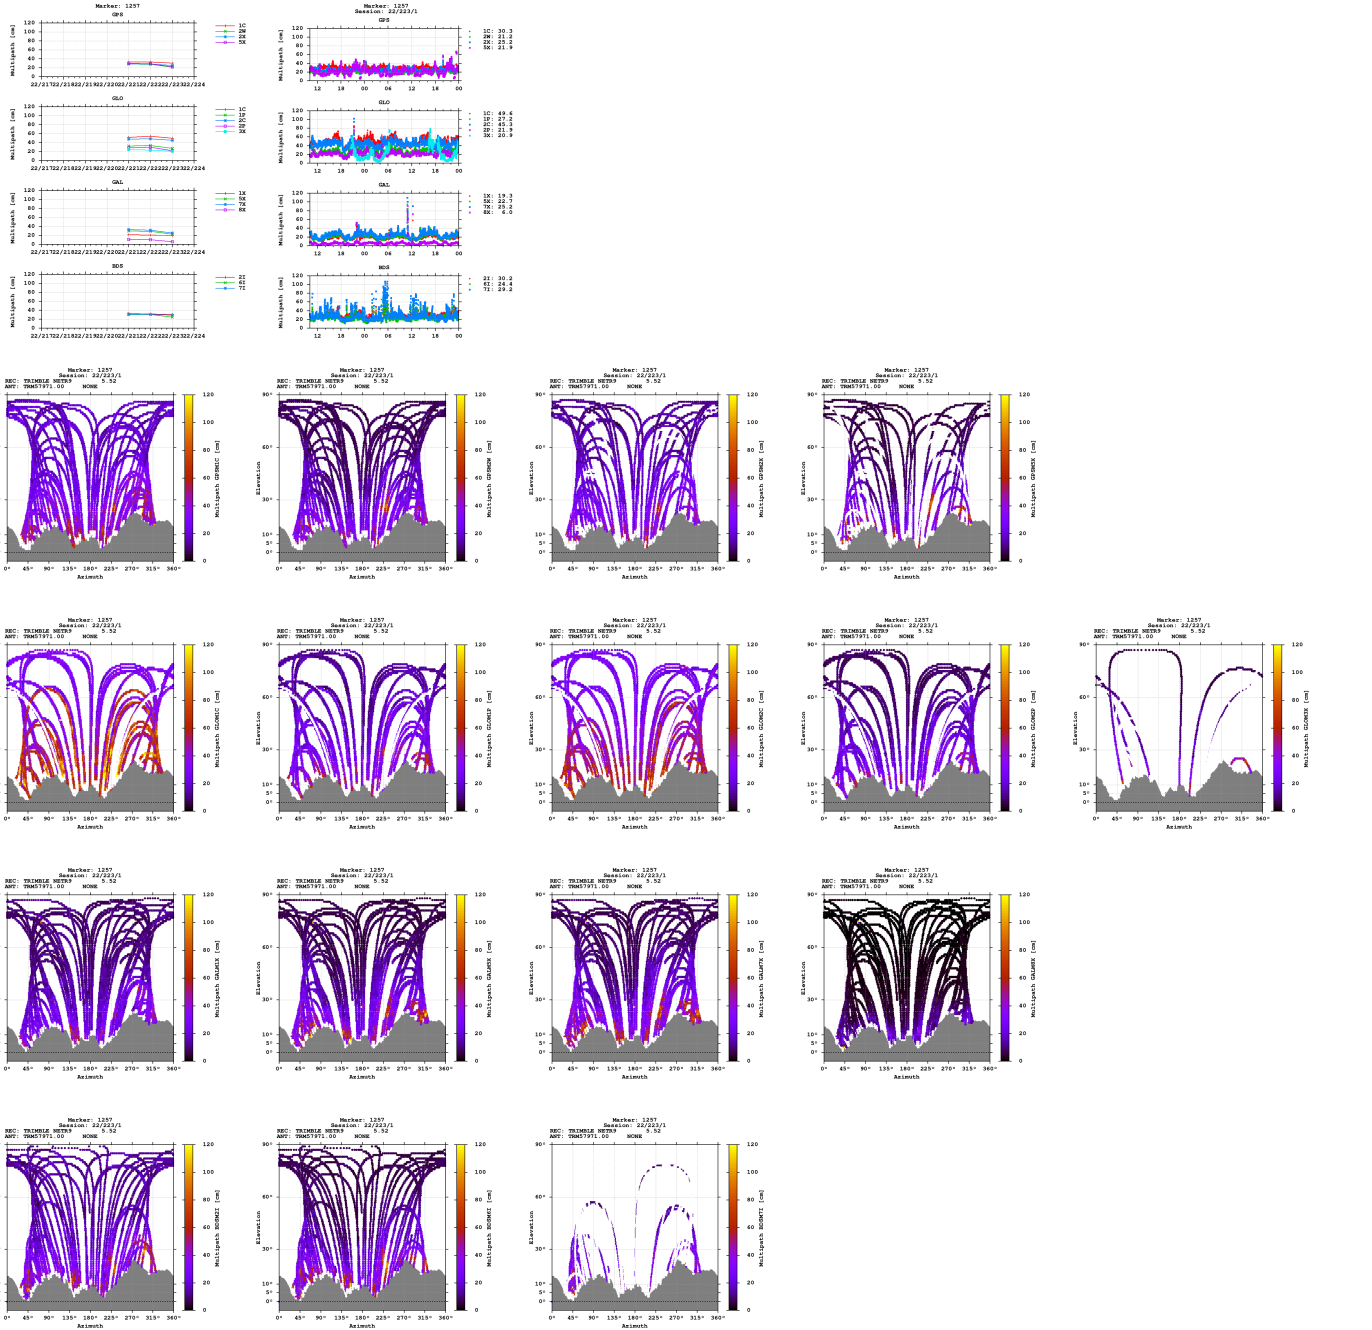


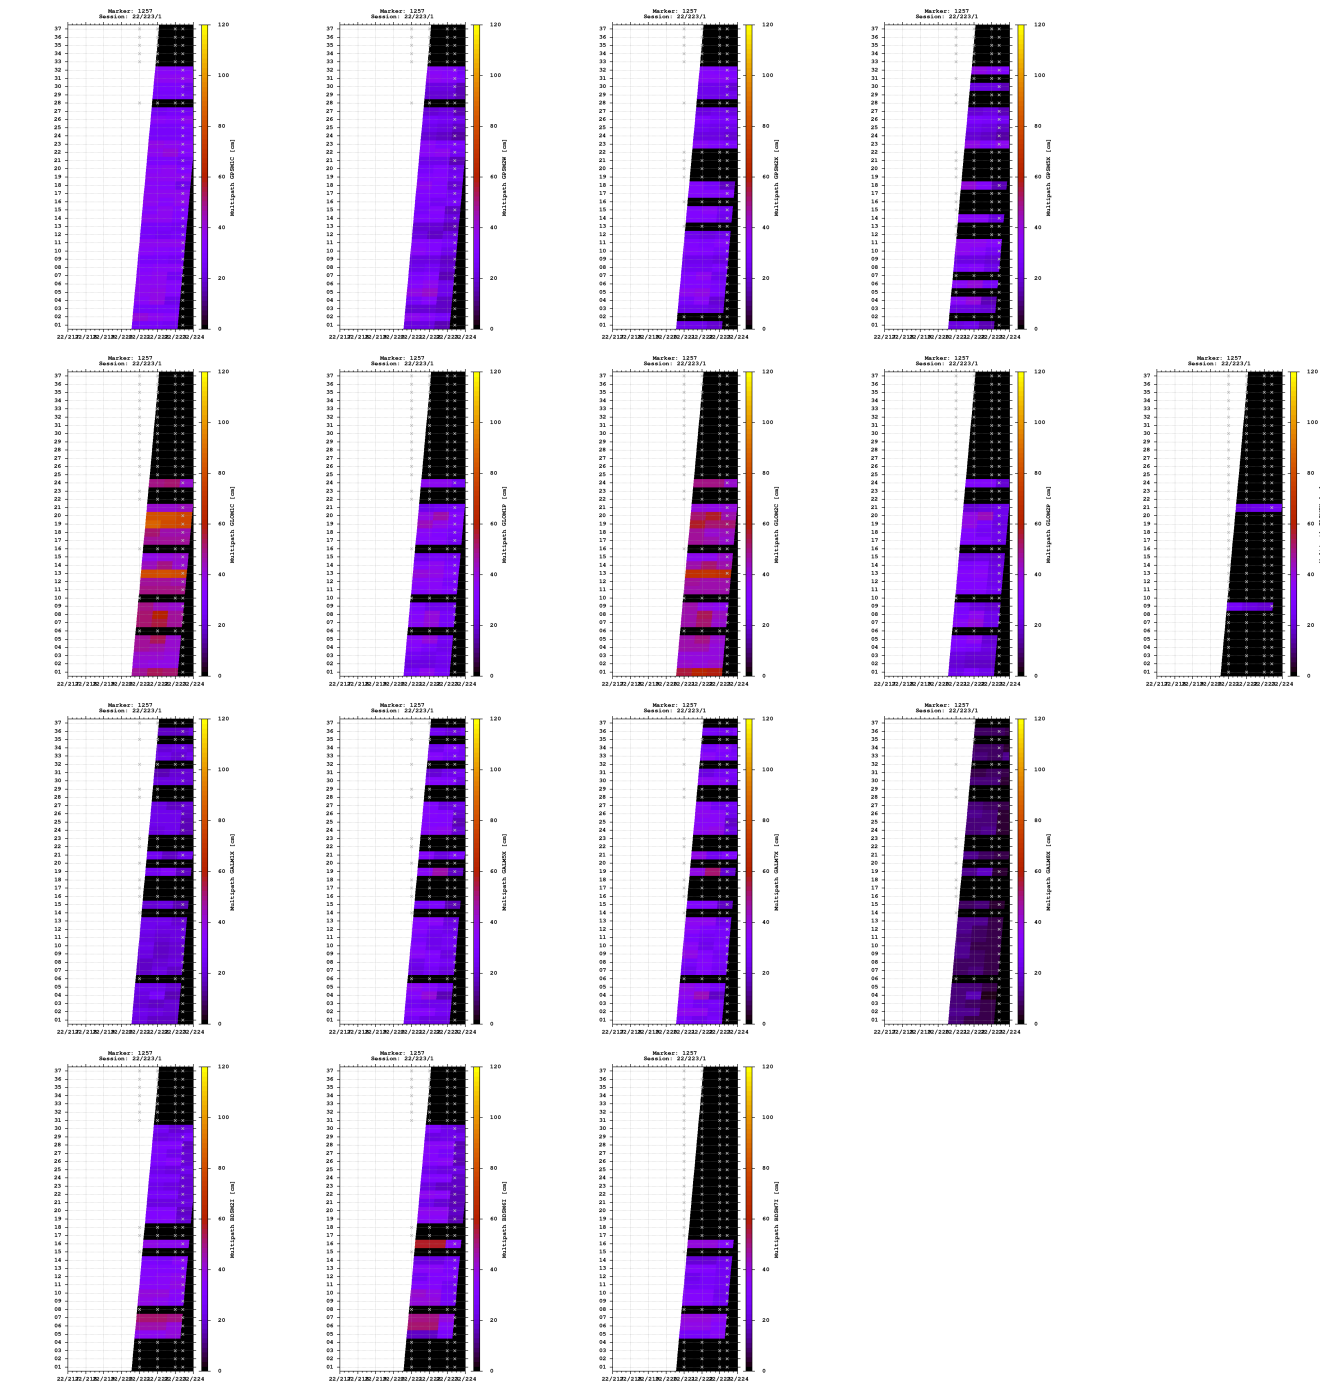


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

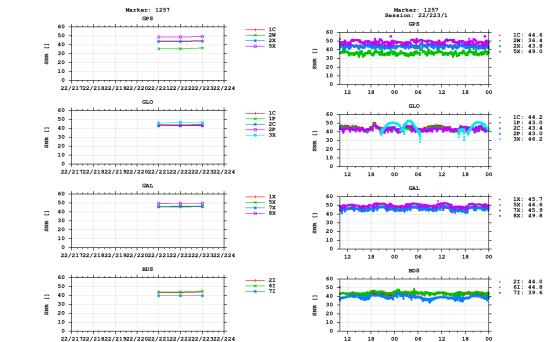


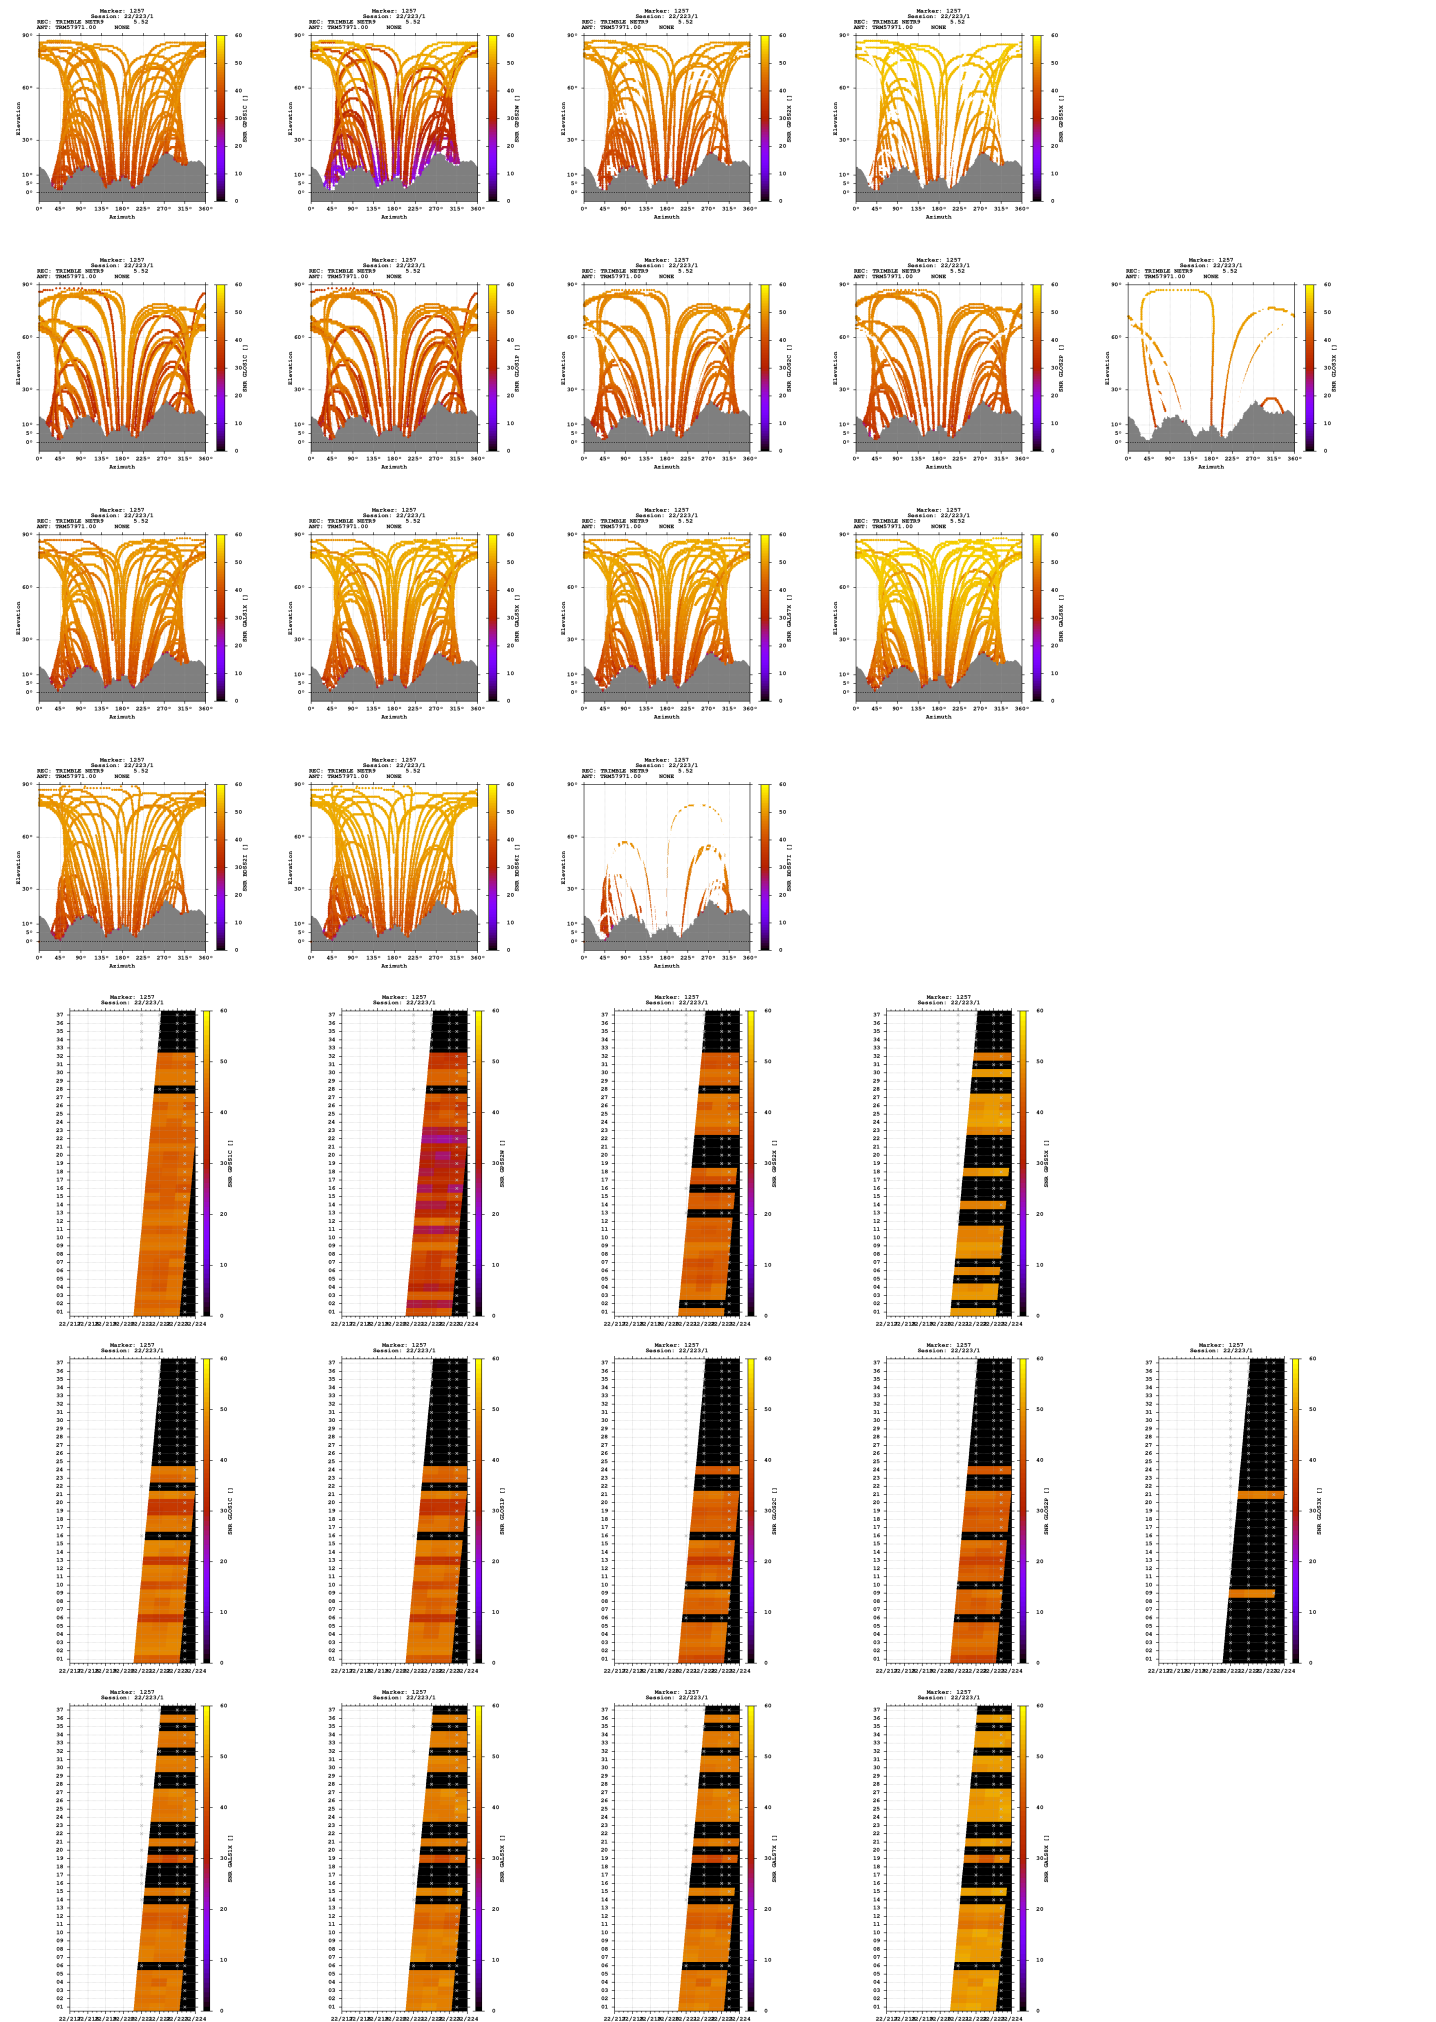

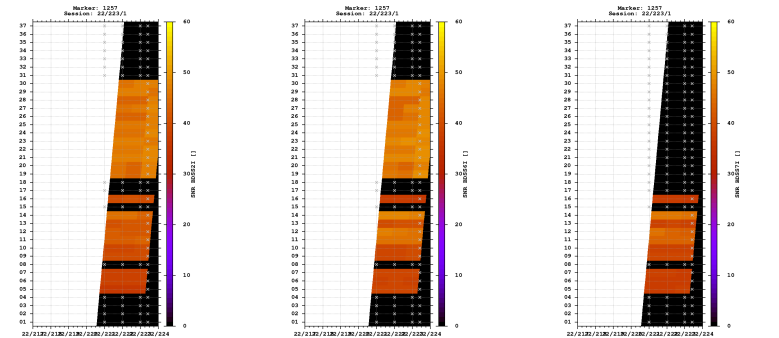


Estimates

2022-08-11 10:05:30	GPS	4331833.0186	753602.3453	4607333.3675	46.530942907	9.868889167	1771.8863
2022-08-11 10:05:30	GLO	4331832.6844	753601.5919	4607332.0542	46.530937774	9.868880241	1770.6178
2022-08-11 10:05:30	GAL	4331833.2408	753602.5007	4607333.0825	46.530939542	9.868890666	1771.8484
2022-08-11 10:05:30	BDS	4331835.1139	753603.1727	4607335.5459	46.530941987	9.868895109	1774.9850

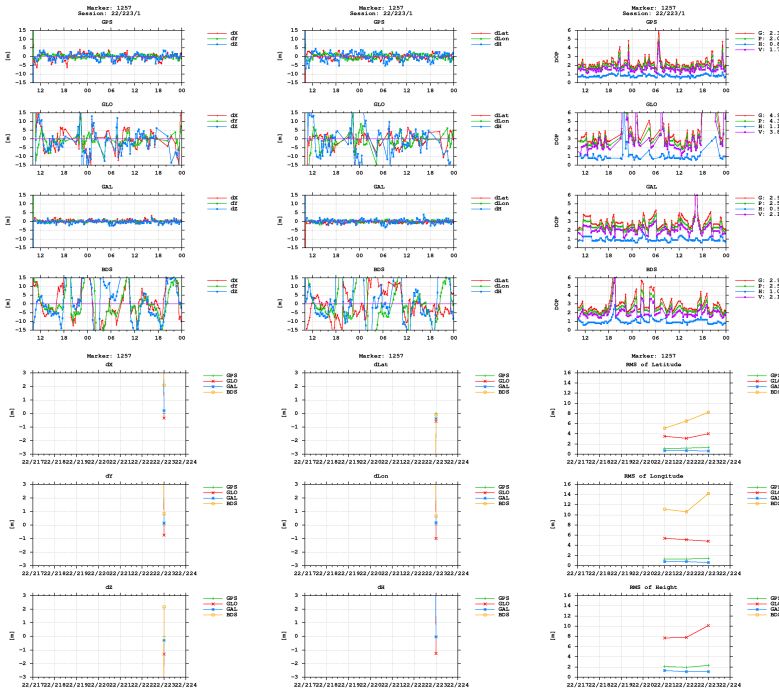

BNC

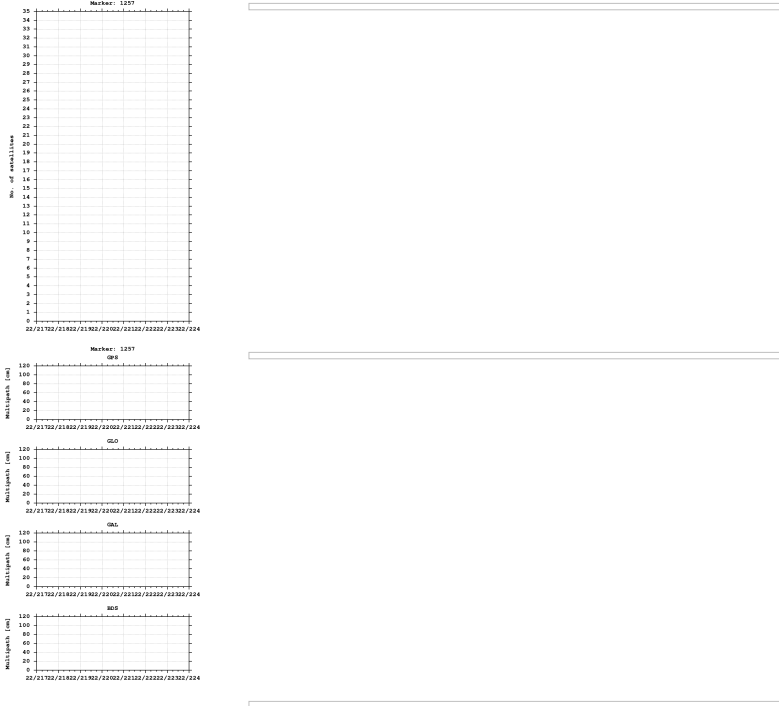



Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)