

GNSS observation file monitoring for 0513

Last RINEX file: 05132291.220

RINEX version: 3.02

Marker: 1096

Receiver: 513

Antenna: 513


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

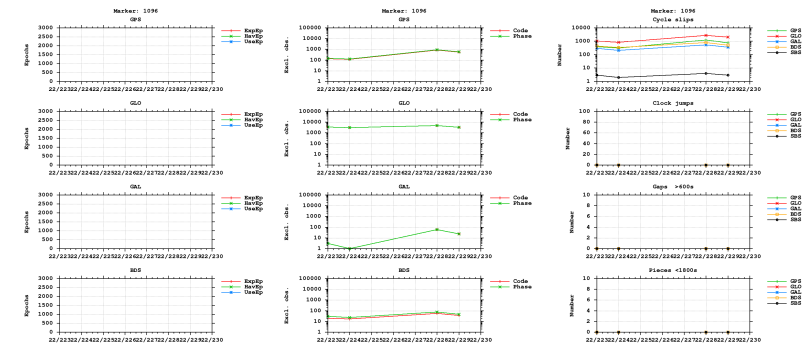



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

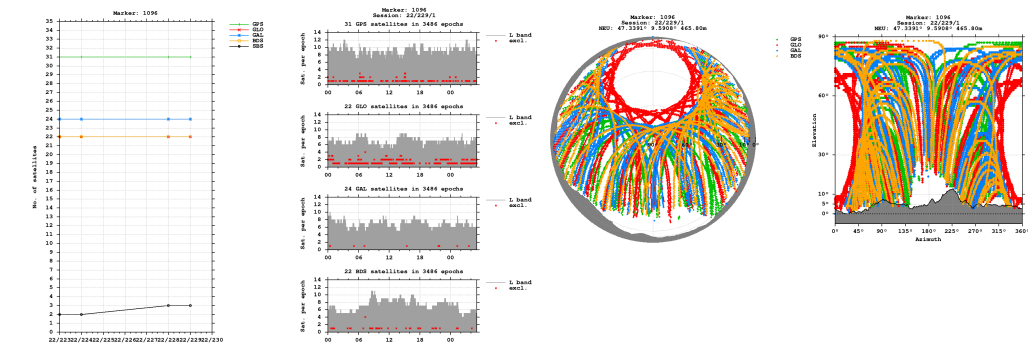


Bands

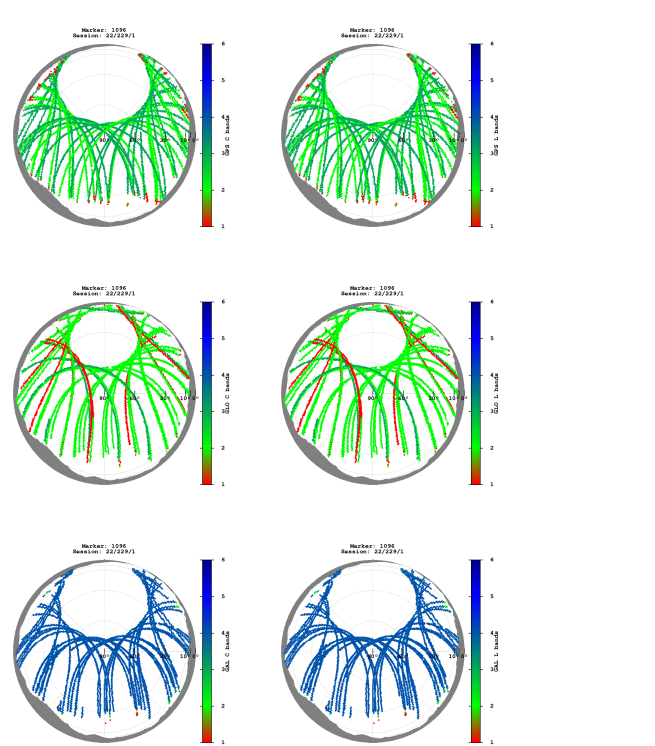


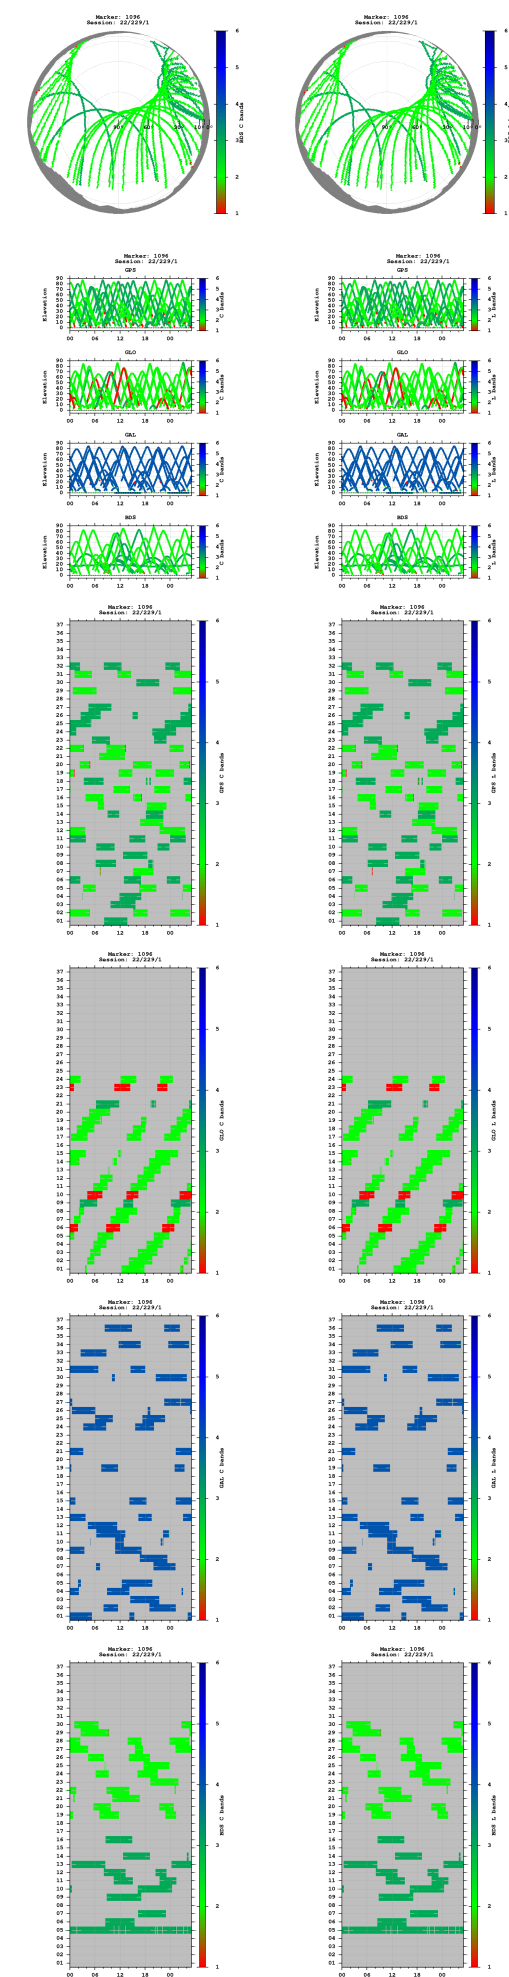


Observations

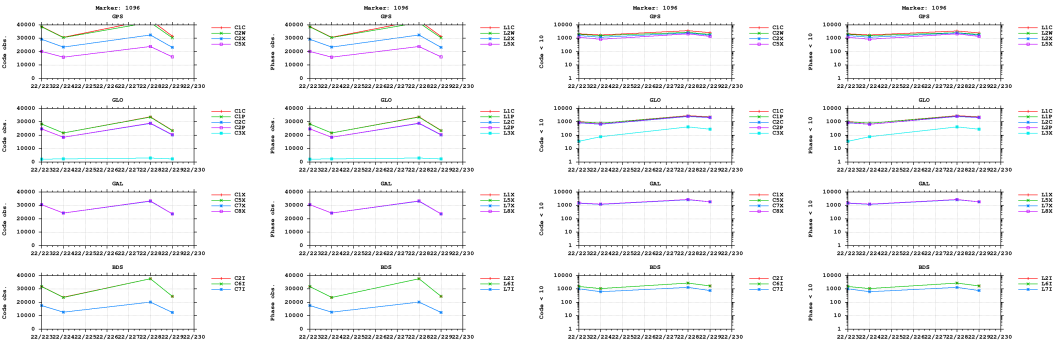


Multipath

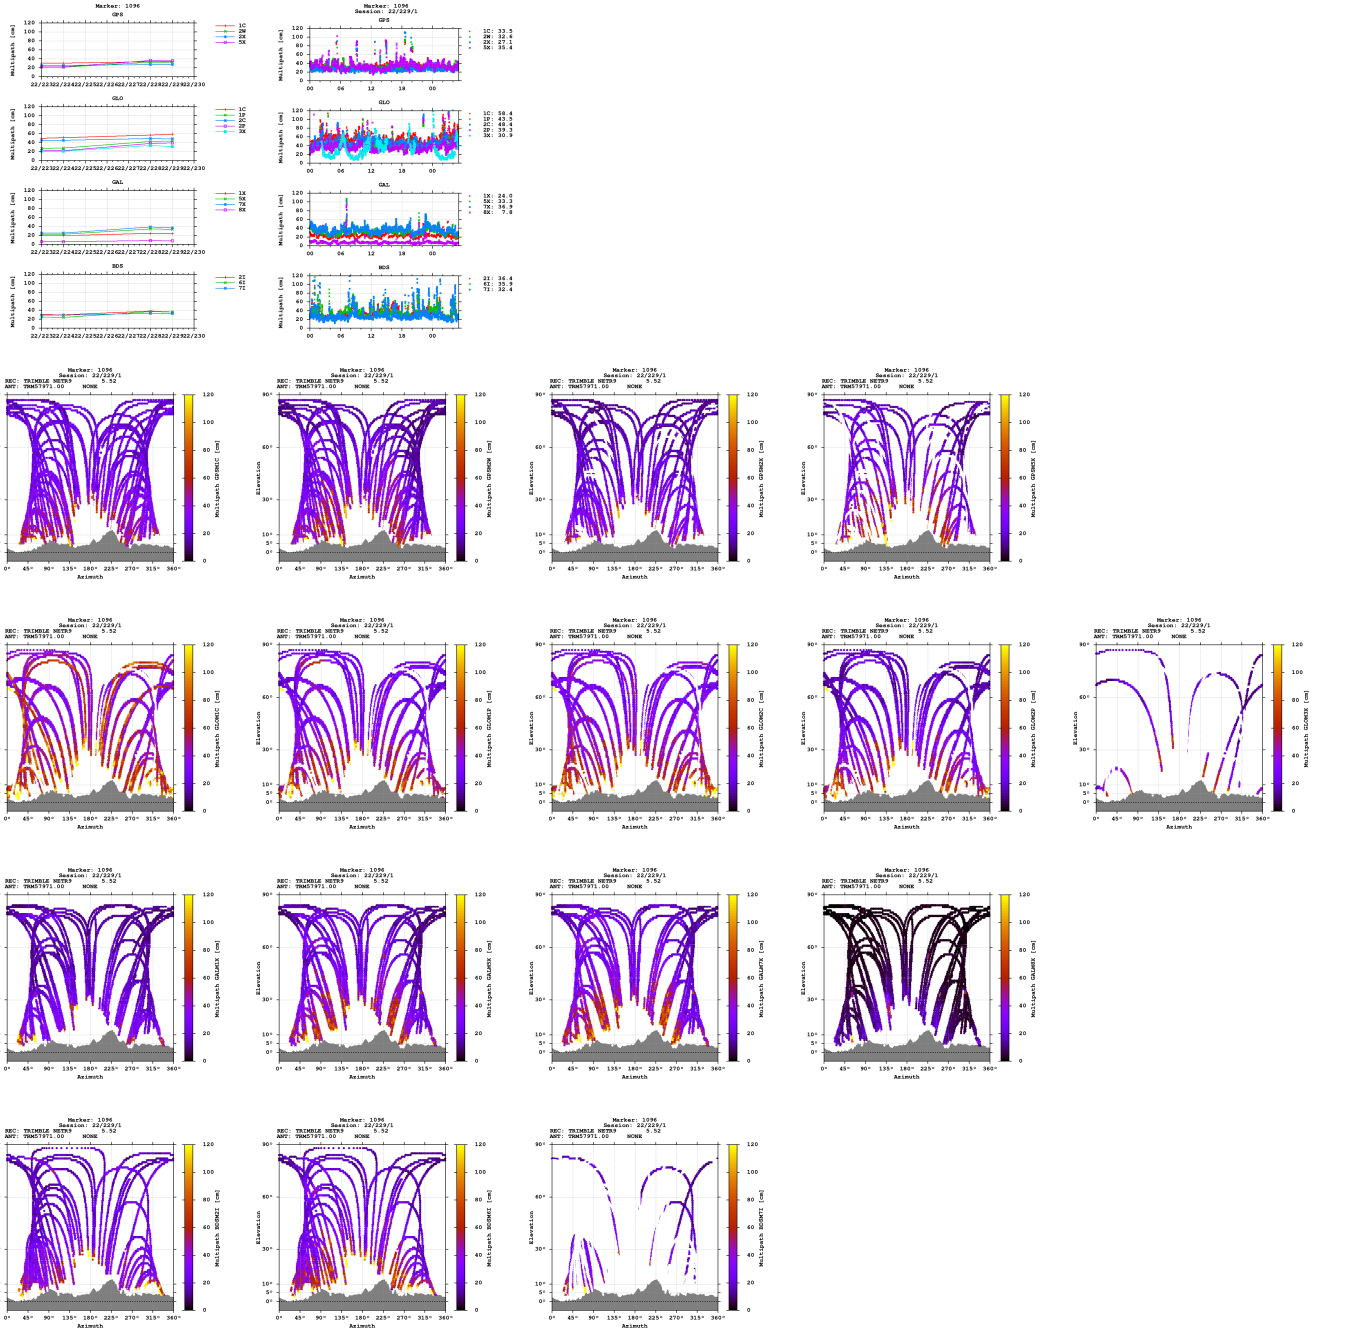


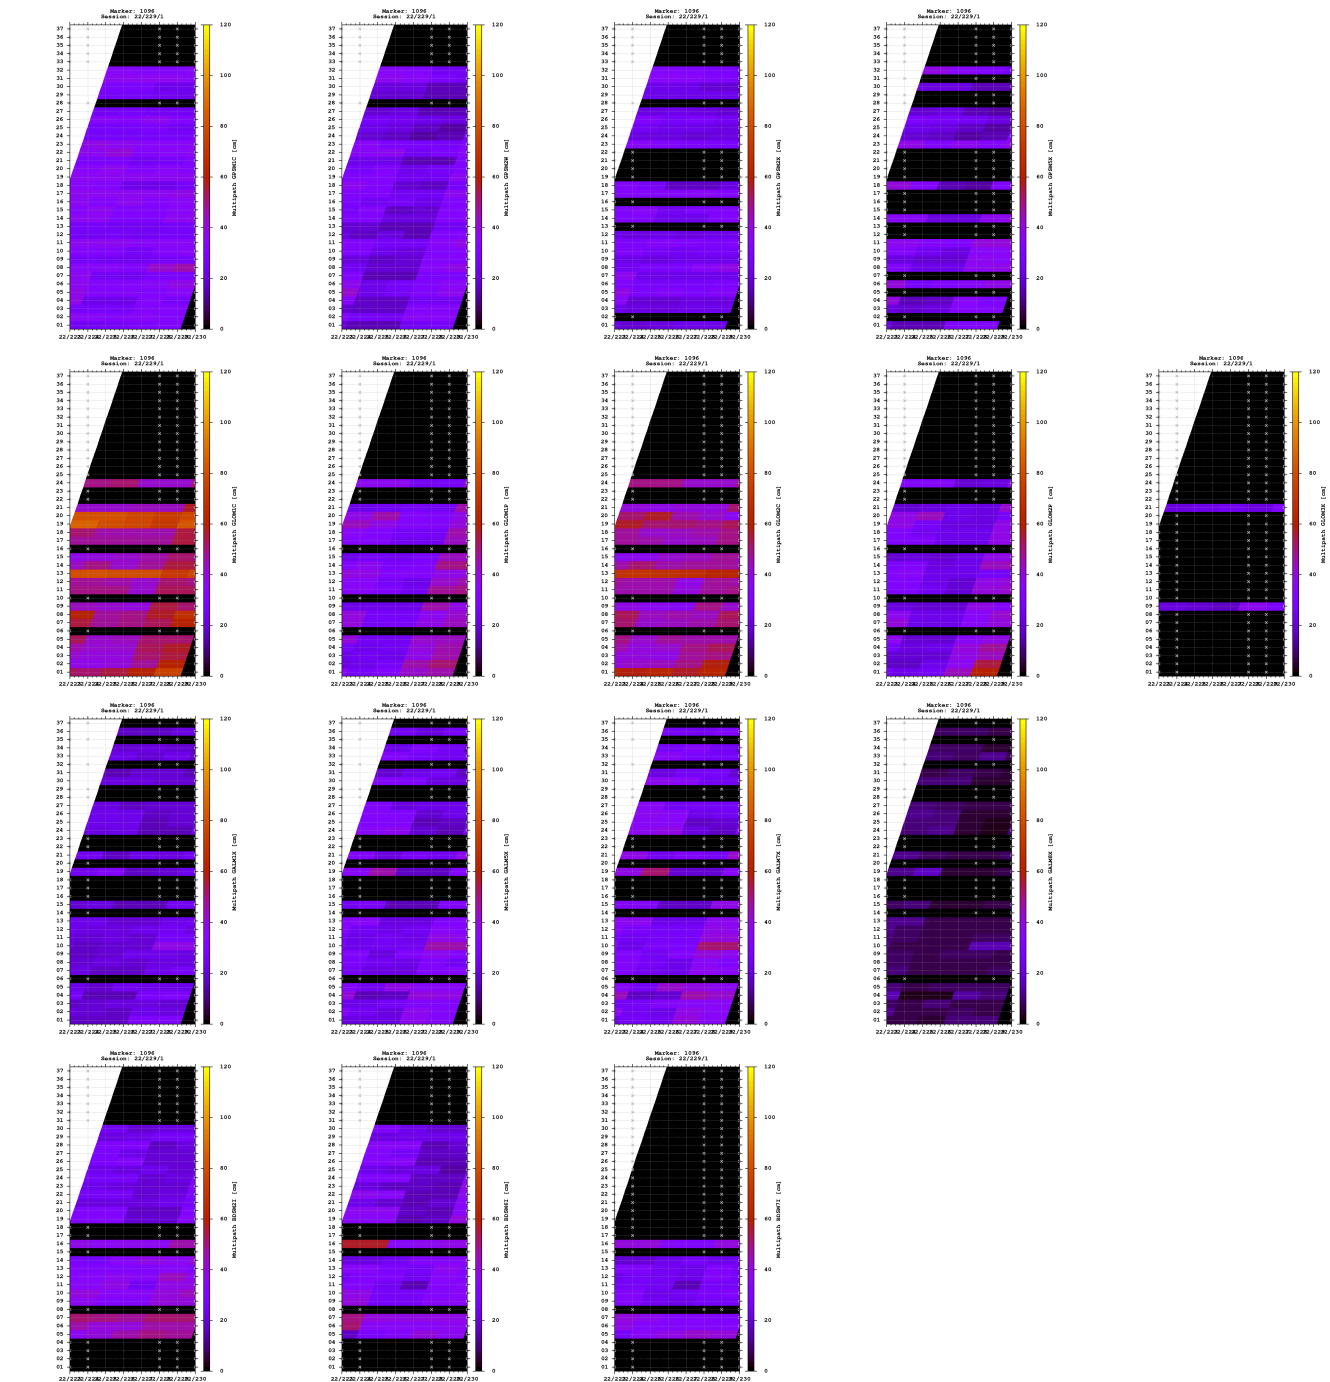


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

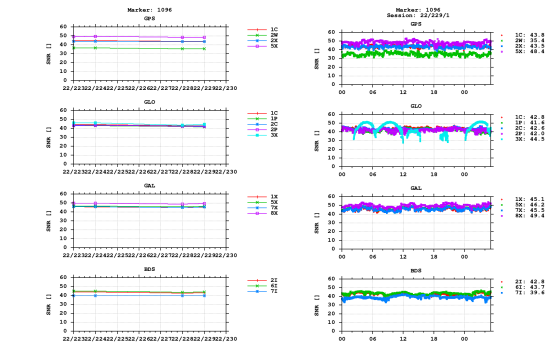


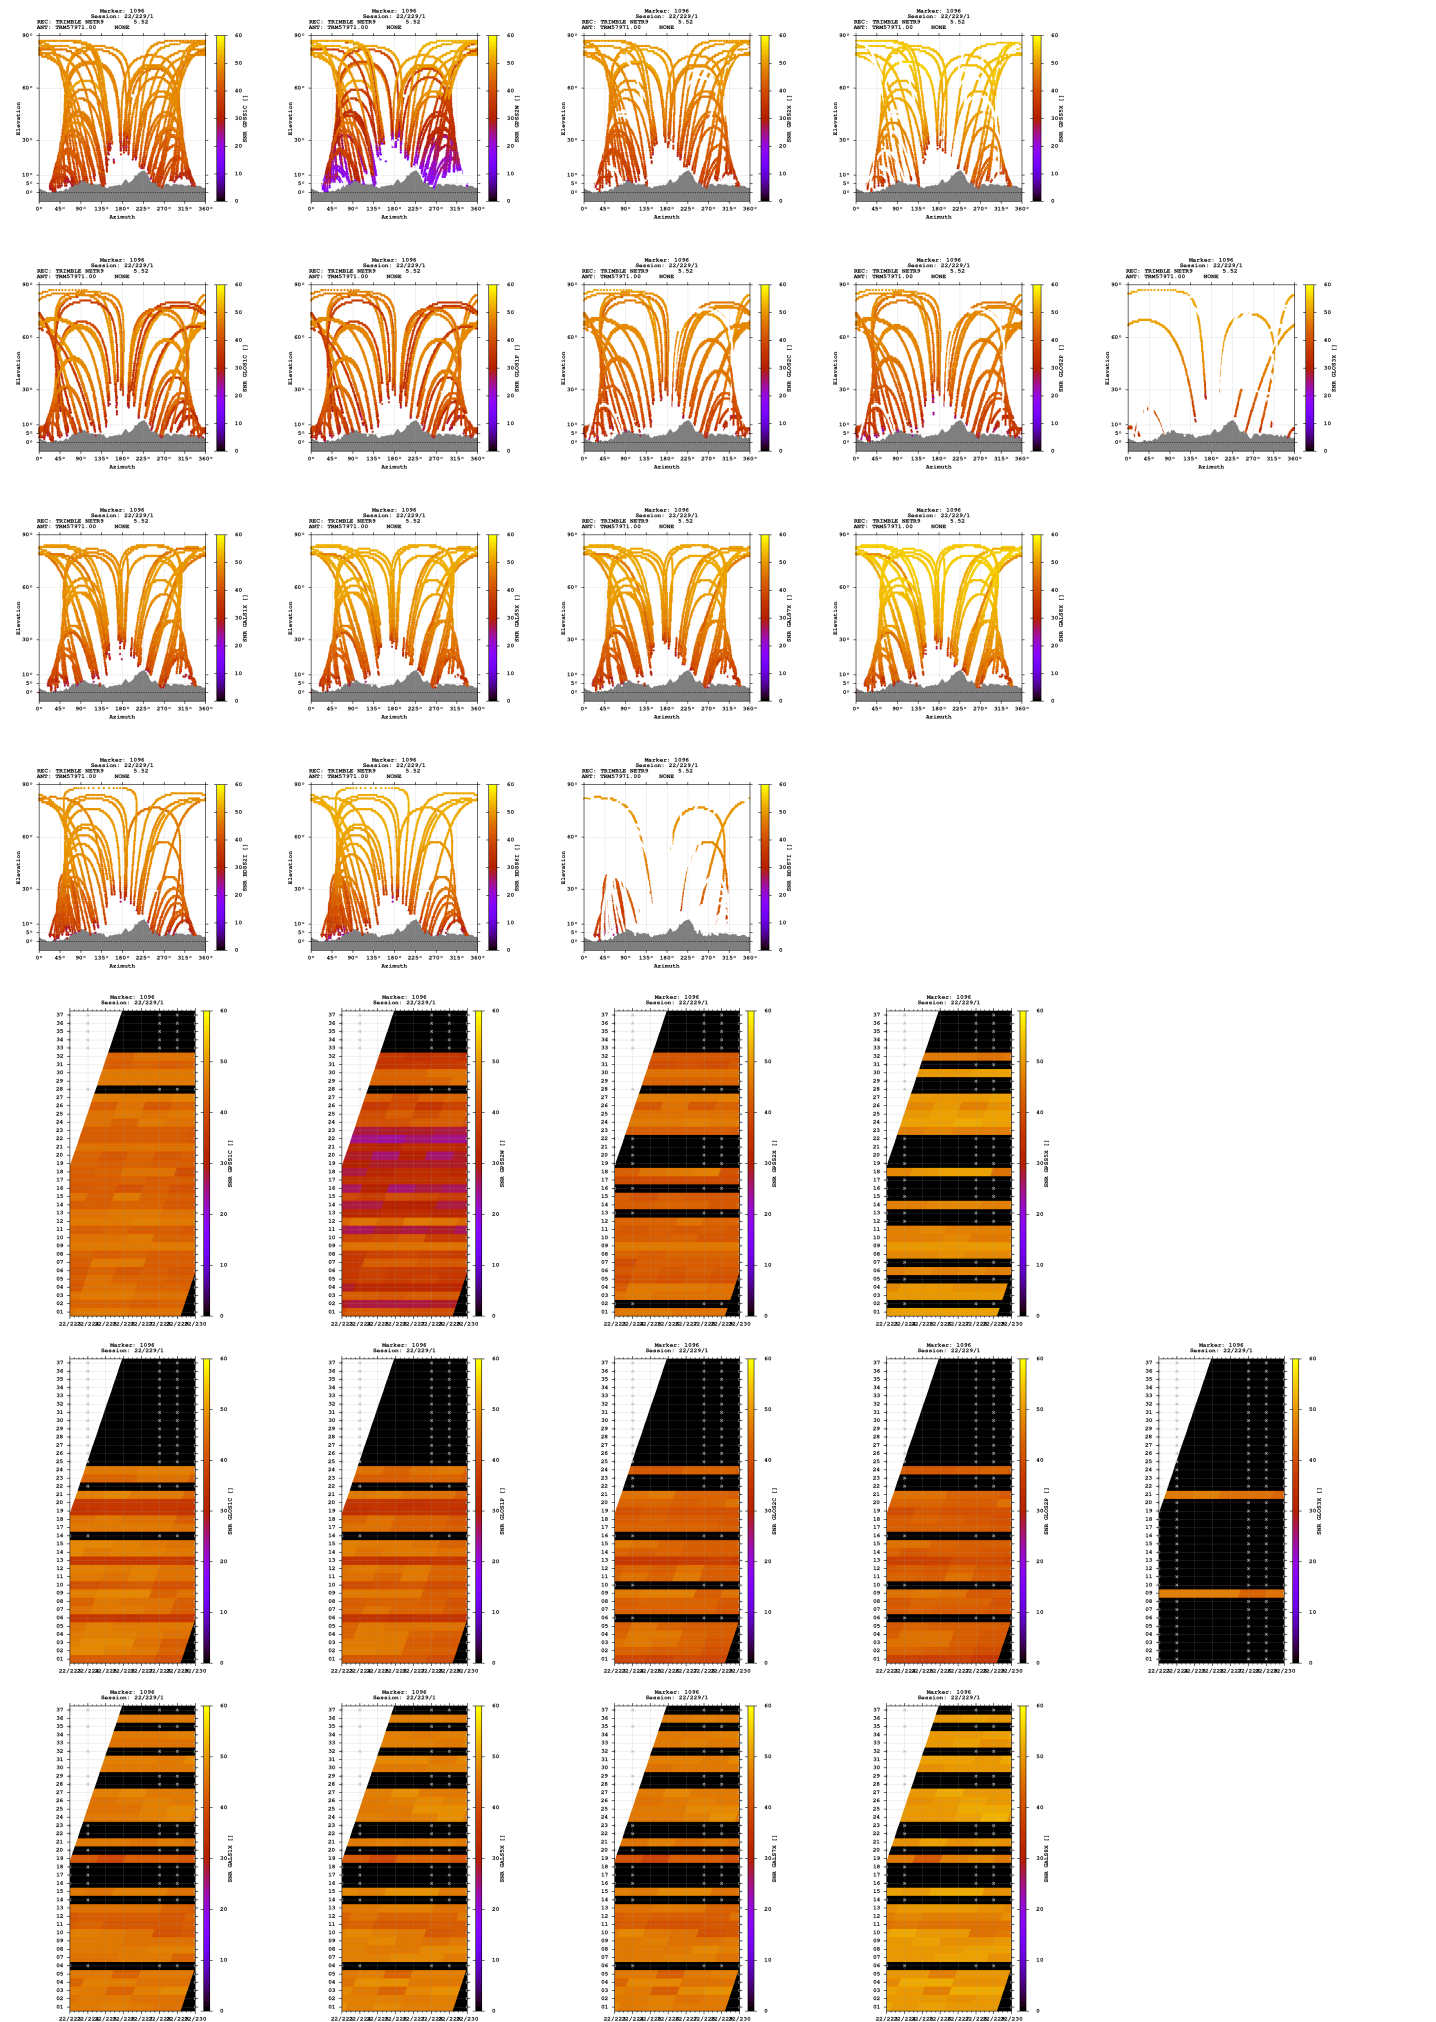

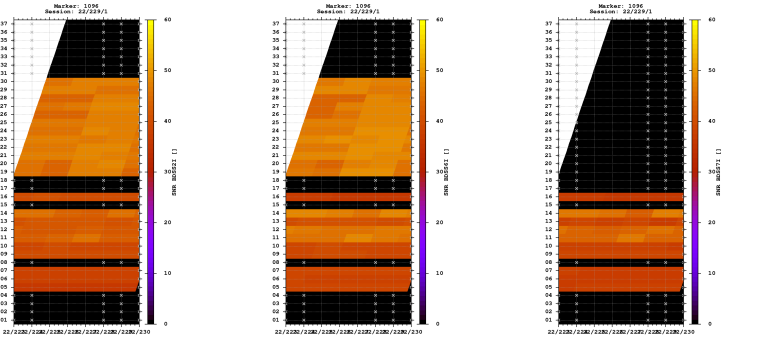



Estimates

2022-08-16 06:47:30	GPS	4269831.7798	721482.8744	4667734.4618	47.339075006	9.590801154	465.7955
2022-08-16 06:47:30	GLO	4269831.5465	721482.3206	4667734.6805	47.339078471	9.590794443	465.7379
2022-08-16 06:47:30	GAL	4269831.4037	721482.8958	4667733.7970	47.339073384	9.590802262	465.0578
2022-08-16 06:47:30	BDS	4269830.7671	721481.8406	4667736.0796	47.339092610	9.590789899	466.1918

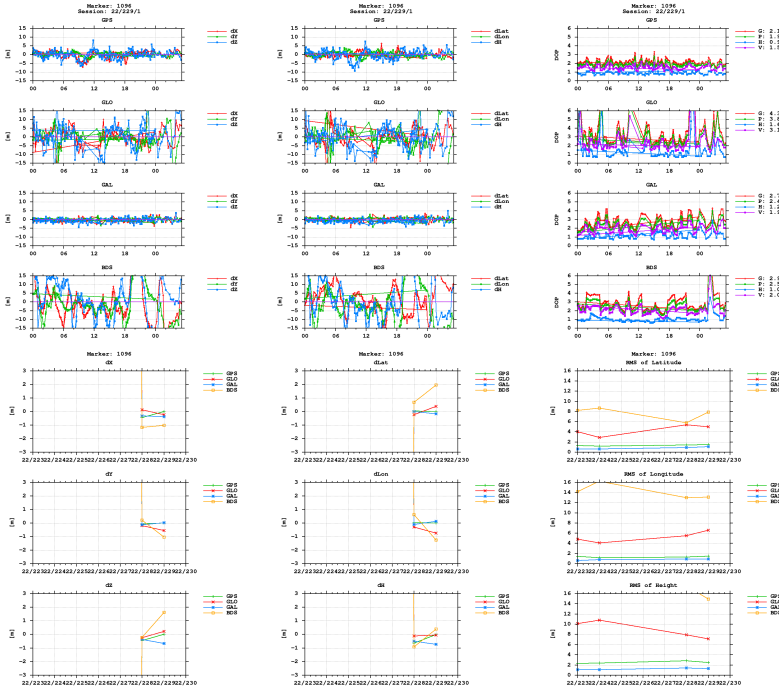

BNC

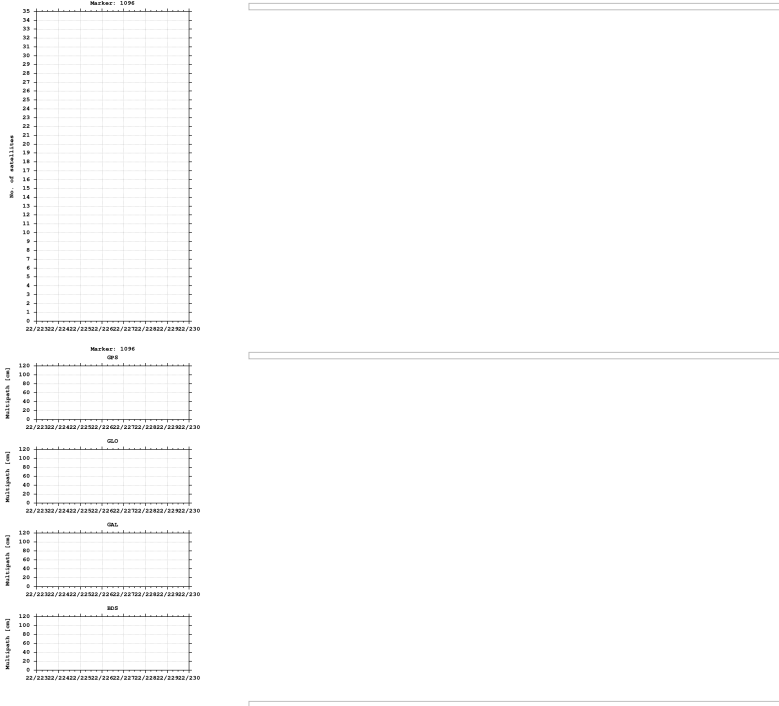

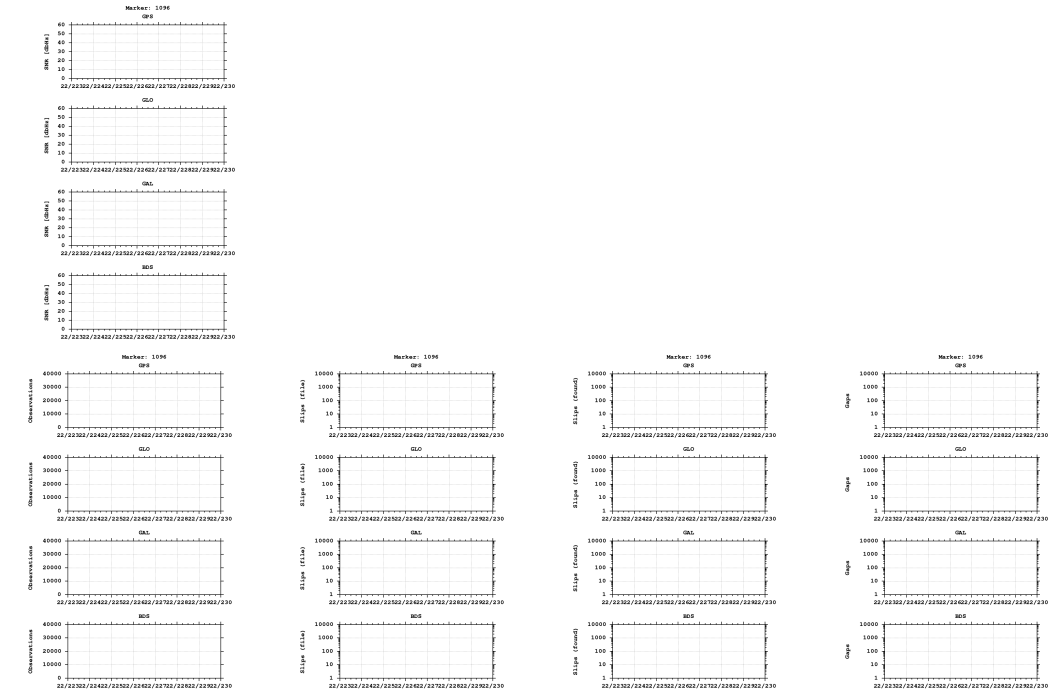

Equipment

2022-08-09 00:00:00 TRIMBLE NETR9 5.52 513 TRM57971.00 NONE 513

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)