

GNSS observation file monitoring for 0513

Last RINEX file: 05132301.220

RINEX version: 3.02

Marker: 1114

Receiver: 511

Antenna: 511


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

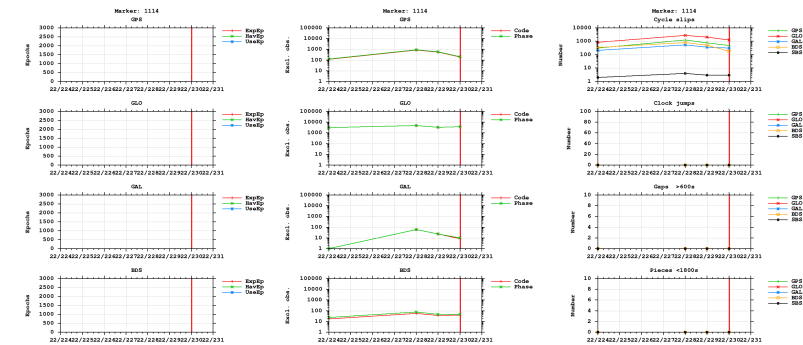



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

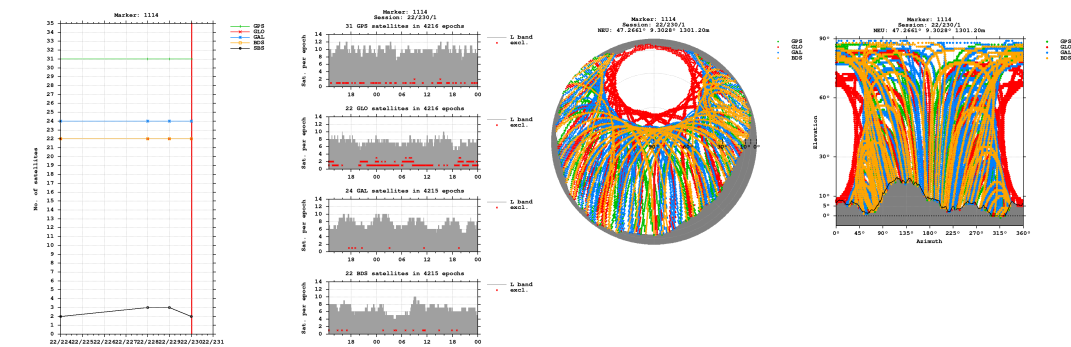


Bands

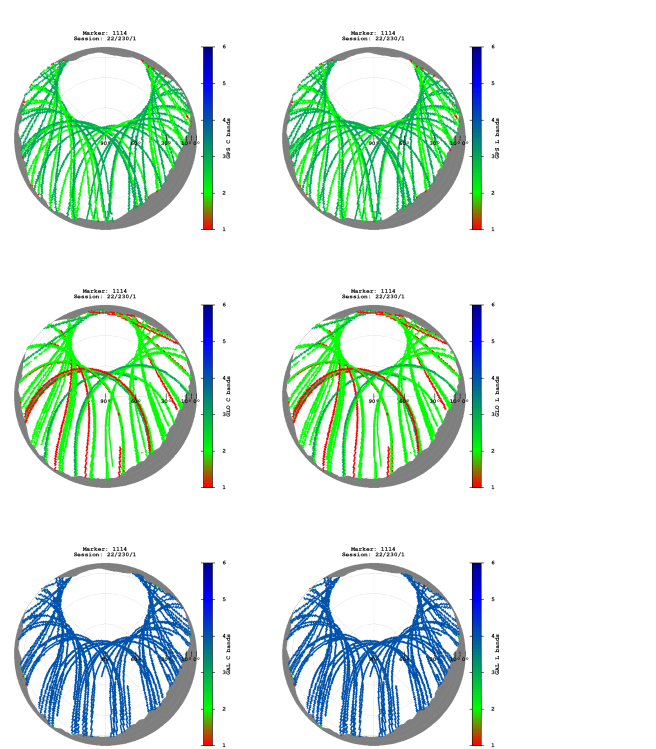


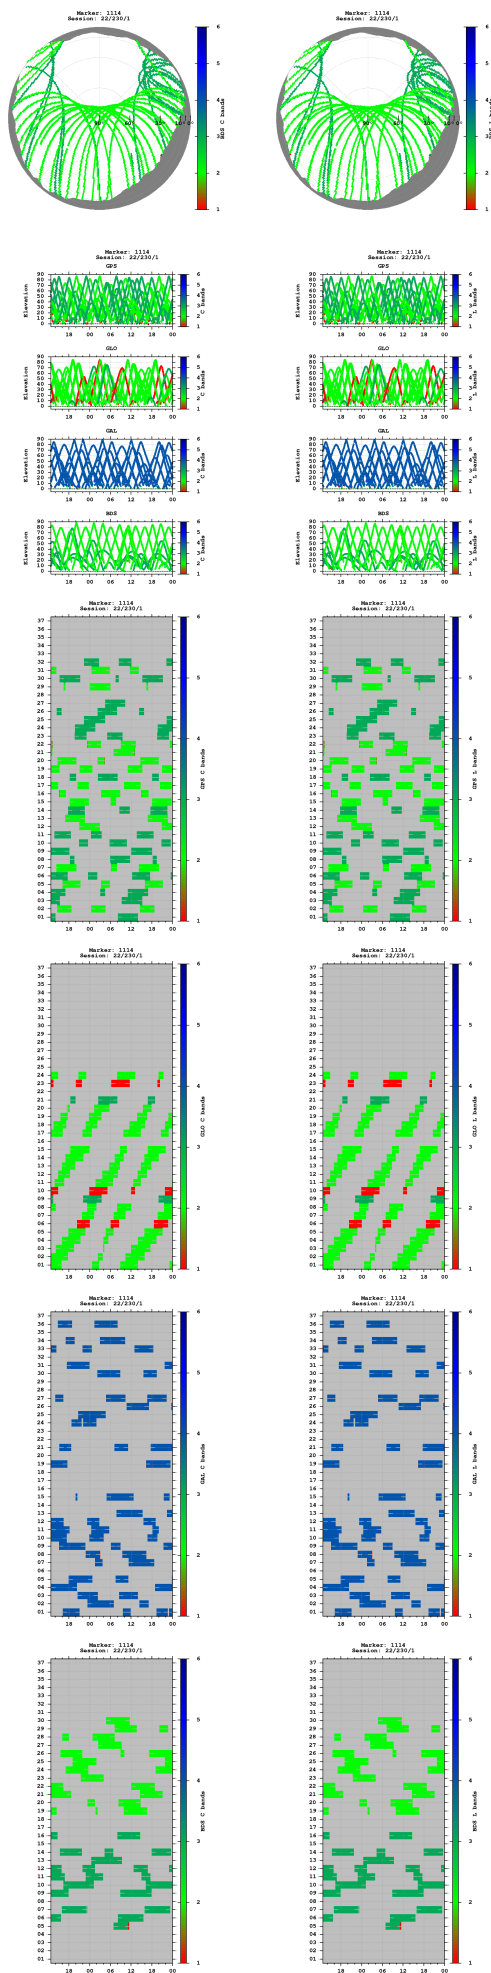


Observations

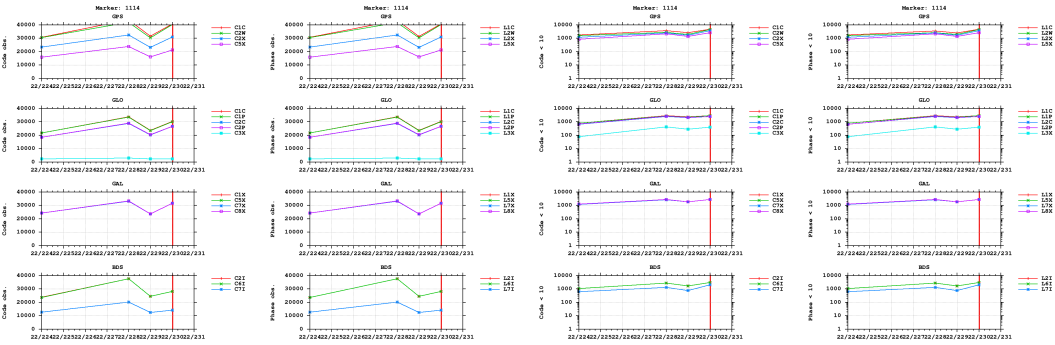


Multipath

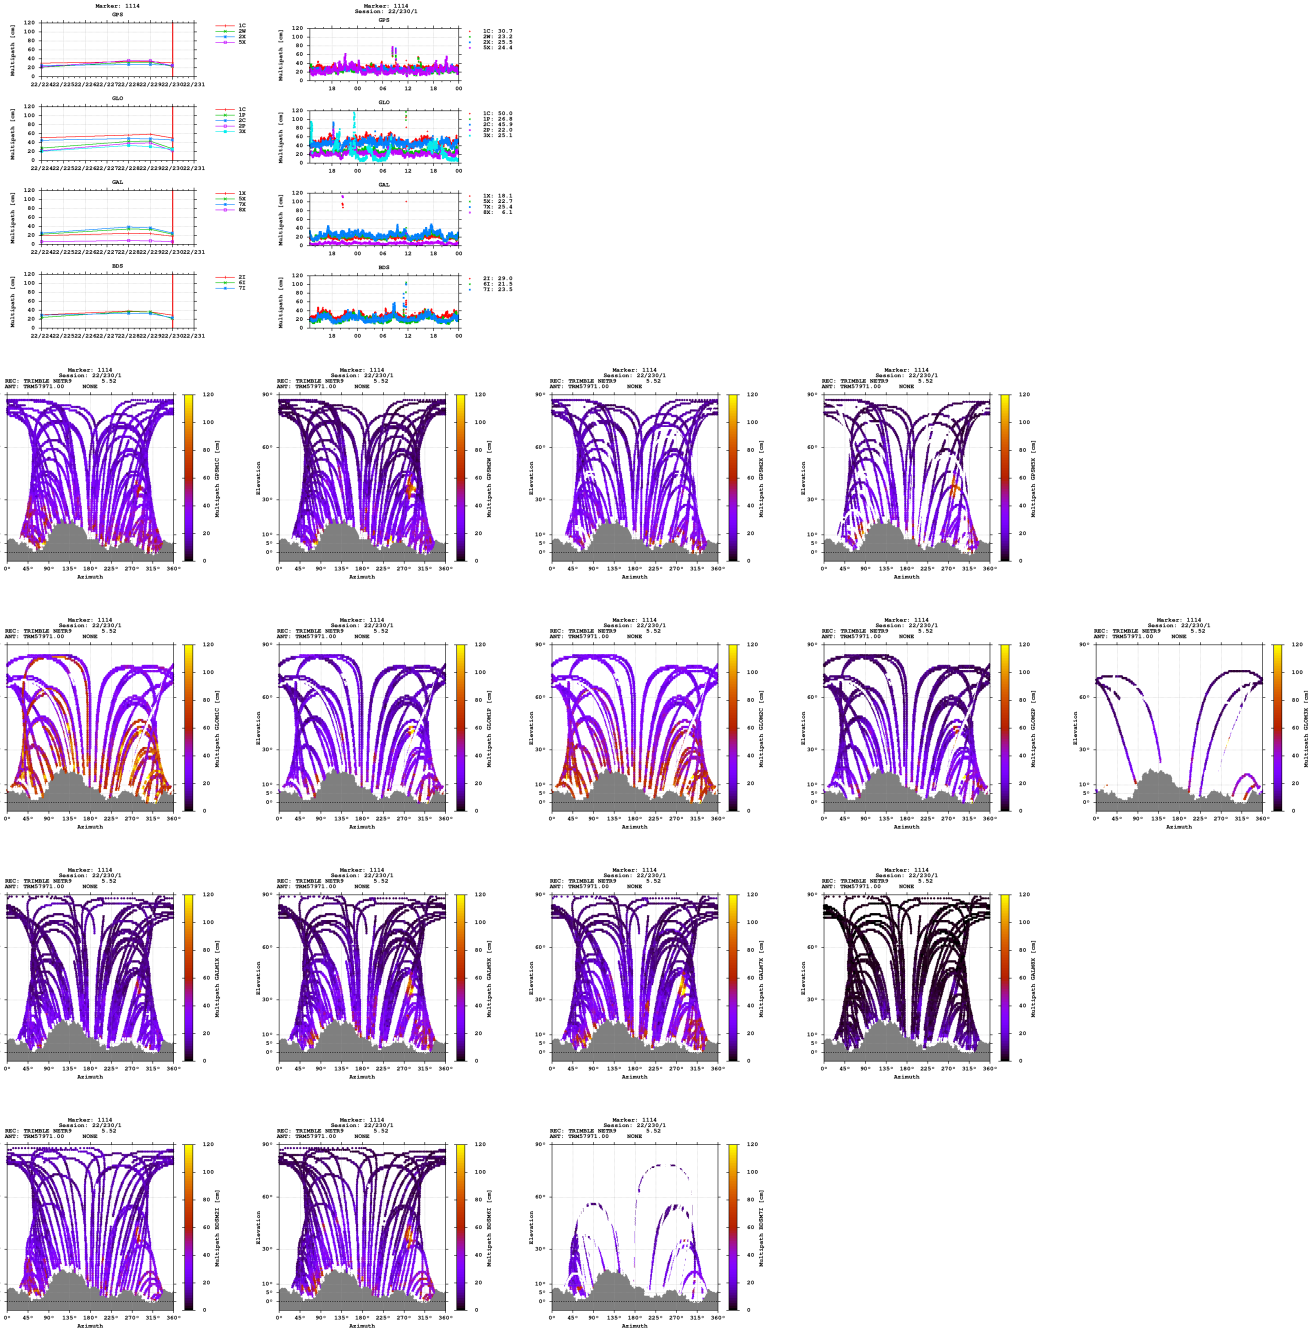


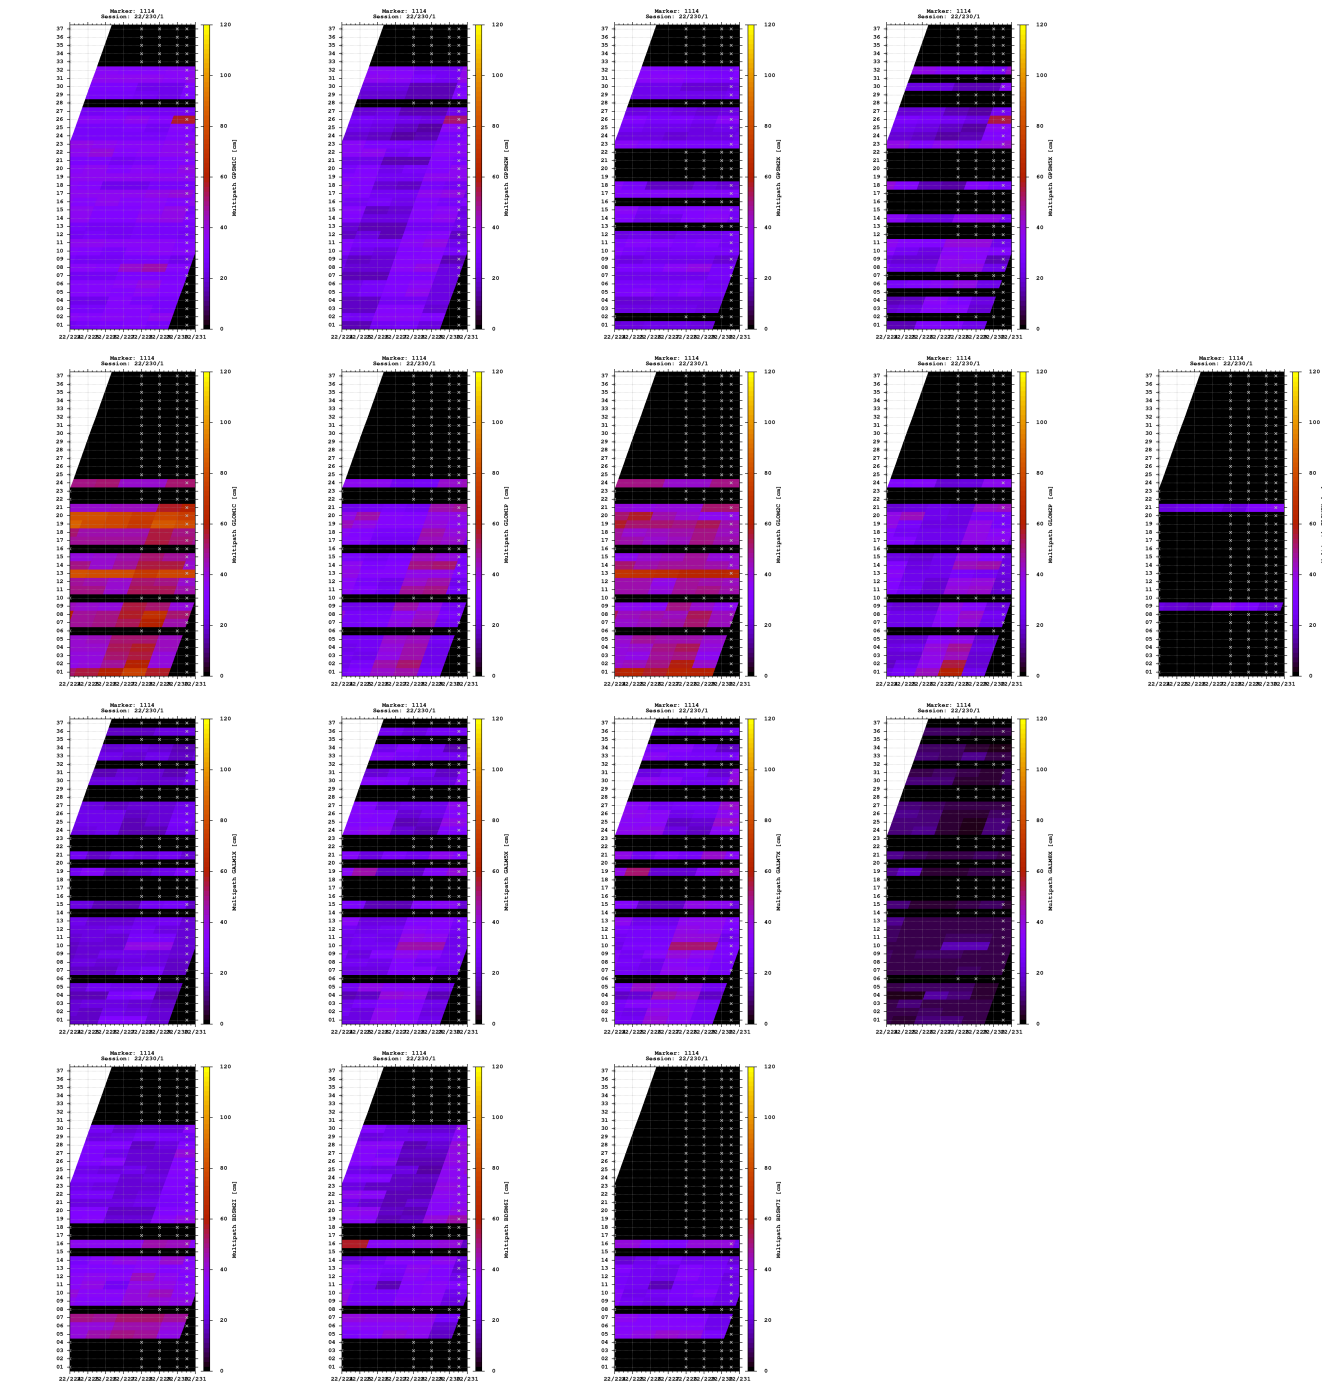


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

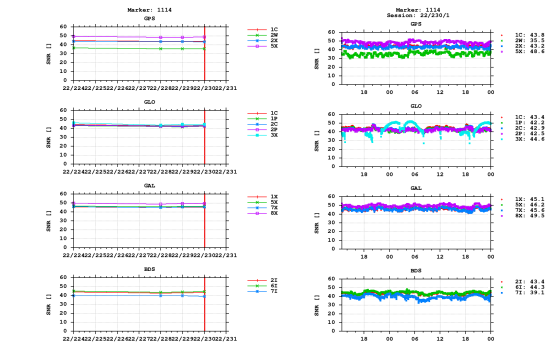


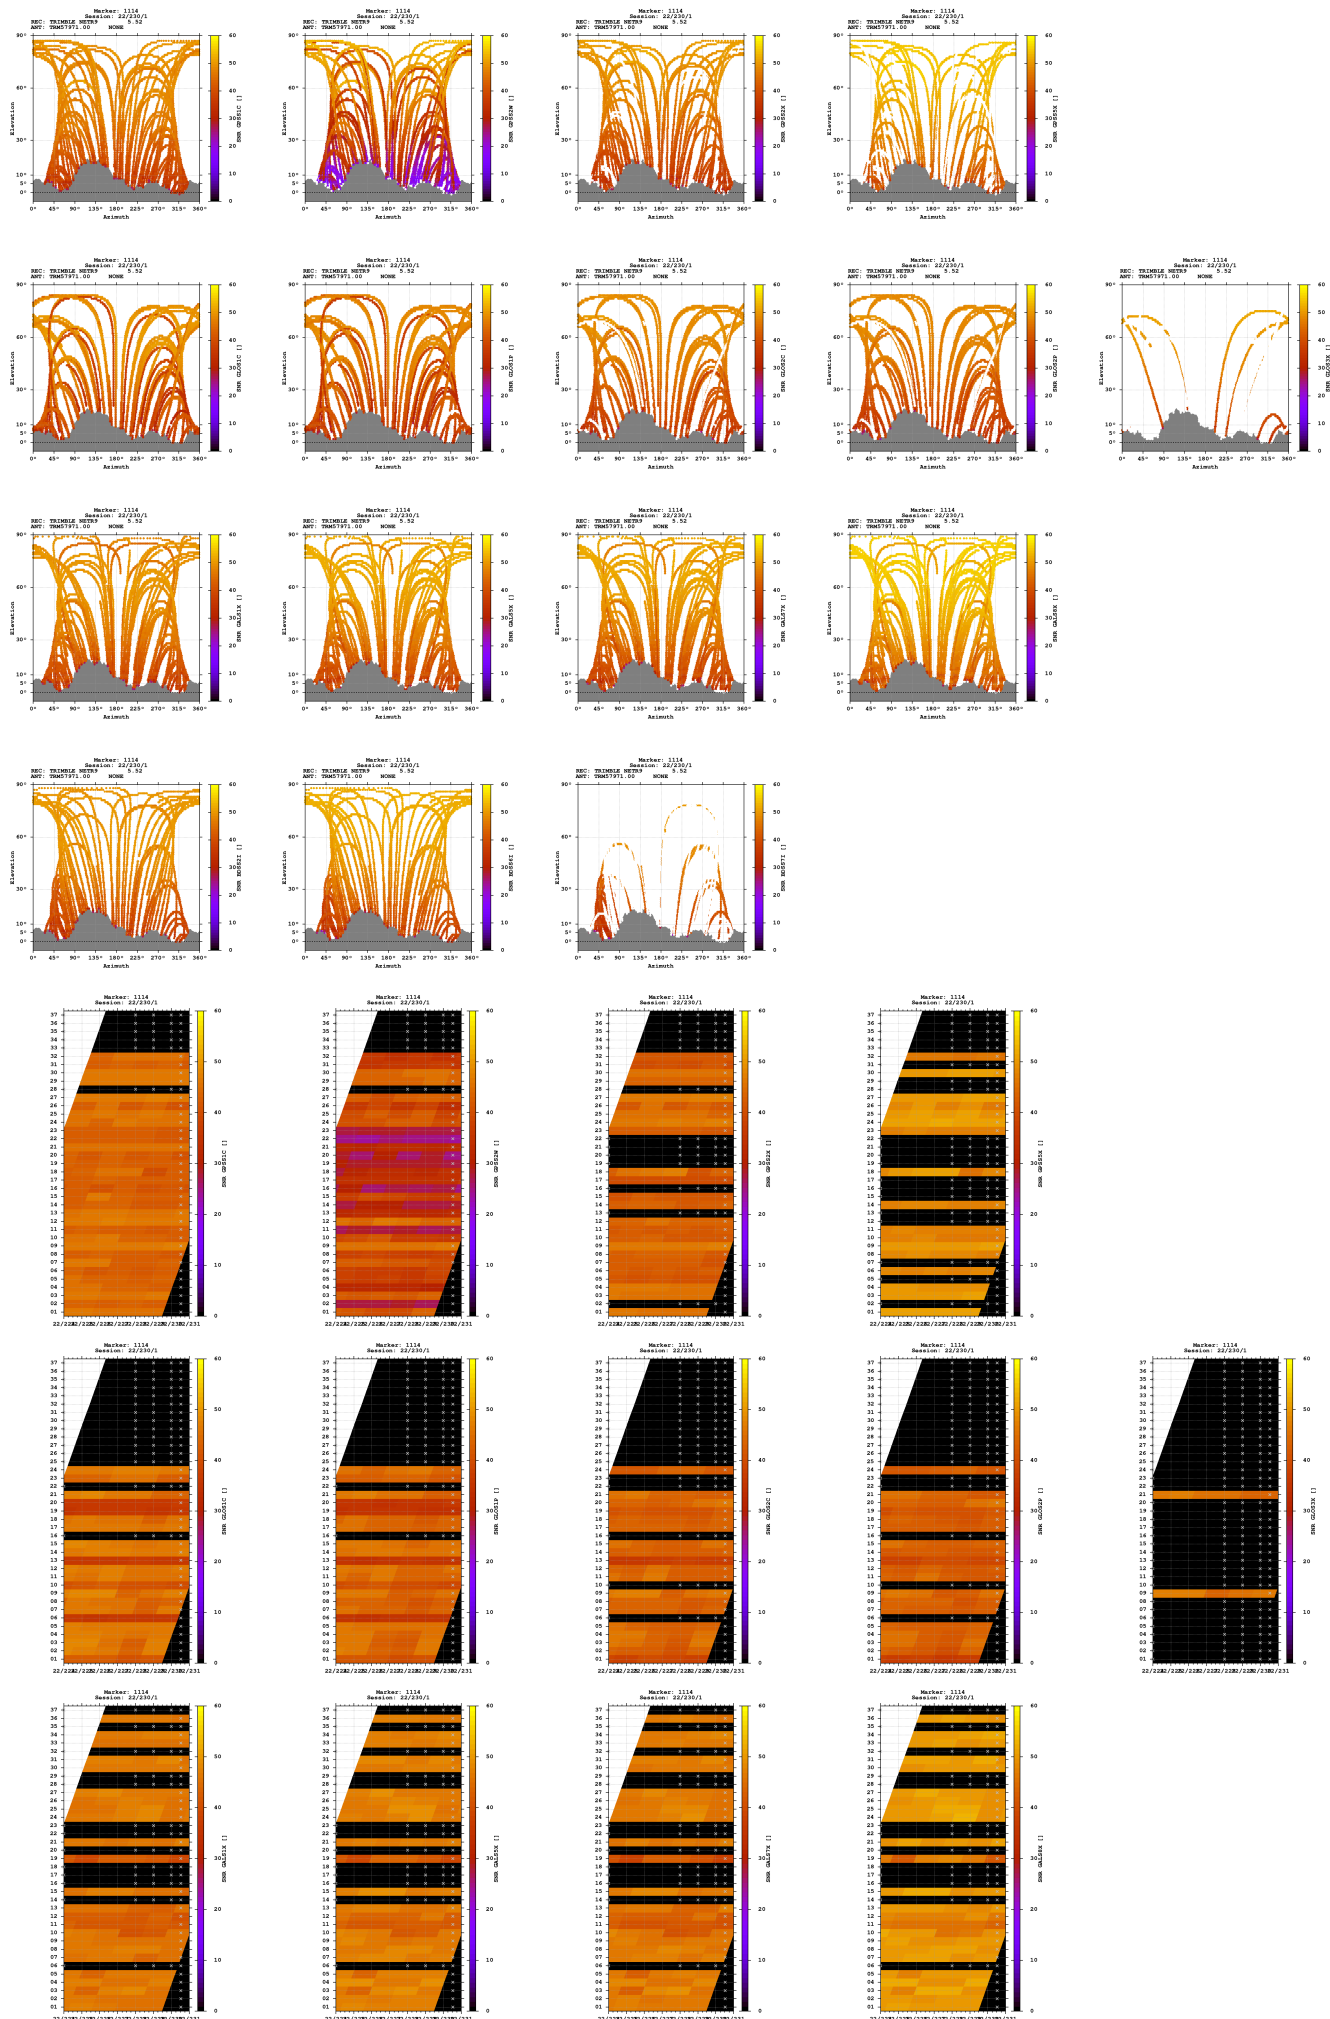

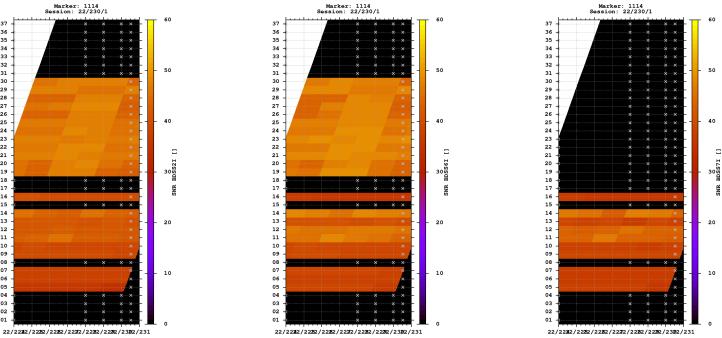


Estimates

2022-08-18 12:45:00	GPS	4279850.4598	701070.8082	4662843.6334	47.266069231	9.302847643	1301.2048
2022-08-18 12:45:00	GLO	4279850.1248	701070.2851	4662843.4280	47.266070720	9.302841537	1300.7722
2022-08-18 12:45:00	GAL	4279850.2316	701070.6759	4662843.4691	47.266069858	9.302846404	1300.9168
2022-08-18 12:45:00	BDS	4279851.7829	701071.2779	4662845.0889	47.266068987	9.302850940	1303.2115

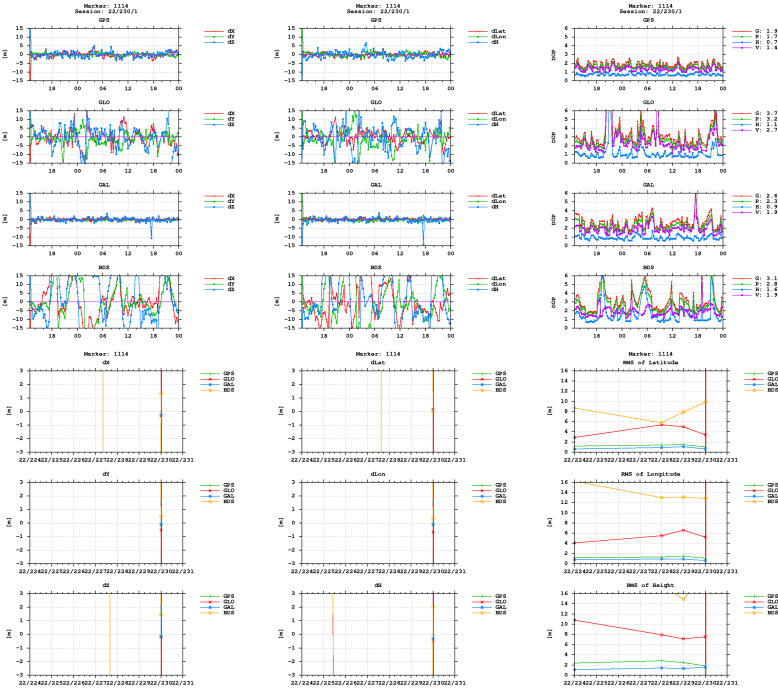

BNC



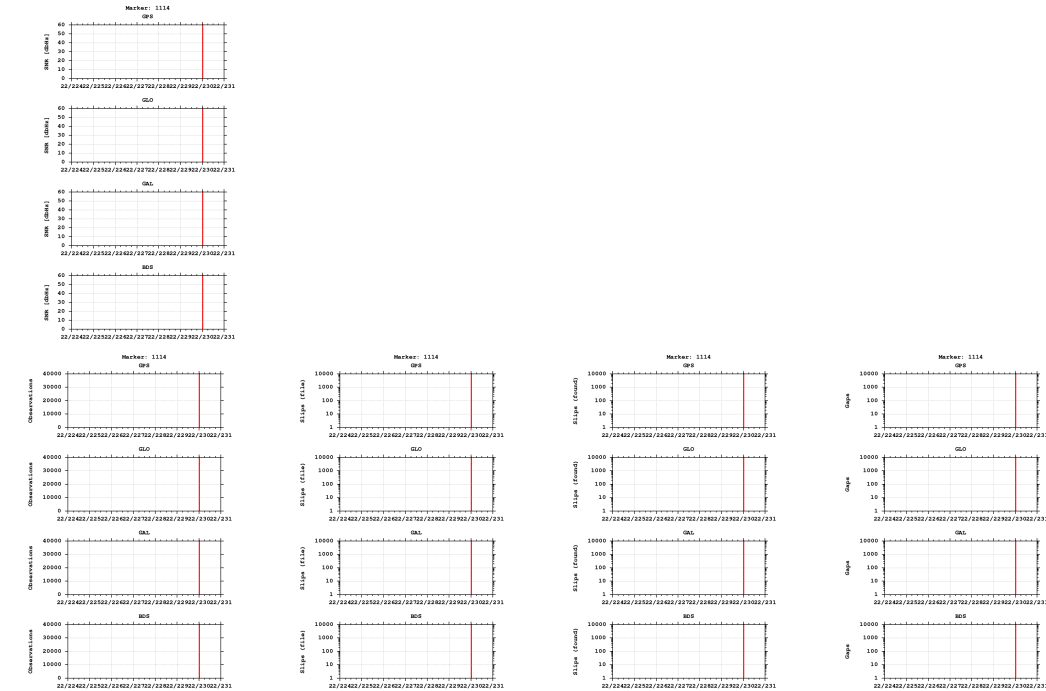

Equipment

2022-08-09 00:00:00 TRIMBLE NETR9 5.52 513 TRM57971.00 NONE 513
2022-08-18 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)