


GNSS observation file monitoring for 0514


Last RINEX file: 05142211.22O
RINEX version: 3.02
Marker: 1276
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

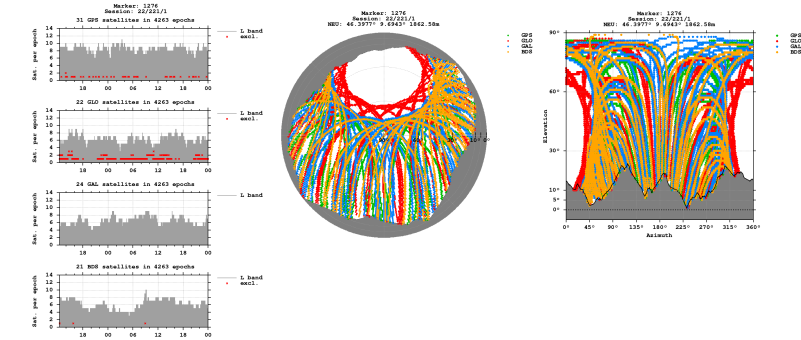


Bands

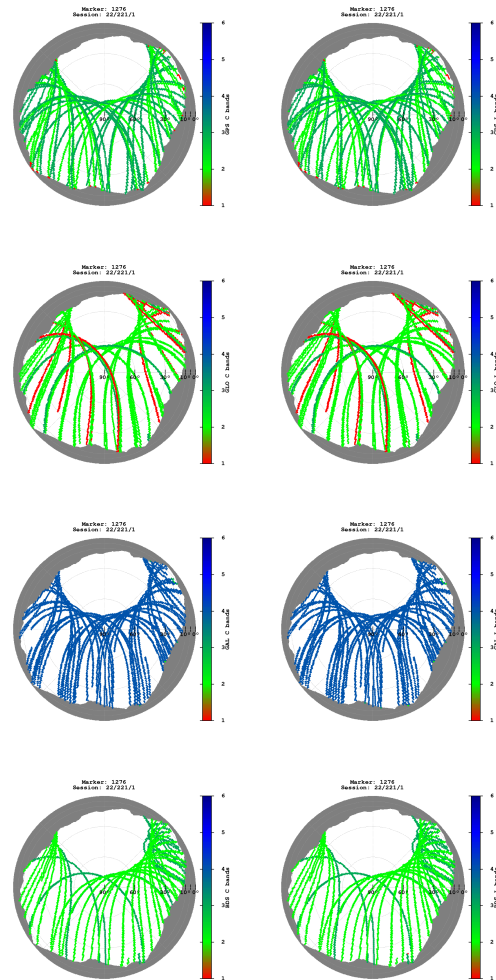

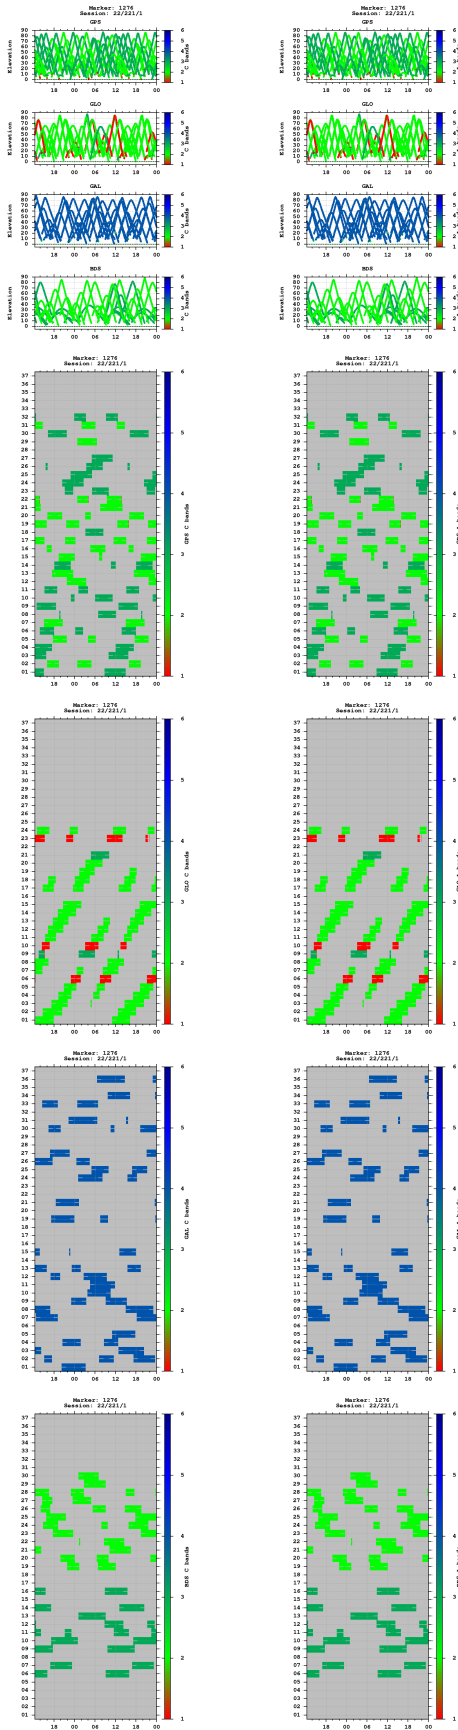



Multipath

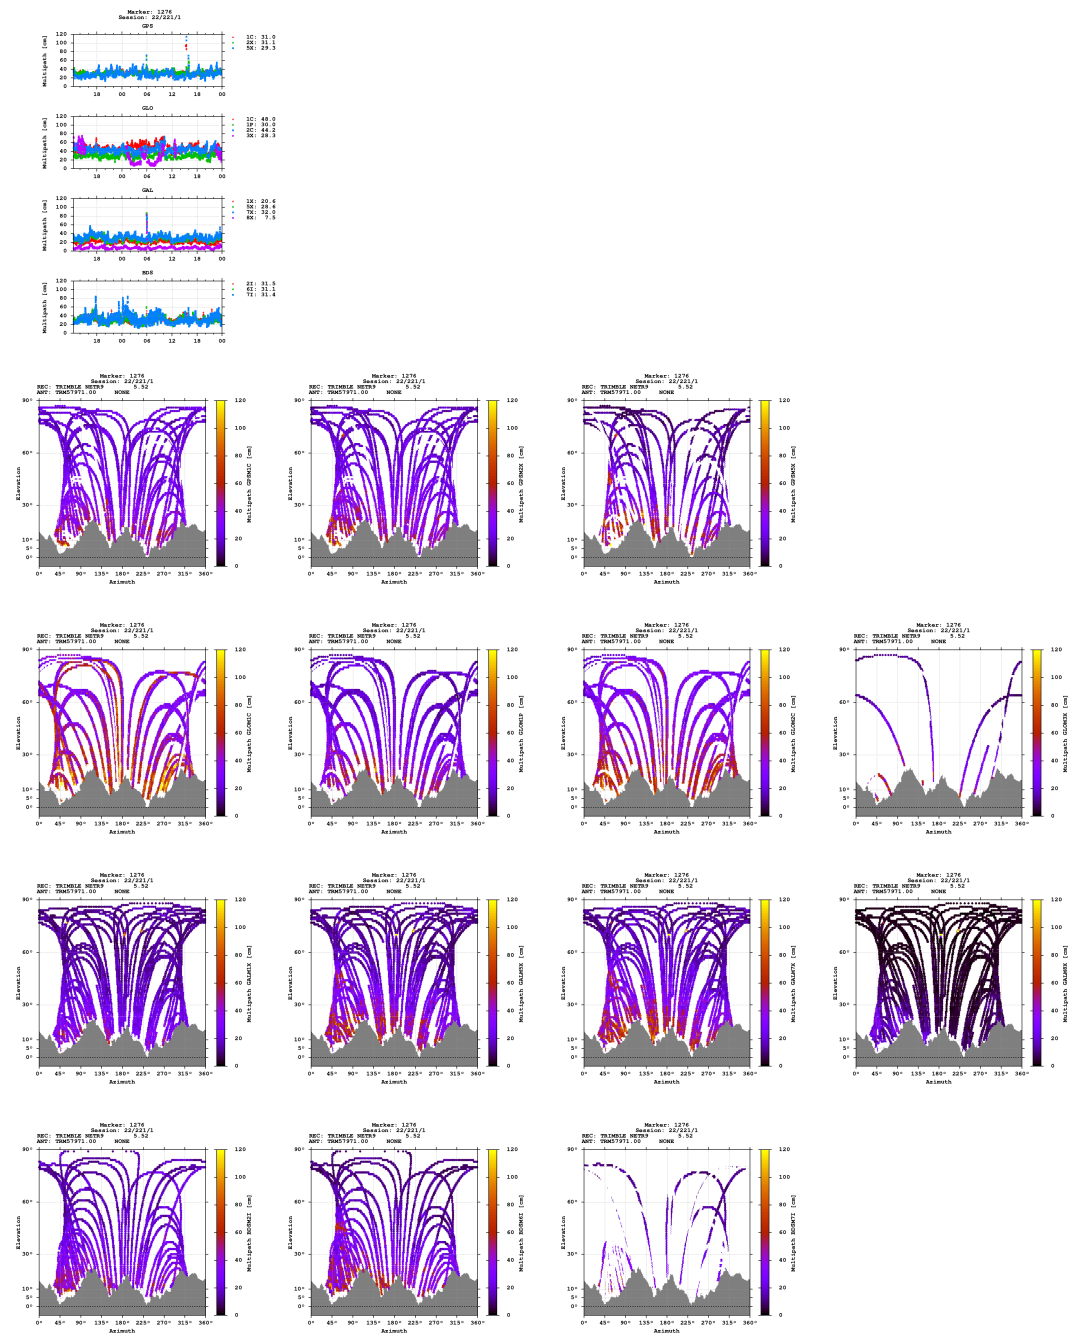

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

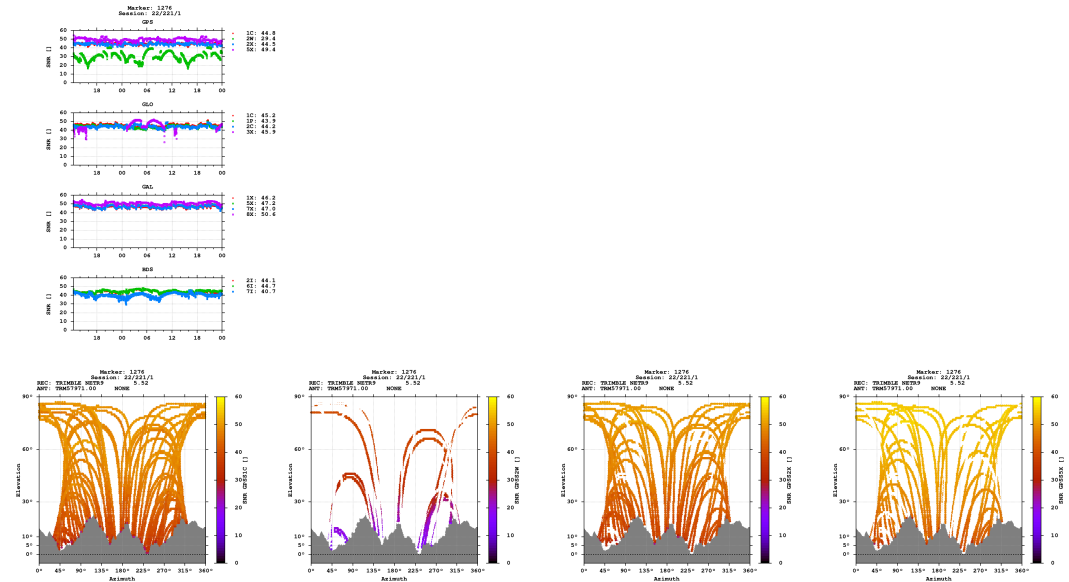

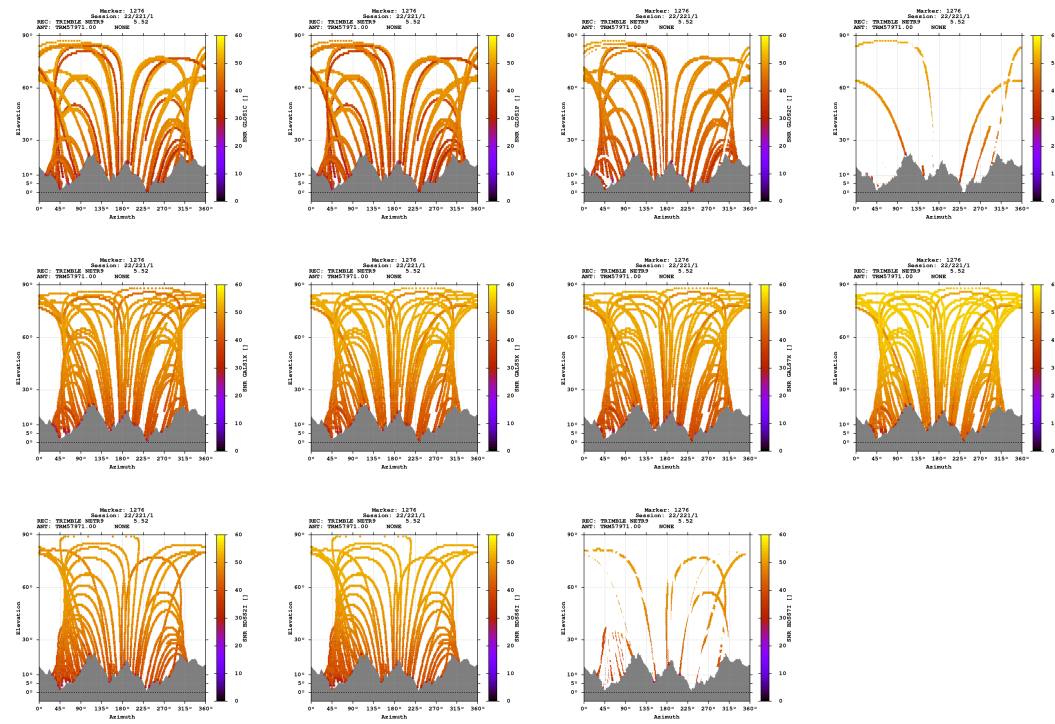

Estimates

2022-08-09 12:26:30	GPS	4344757.7639	742215.9689	4597194.5832	46.397706697	9.694271530	1862.5800
2022-08-09 12:26:30	GLO	4344758.7260	742216.2900	4597195.3242	46.397704765	9.694273538	1863.8080
2022-08-09 12:26:30	GAL	4344757.4352	742216.1070	4597194.3729	46.397707351	9.694274018	1862.2203
2022-08-09 12:26:30	BDS	4344757.0198	742216.5421	4597194.4998	46.397710328	9.694280503	1862.0803

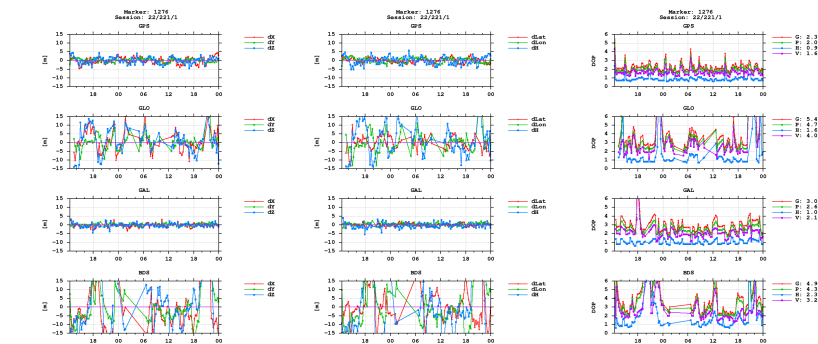

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)