


GNSS observation file monitoring for 0514


Last RINEX file: 05142281.220
RINEX version: 3.02
Marker: 1076
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE

Epochs

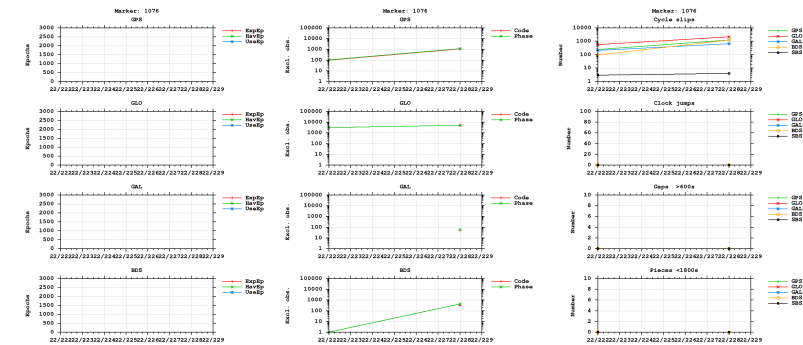



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

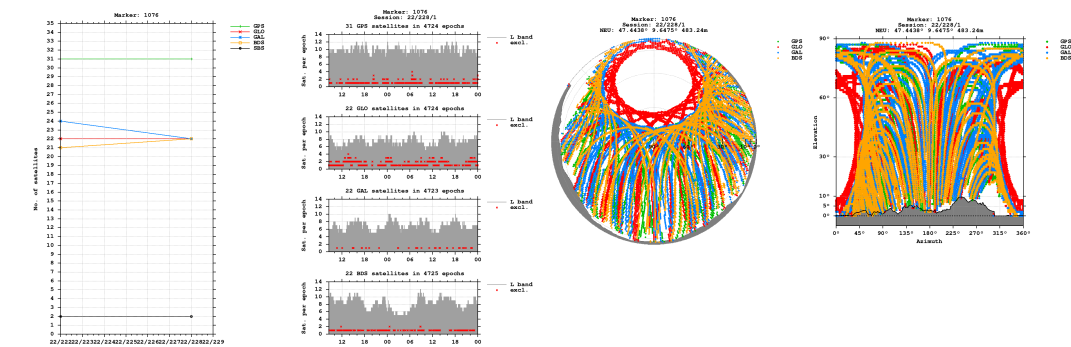


Bands

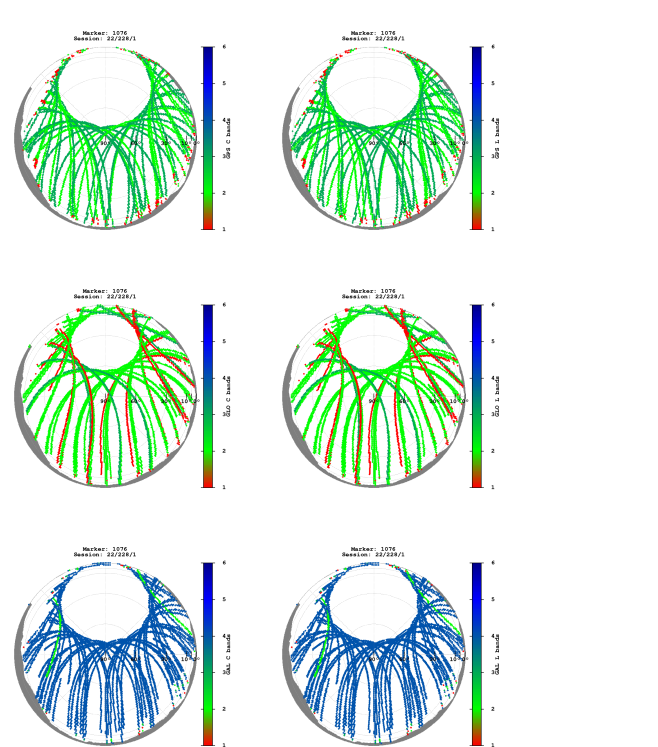


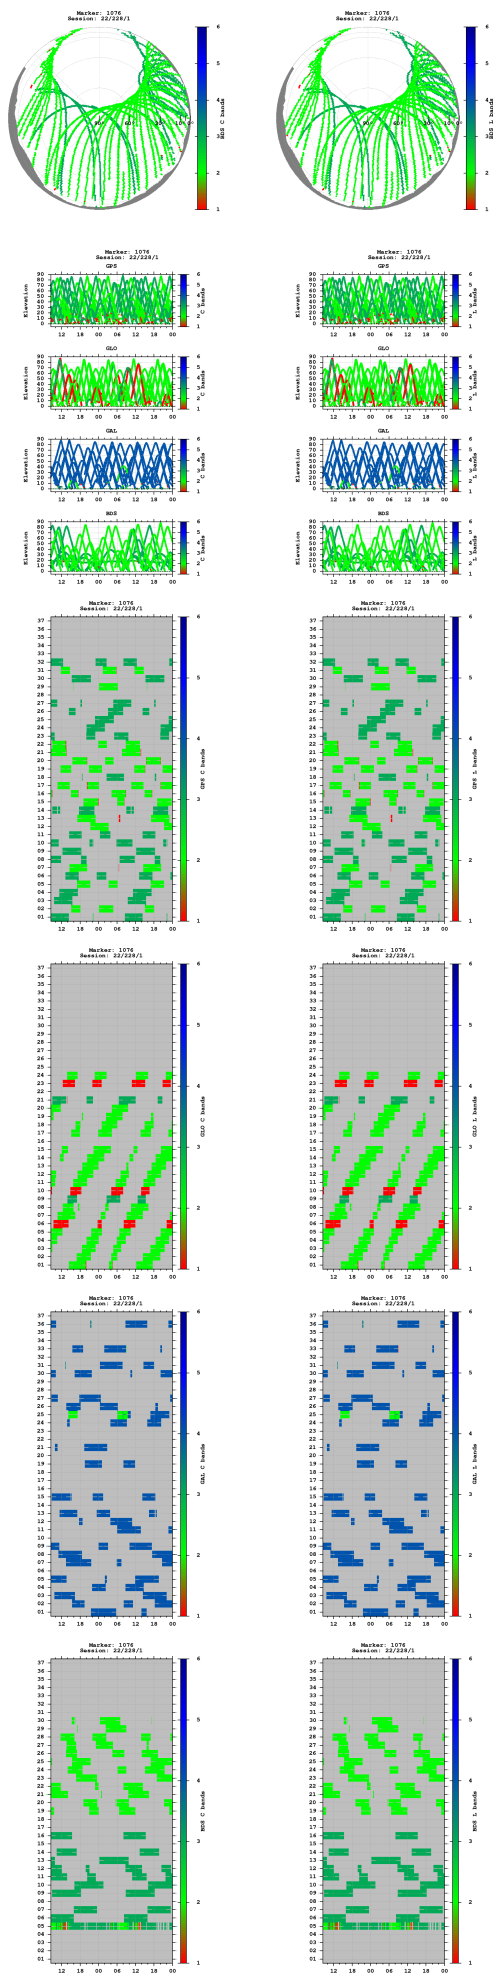


Observations

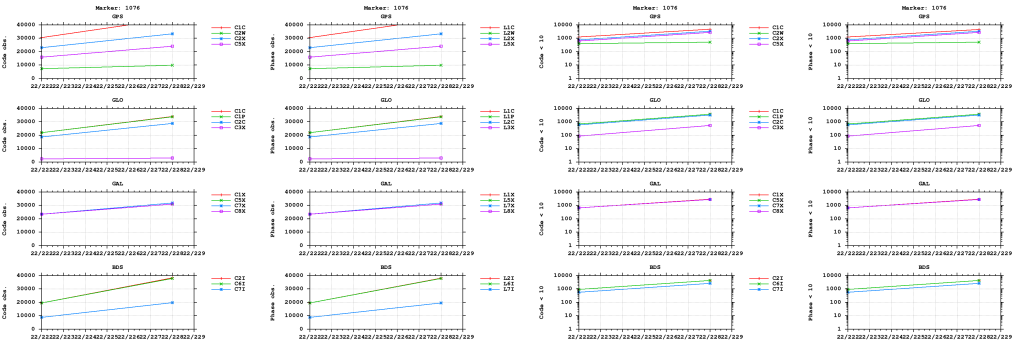


Multipath

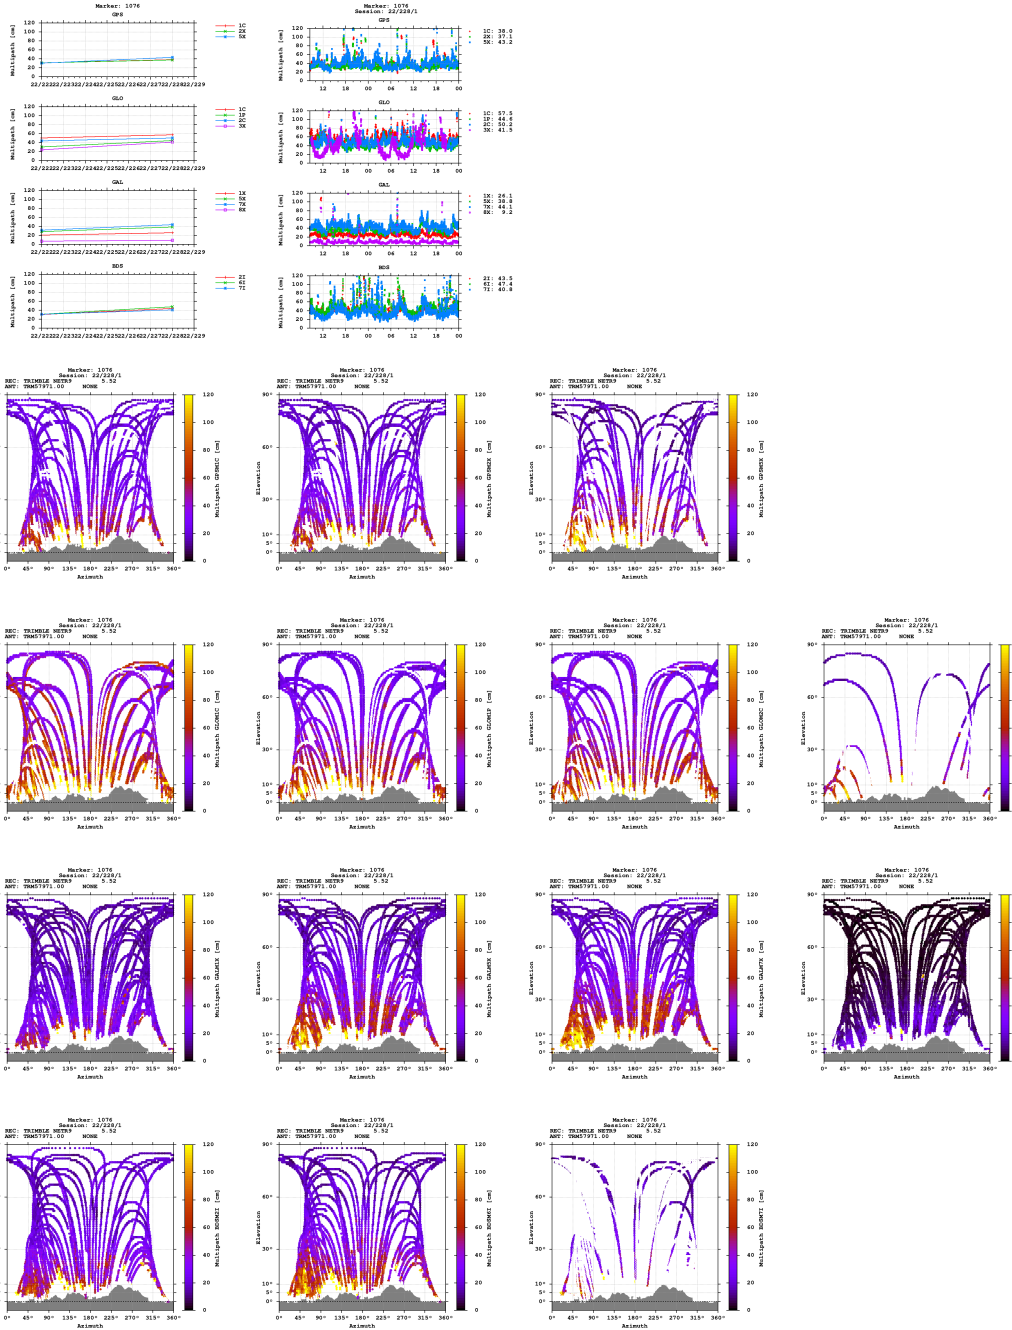


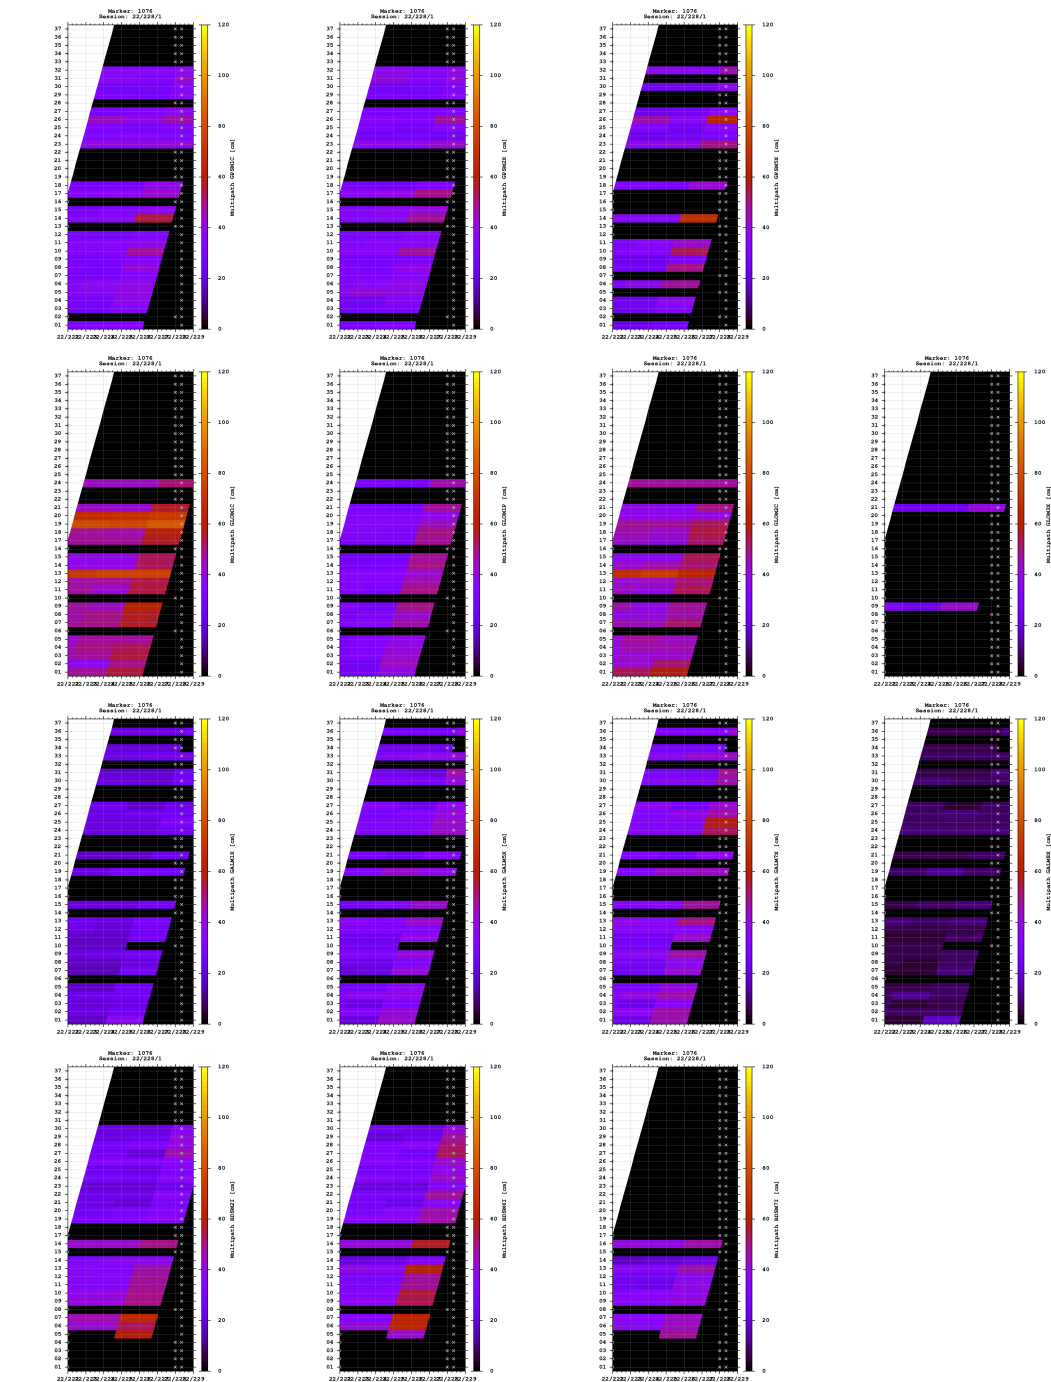


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

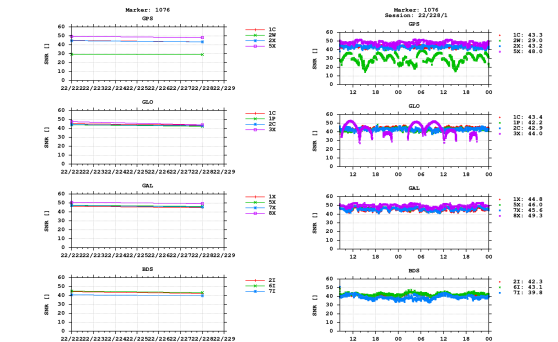


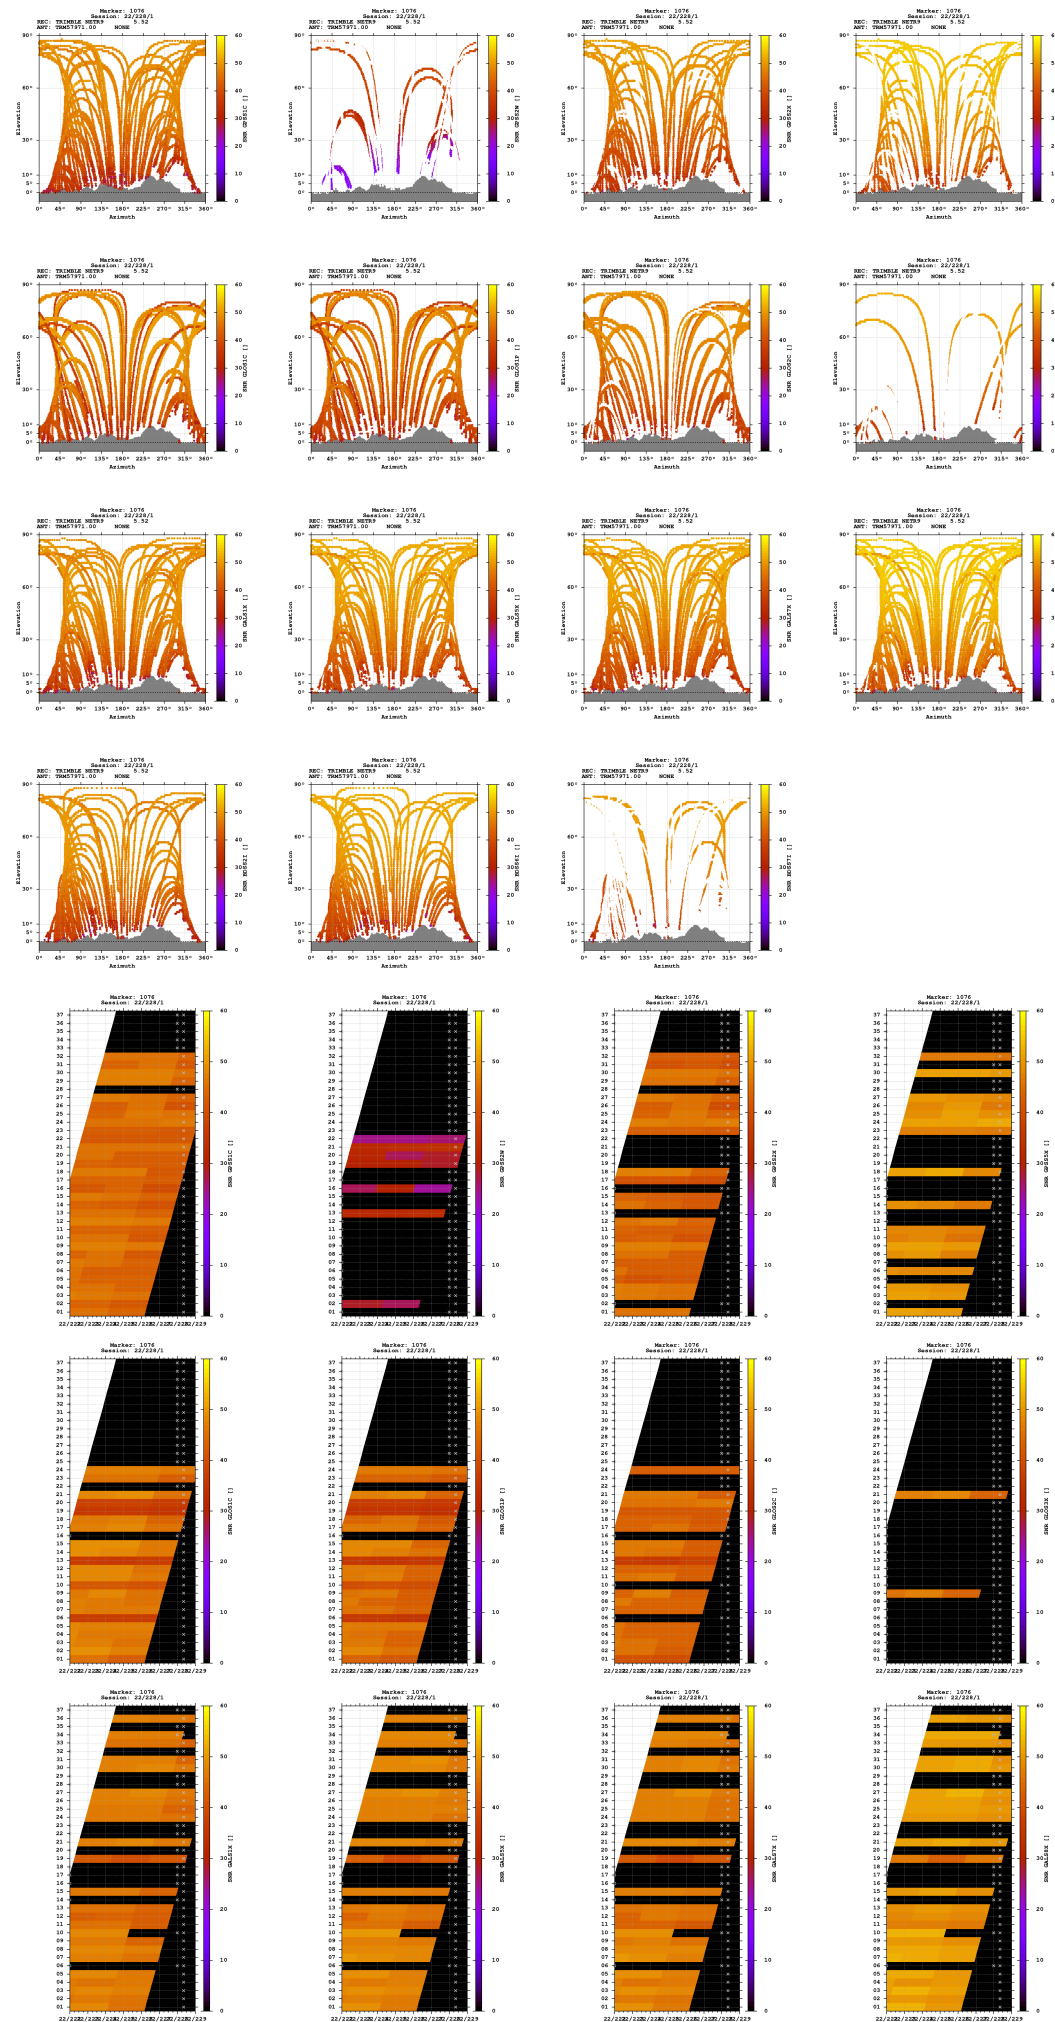

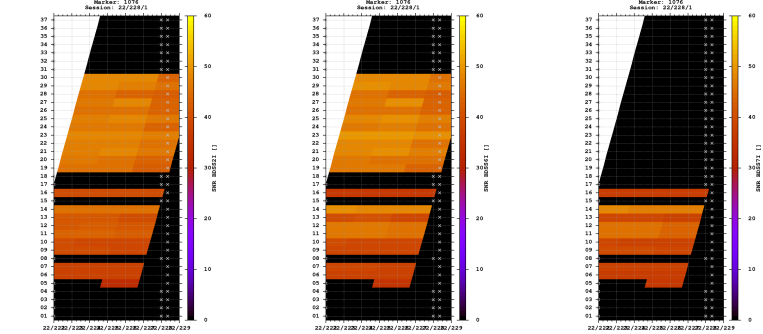


Estimates

2022-08-16 08:32:00	GPS	4260677.5018	724271.3797	4675631.4912	47.443817915	9.647472913	483.2371
2022-08-16 08:32:00	GLO	4260678.1280	724271.9619	4675631.6906	47.443814392	9.647479131	483.8675
2022-08-16 08:32:00	GAL	4260677.6053	724271.5600	4675631.3471	47.443816161	9.647475040	483.2204
2022-08-16 08:32:00	BDS	4260677.0604	724271.9768	4675632.6994	47.443827484	9.647481697	483.9005

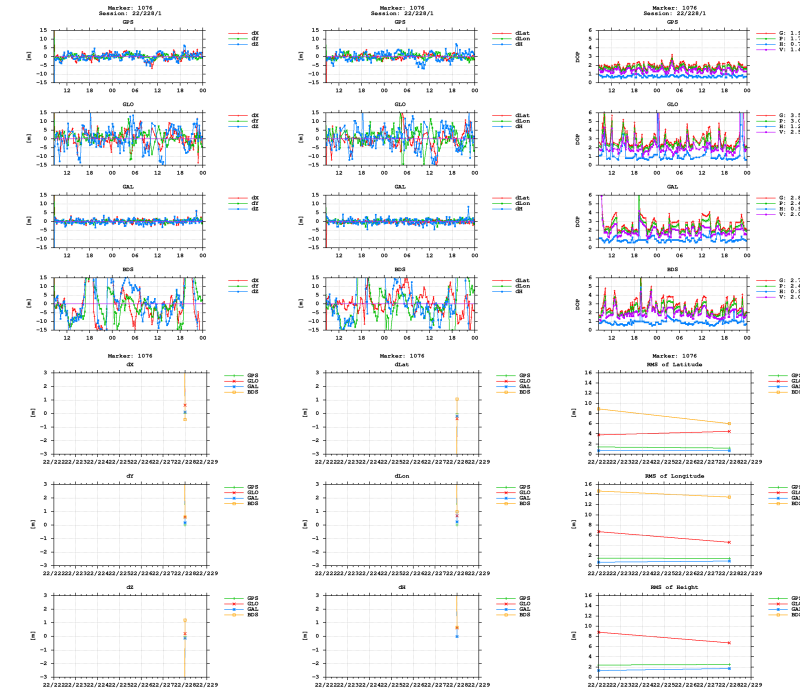

BNC



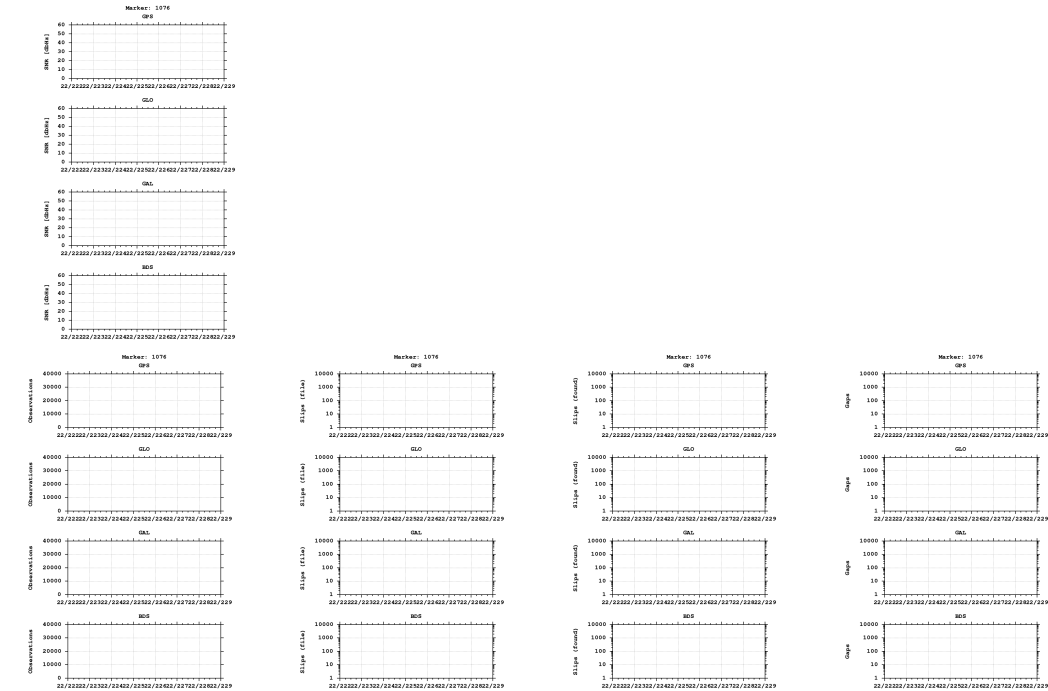

Equipment

2022-08-09 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)