


GNSS observation file monitoring for 0514


Last RINEX file: 05142291.220
RINEX version: 3.02
Marker: 1076
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE

Epochs

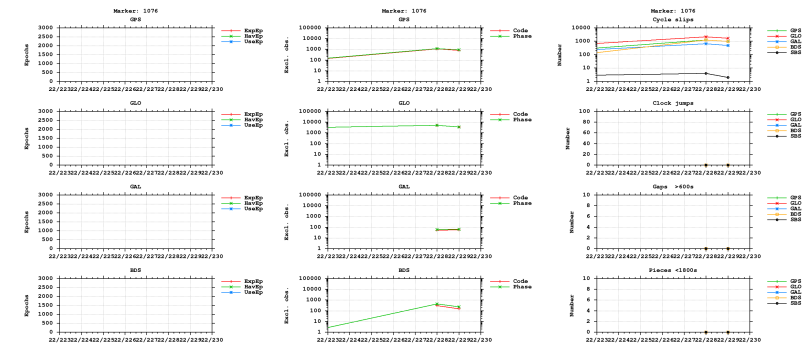



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

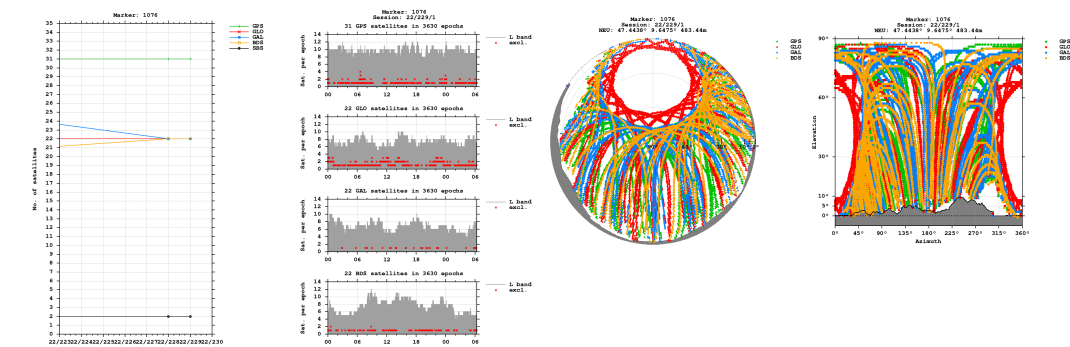


Bands

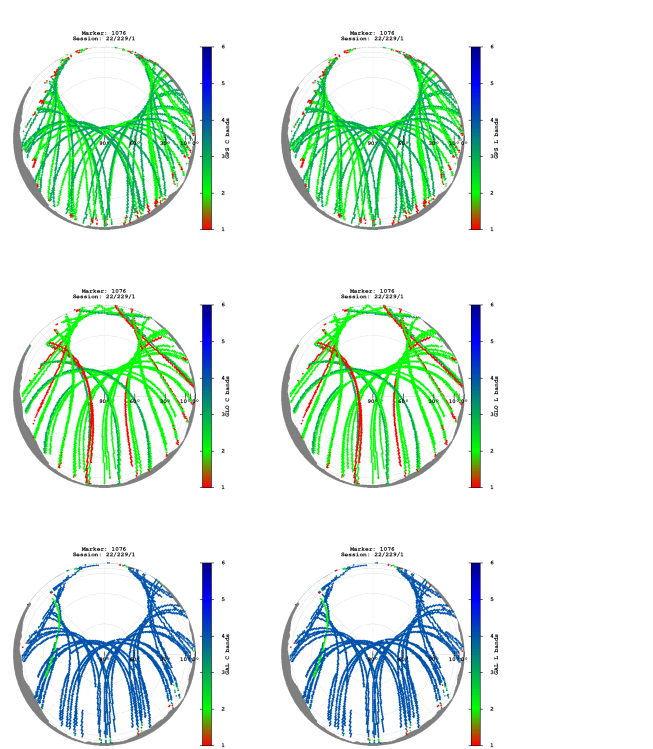

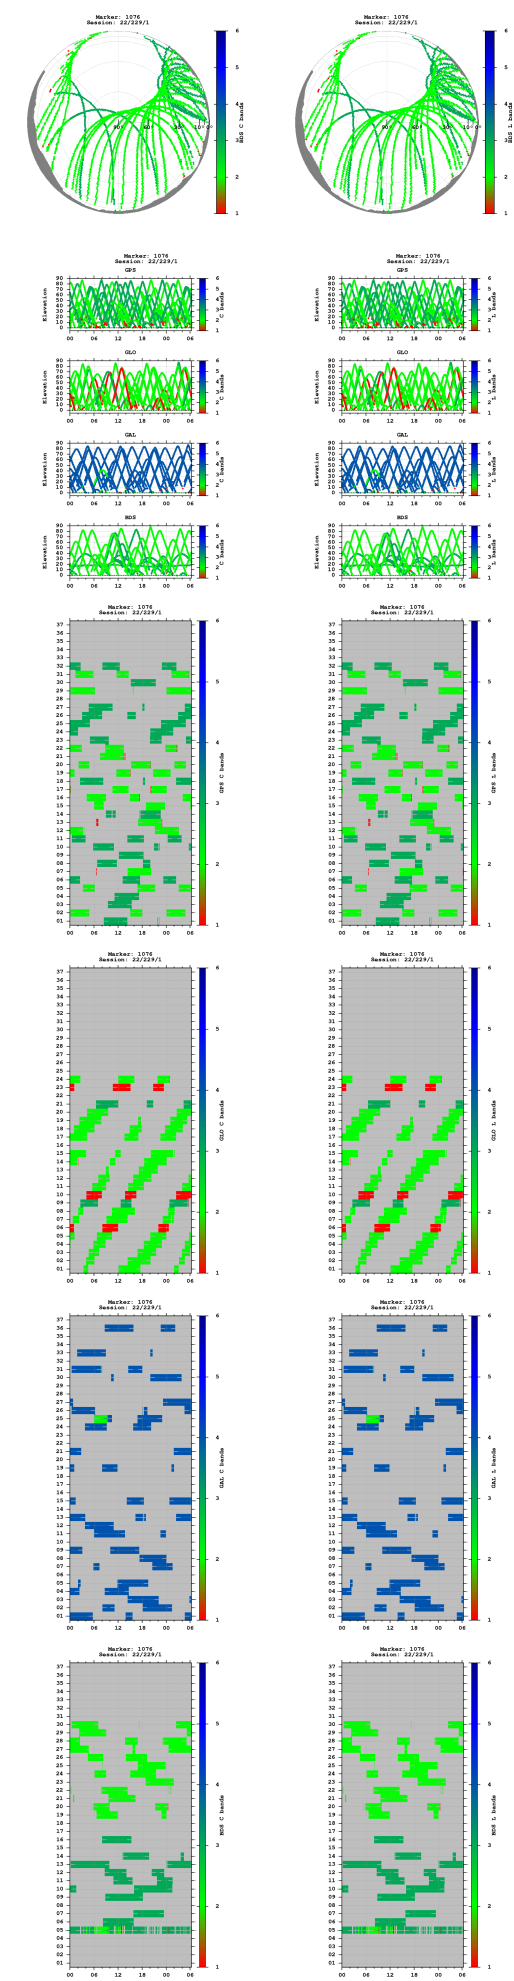


Observations




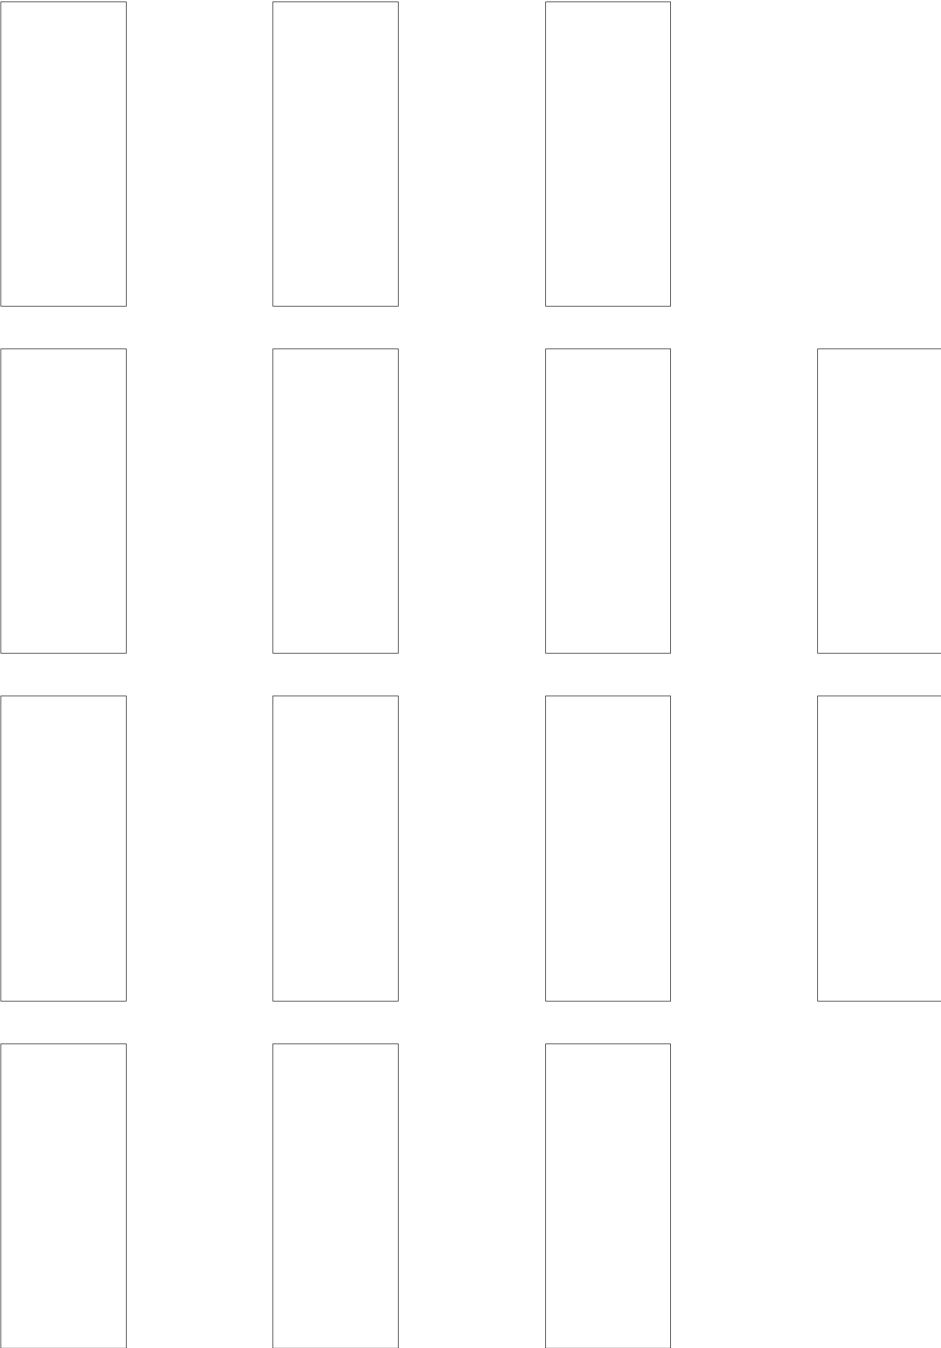


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

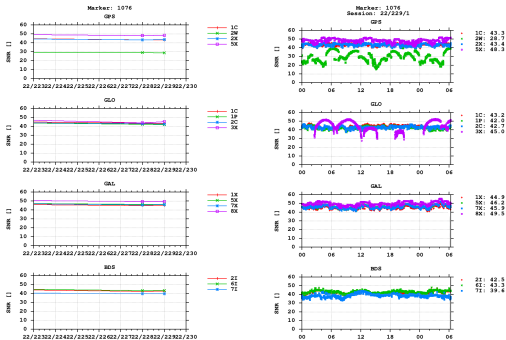


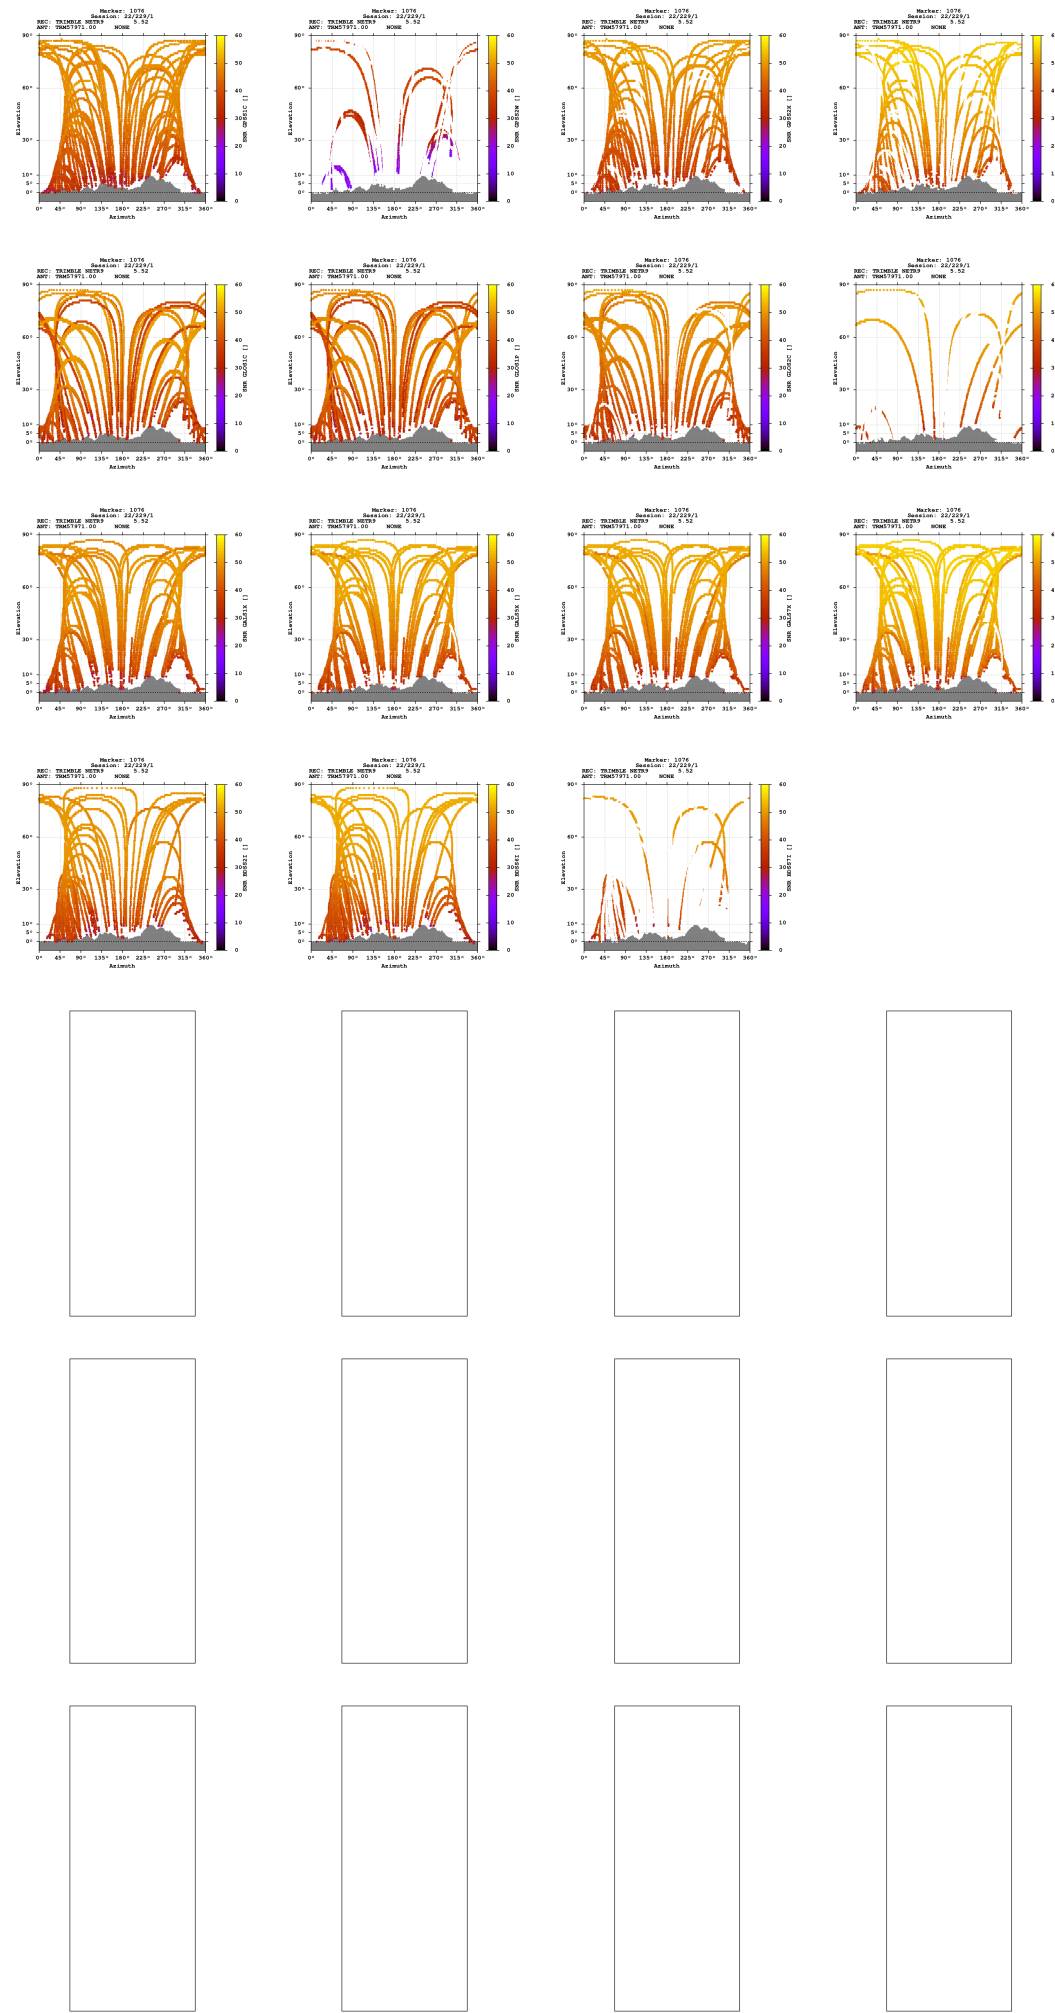


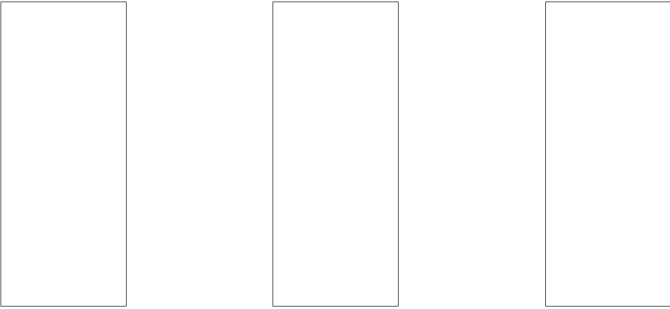

Estimates

2022-08-16 08:32:00	GPS	4260677.7673	724271.5451	4675631.4991	47.443816045	9.647474485	483.4387
2022-08-16 08:32:00	GLO	4260678.2471	724272.0378	4675632.4444	47.443818114	9.647479859	484.5107
2022-08-16 08:32:00	GAL	4260677.6277	724271.5505	4675631.4176	47.443816455	9.647474865	483.2862
2022-08-16 08:32:00	BDS	4260676.1689	724269.5476	4675633.8748	47.443843153	9.647451929	483.8966

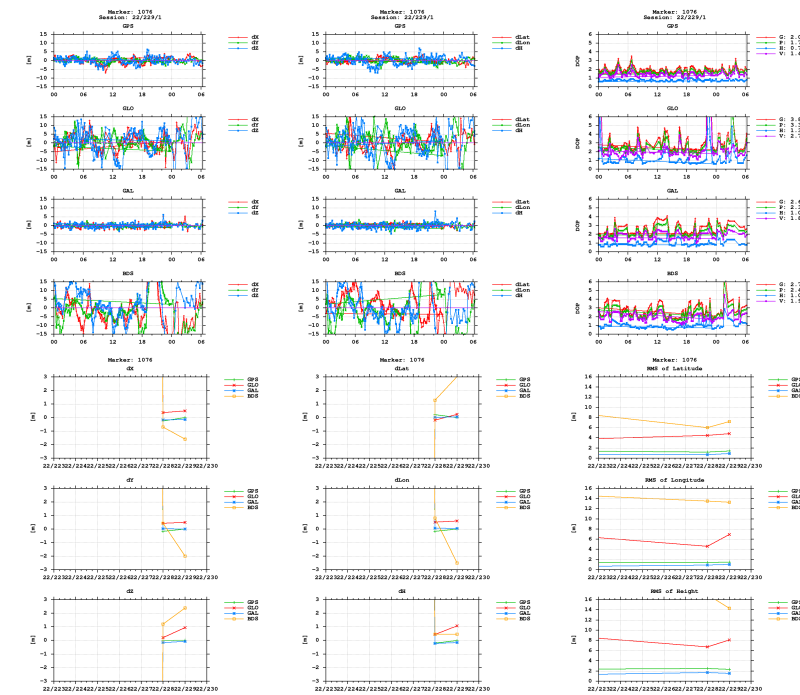

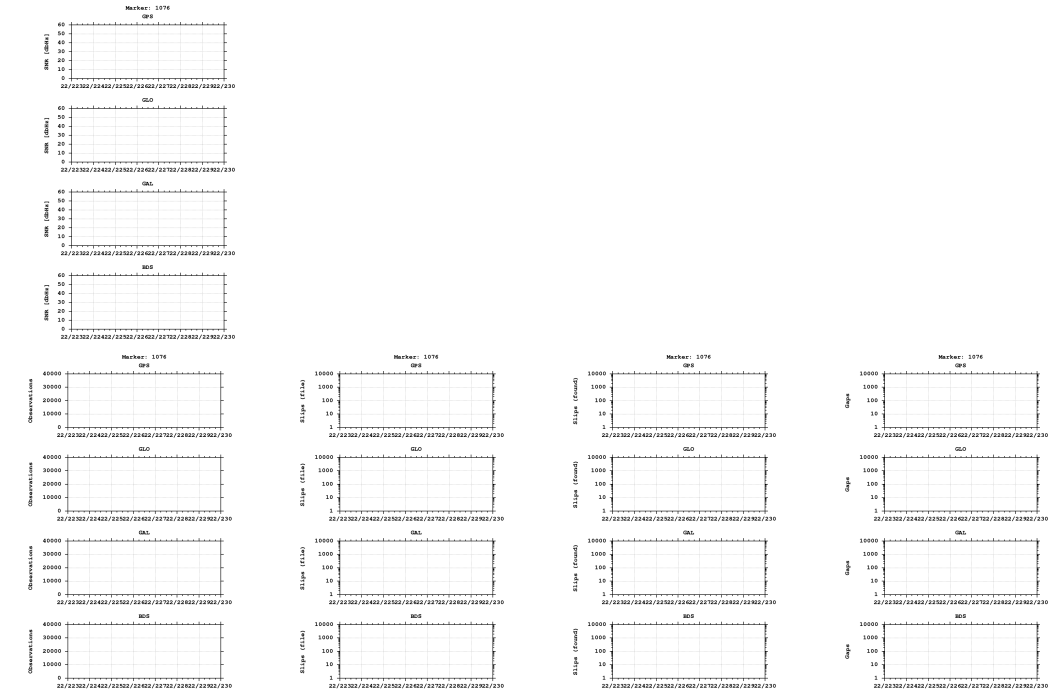

Equipment

2022-08-09 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)