

GNSS observation file monitoring for 0514

Last RINEX file: 05142301.220

RINEX version: 3.02

Marker: 1095

Receiver: 514

Antenna: 514


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

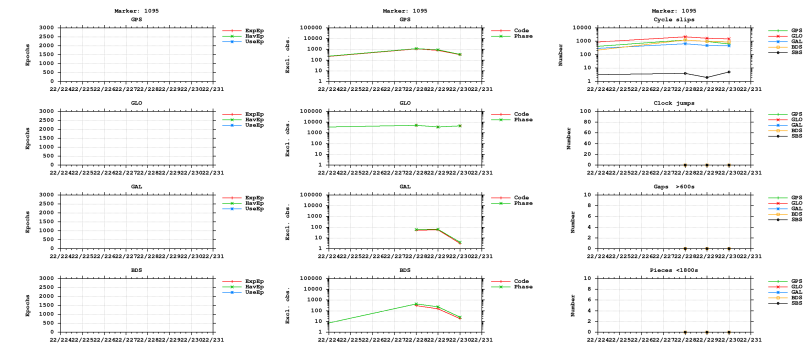



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

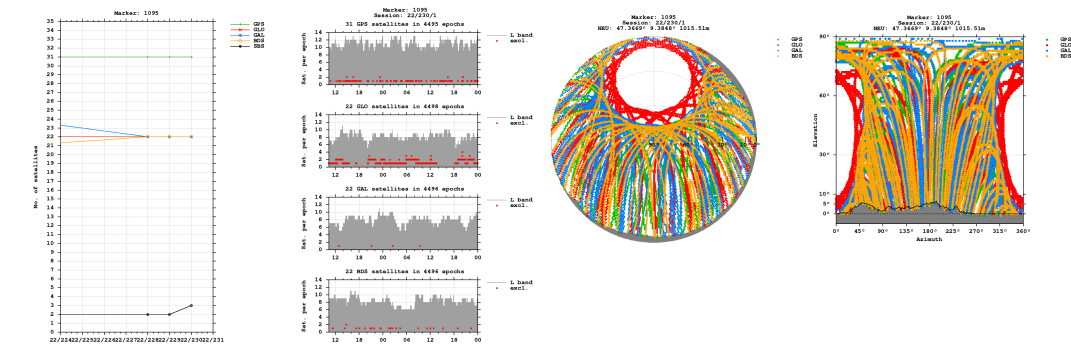


Bands

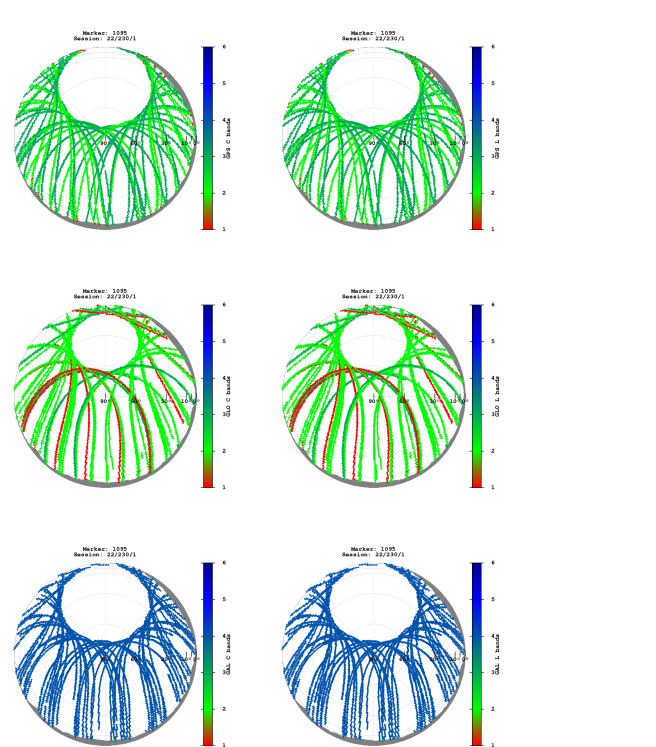


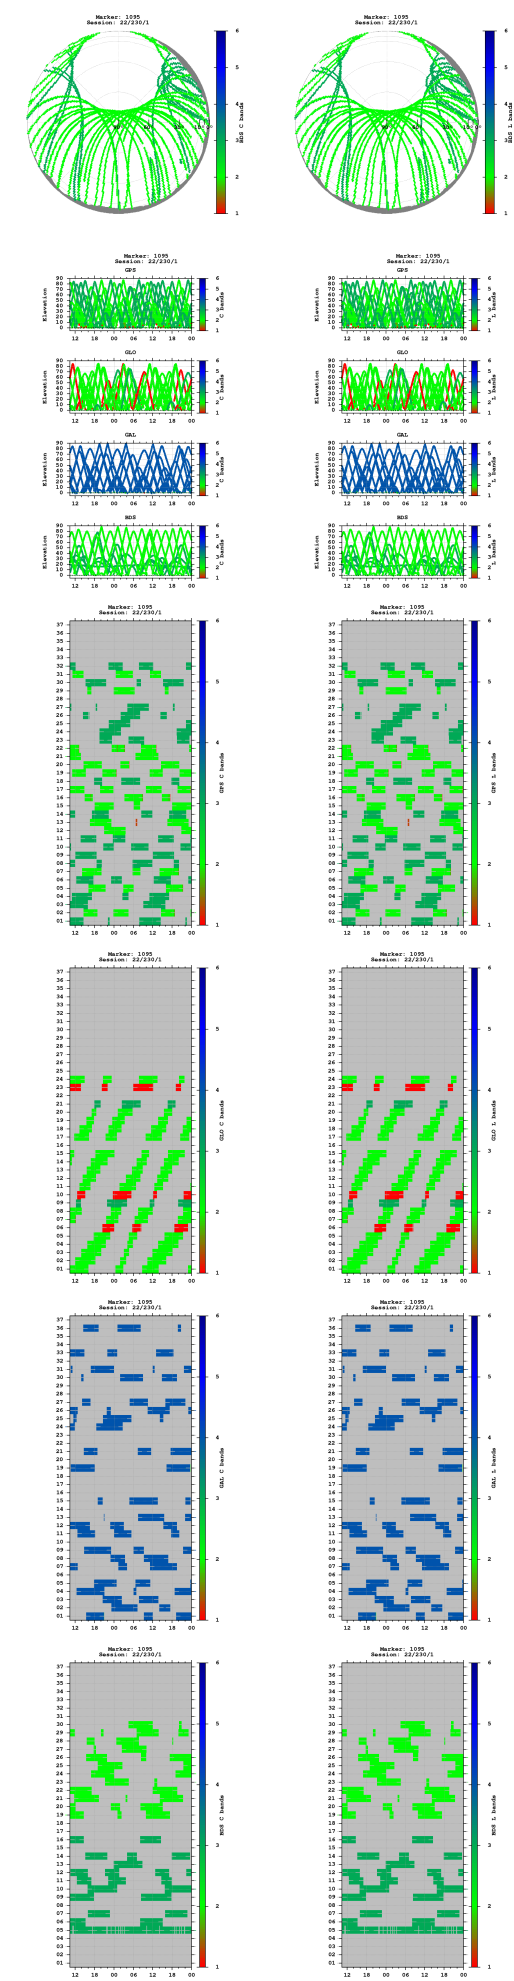


Observations

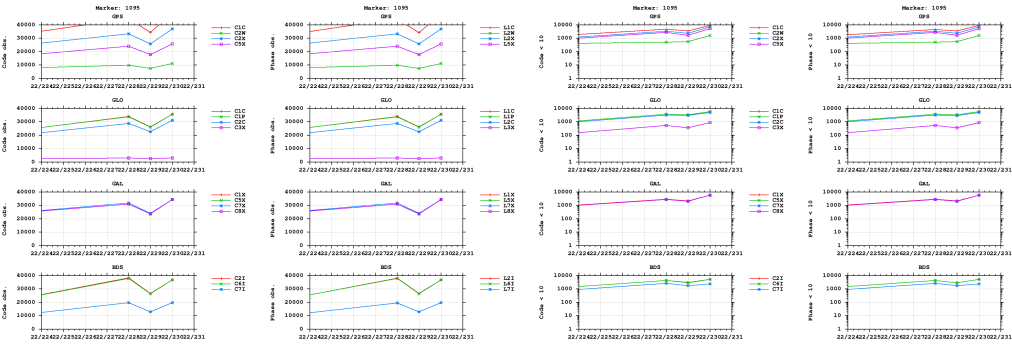


Multipath

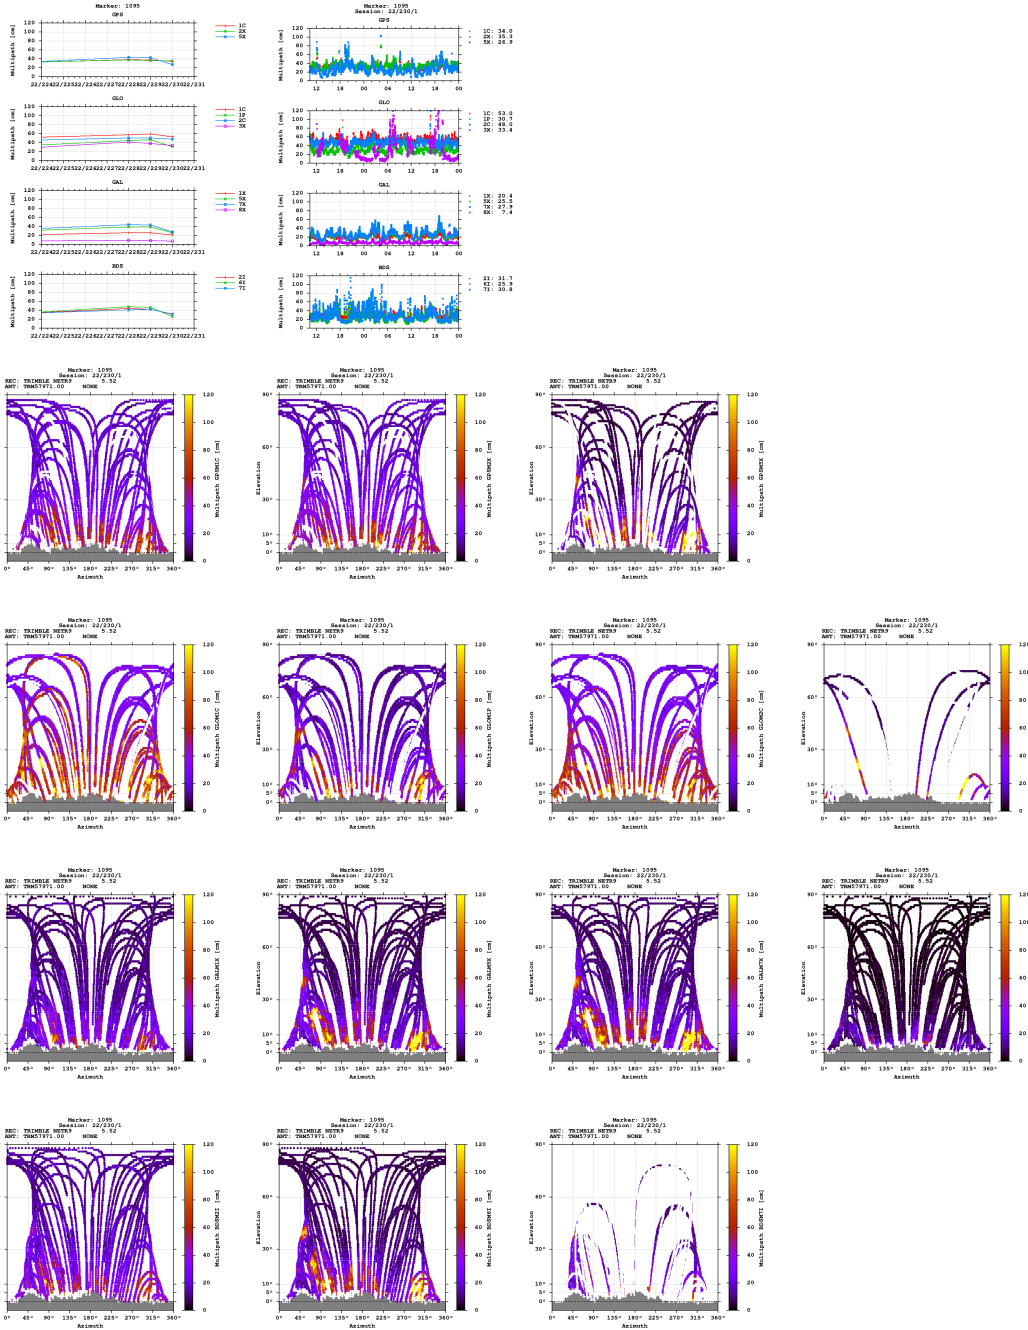


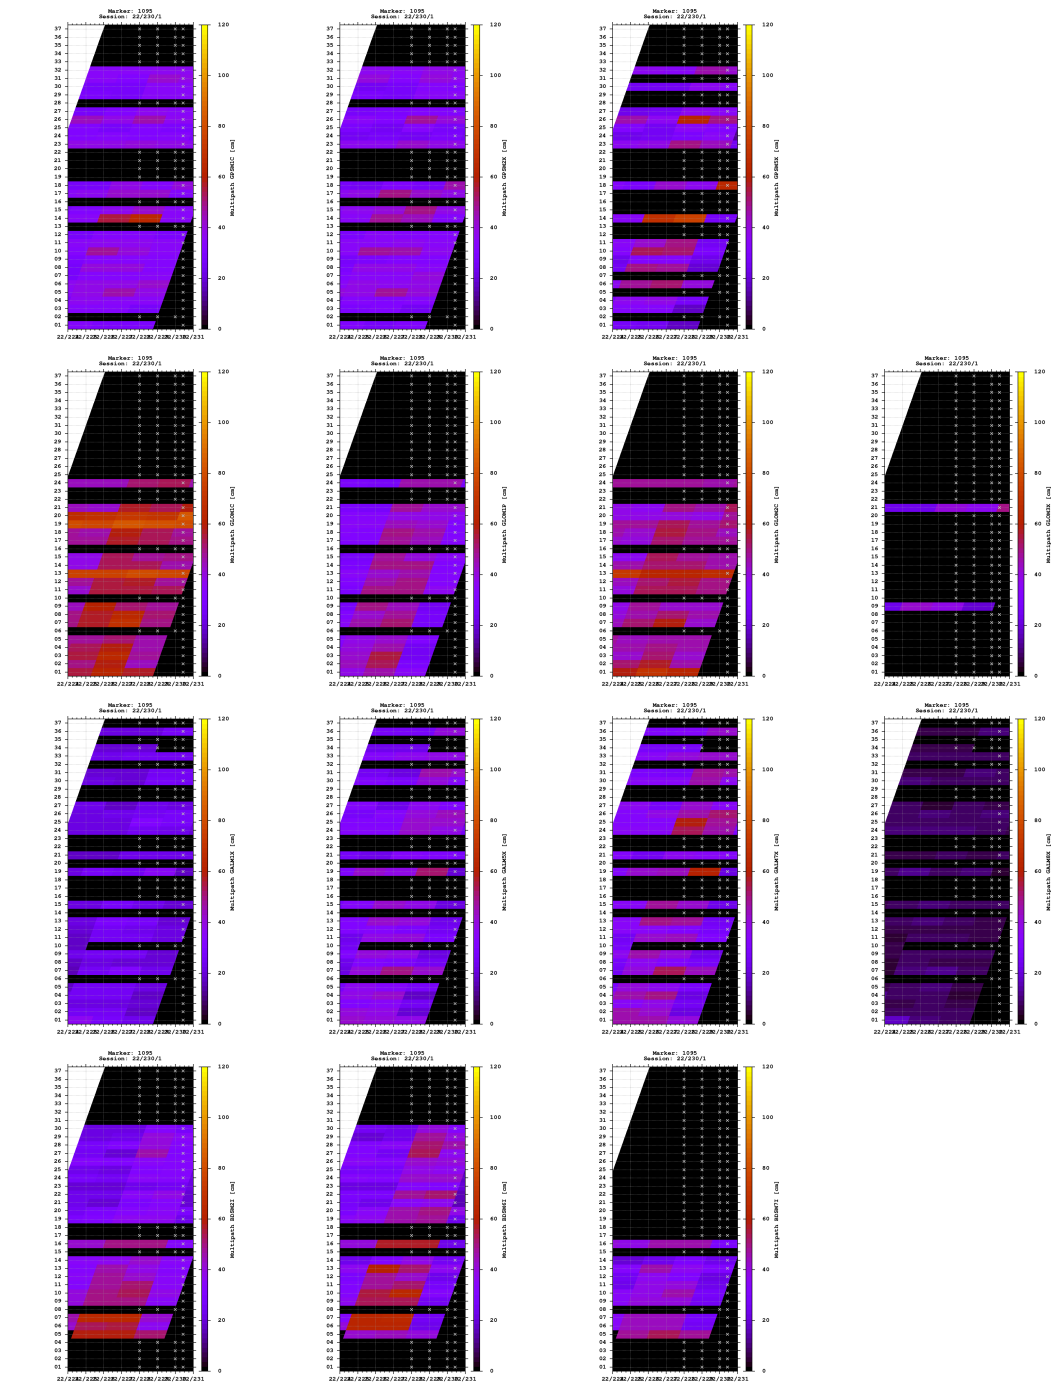


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

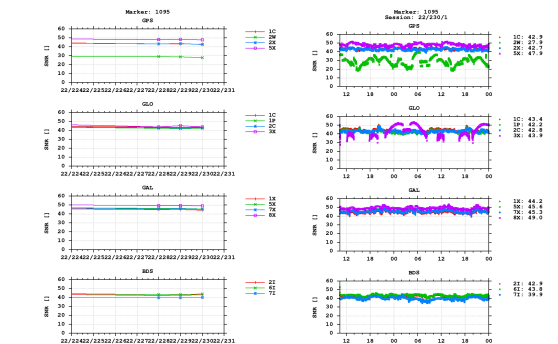


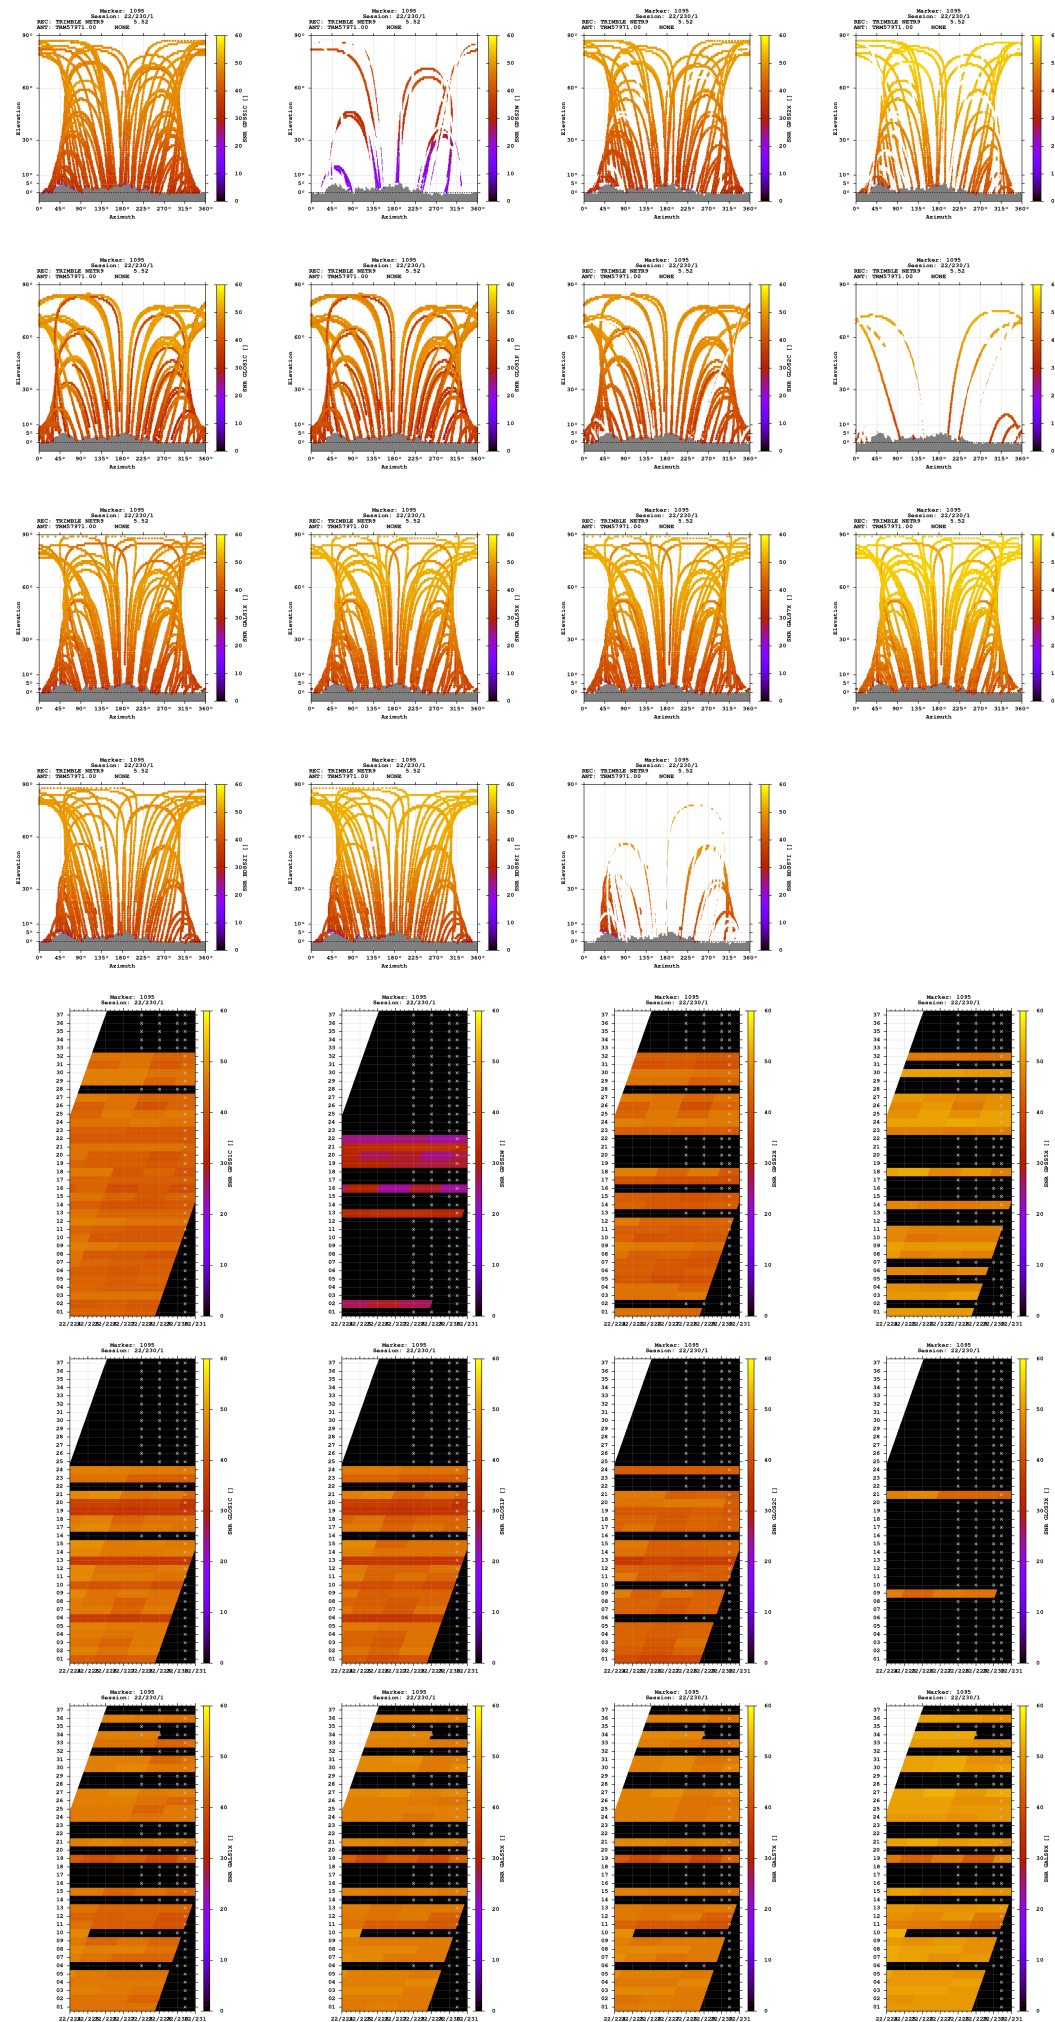

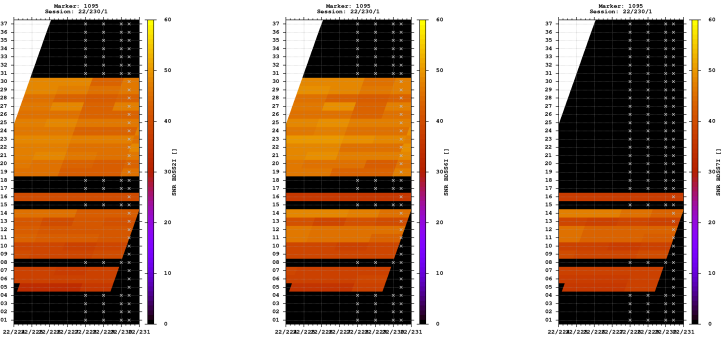



Estimates

2022-08-18 10:22:30	GPS	4270524.7277	705815.0461	4670231.0865	47.366850158	9.384776337	1015.5104
2022-08-18 10:22:30	GLO	4270523.7816	705814.5245	4670229.6998	47.366848450	9.384771567	1013.8003
2022-08-18 10:22:30	GAL	4270524.6337	705815.1076	4670230.7865	47.366848878	9.384777342	1015.2336
2022-08-18 10:22:30	BDS	4270525.3217	705815.4115	4670232.9639	47.366857321	9.384779827	1017.3289

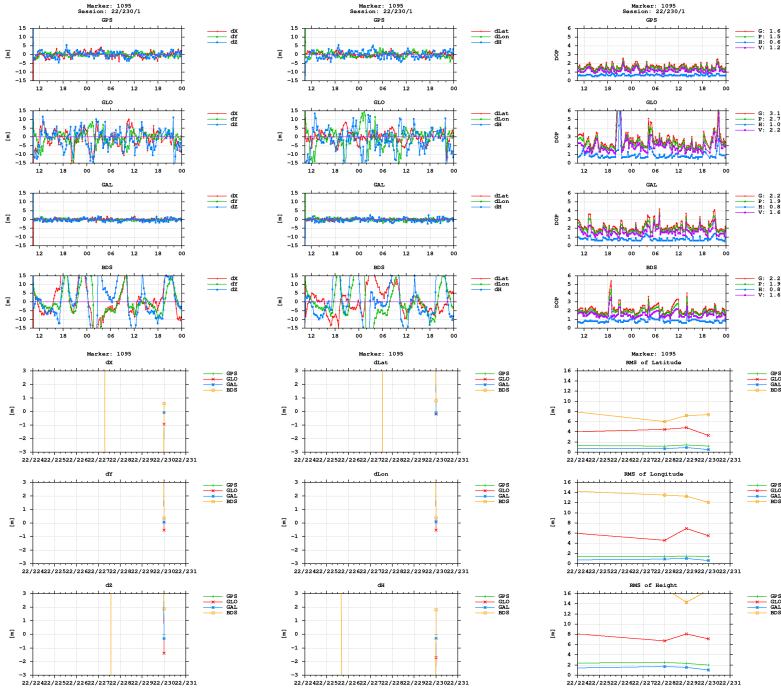

BNC

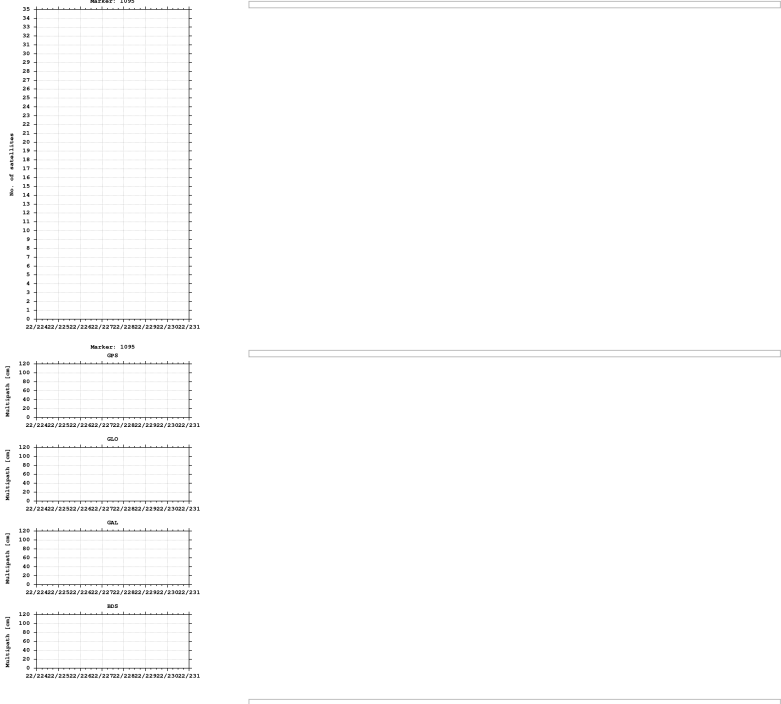

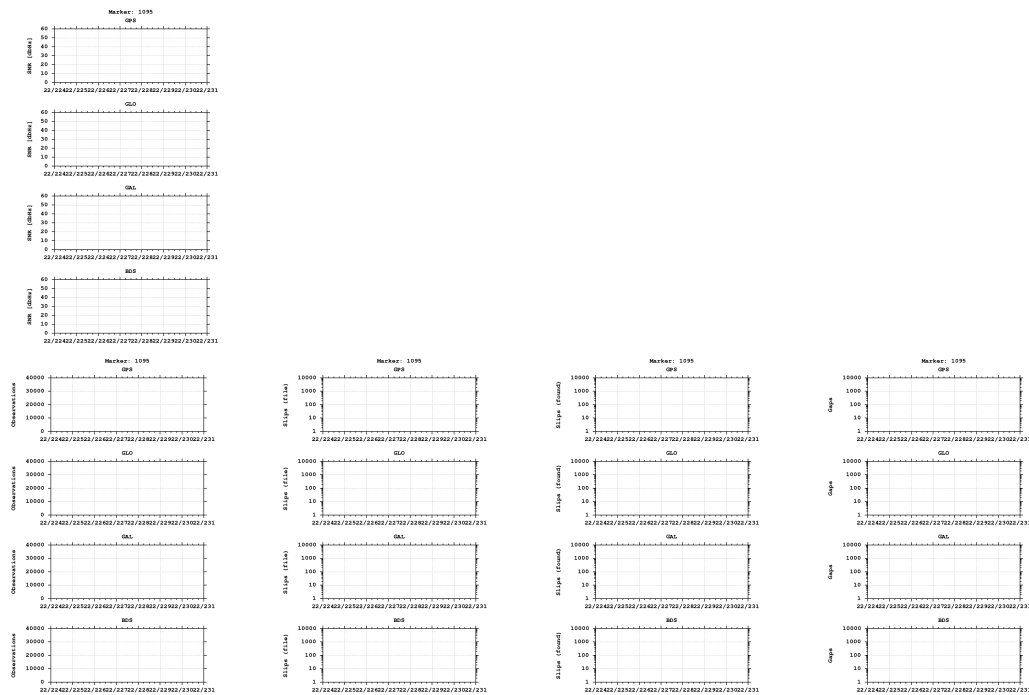

Equipment

2022-08-09 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)