


GNSS observation file monitoring for 0515


Last RINEX file: 05152191.22O
RINEX version: 3.02
Marker: 1214
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

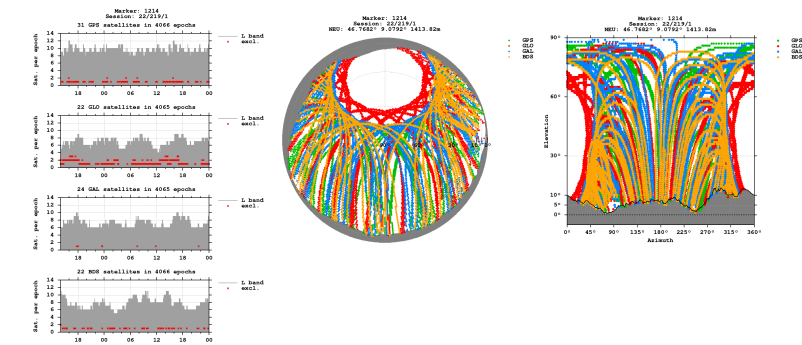


Bands

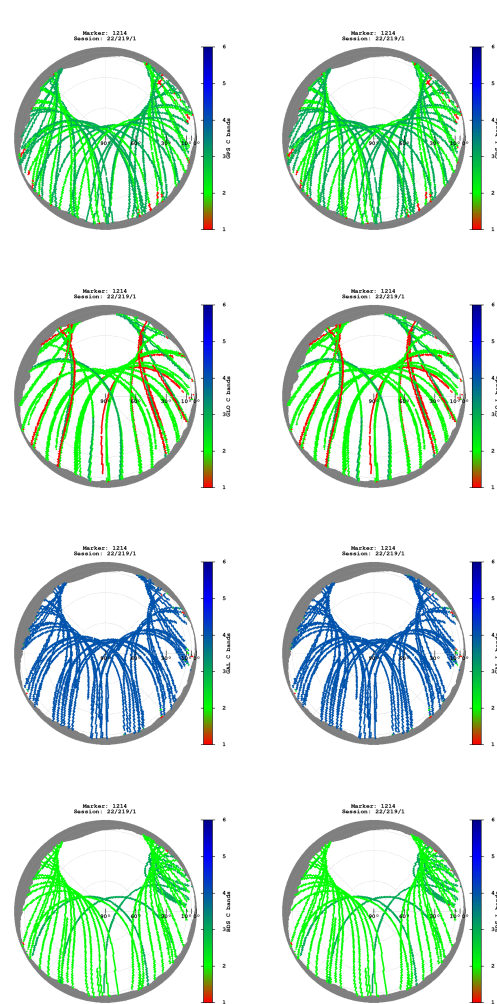


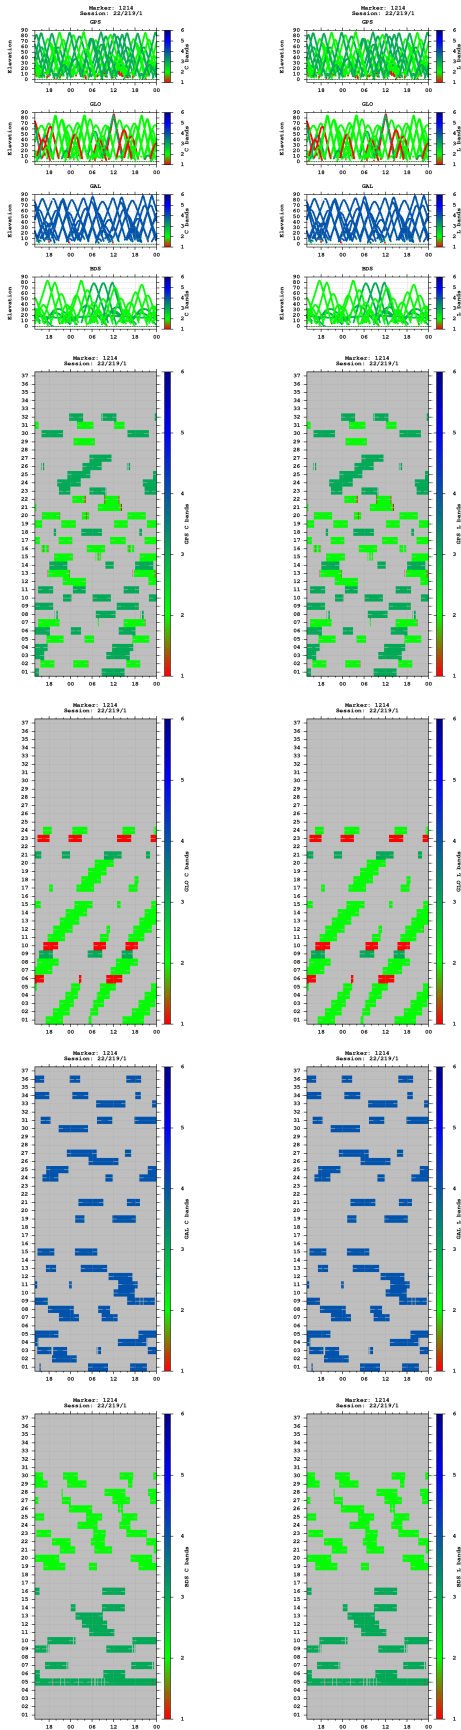


Multipath

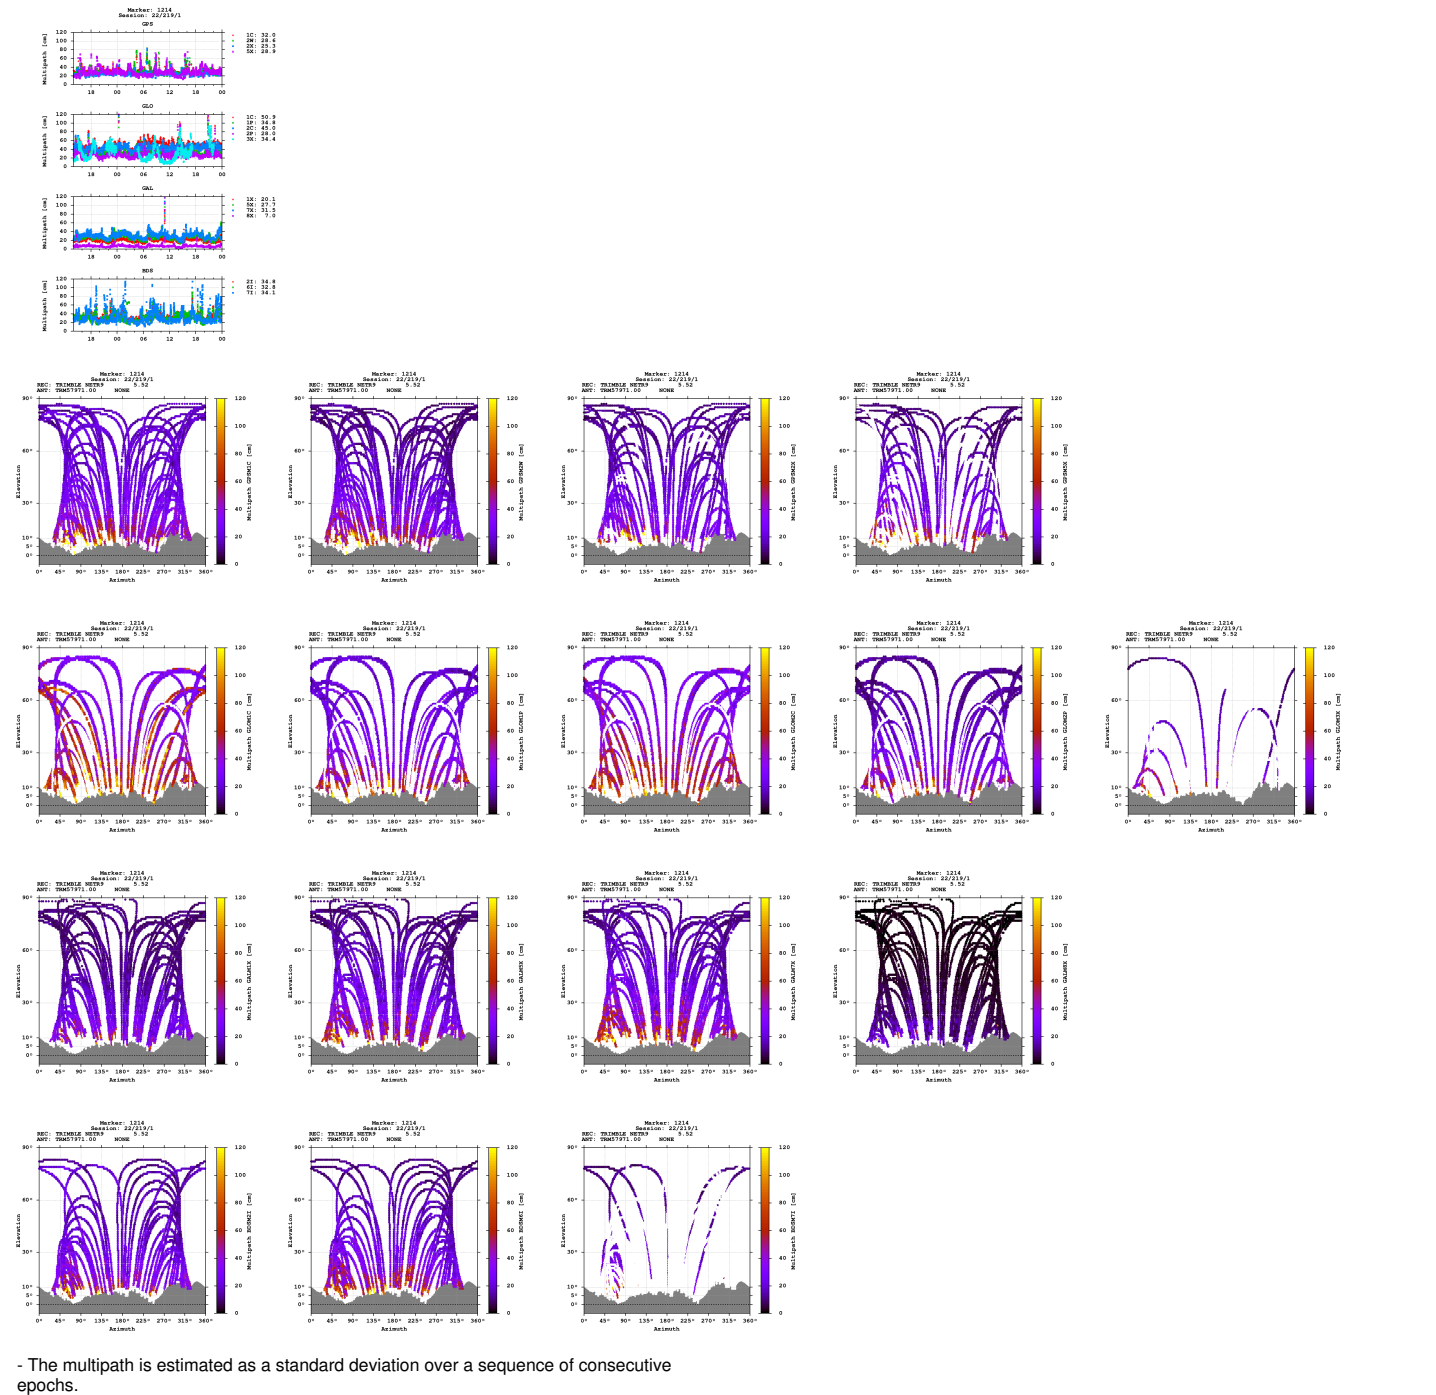


Signal-to-noise ratio

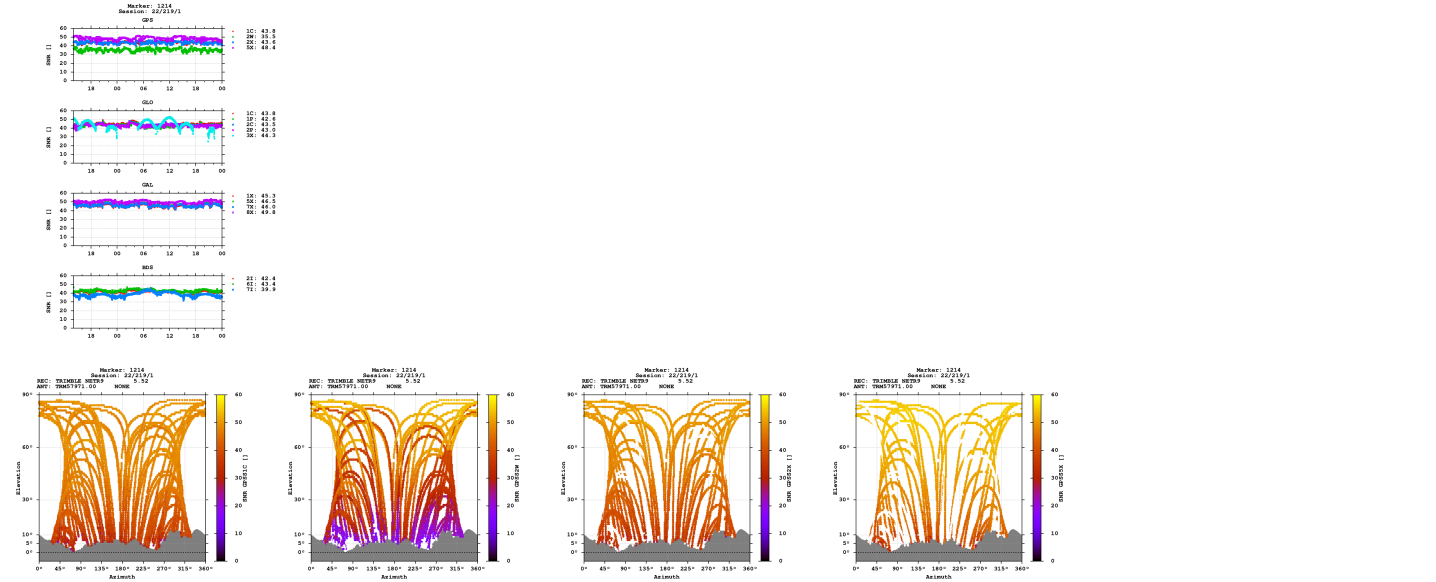

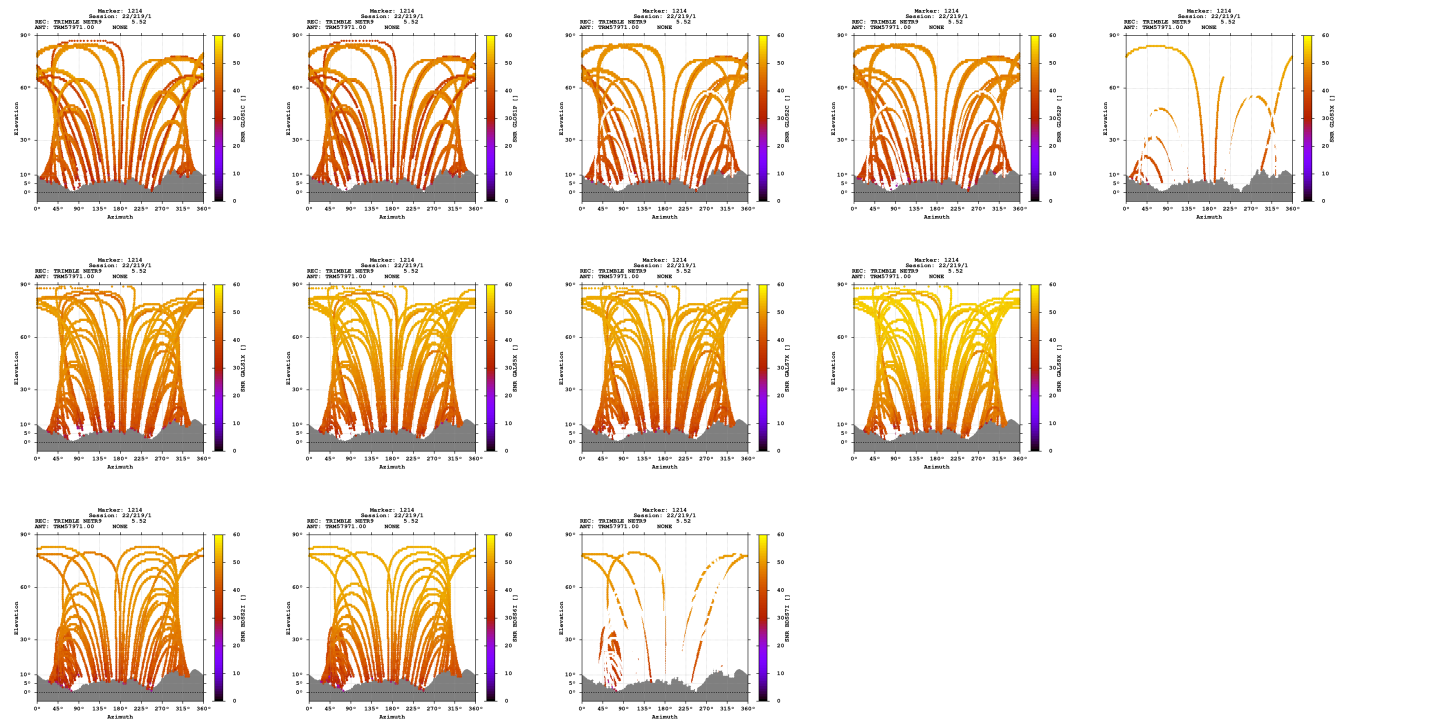

Estimates

2022-08-07 14:03:00	GPS	4322622.3648	690762.8217	4625182.1569	46.768195837	9.079203845	1413.8176
2022-08-07 14:03:00	GLO	4322624.2402	690762.8212	4625183.0460	46.768189180	9.079199966	1415.7338
2022-08-07 14:03:00	GAL	4322622.1844	690762.6957	4625182.0305	46.768196356	9.079202590	1413.5899
2022-08-07 14:03:00	BDS	4322621.1957	690761.5680	4625182.0392	46.768203973	9.079190057	1412.8056

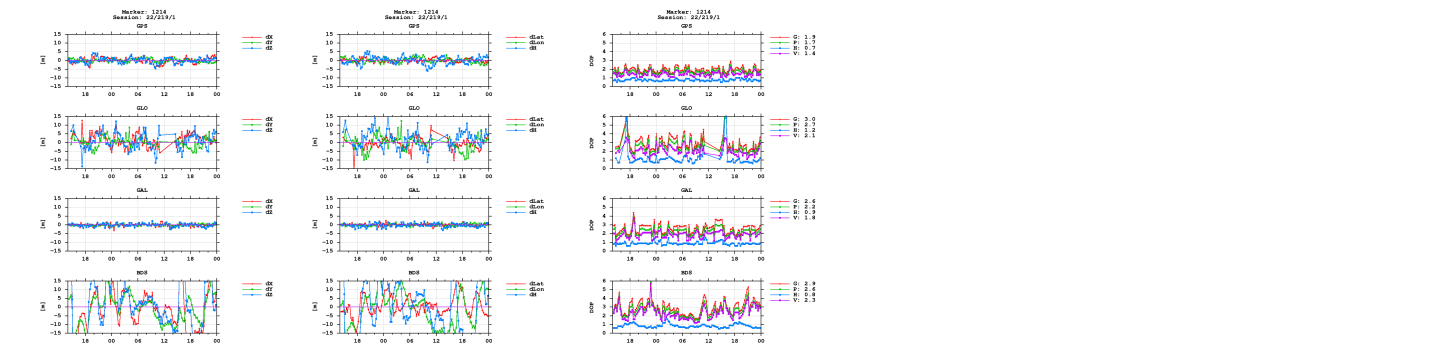

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)