


GNSS observation file monitoring for 0515


Last RINEX file: 05152221.220
RINEX version: 3.02
Marker: 1256
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE

Epochs

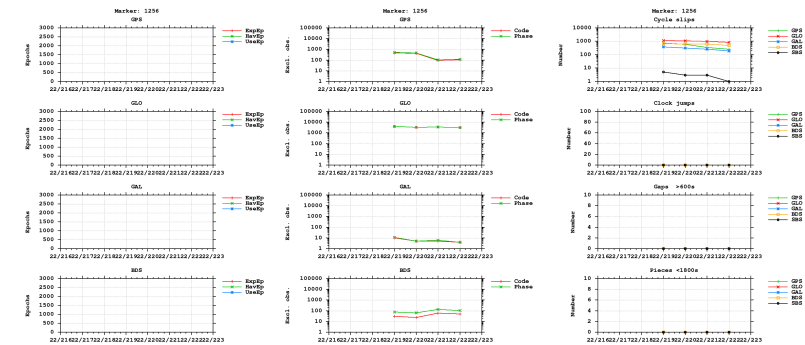



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

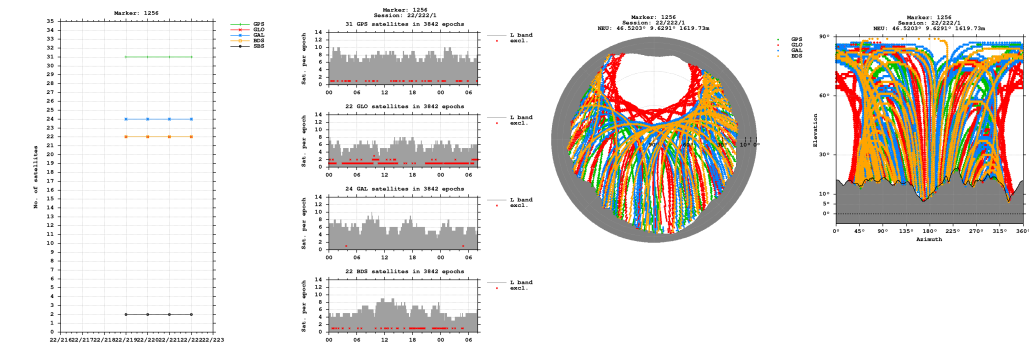


Bands

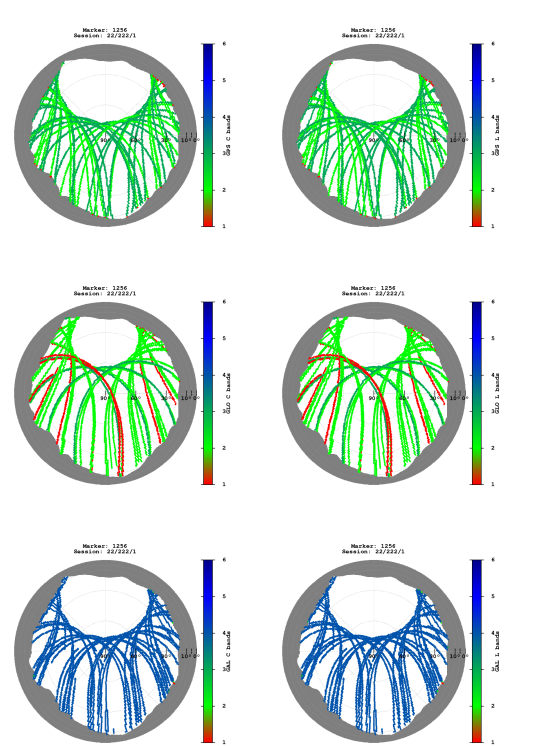


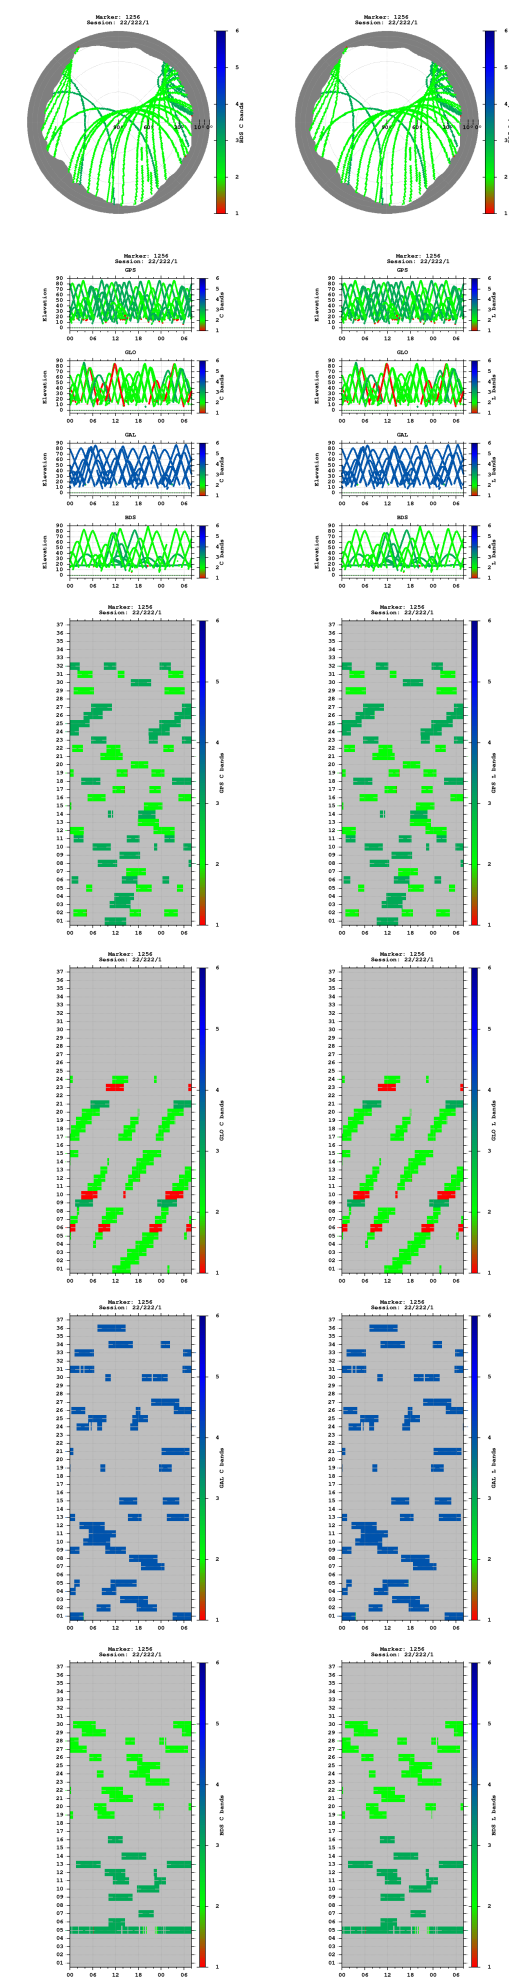


Observations

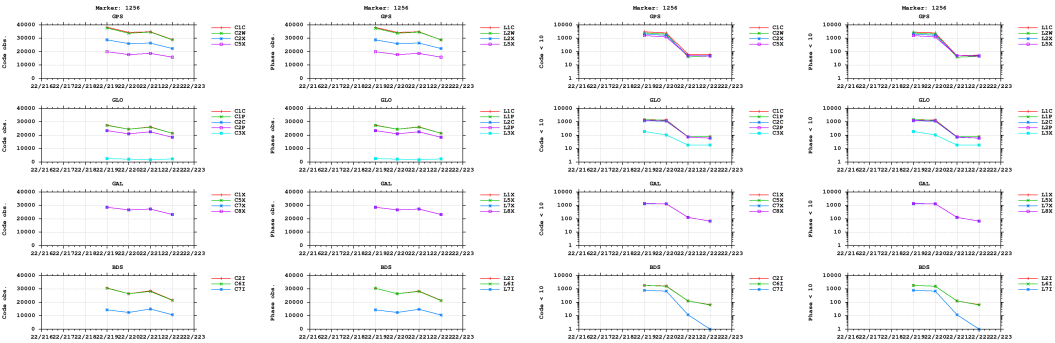


Multipath

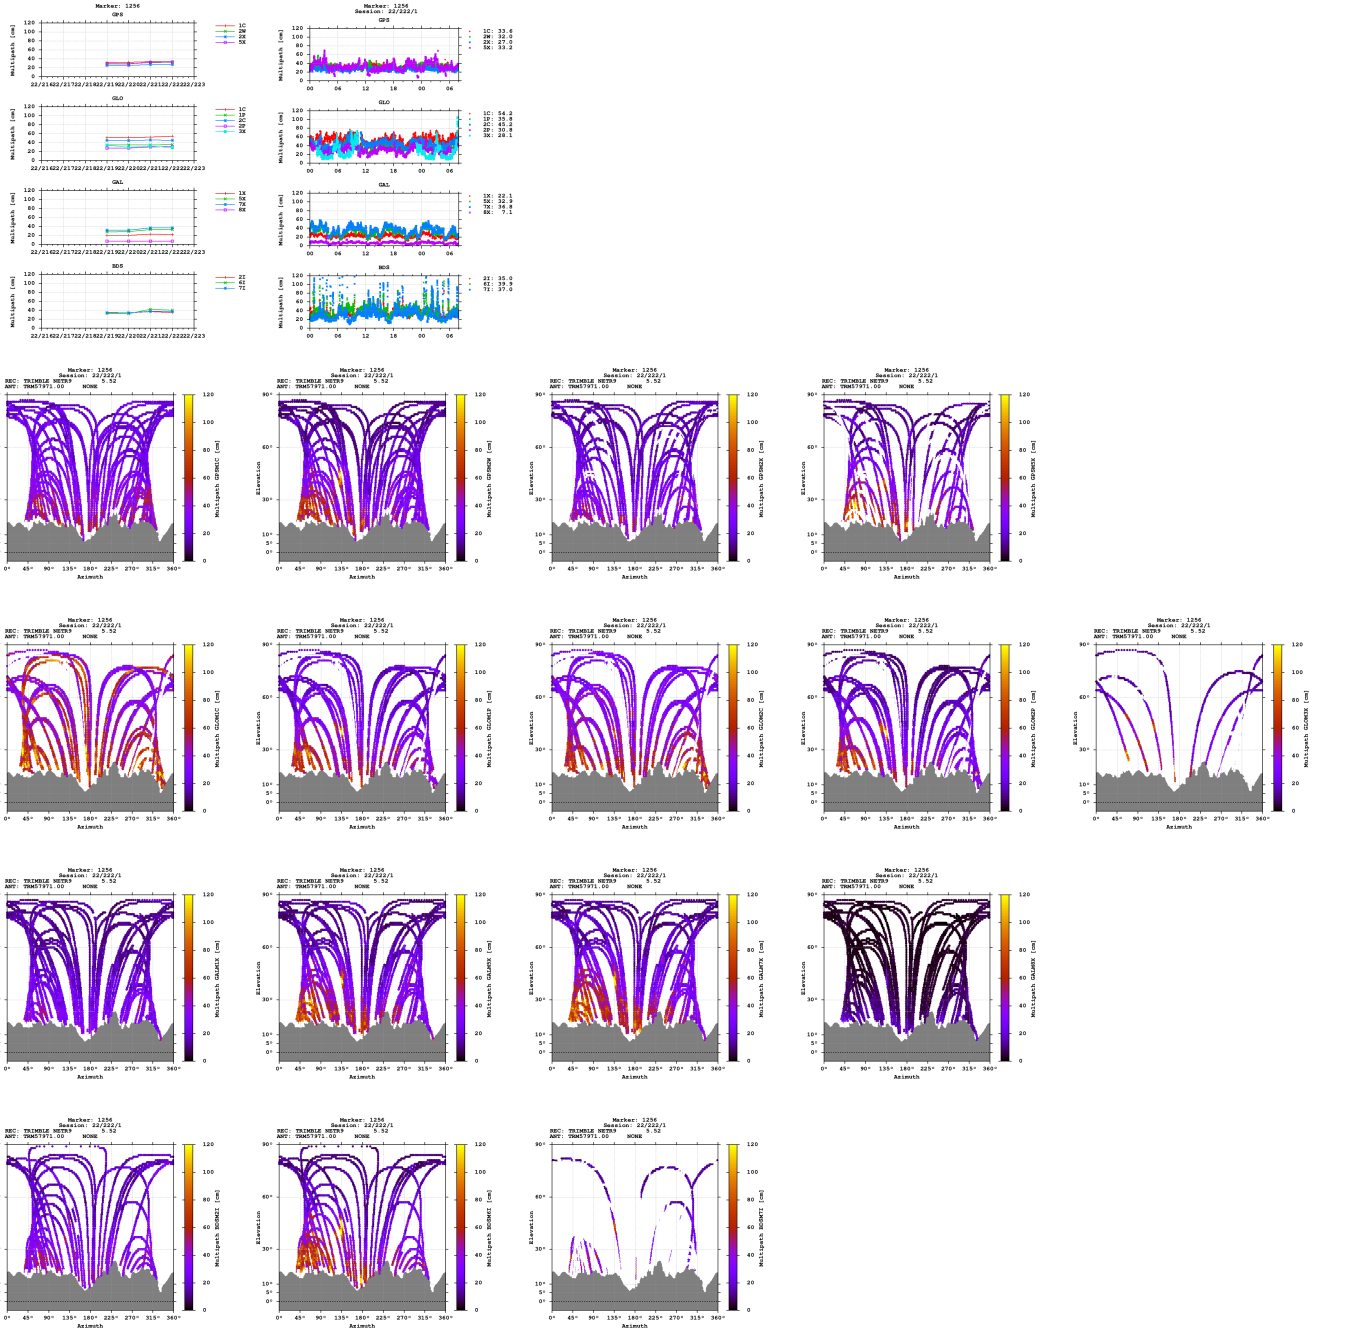


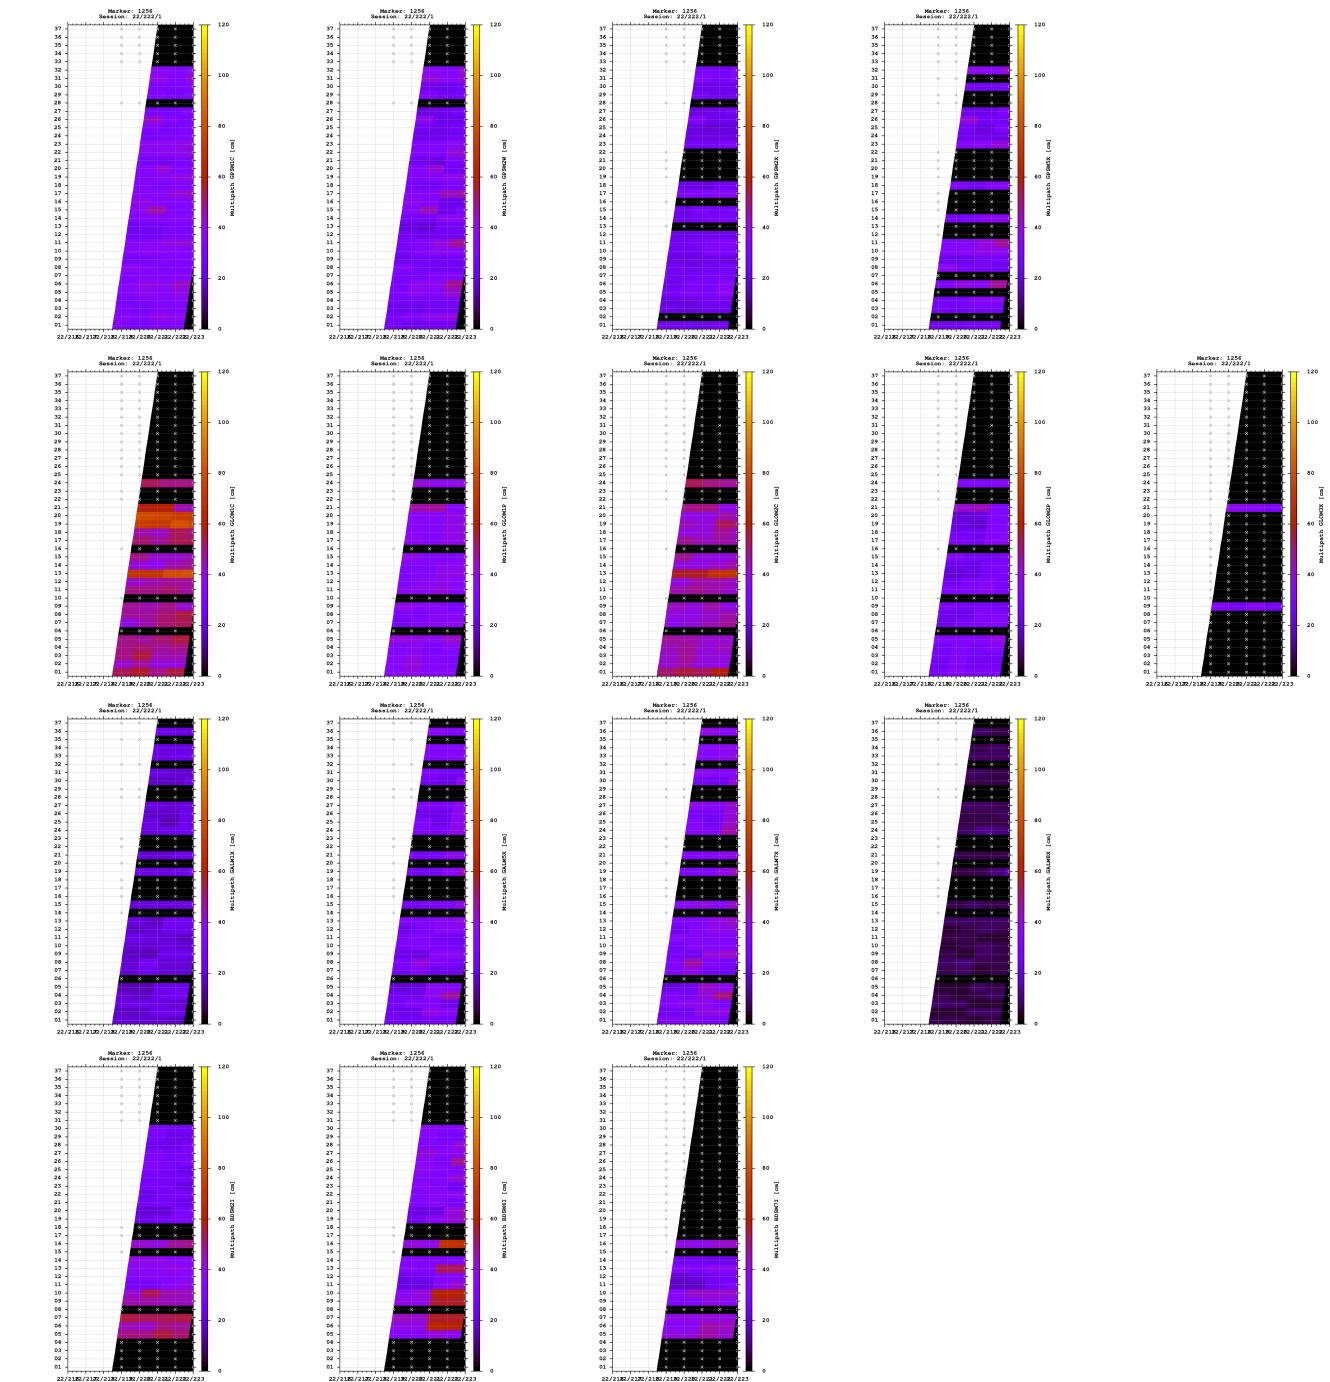


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

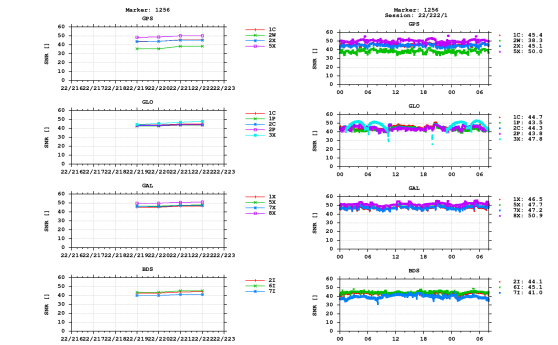


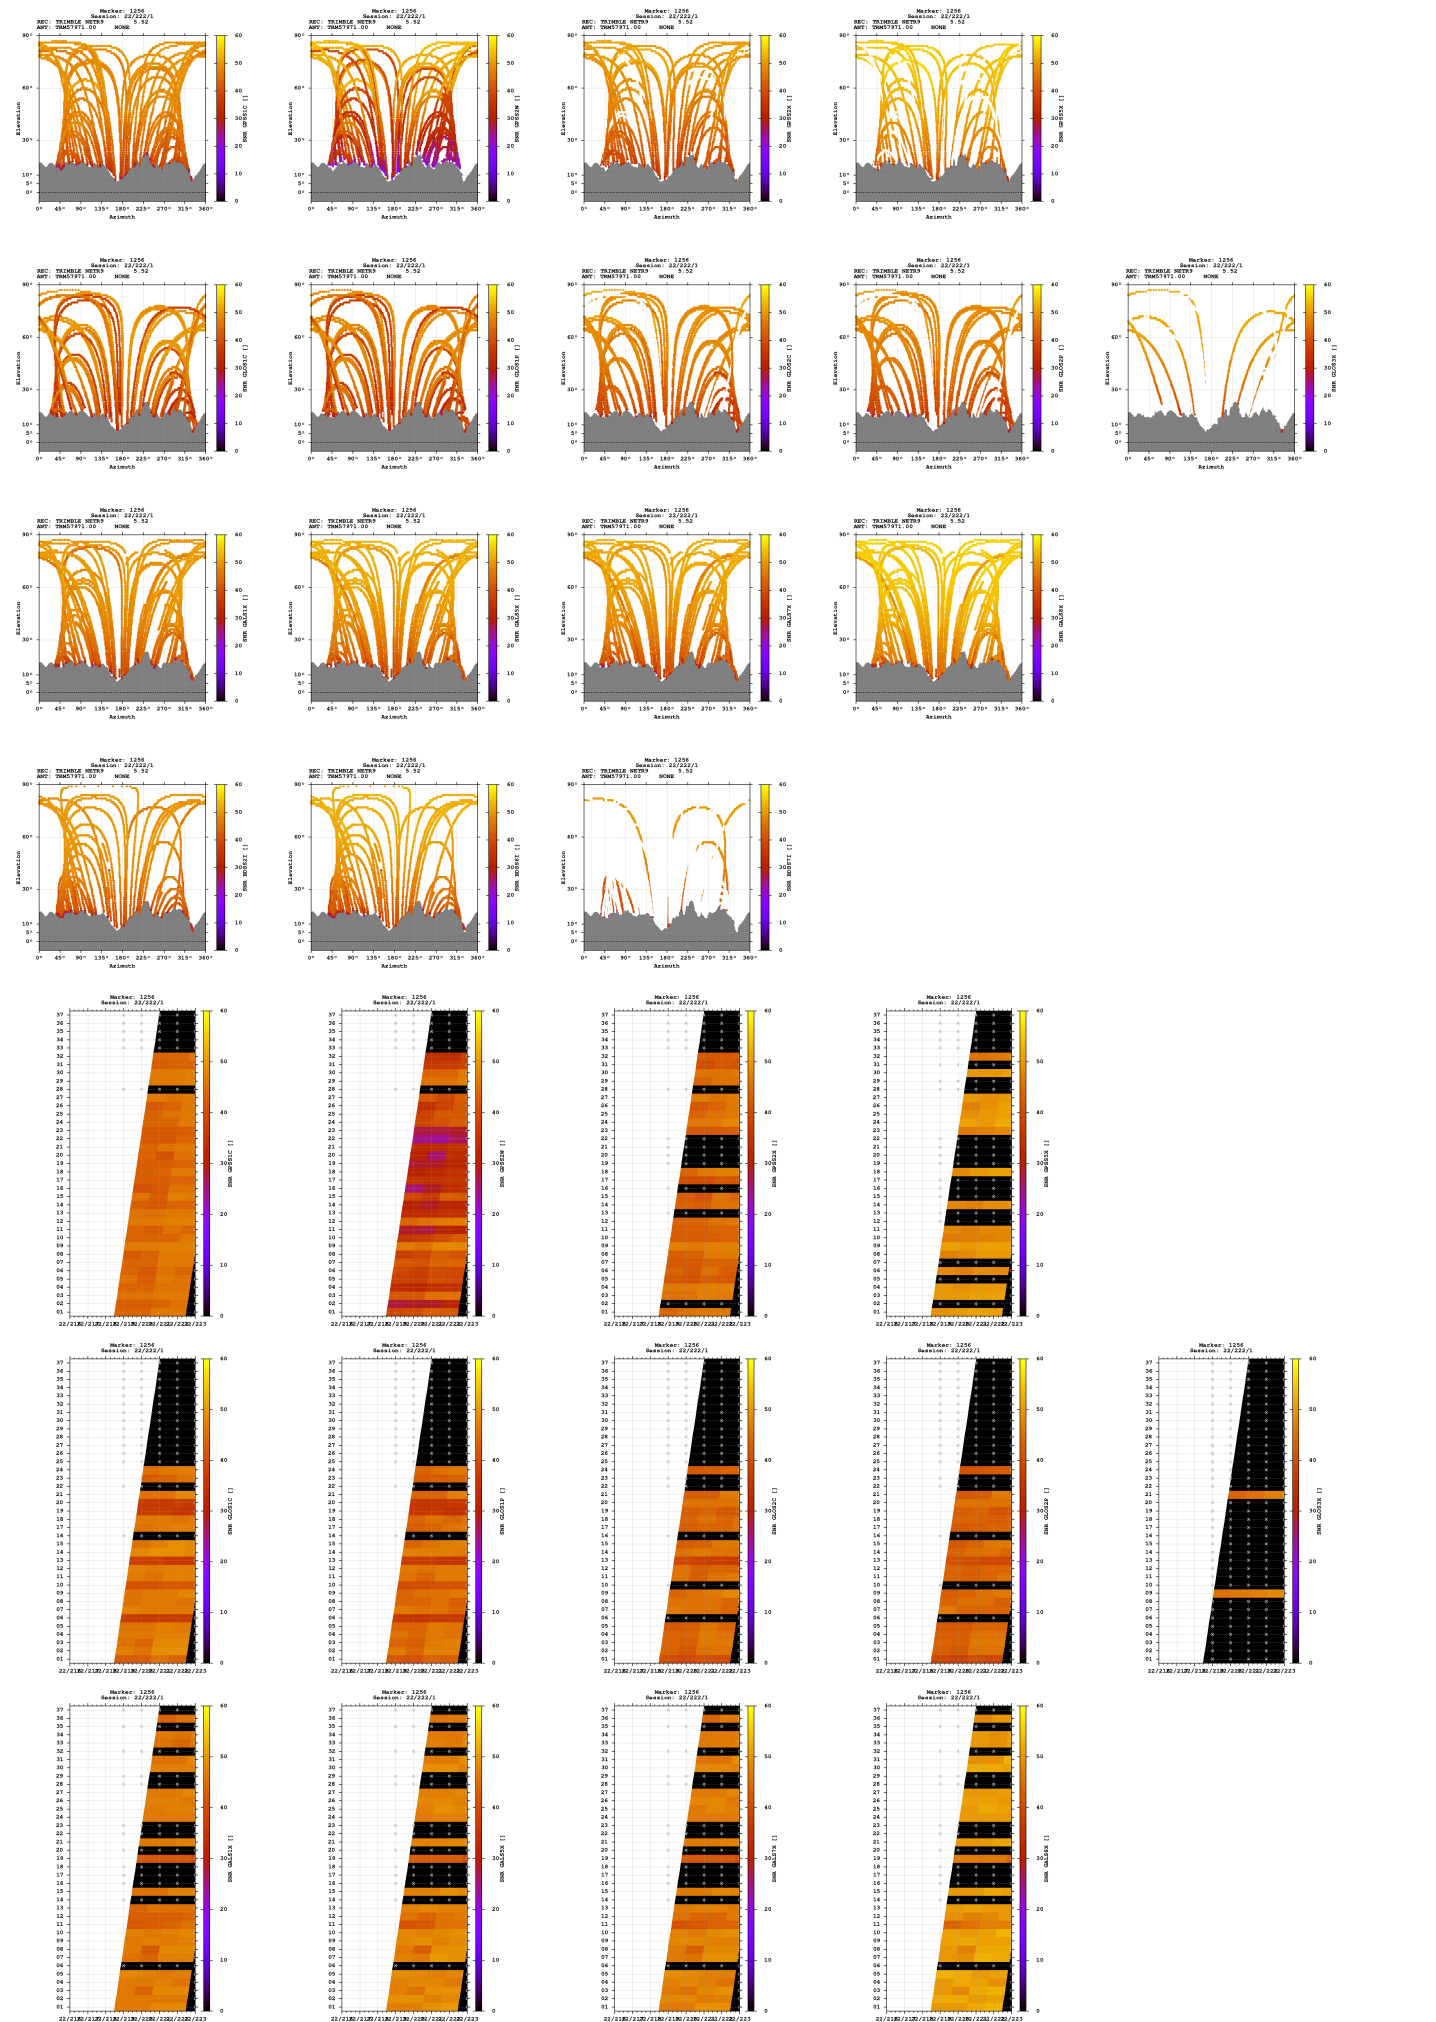

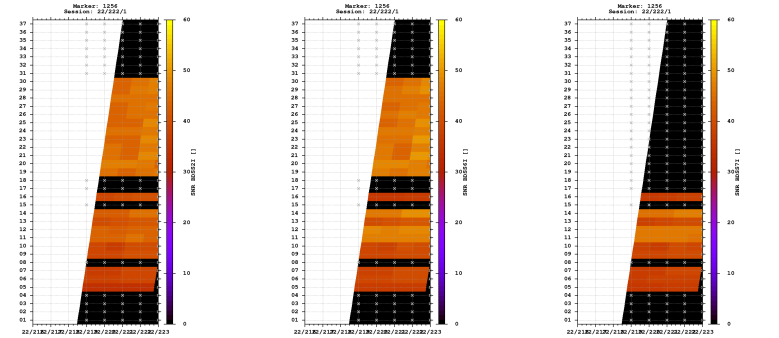



Estimates

2022-08-09 09:42:00	GPS	4335691.9229	735592.8699	4606409.1983	46.520306033	9.629102877	1619.7291
2022-08-09 09:42:00	GLO	4335691.2023	735592.7622	4606409.3159	46.520311515	9.629103064	1619.3132
2022-08-09 09:42:00	GAL	4335691.5470	735592.8162	4606408.9536	46.520306997	9.629103006	1619.2904
2022-08-09 09:42:00	BDS	4335691.0683	735593.2345	4606412.6197	46.520332307	9.629109423	1621.6740

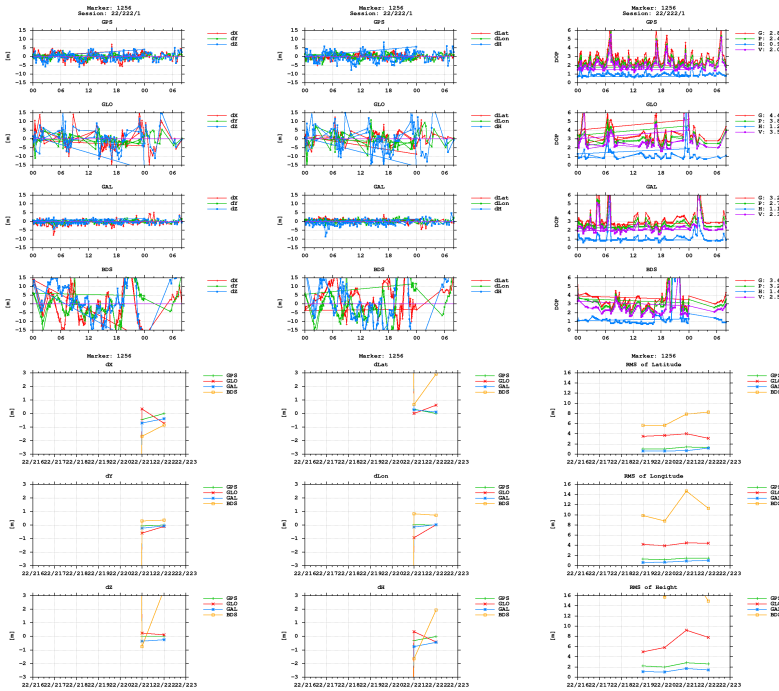

BNC

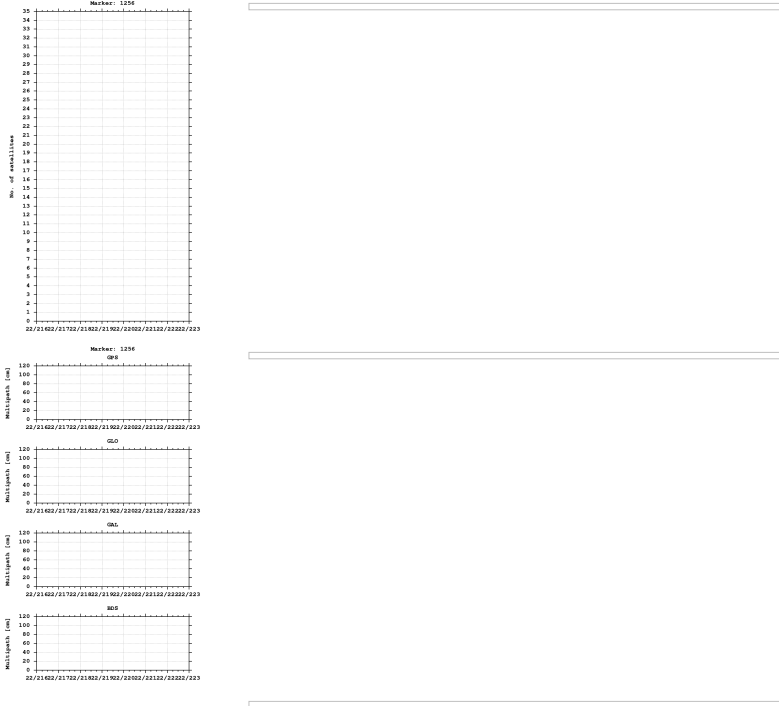

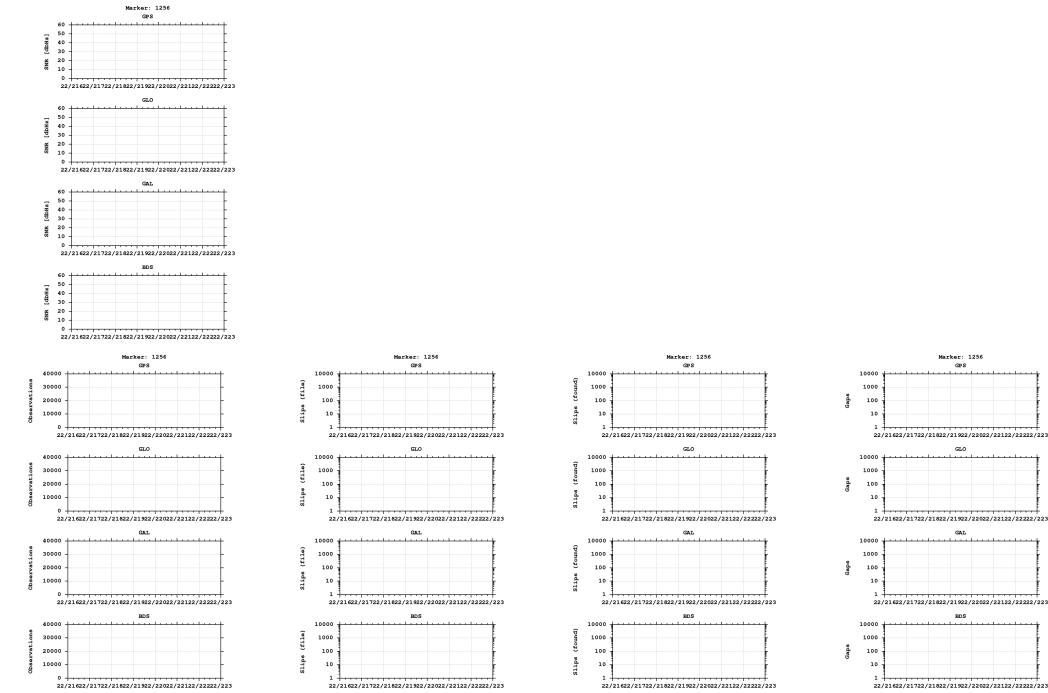

Equipment

2022-08-07 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)