


GNSS observation file monitoring for 0515


Last RINEX file: 05152271.220
RINEX version: 3.02
Marker: 1218
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE

Epochs

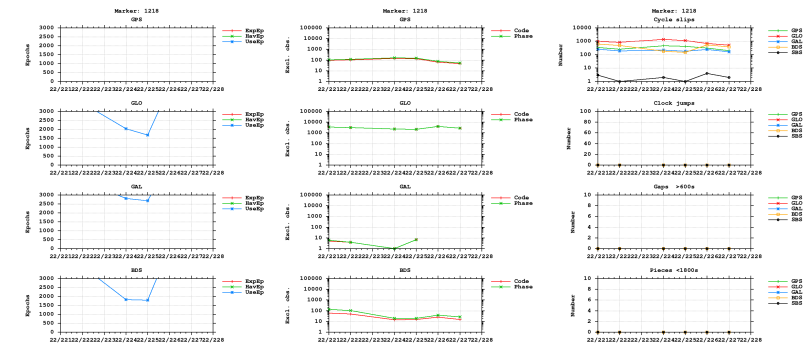



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

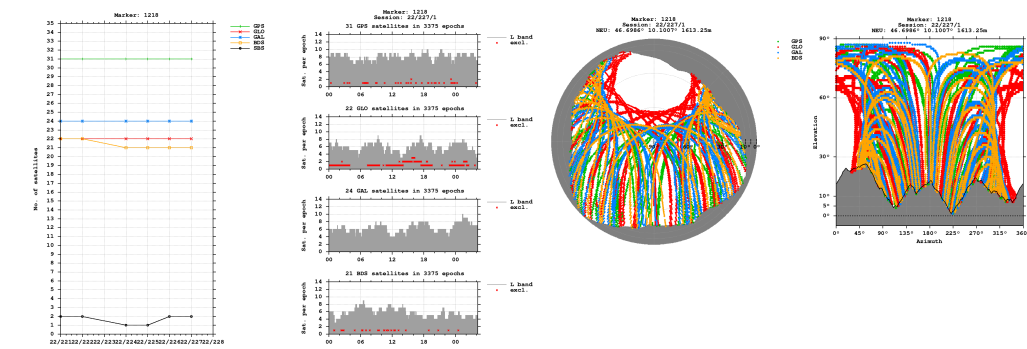


Bands

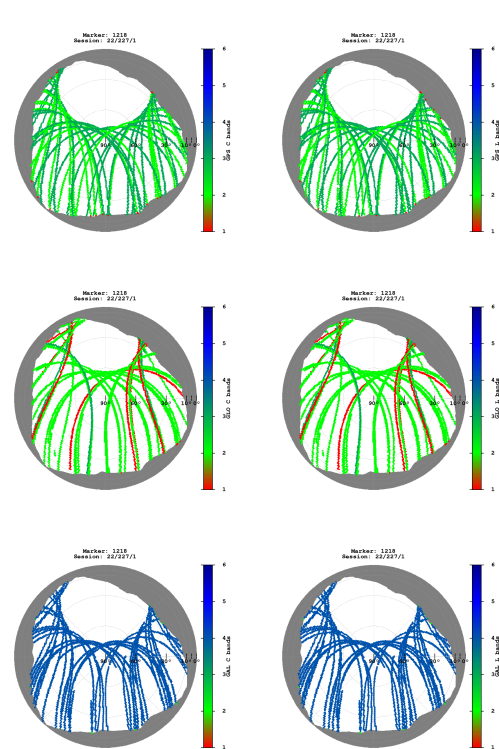


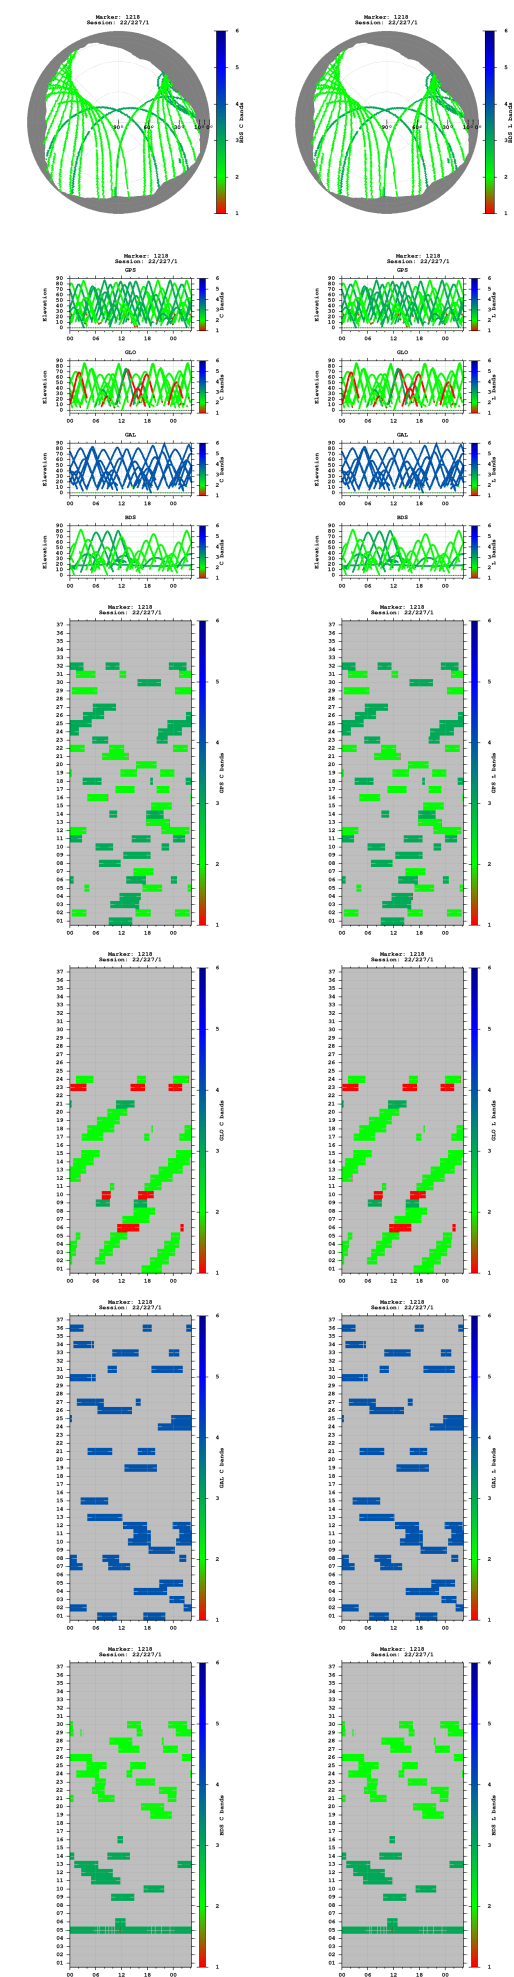


Observations

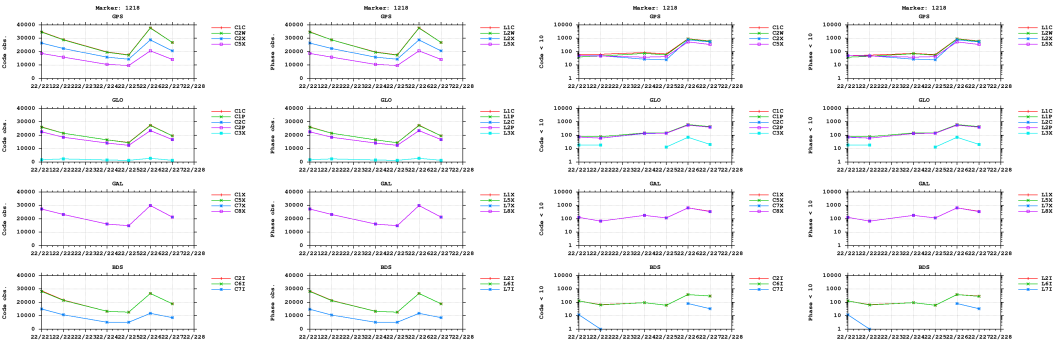



Multipath

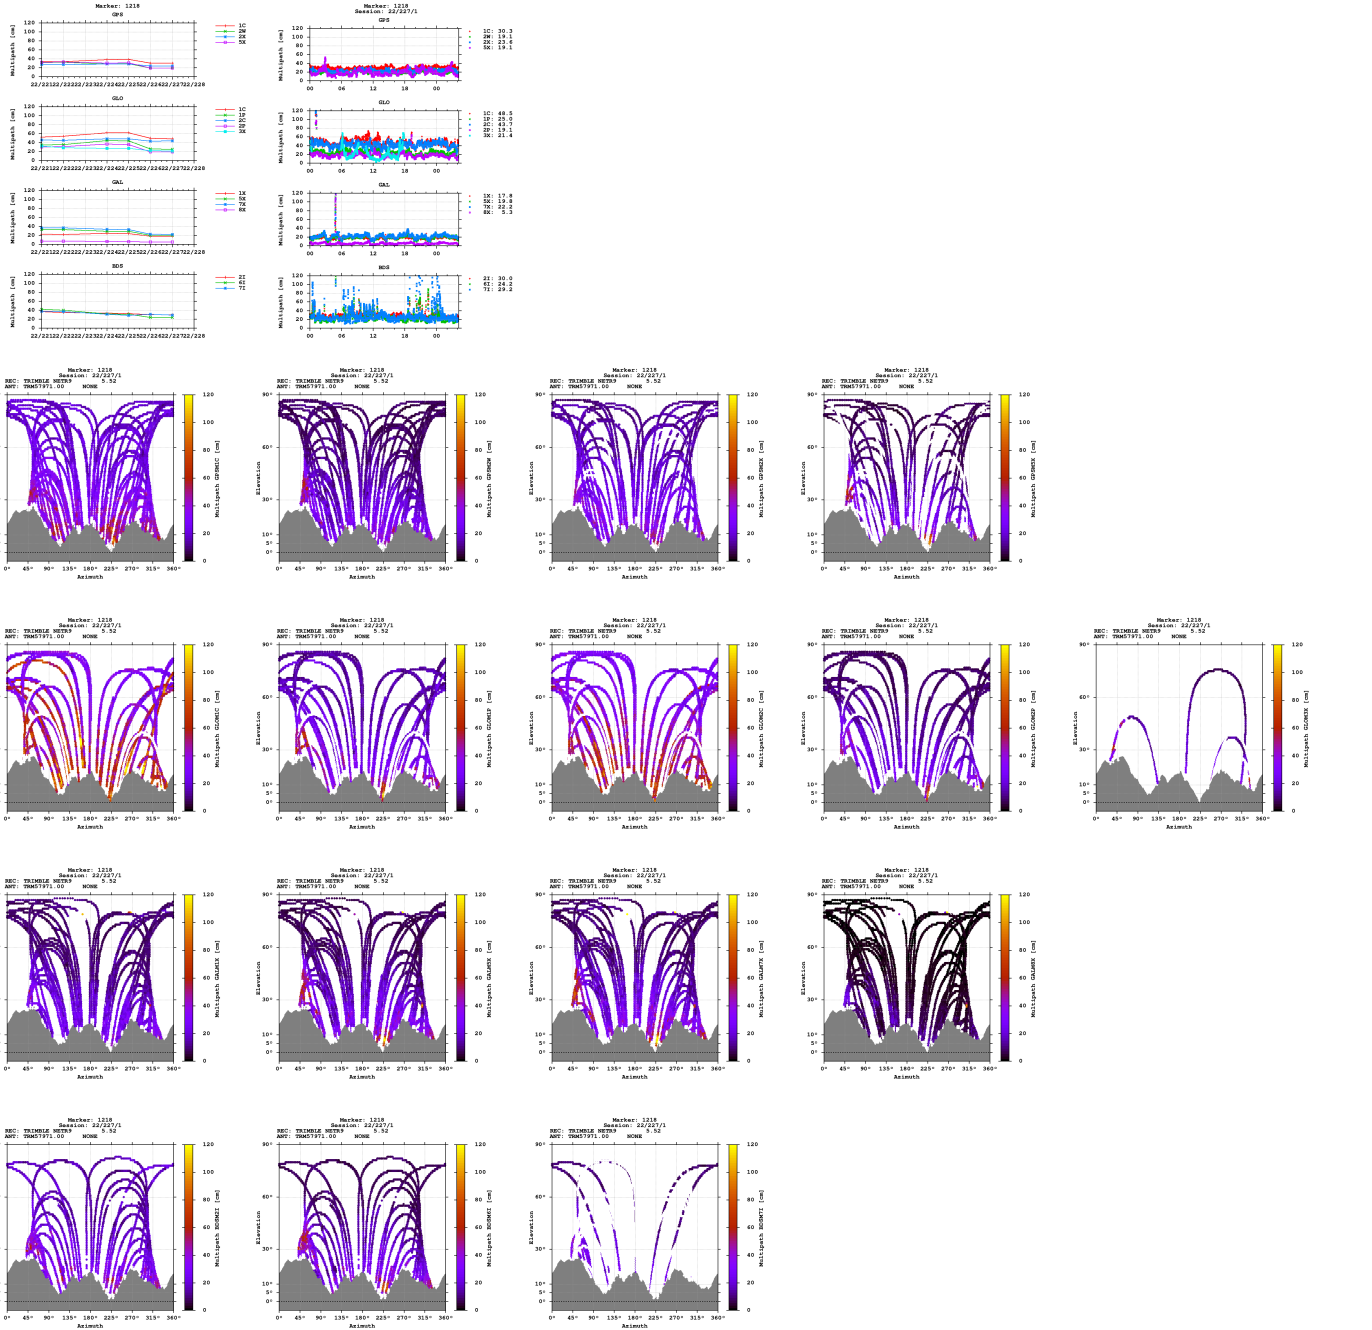


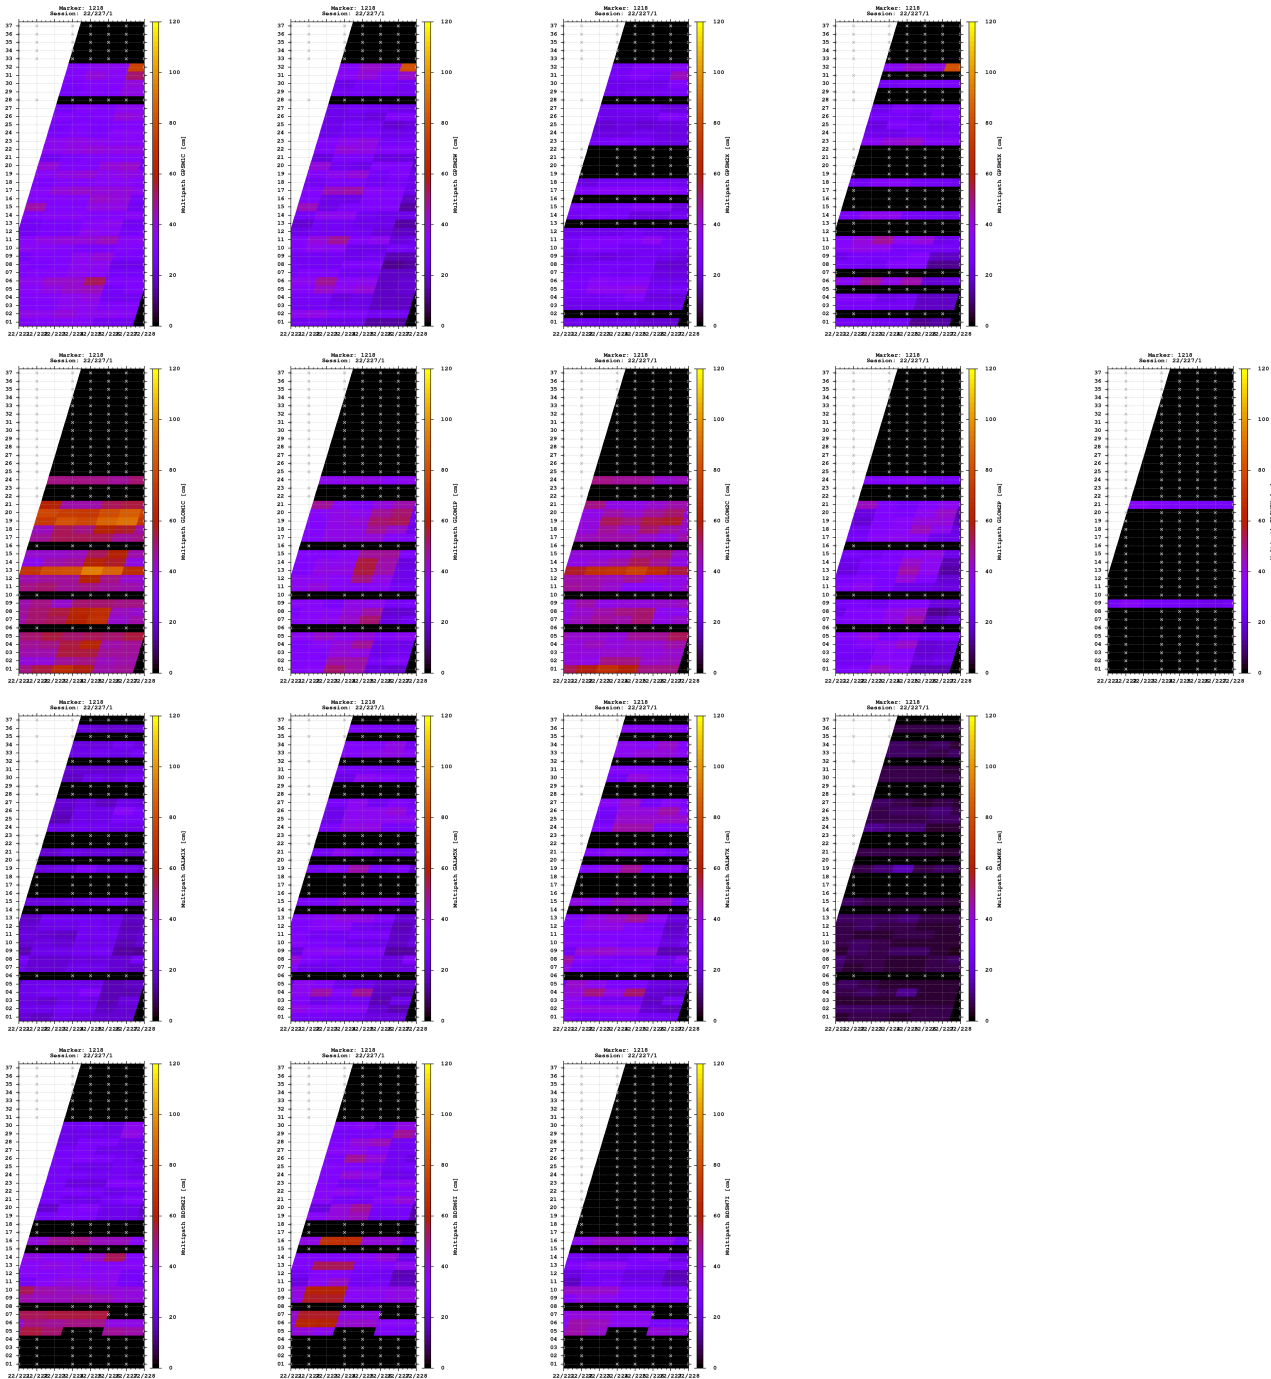


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

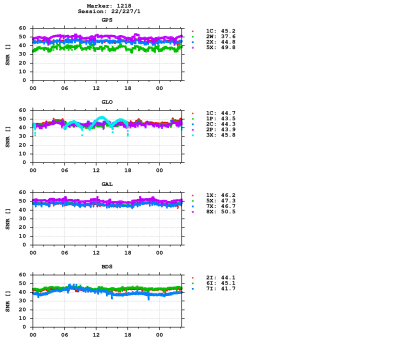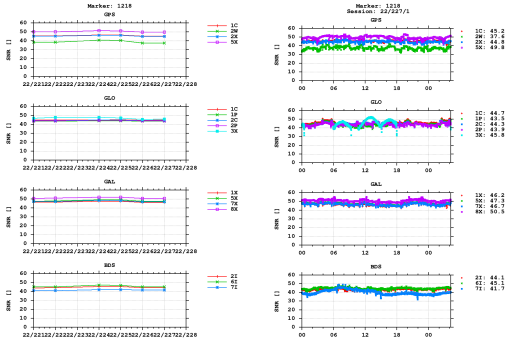


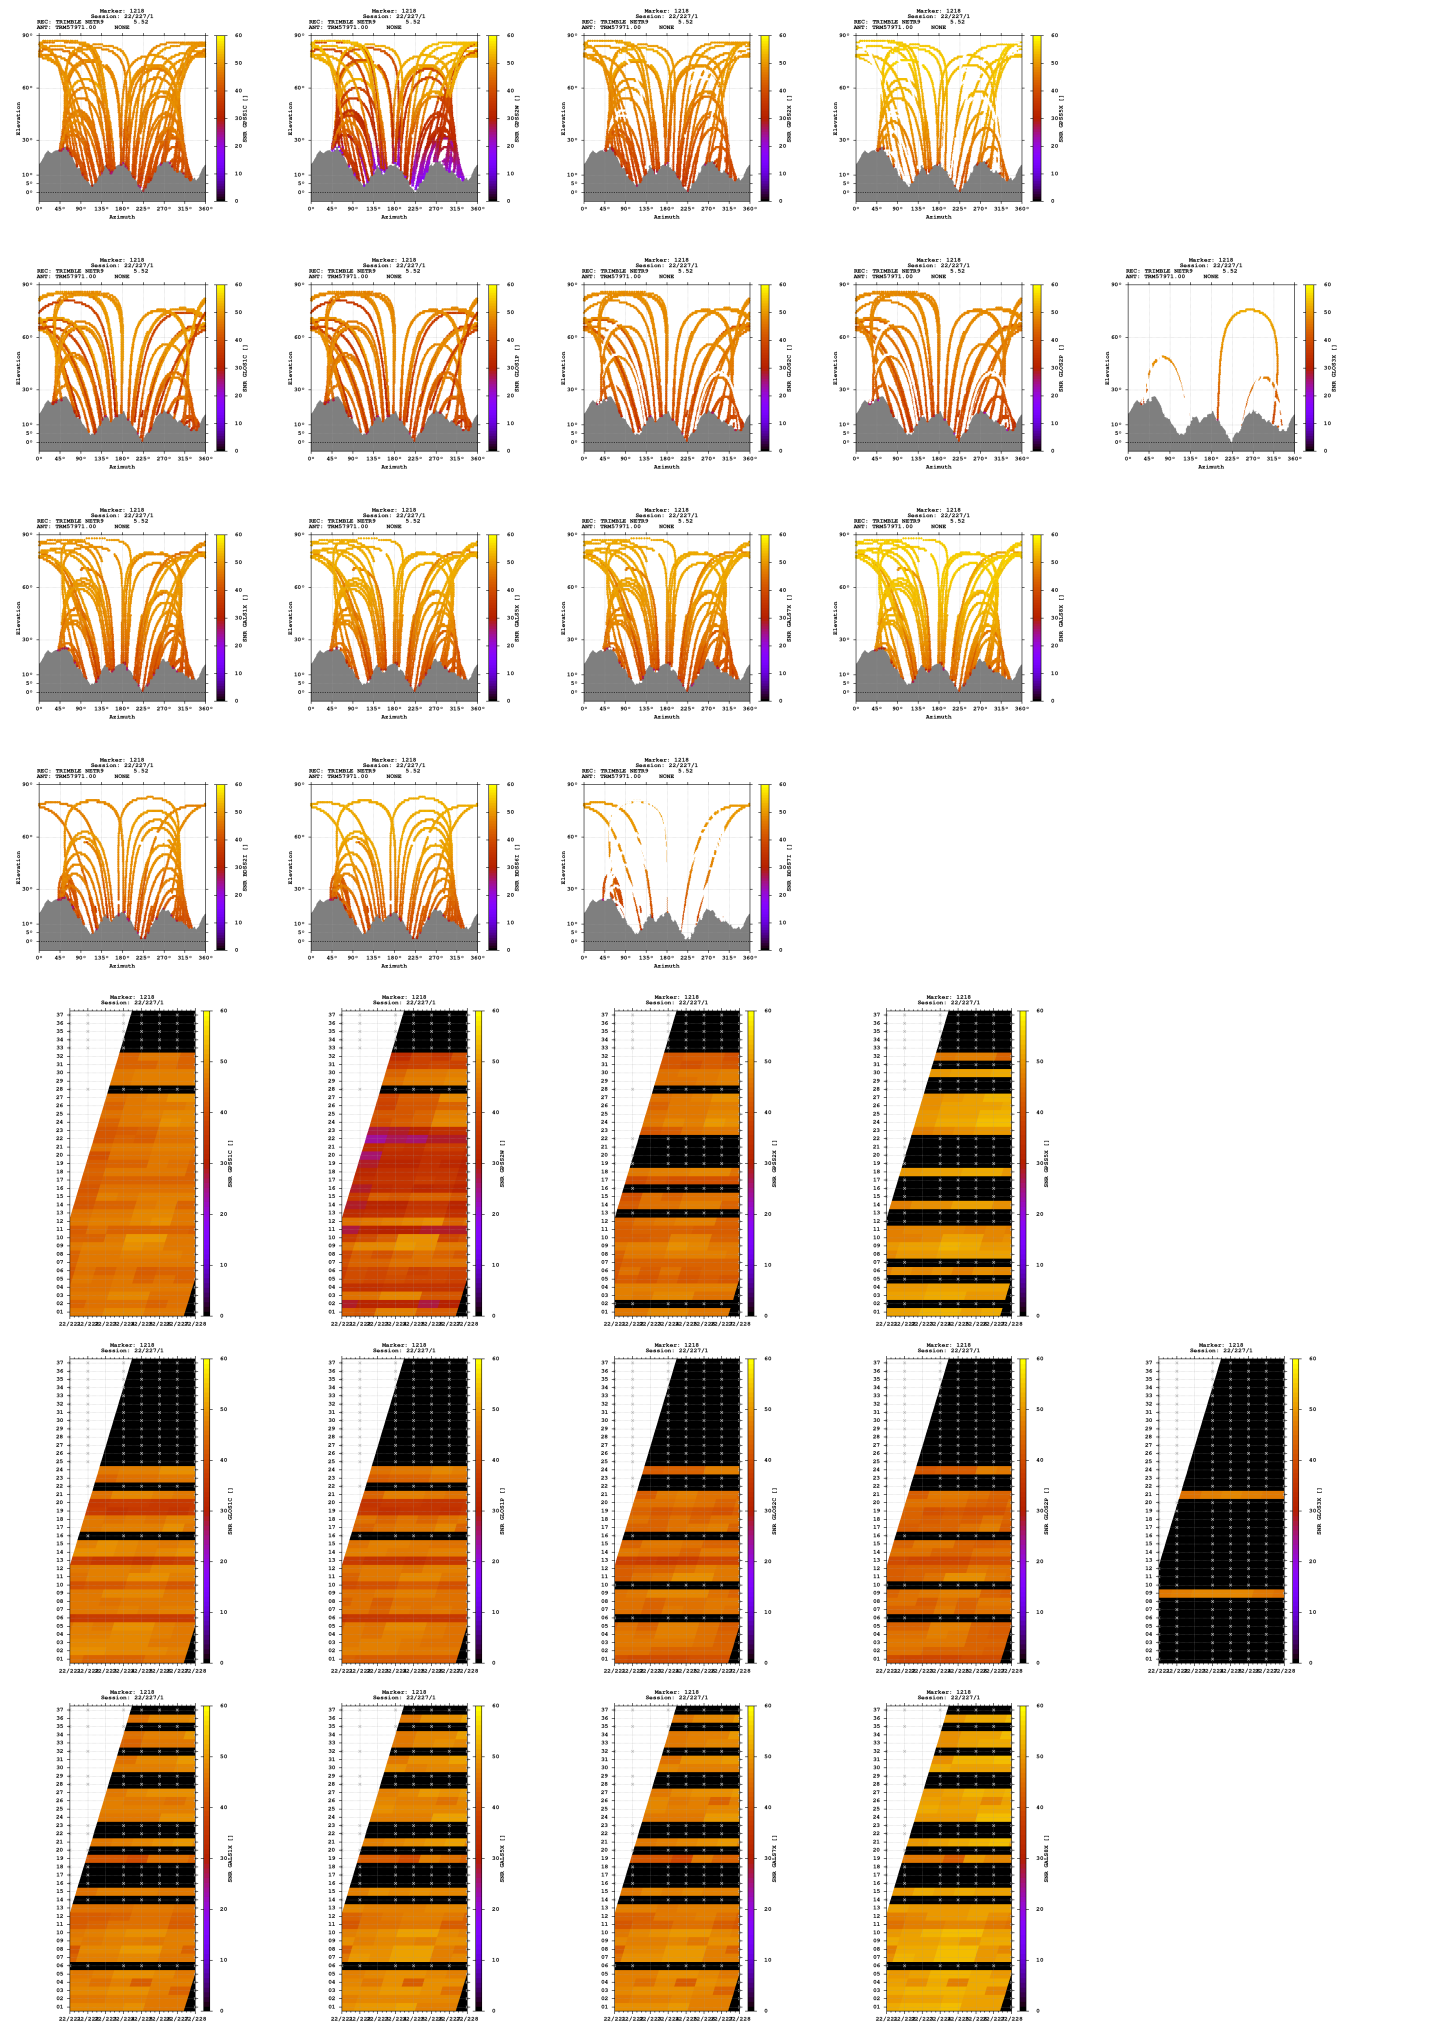

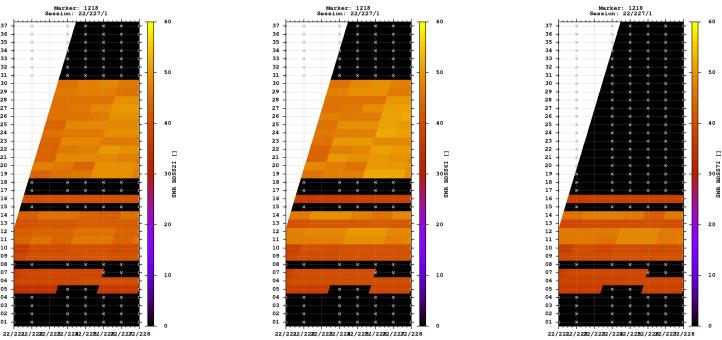



Estimates

2022-08-14 08:17:00	GPS	4315304.1081	768729.3588	4620022.0364	46.698581386	10.100728671	1613.2527
2022-08-14 08:17:00	GLO	4315304.4632	768729.5237	4620022.1895	46.698579853	10.100729979	1613.6238
2022-08-14 08:17:00	GAL	4315304.2956	768729.2923	4620021.9392	46.698579655	10.100727385	1613.3006
2022-08-14 08:17:00	BDS	4315305.0758	768728.4458	4620025.7124	46.698598873	10.100714703	1616.4715

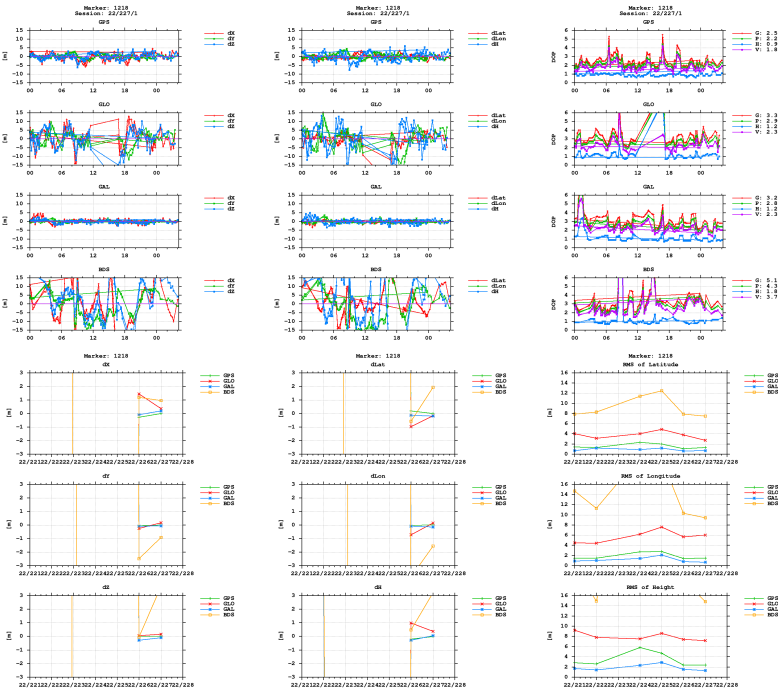

BNC

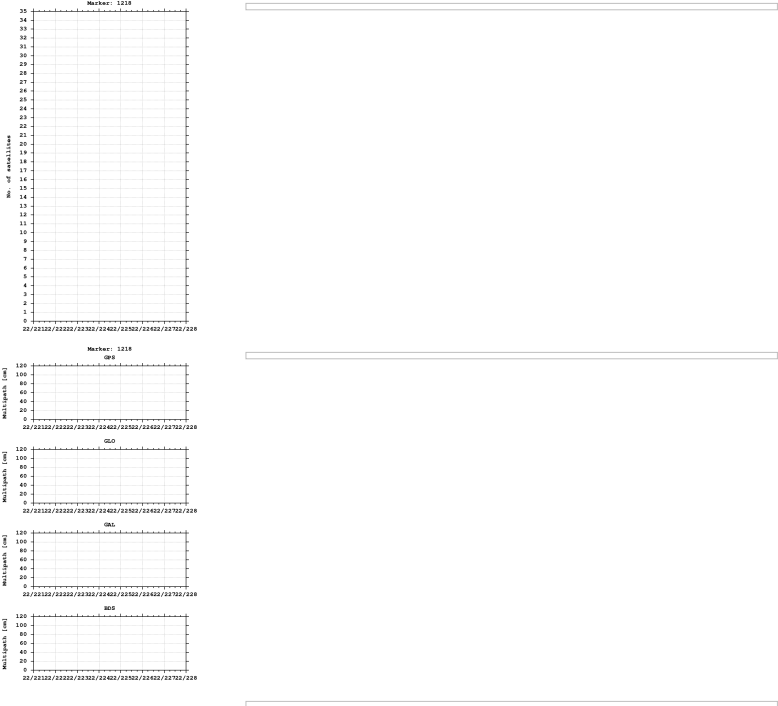

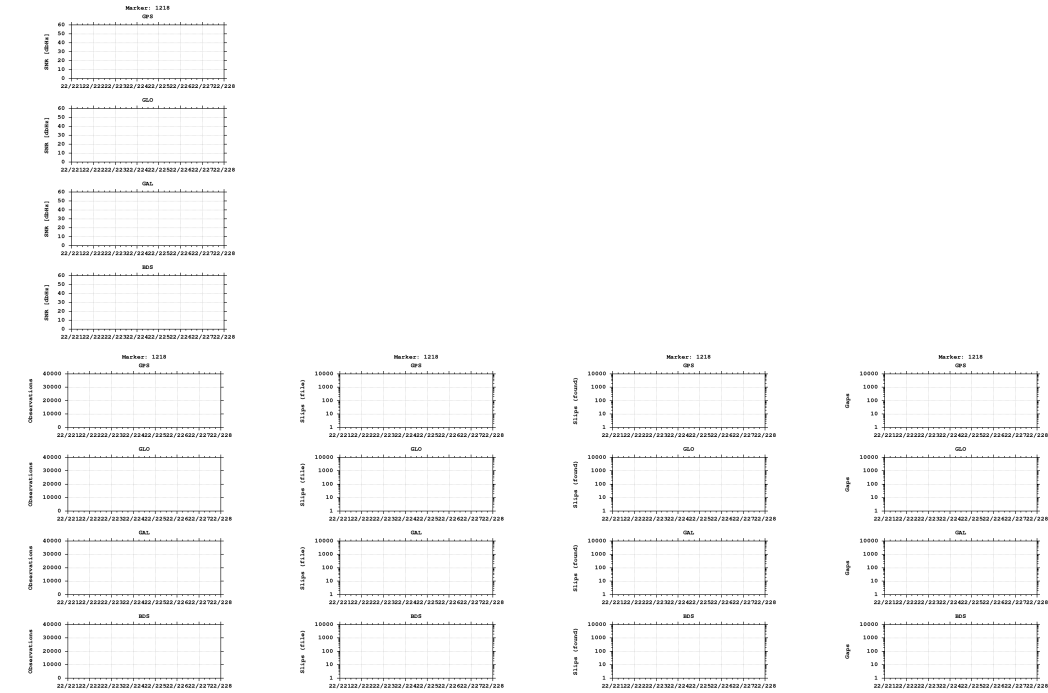

Equipment

2022-08-08 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)