


GNSS observation file monitoring for 0516


Last RINEX file: 05162201.22O
RINEX version: 3.02
Marker: 1234
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

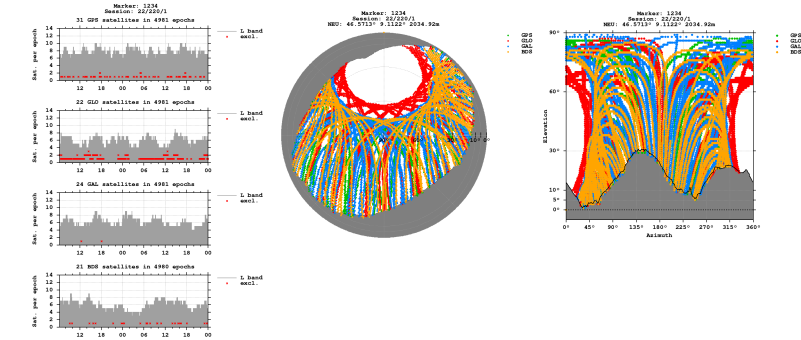


Bands

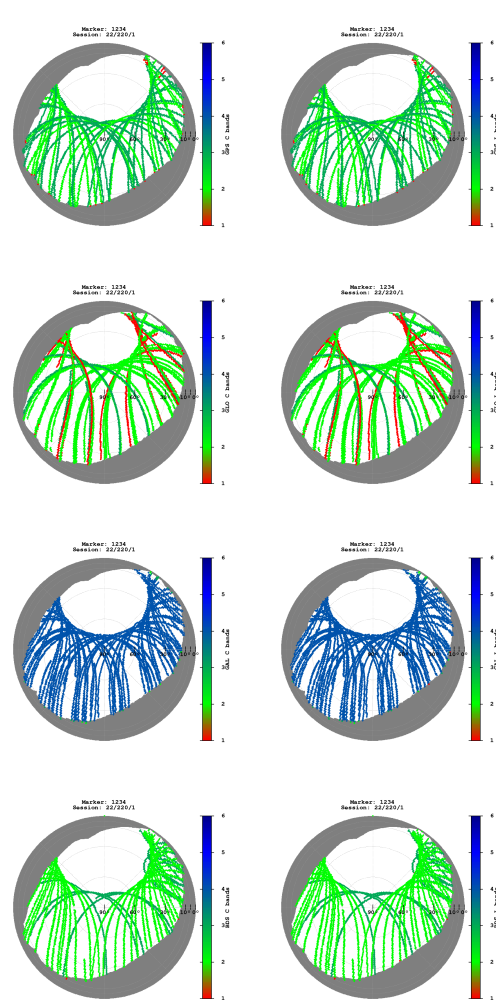

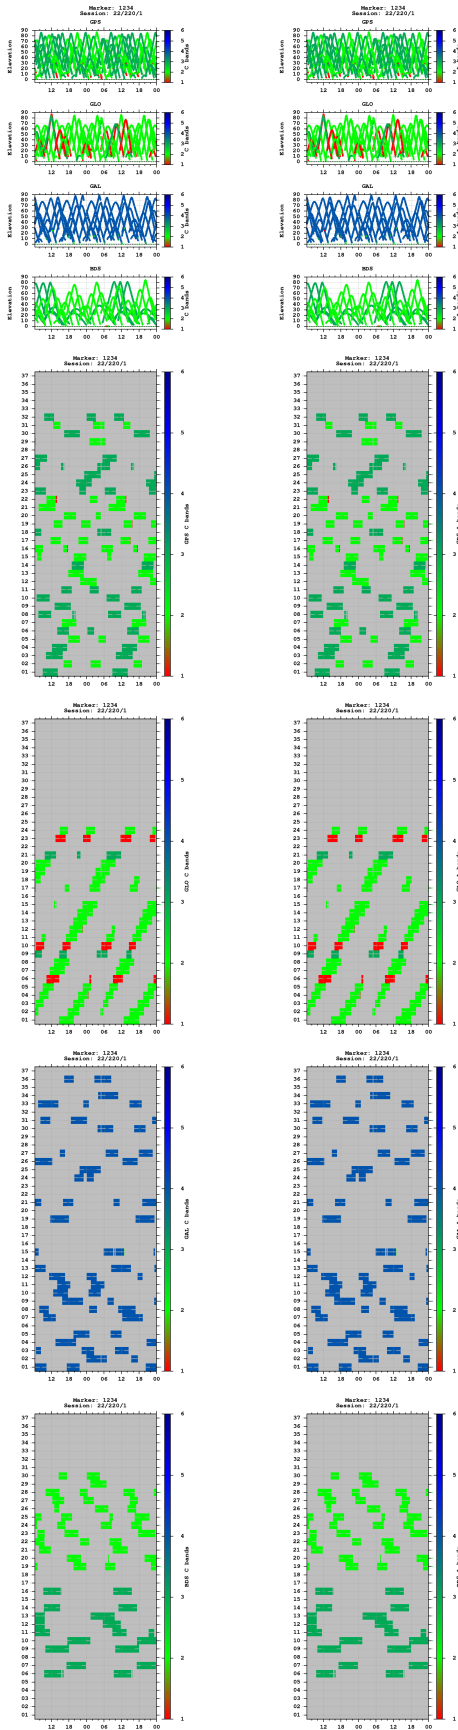



Multipath

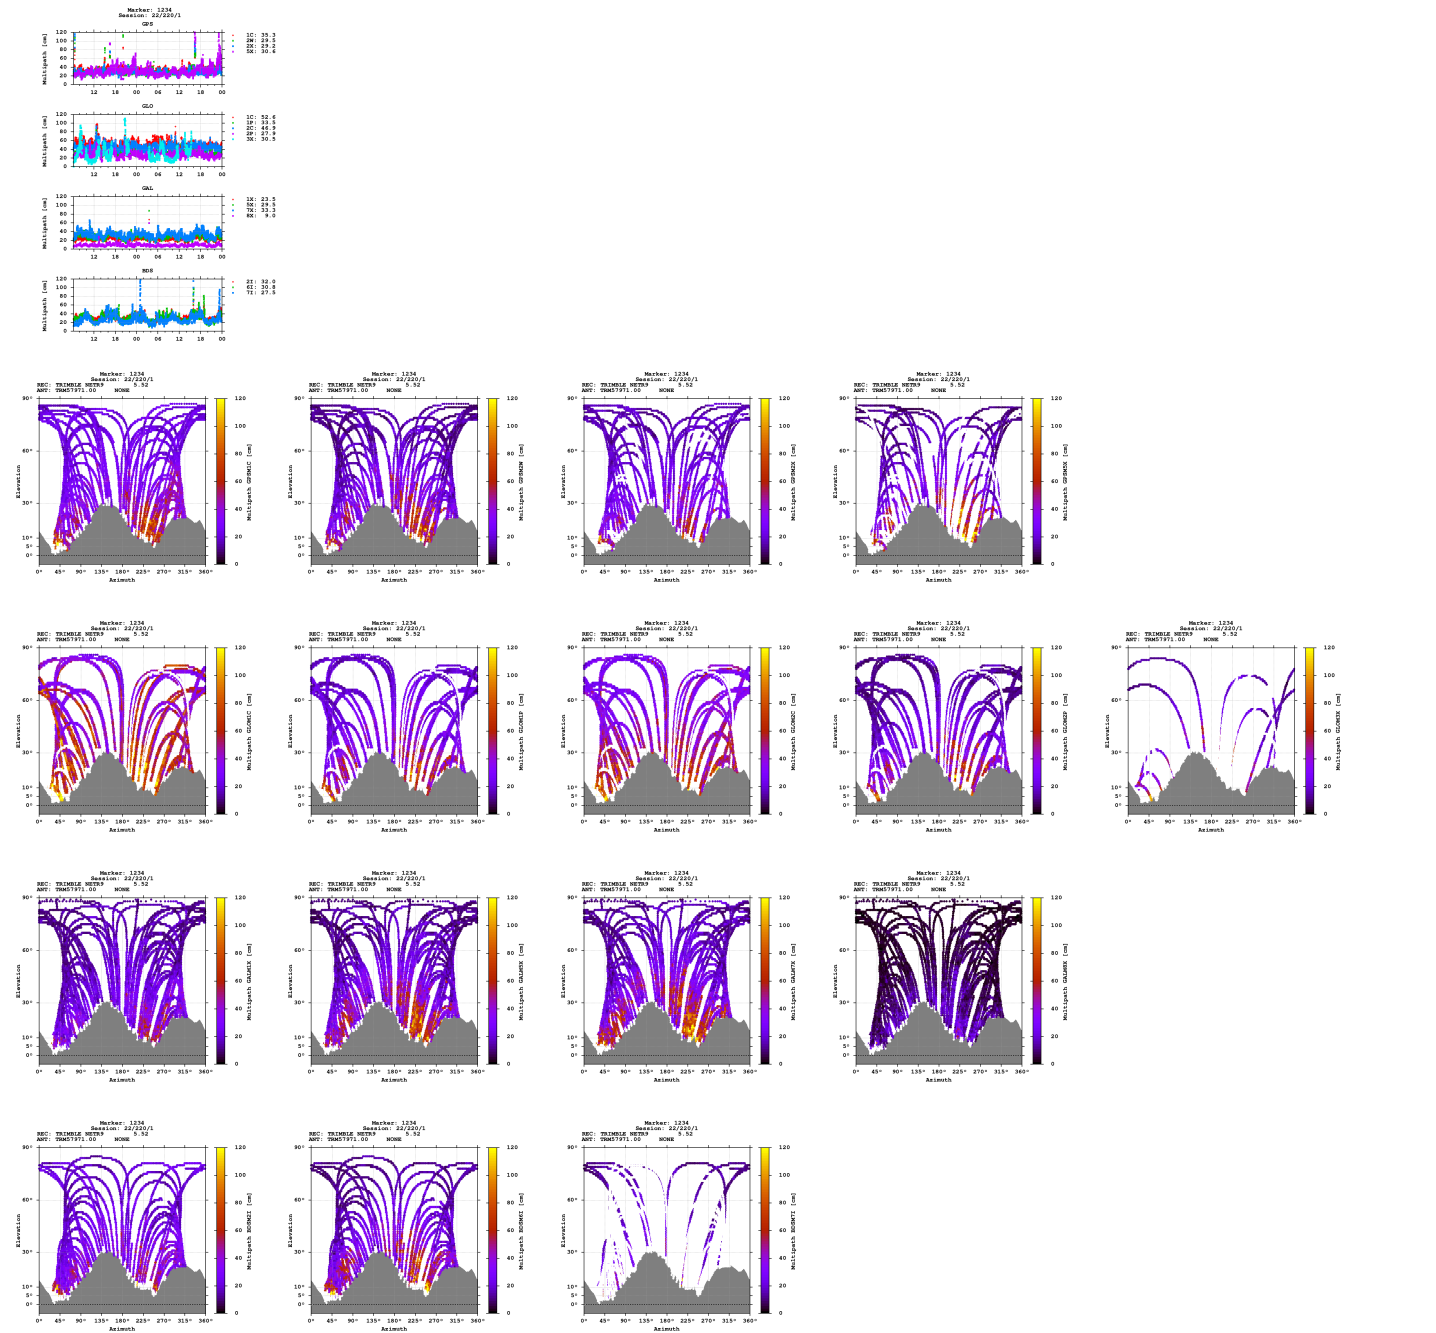

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

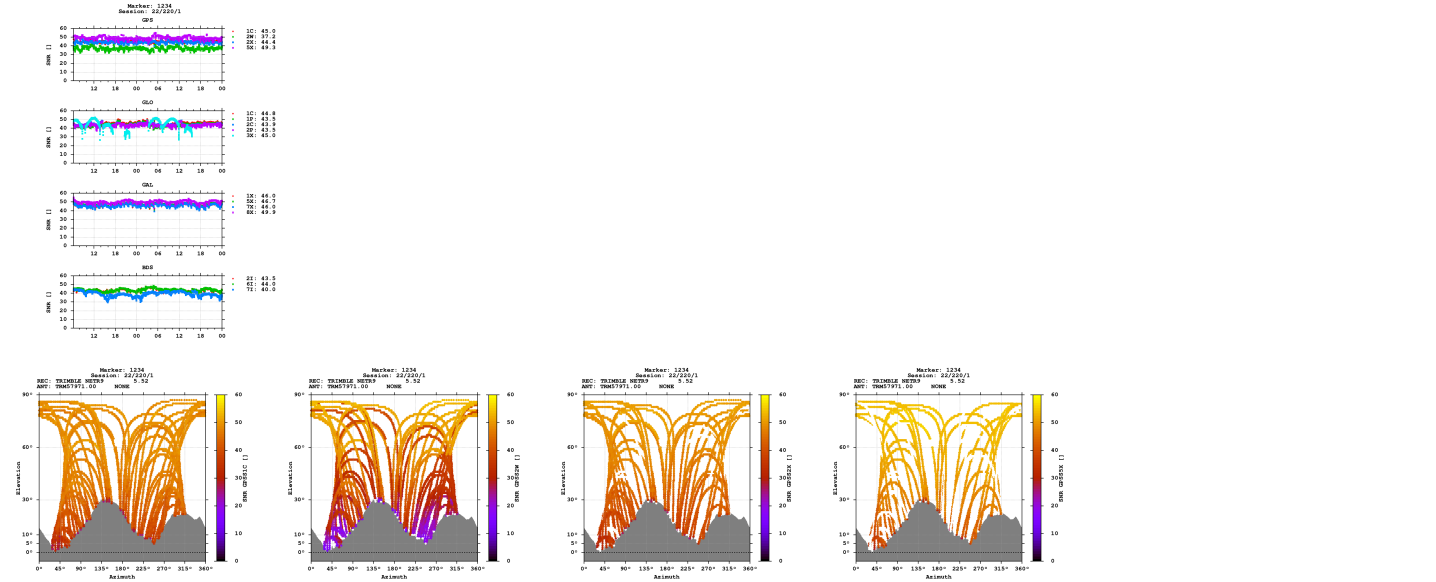

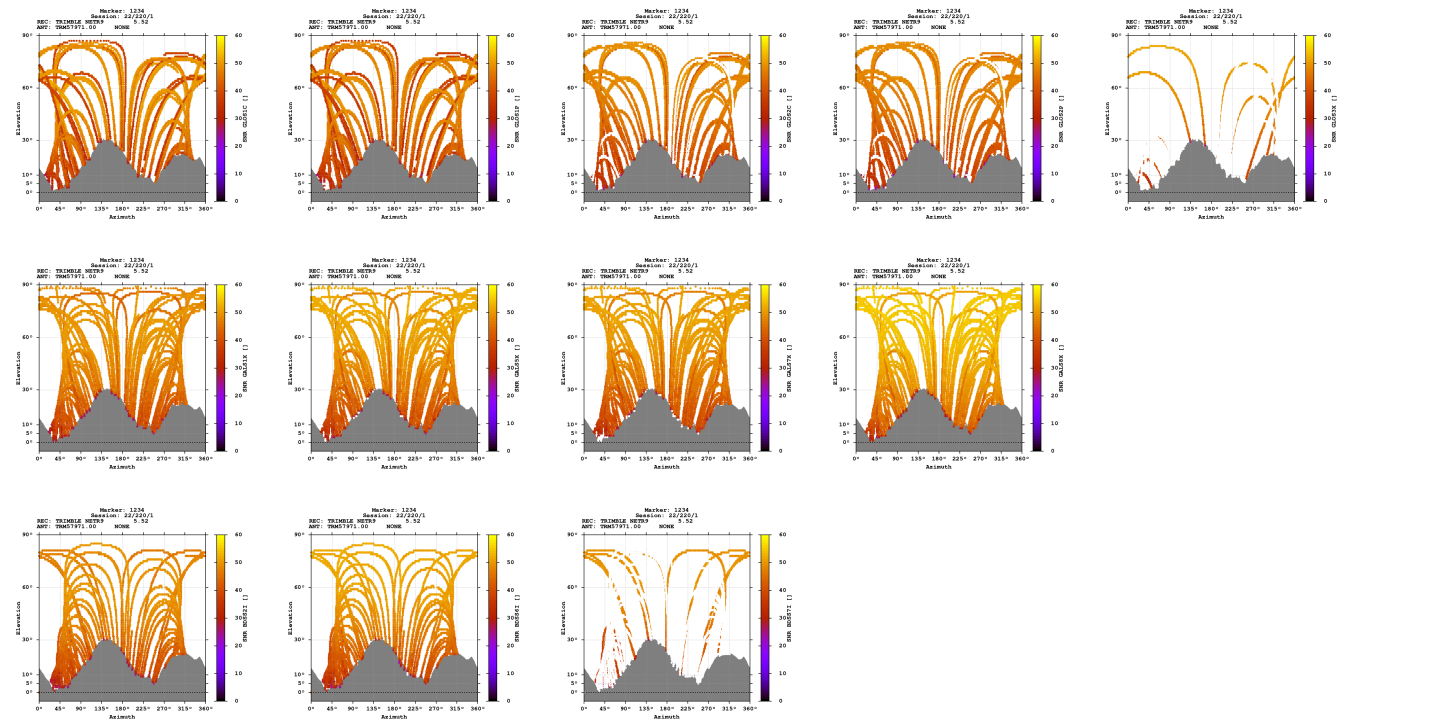

Estimates

2022-08-08 06:21:00	GPS	4338372.0172	695839.5005	4610608.3158	46.571272414	9.112166353	2034.9186
2022-08-08 06:21:00	GLO	4338373.9482	695839.5451	4610610.6639	46.571274432	9.112162940	2037.9395
2022-08-08 06:21:00	GAL	4338372.6279	695839.4438	4610608.7493	46.571271215	9.112164362	2035.6418
2022-08-08 06:21:00	BDS	4338371.6476	695837.5998	4610609.0525	46.571281318	9.112142644	2034.9959

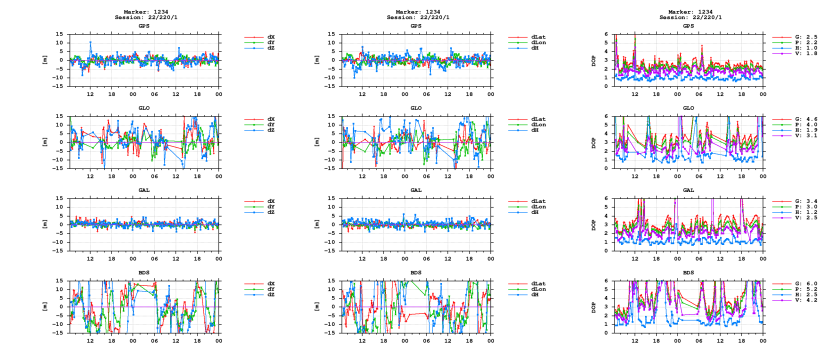

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)