

GNSS observation file monitoring for 0516

Last RINEX file: 05162221.22O


RINEX version: 3.02

Marker: 1197

Receiver: 516 TRIMBLE NETR9 5.52


Antenna:	516	TRM57971.00	NONE
----------	-----	-------------	------

Epochs

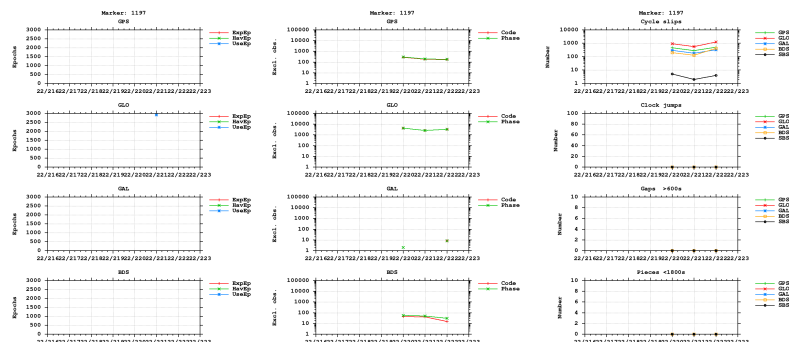



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

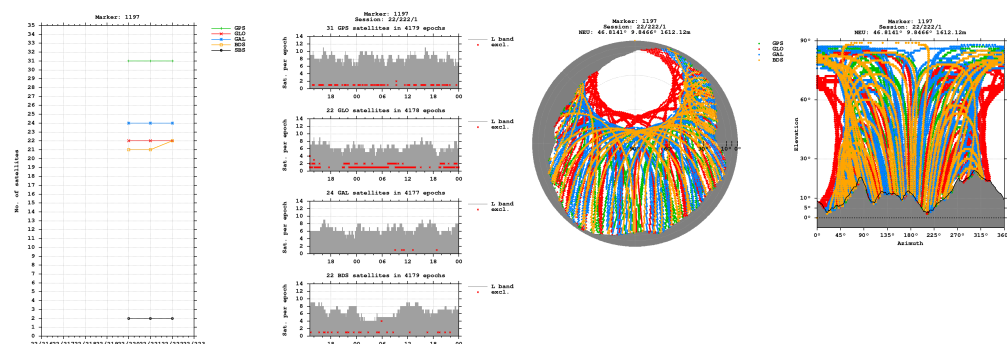


Bands

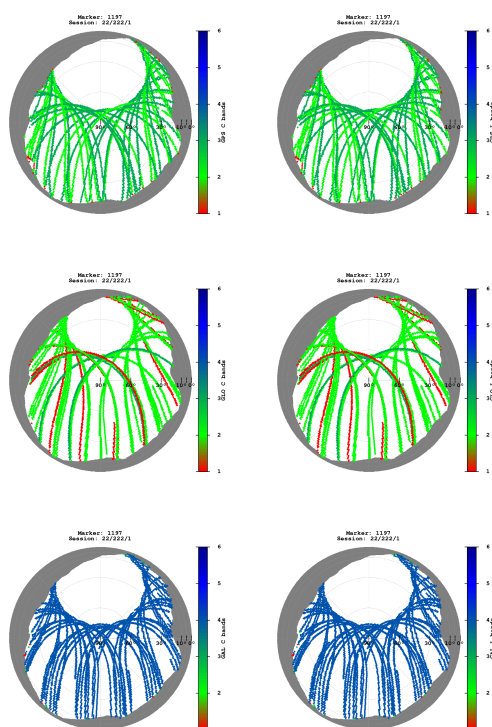


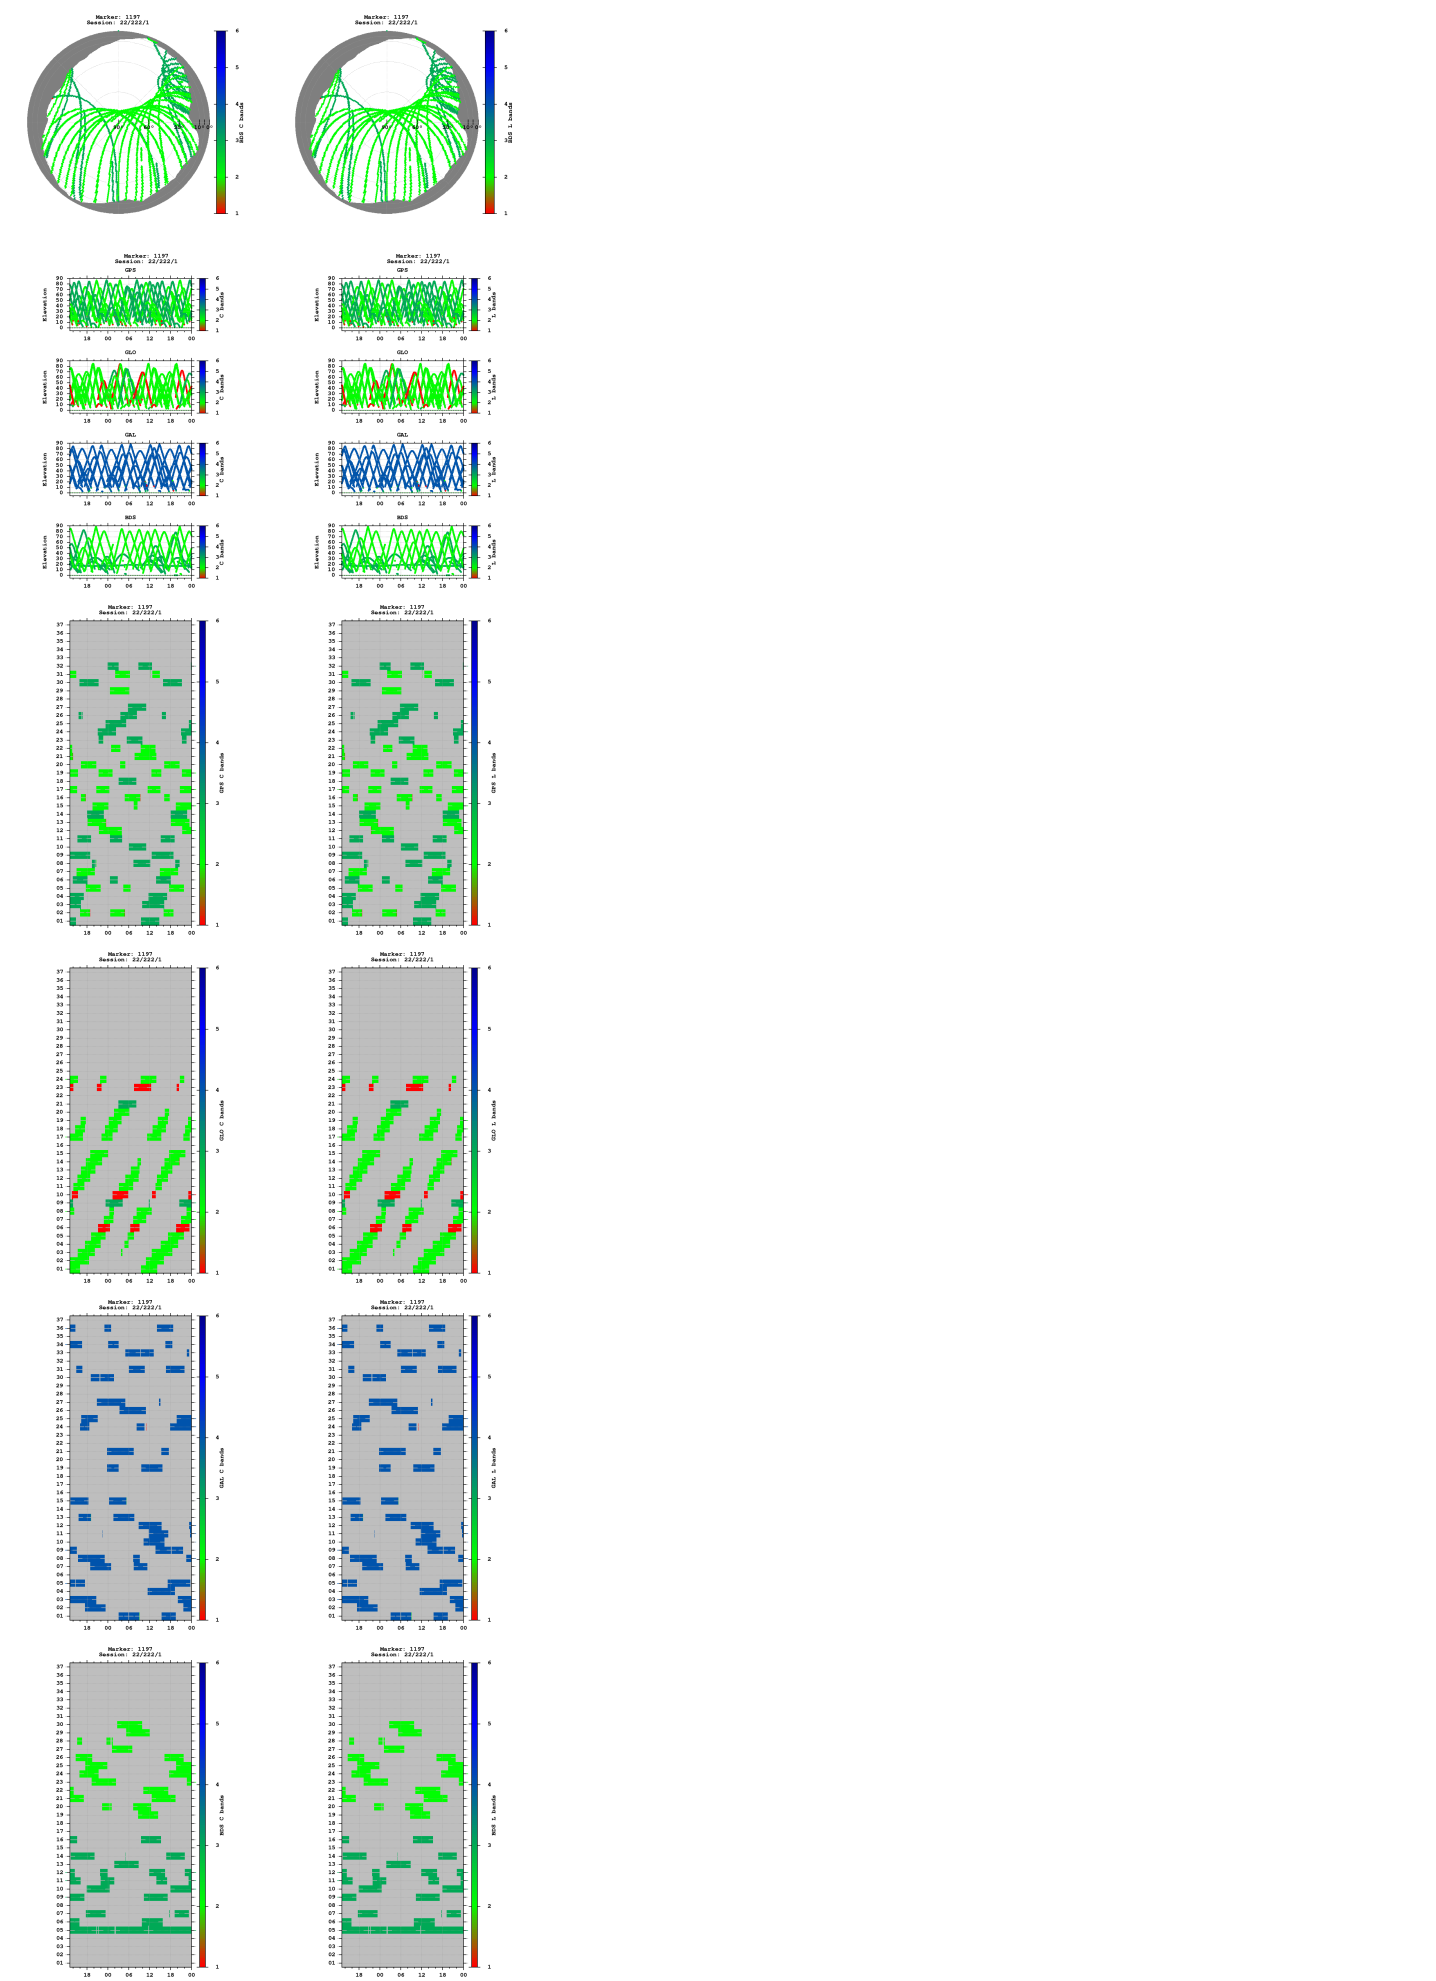

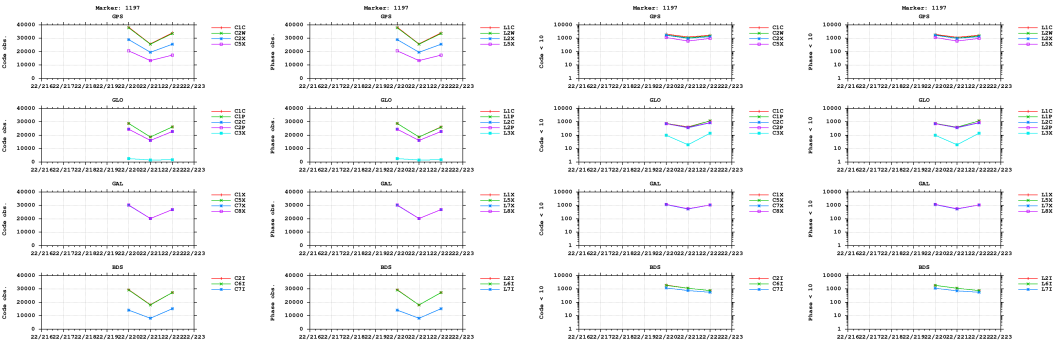


Multipath

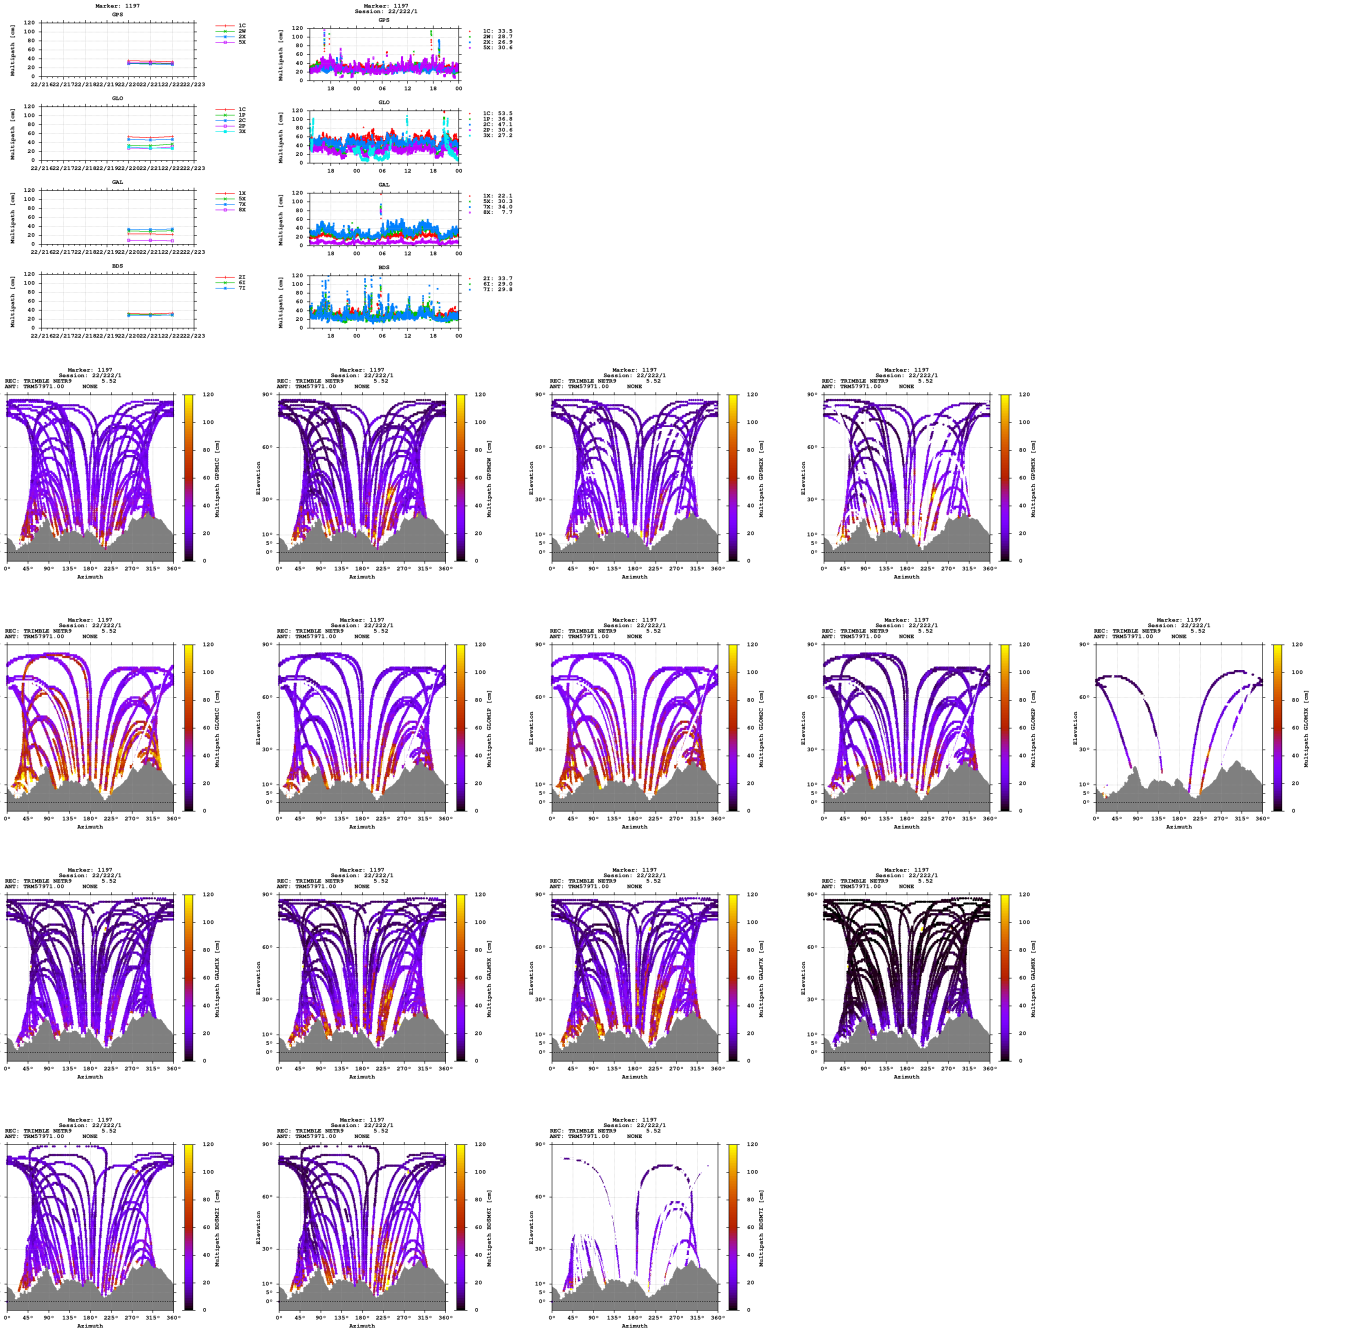


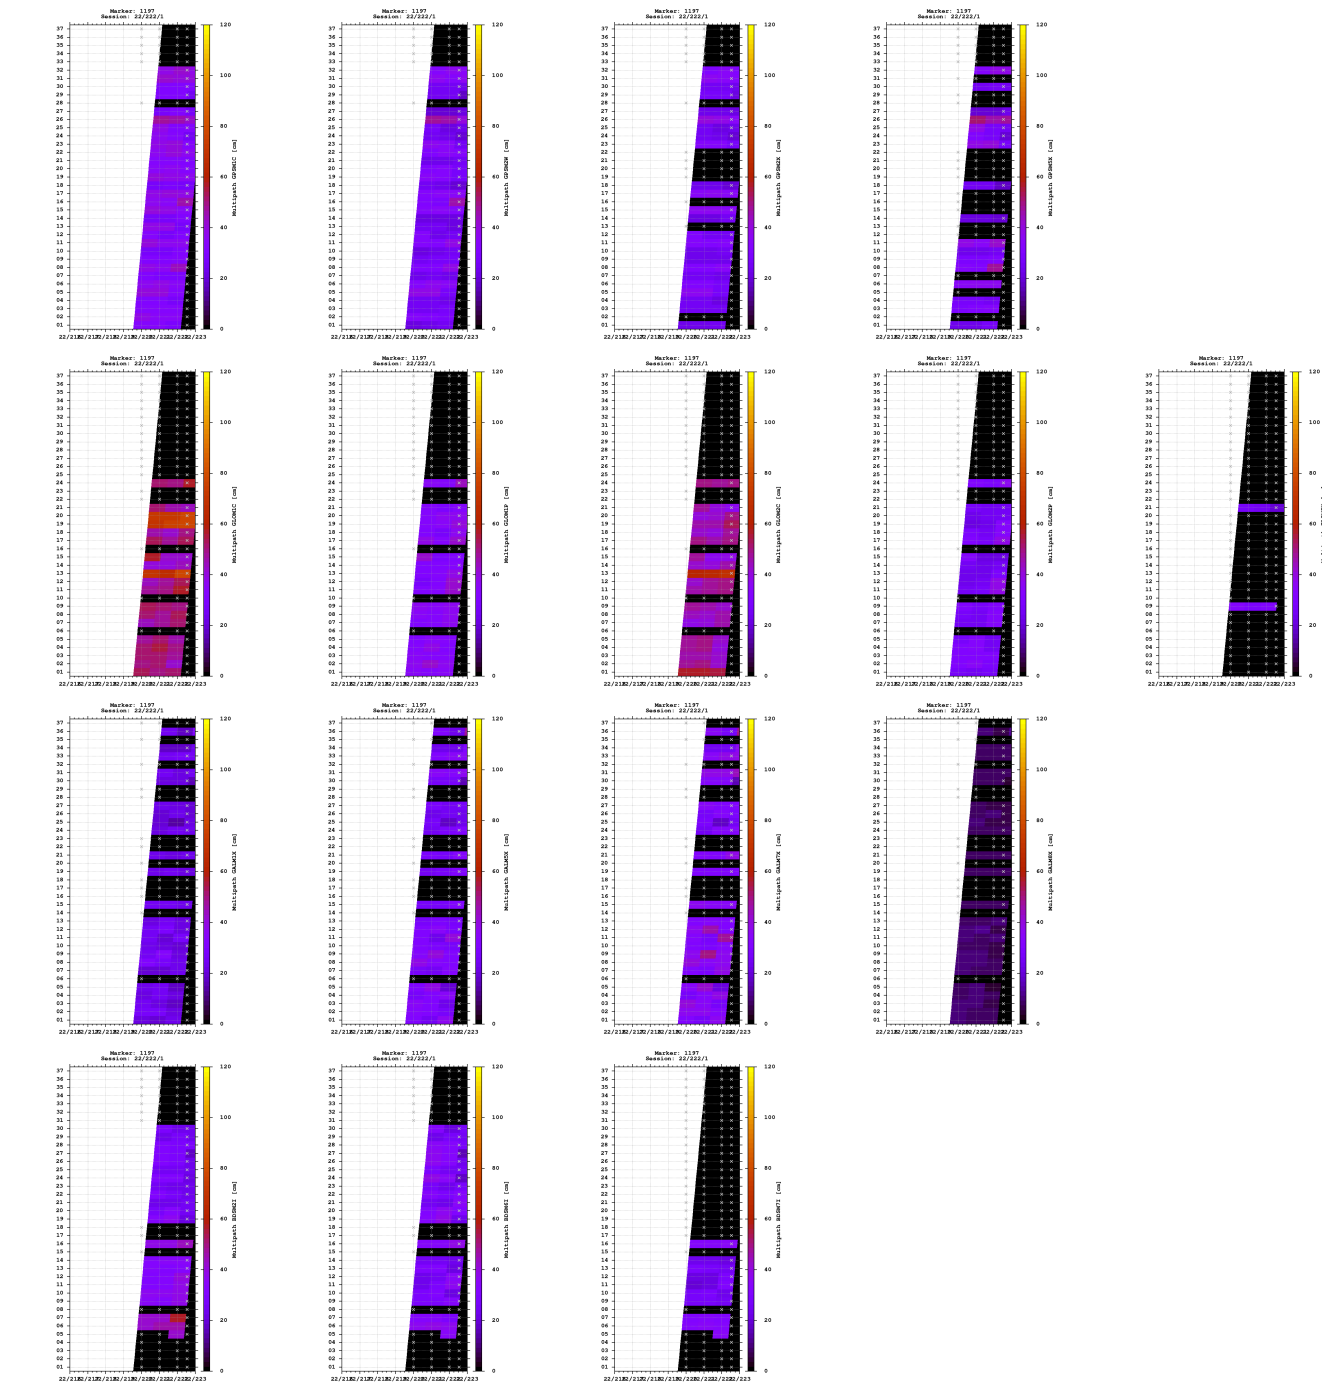


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

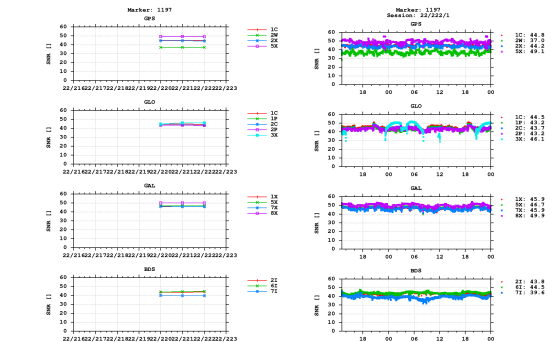


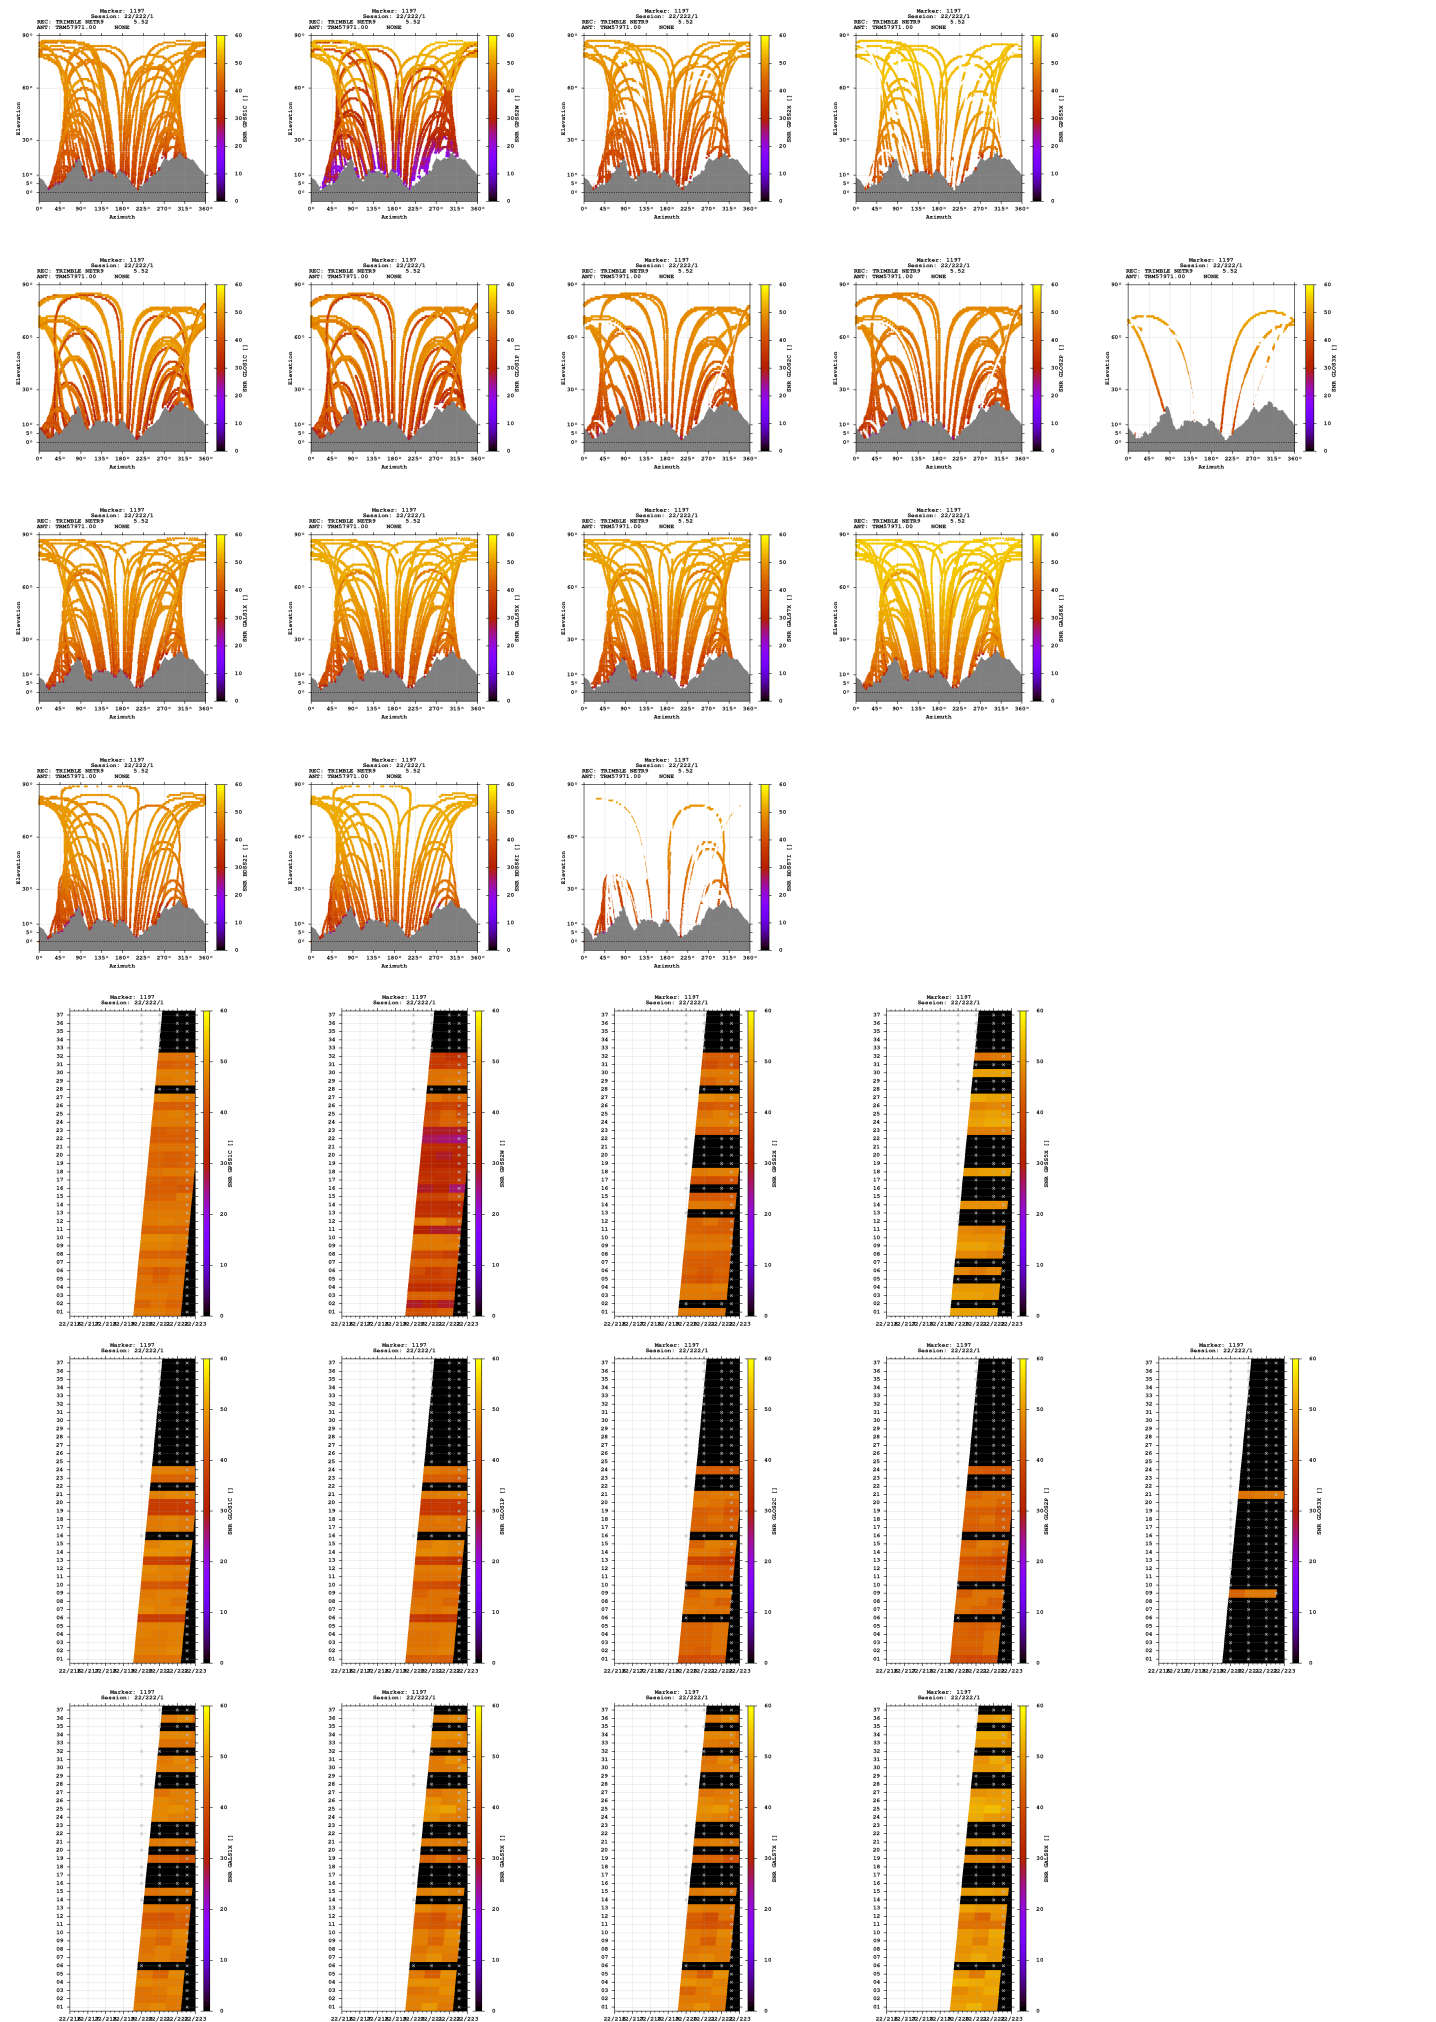

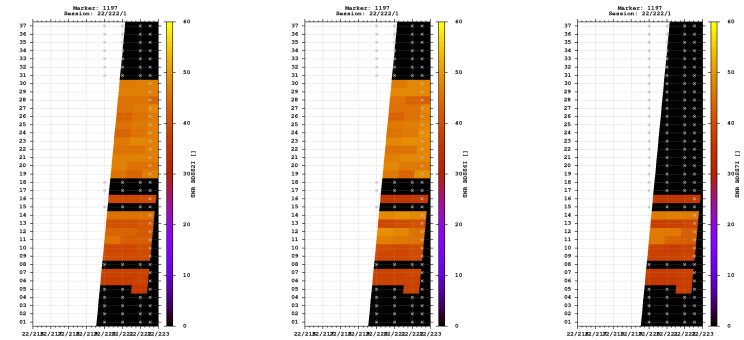



Estimates

2022-08-10 13:04:00	GPS	4309447.6582	747981.7959	4628824.8035	46.814145353	9.846611322	1612.1197
2022-08-10 13:04:00	GLO	4309447.8545	747981.3569	4628824.4282	46.814142267	9.846605216	1611.9271
2022-08-10 13:04:00	GAL	4309447.7089	747981.9146	4628824.6695	46.814144068	9.846612740	1612.0701
2022-08-10 13:04:00	BDS	4309449.1432	747984.2735	4628828.5119	46.814155805	9.846639972	1616.1149

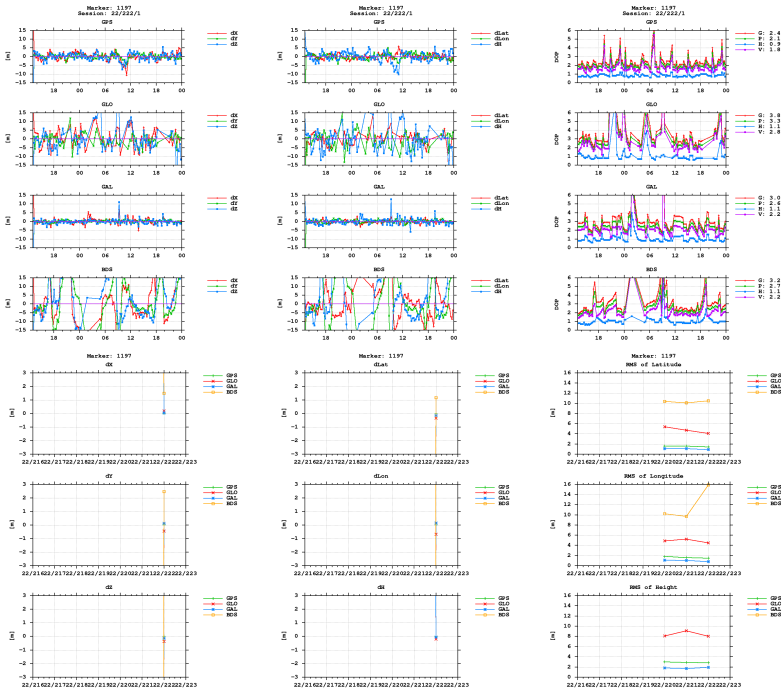

BNC

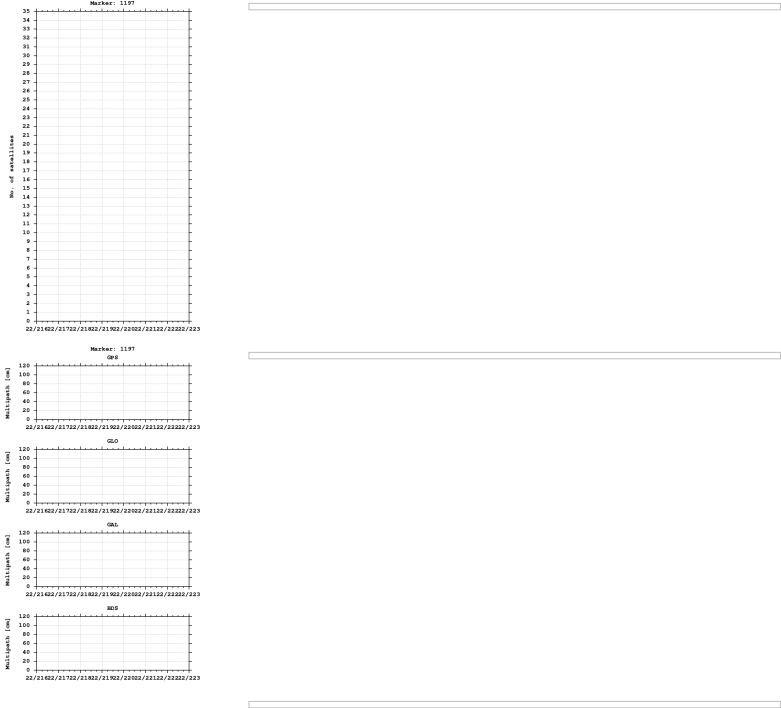

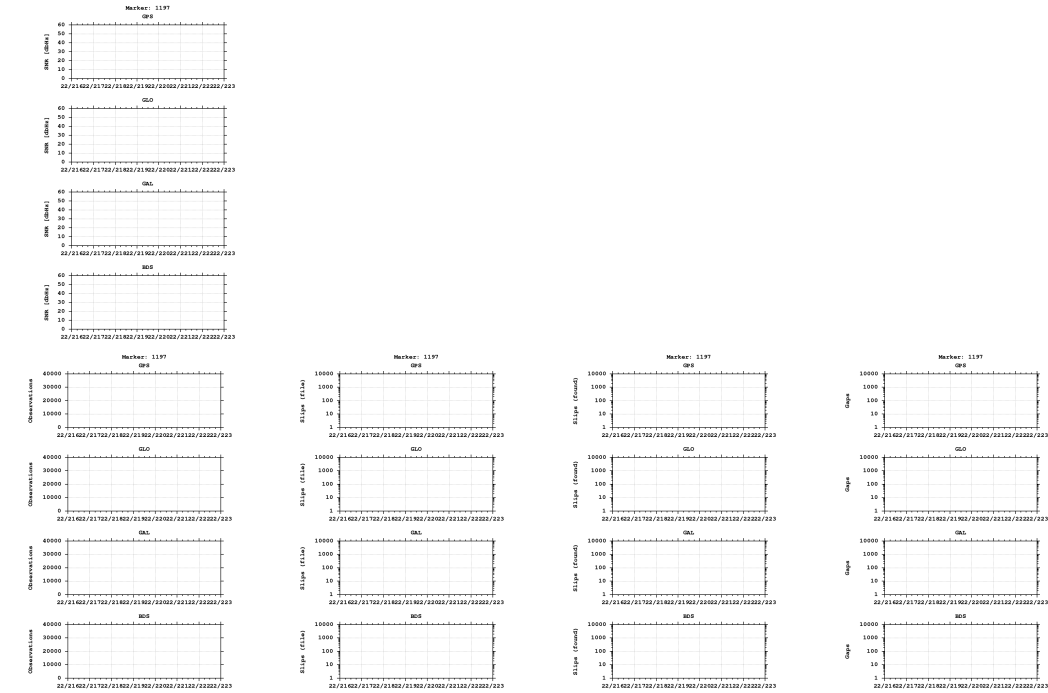

Equipment

2022-08-08 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)