


GNSS observation file monitoring for 0516


Last RINEX file: 05162241.220
RINEX version: 3.02
Marker: 1199
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

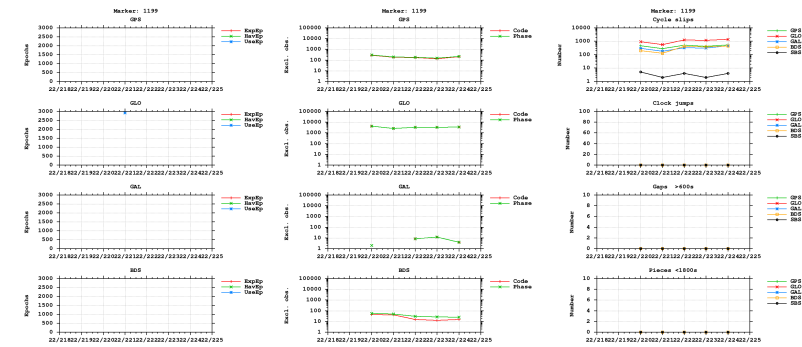



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

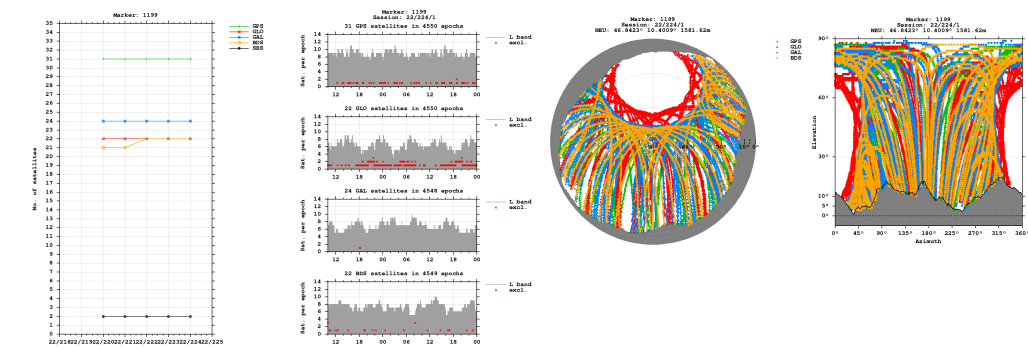


Bands


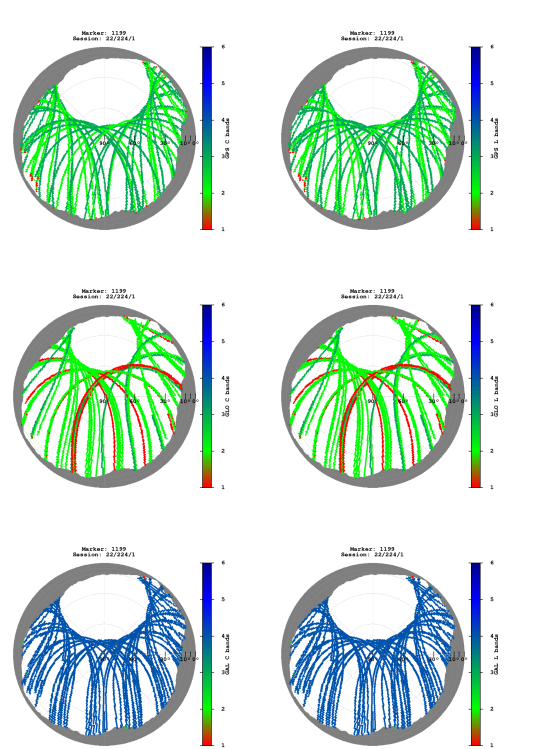


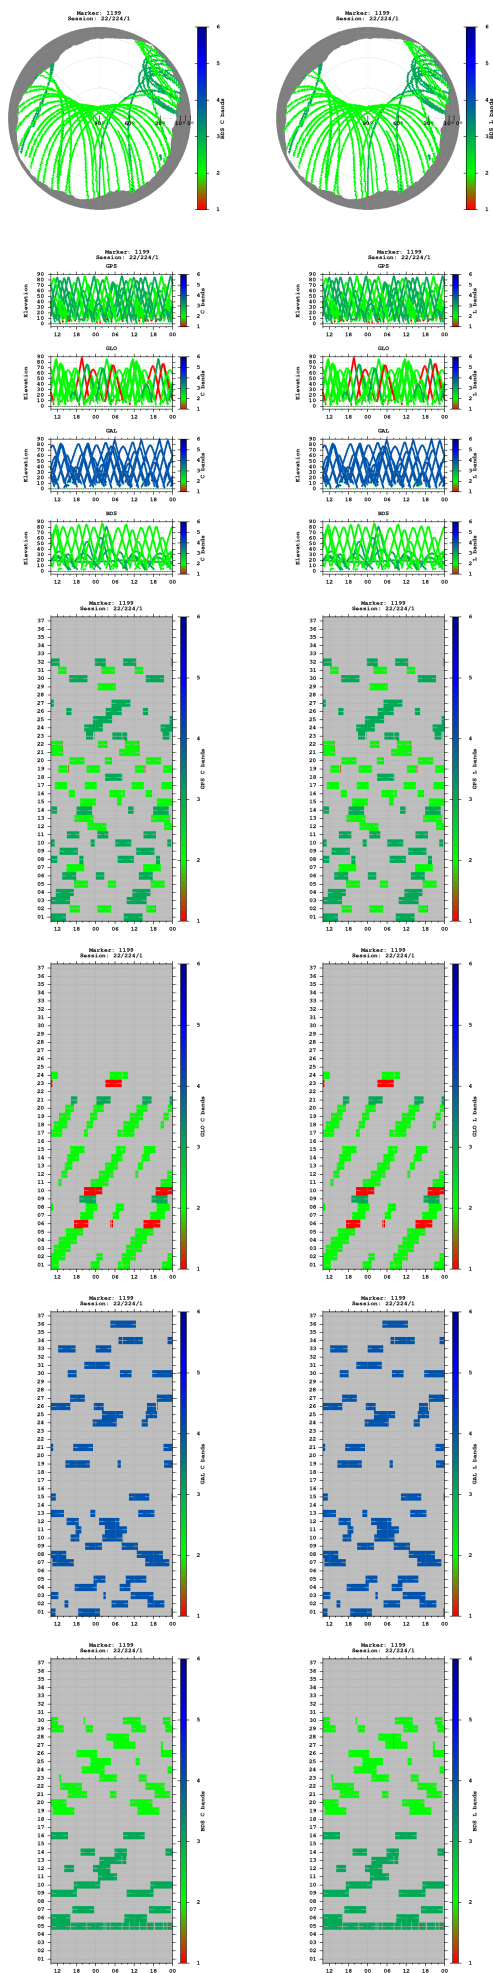


Observations

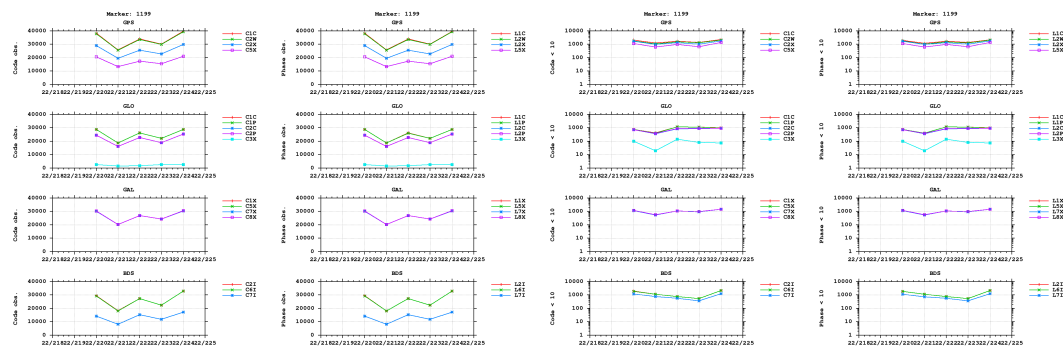


Multipath

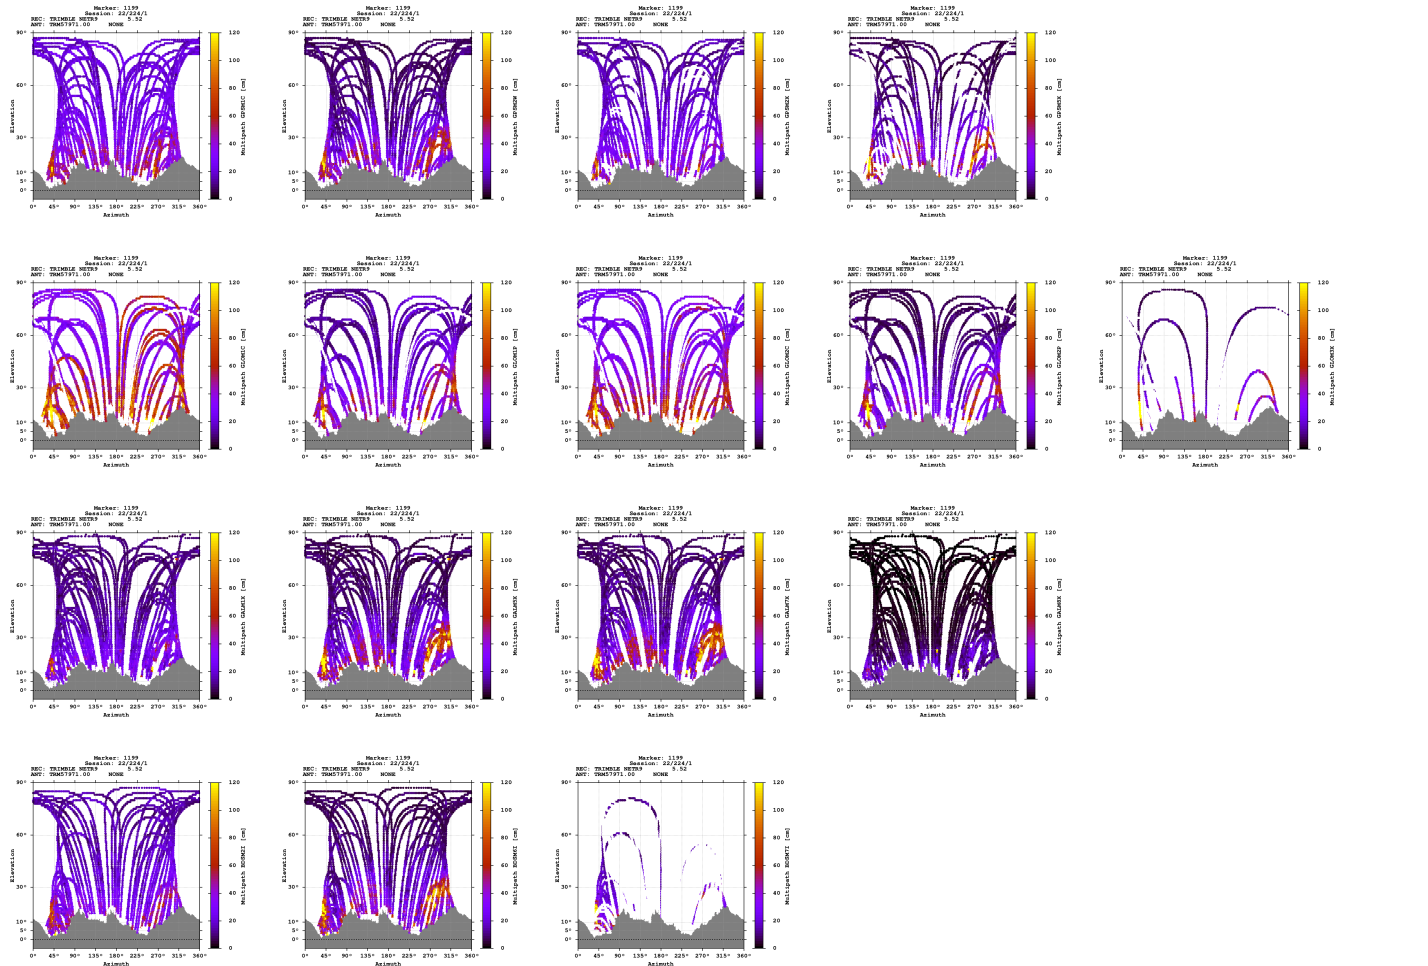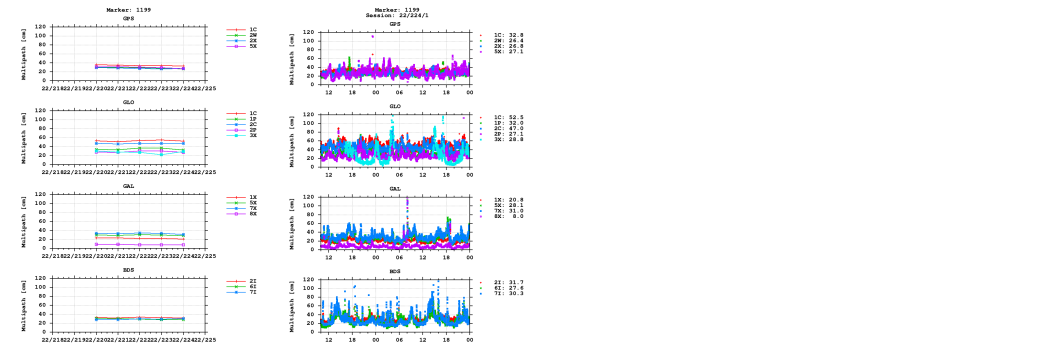


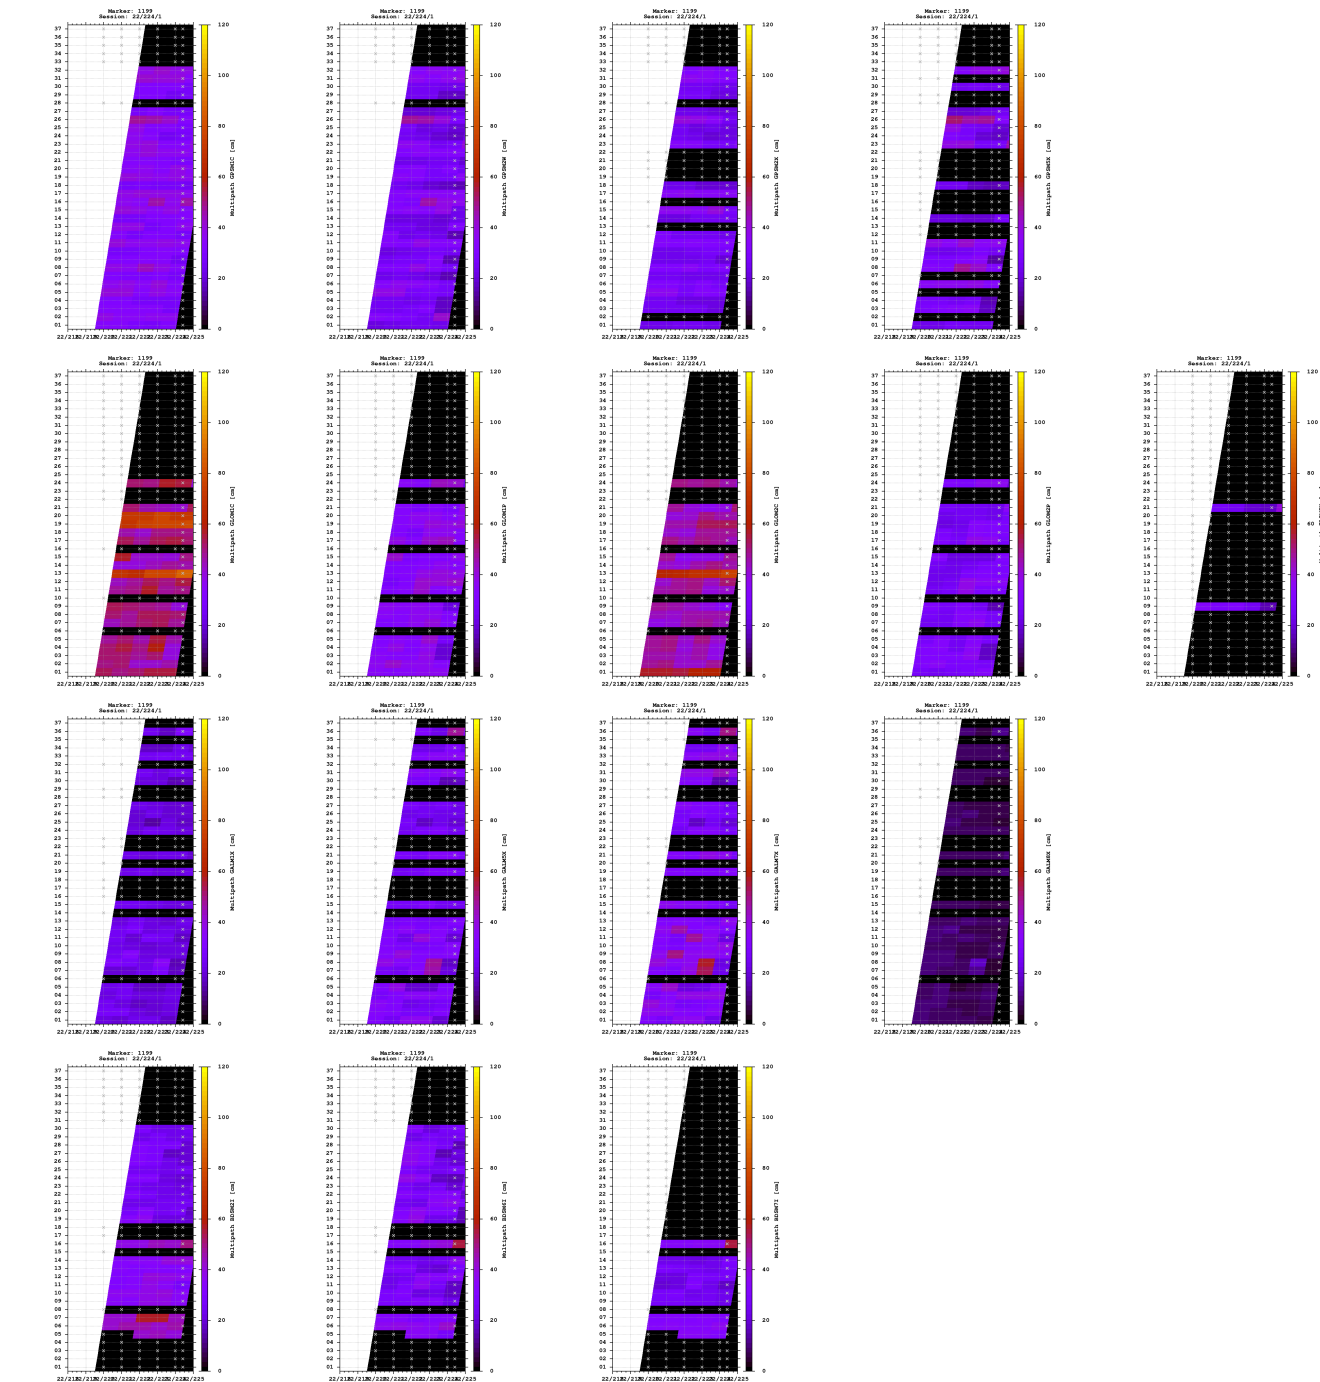


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

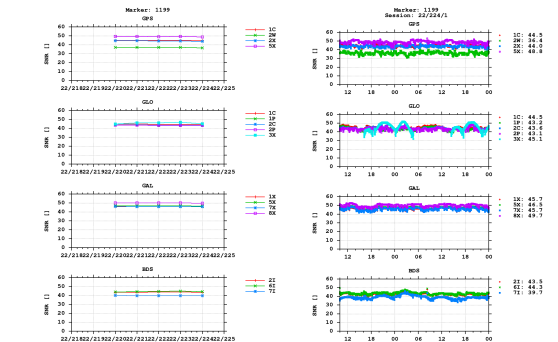


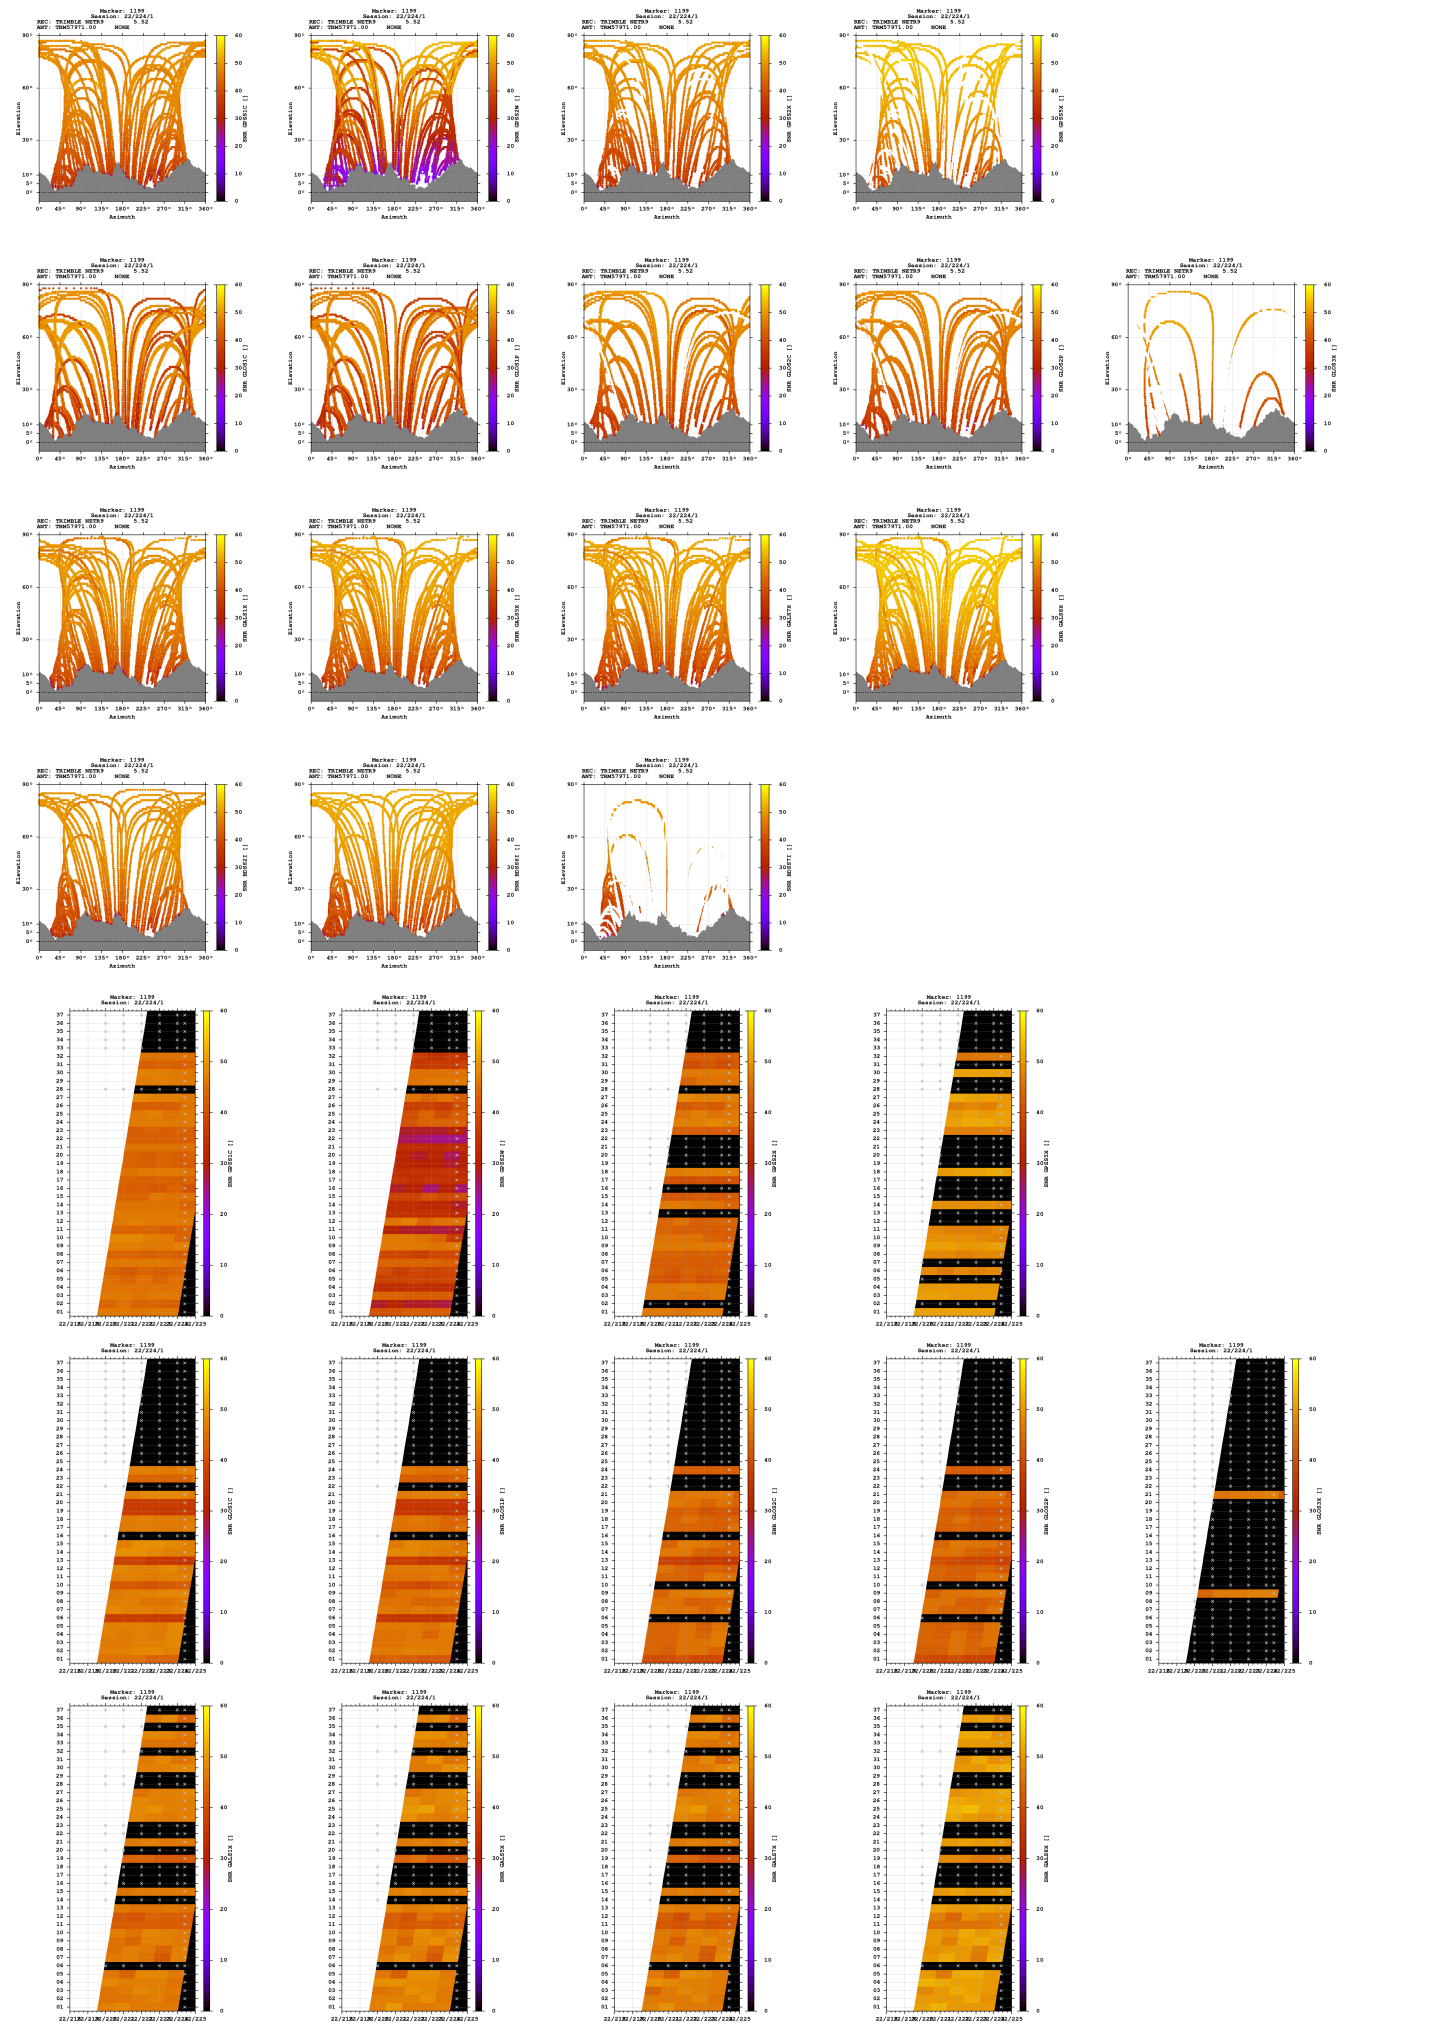

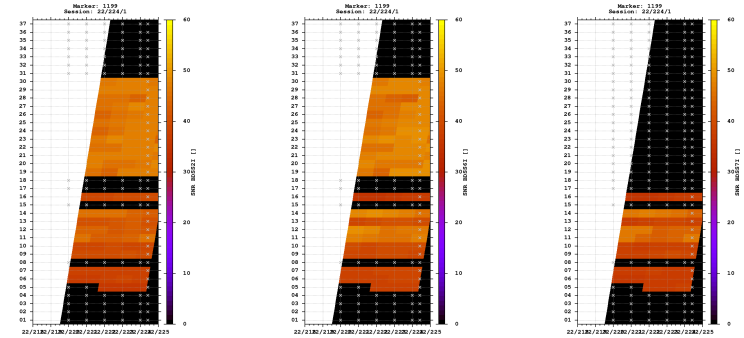



Estimates

2022-08-12 10:00:30	GPS	4299741.5162	789222.7281	4630946.2420	46.842322603	10.400934440	1581.6186
2022-08-12 10:00:30	GLO	4299740.2669	789222.2311	4630944.7144	46.842321856	10.400930989	1579.6024
2022-08-12 10:00:30	GAL	4299741.6773	789222.6418	4630946.1824	46.842321299	10.400932946	1581.6728
2022-08-12 10:00:30	BDS	4299742.9836	789222.2917	4630947.3458	46.842320441	10.400925341	1583.3571

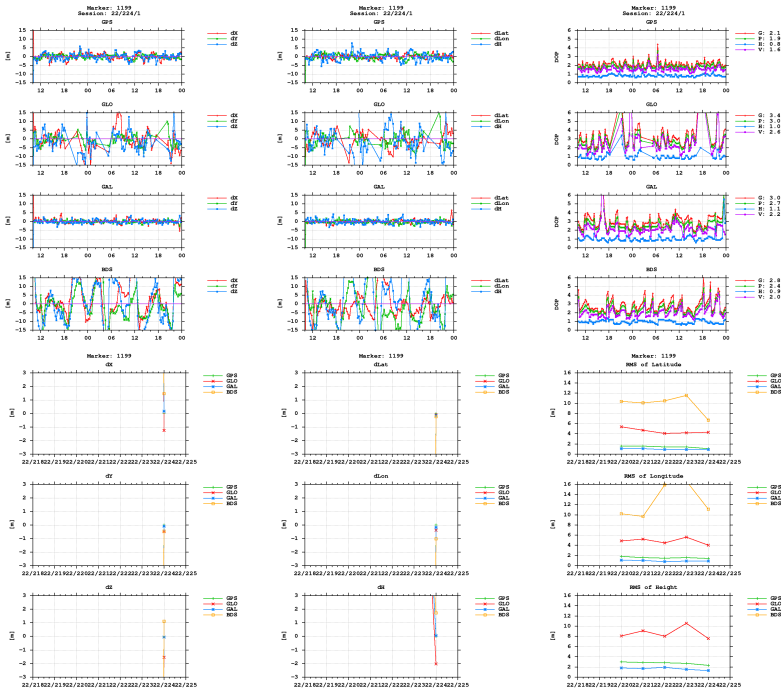

BNC

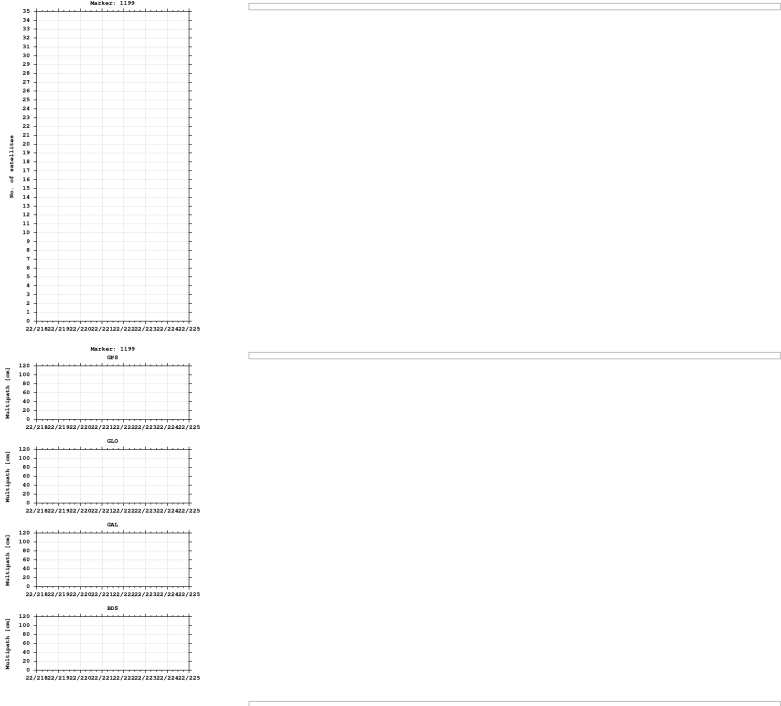

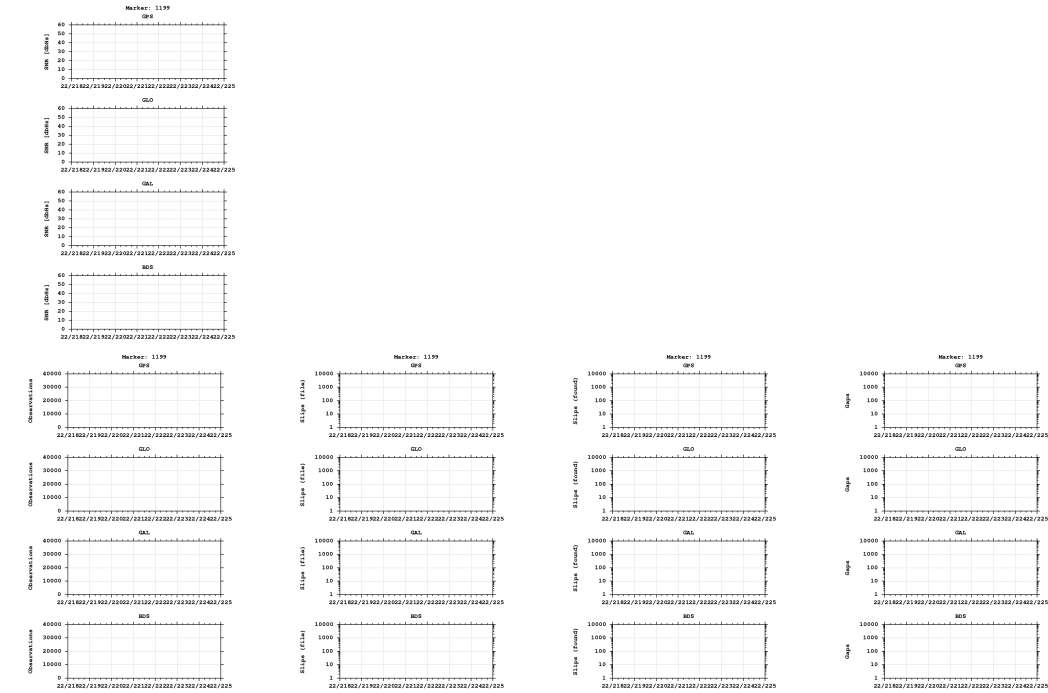

Equipment

2022-08-08 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)