


GNSS observation file monitoring for 0516


Last RINEX file: 05162251.220
RINEX version: 3.02
Marker: 1199
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

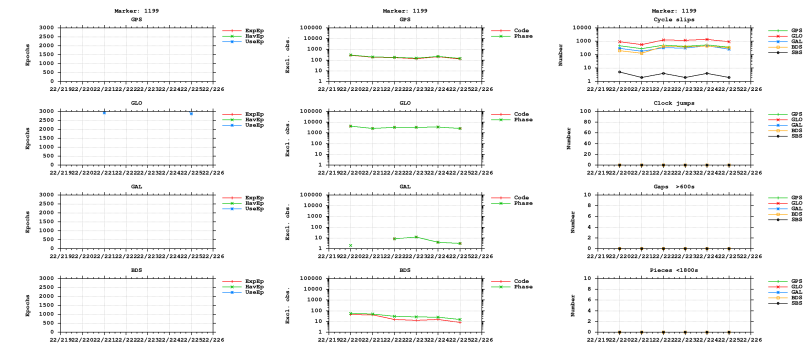



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

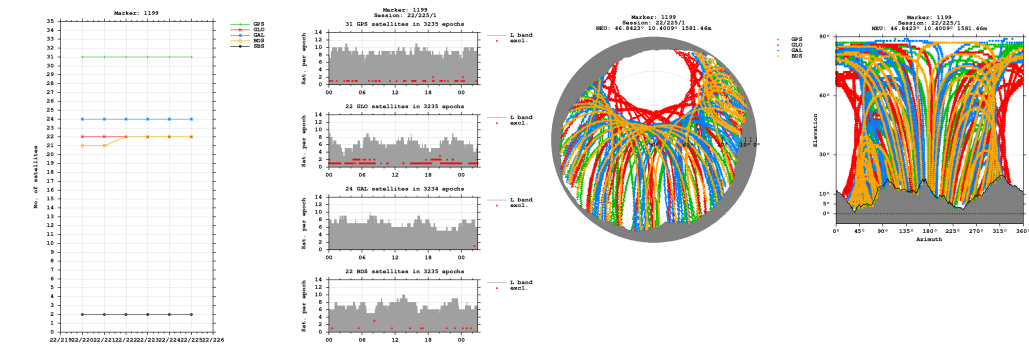


Bands

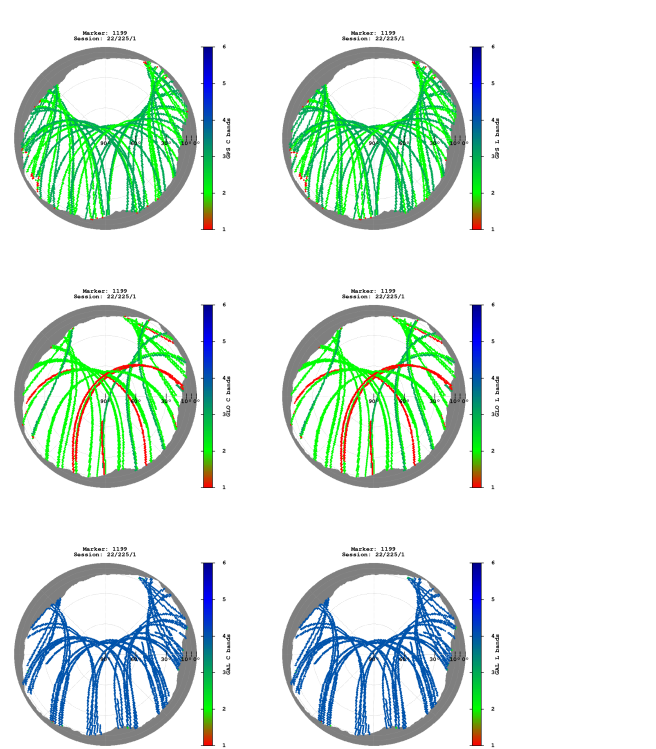


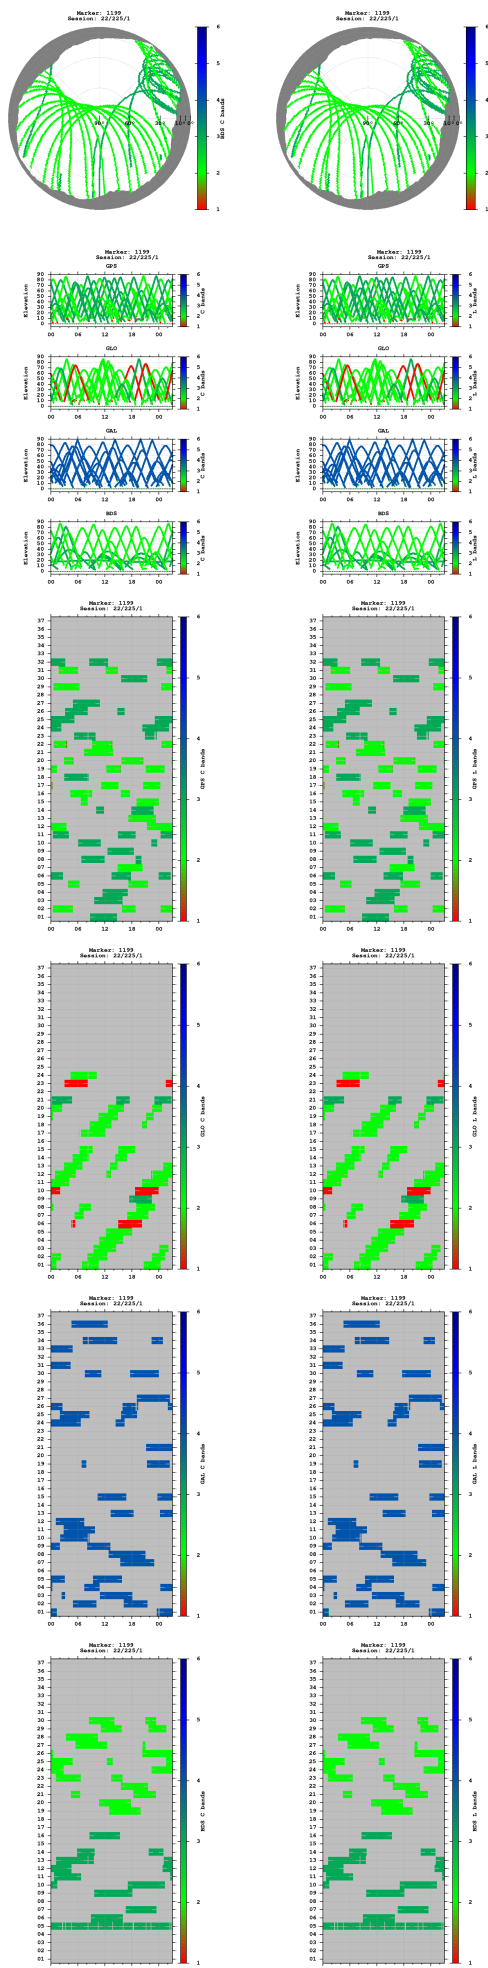


Observations

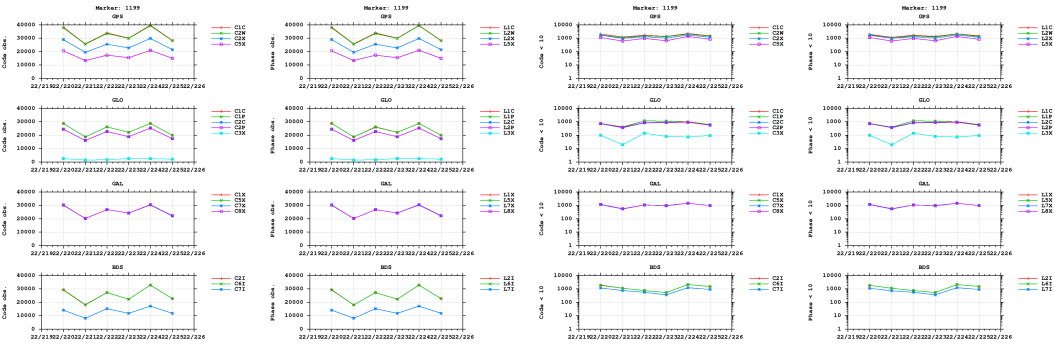


Multipath

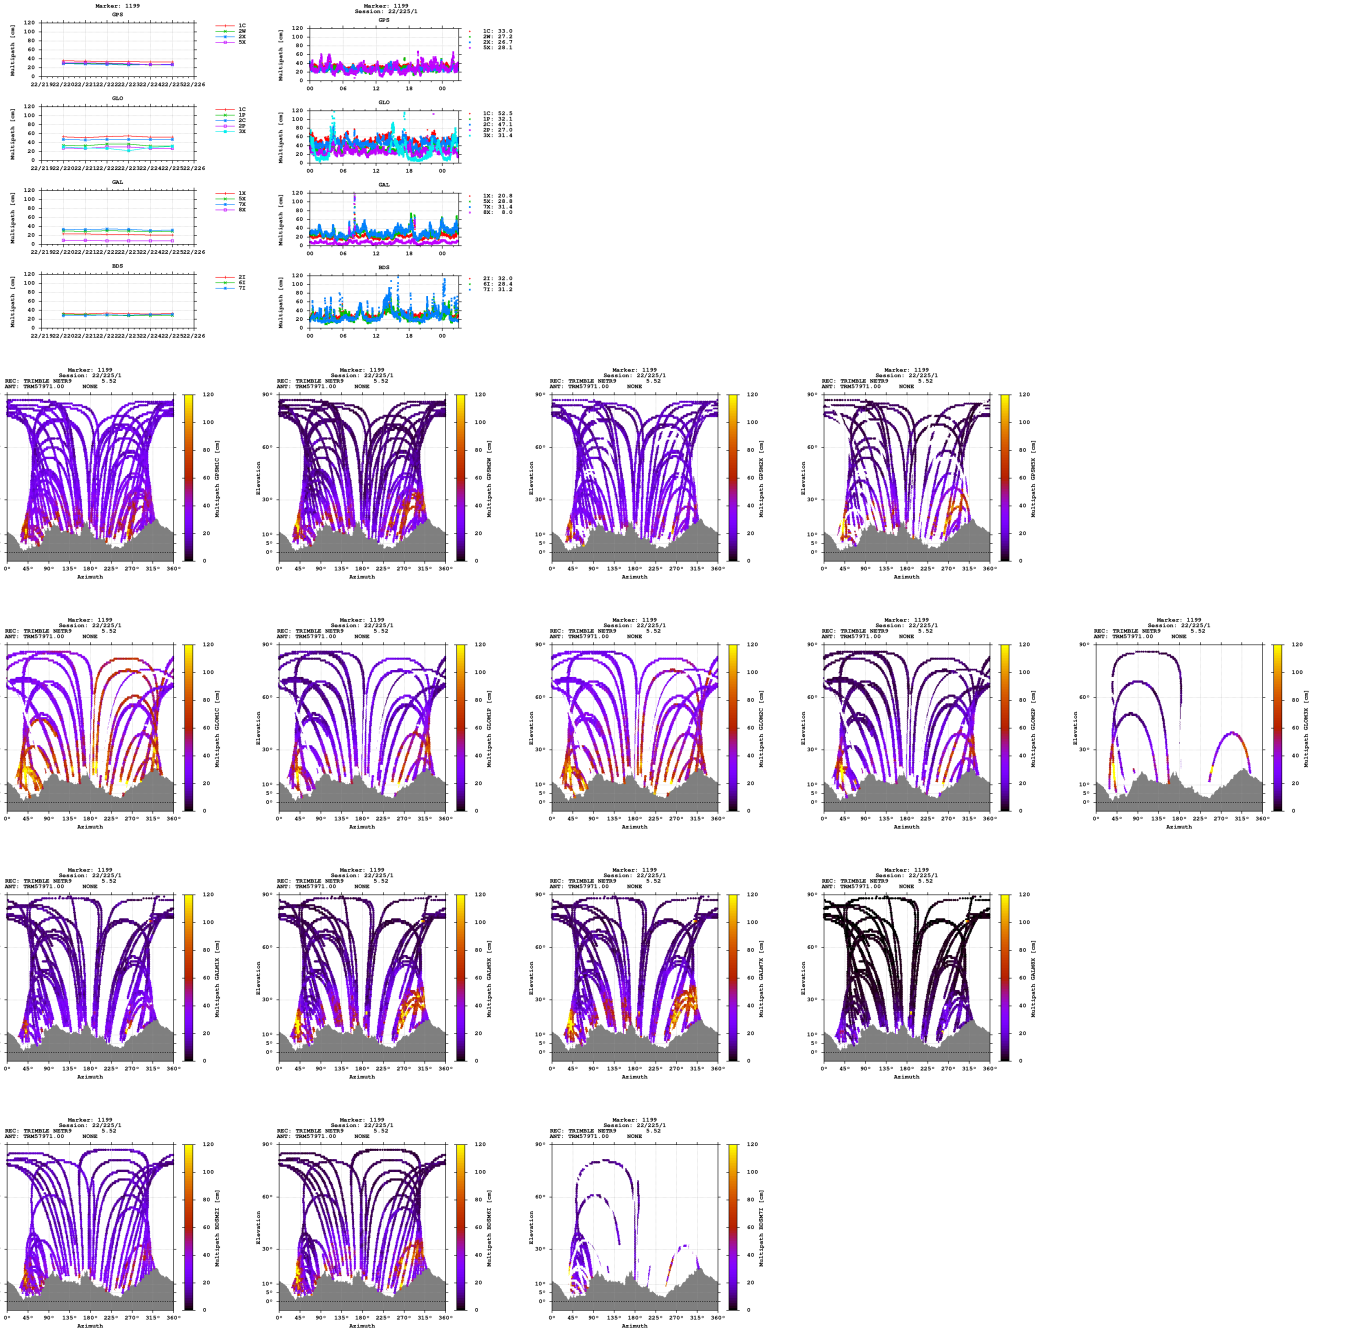


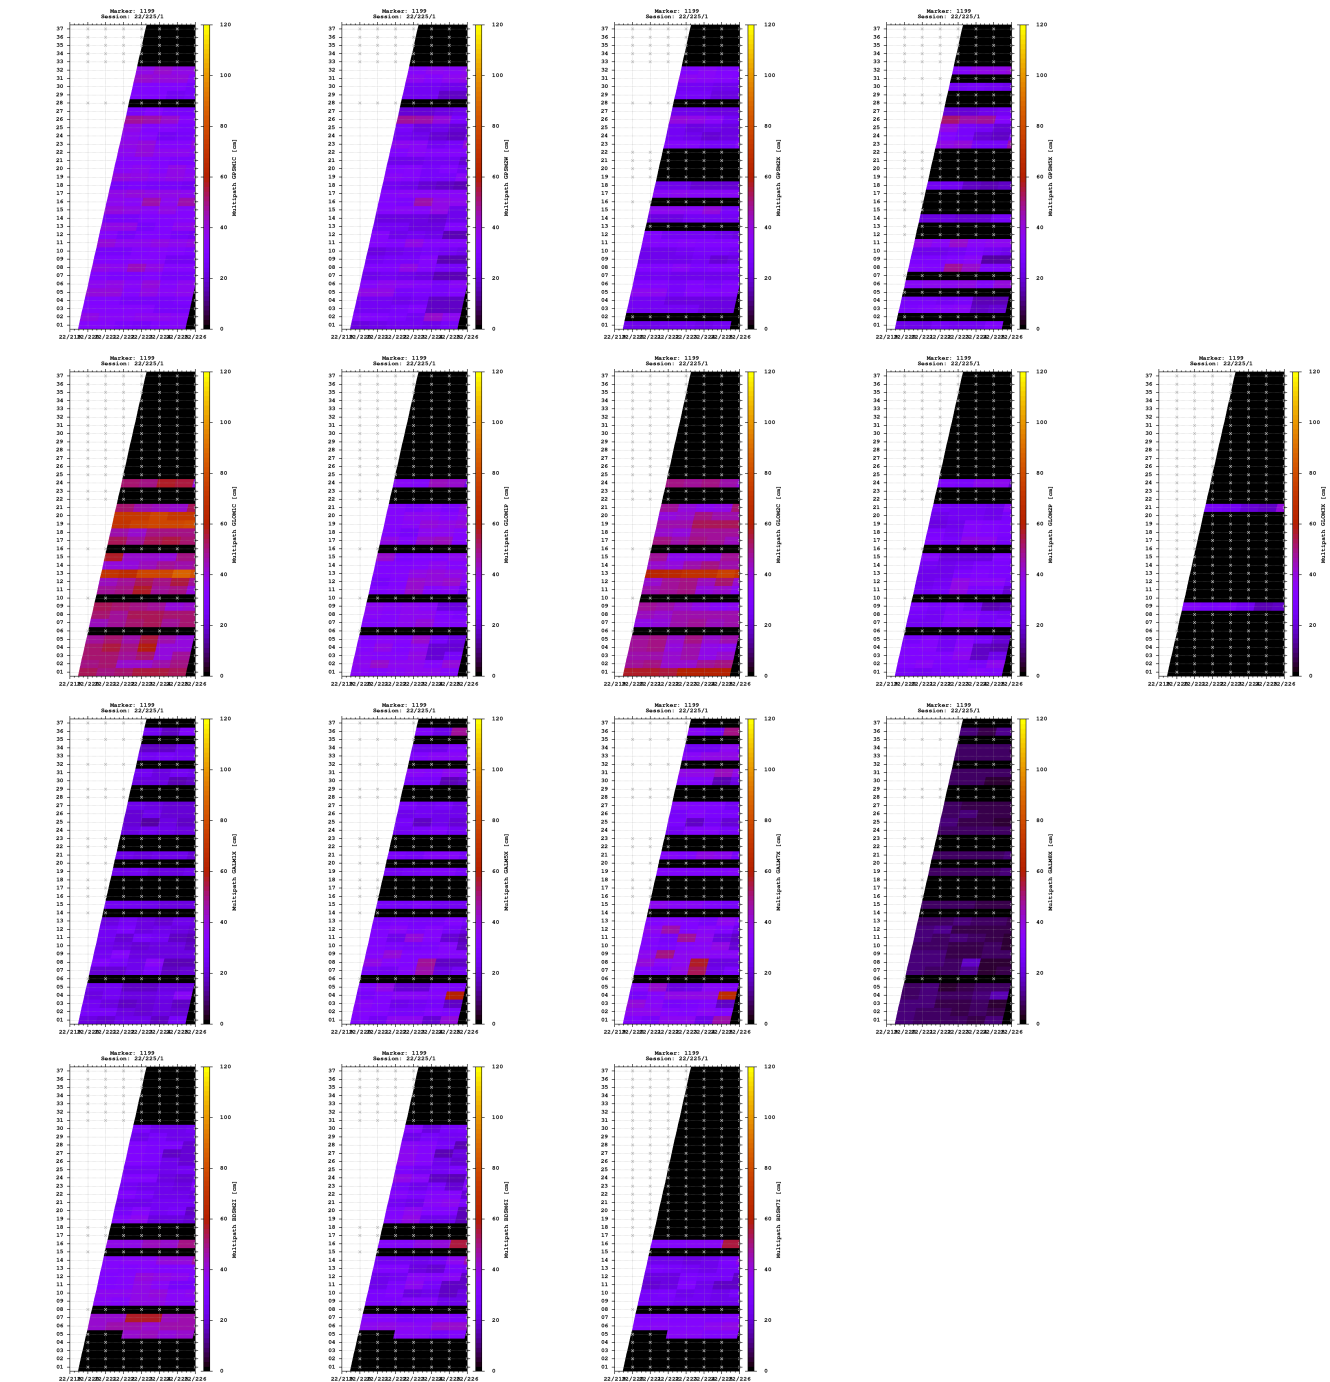


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

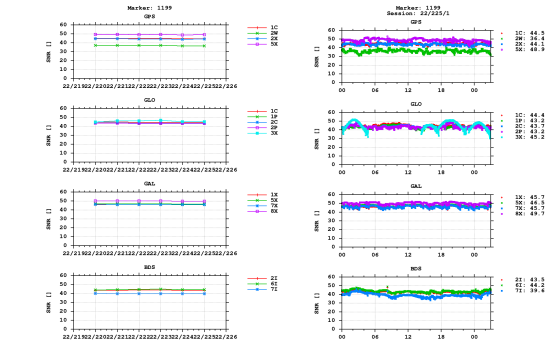


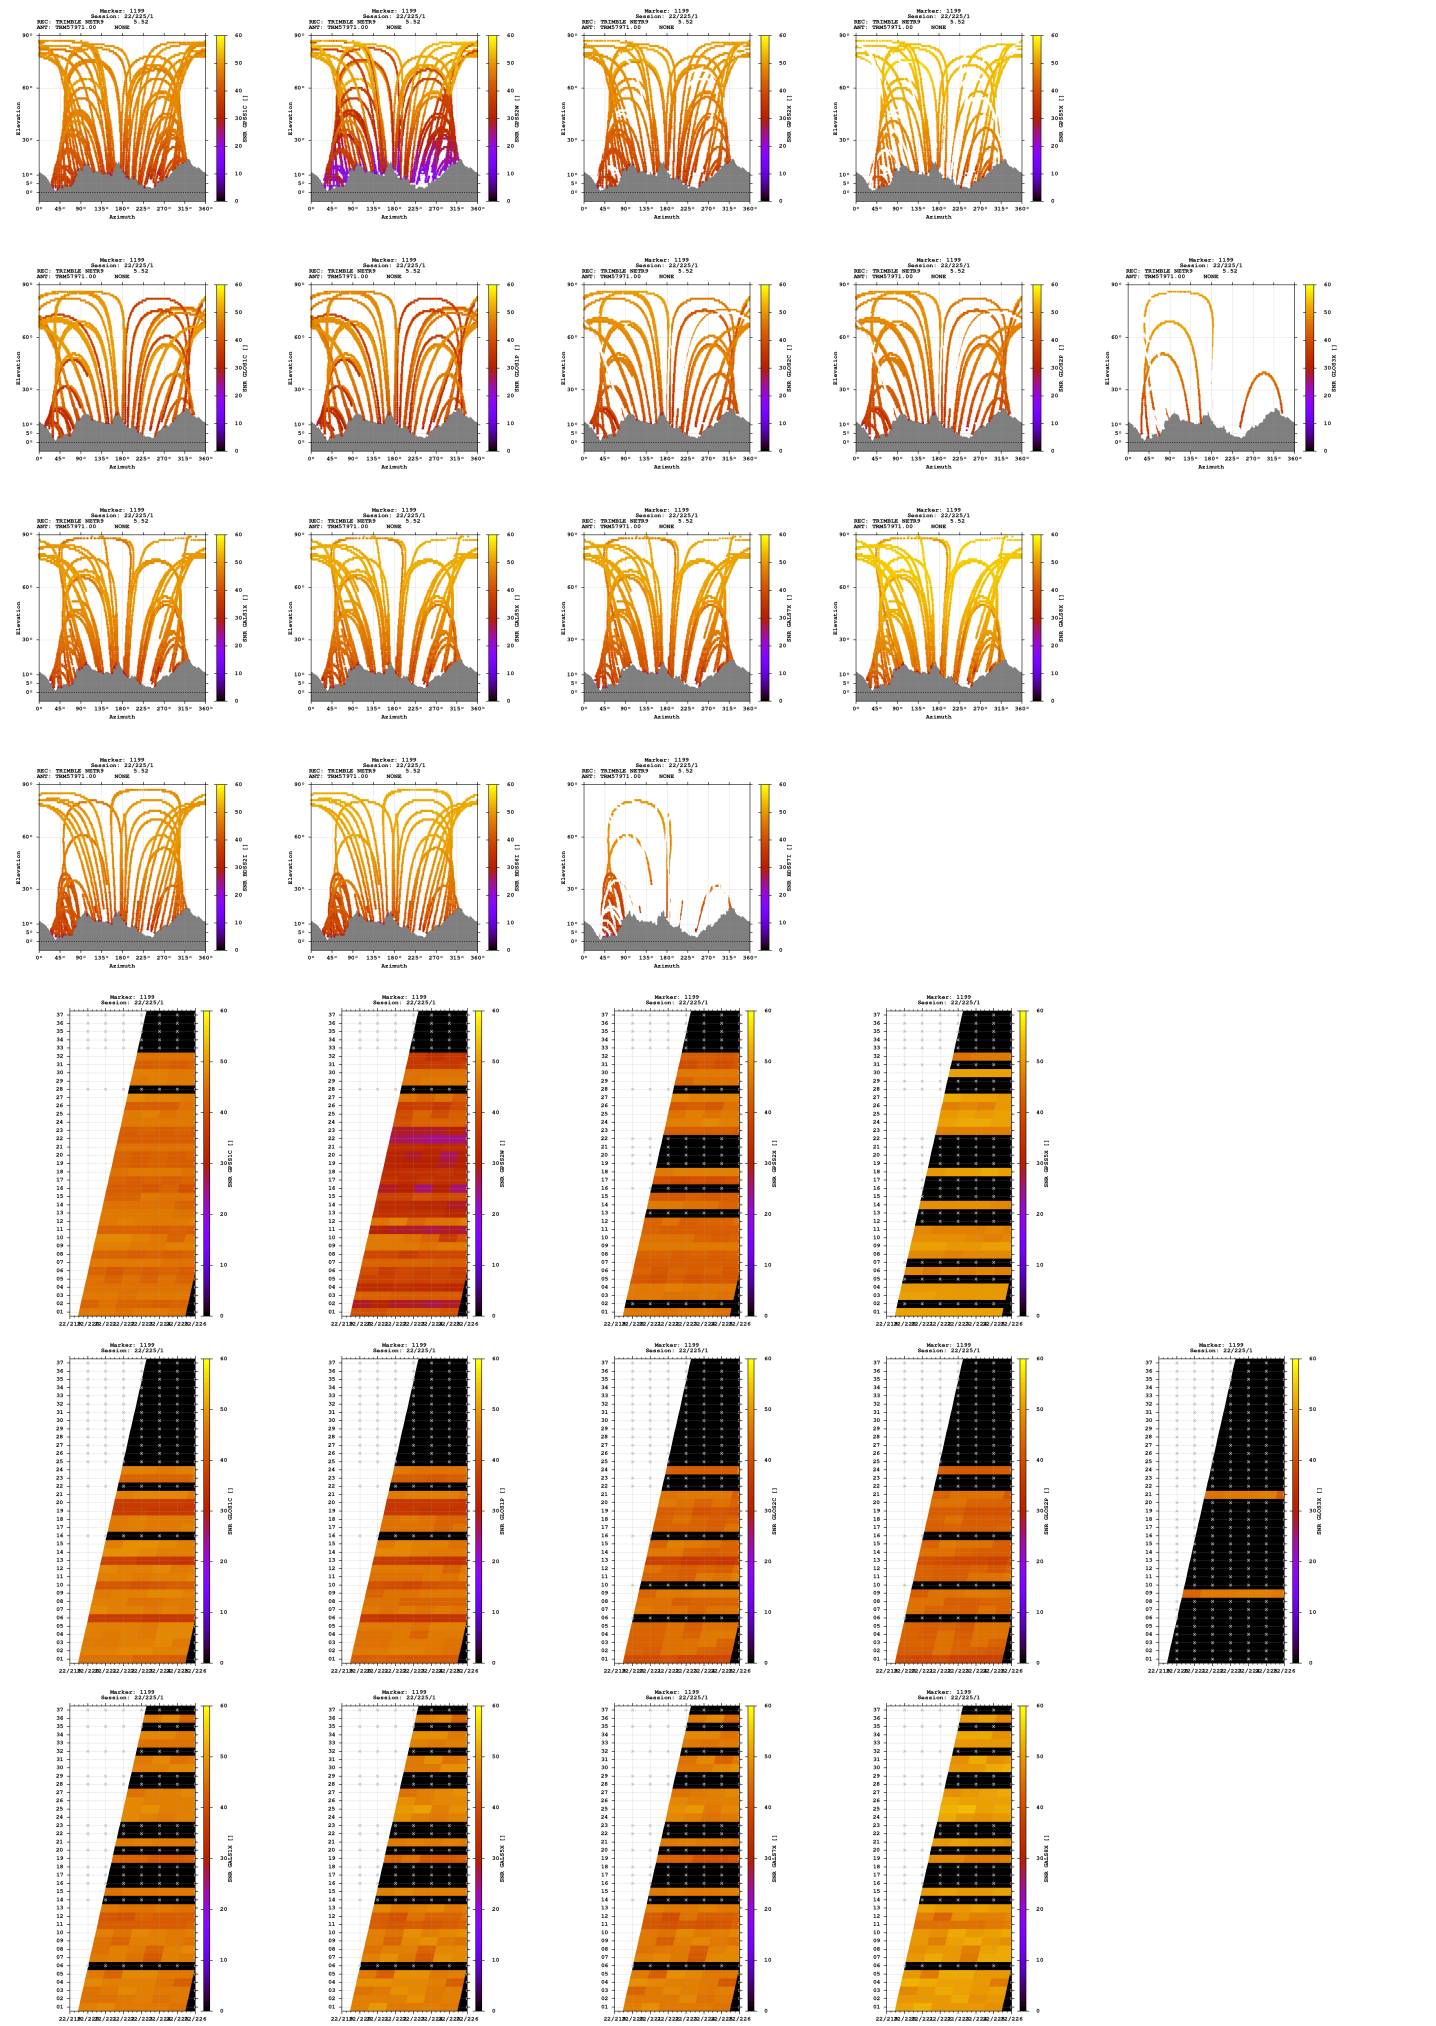

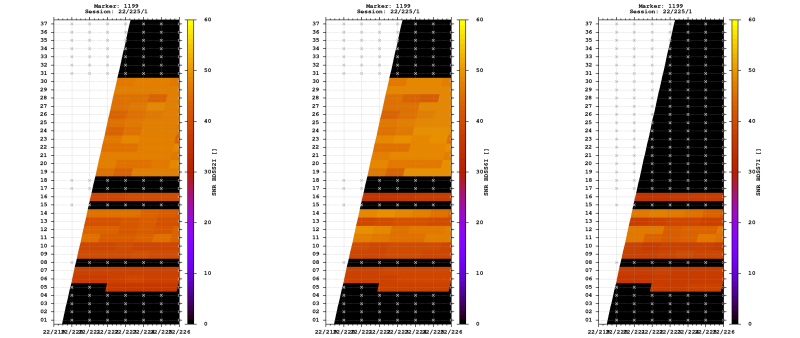


Estimates

2022-08-12 10:00:30	GPS	4299741.5398	789222.7294	4630945.9973	46.842320944	10.400934400	1581.4561
2022-08-12 10:00:30	GLO	4299741.5154	789222.2070	4630945.5483	46.842318958	10.400927723	1581.0477
2022-08-12 10:00:30	GAL	4299741.5057	789222.7215	4630946.1302	46.842321990	10.400934379	1581.5292
2022-08-12 10:00:30	BDS	4299741.9138	789222.5678	4630948.1792	46.842332144	10.400931432	1583.2794

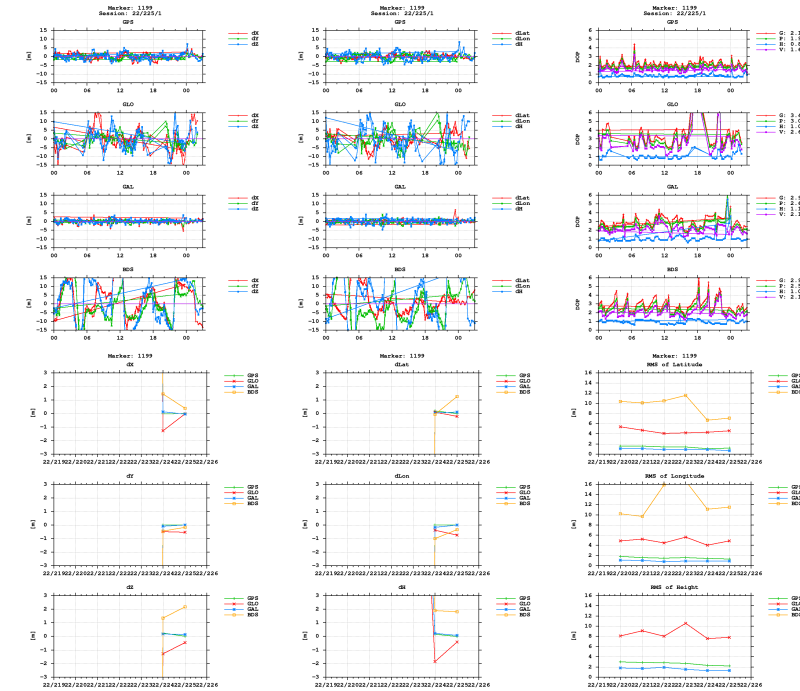

BNC



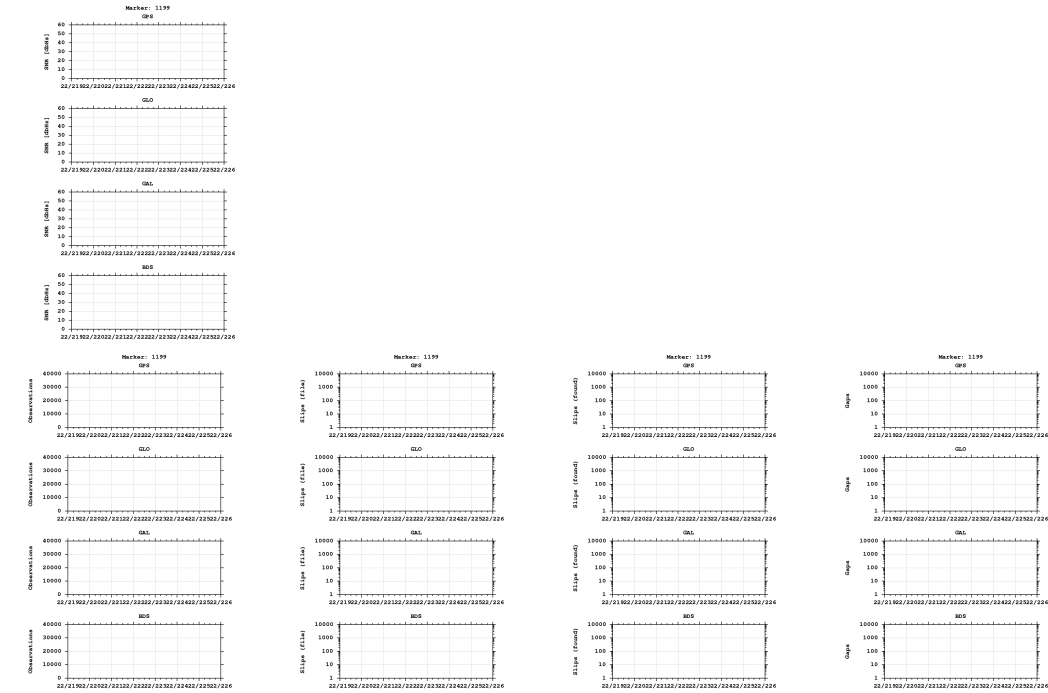

Equipment

2022-08-08 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)