


```

Last RINEX file: 05162261.22O
RINEX version: 3.02
Marker: 1239
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE


```

- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Figure 1 consists of several panels. On the left, there are four line plots showing station characteristics (GPS, LAD, DMS, DMS) over time. The top plot is for GPS, showing a constant value of approximately 33. The second plot is for LAD, showing a constant value of approximately 25. The third plot is for DMS, showing a constant value of approximately 25. The bottom plot is for DMS, showing a constant value of approximately 25. In the middle, there are four histograms showing the distribution of station characteristics (GPS, LAD, DMS, DMS) over time. The top histogram is for GPS, showing a distribution centered around 33. The second histogram is for LAD, showing a distribution centered around 25. The third histogram is for DMS, showing a distribution centered around 25. The bottom histogram is for DMS, showing a distribution centered around 25. On the right, there is a 3D visualization of the station characteristics and a 2D map of the station location. The 3D plot shows the station characteristics (GPS, LAD, DMS, DMS) over time. The 2D map shows the station location (Latitude vs. Longitude) and the station characteristics (GPS, LAD, DMS, DMS) over time.

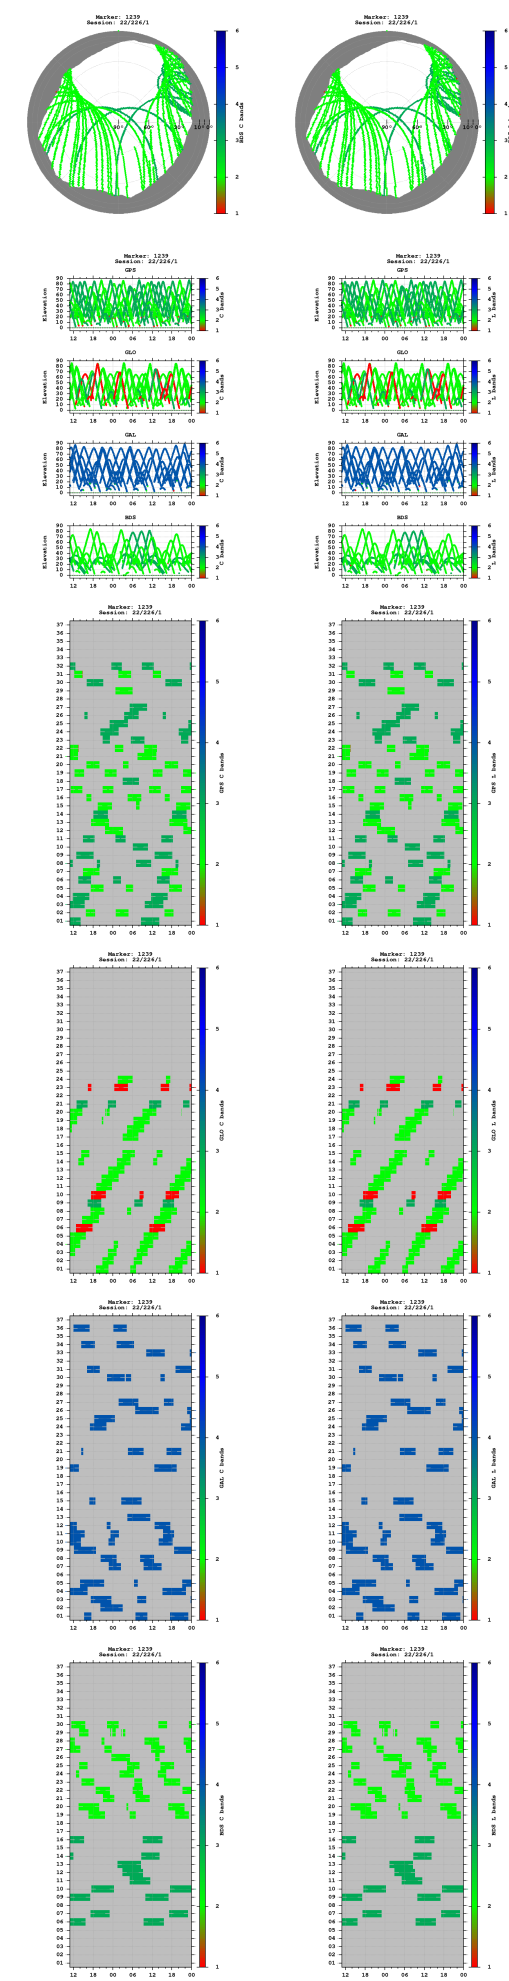


Observations

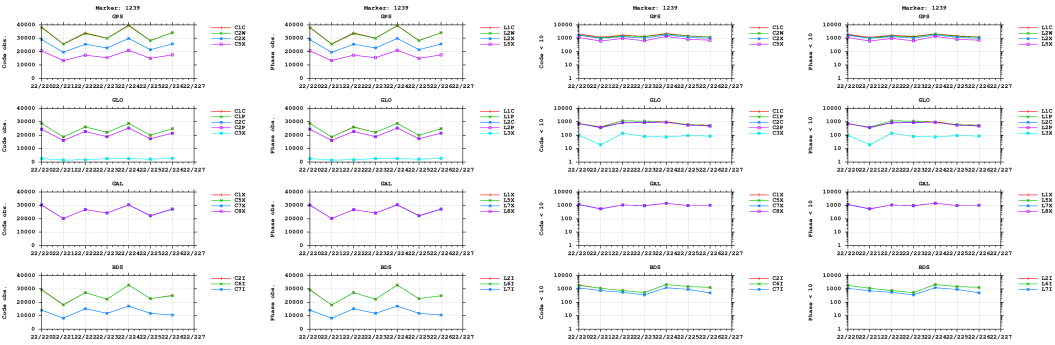



Multipath

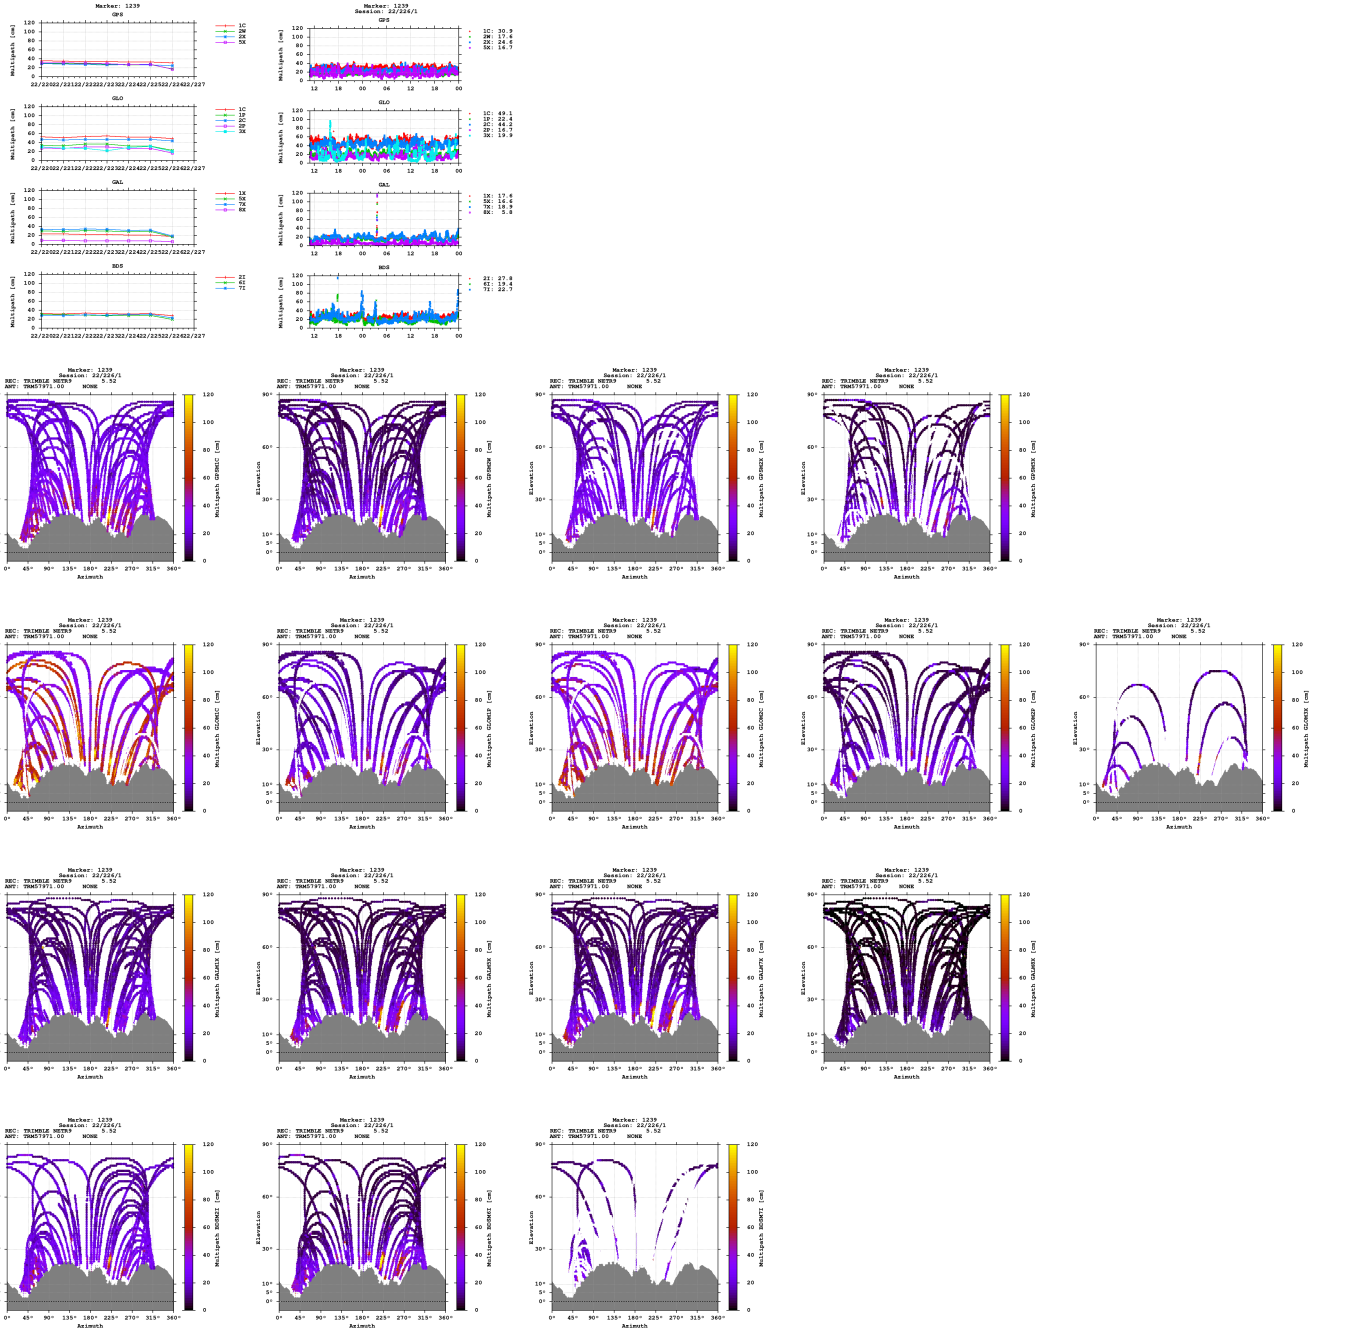


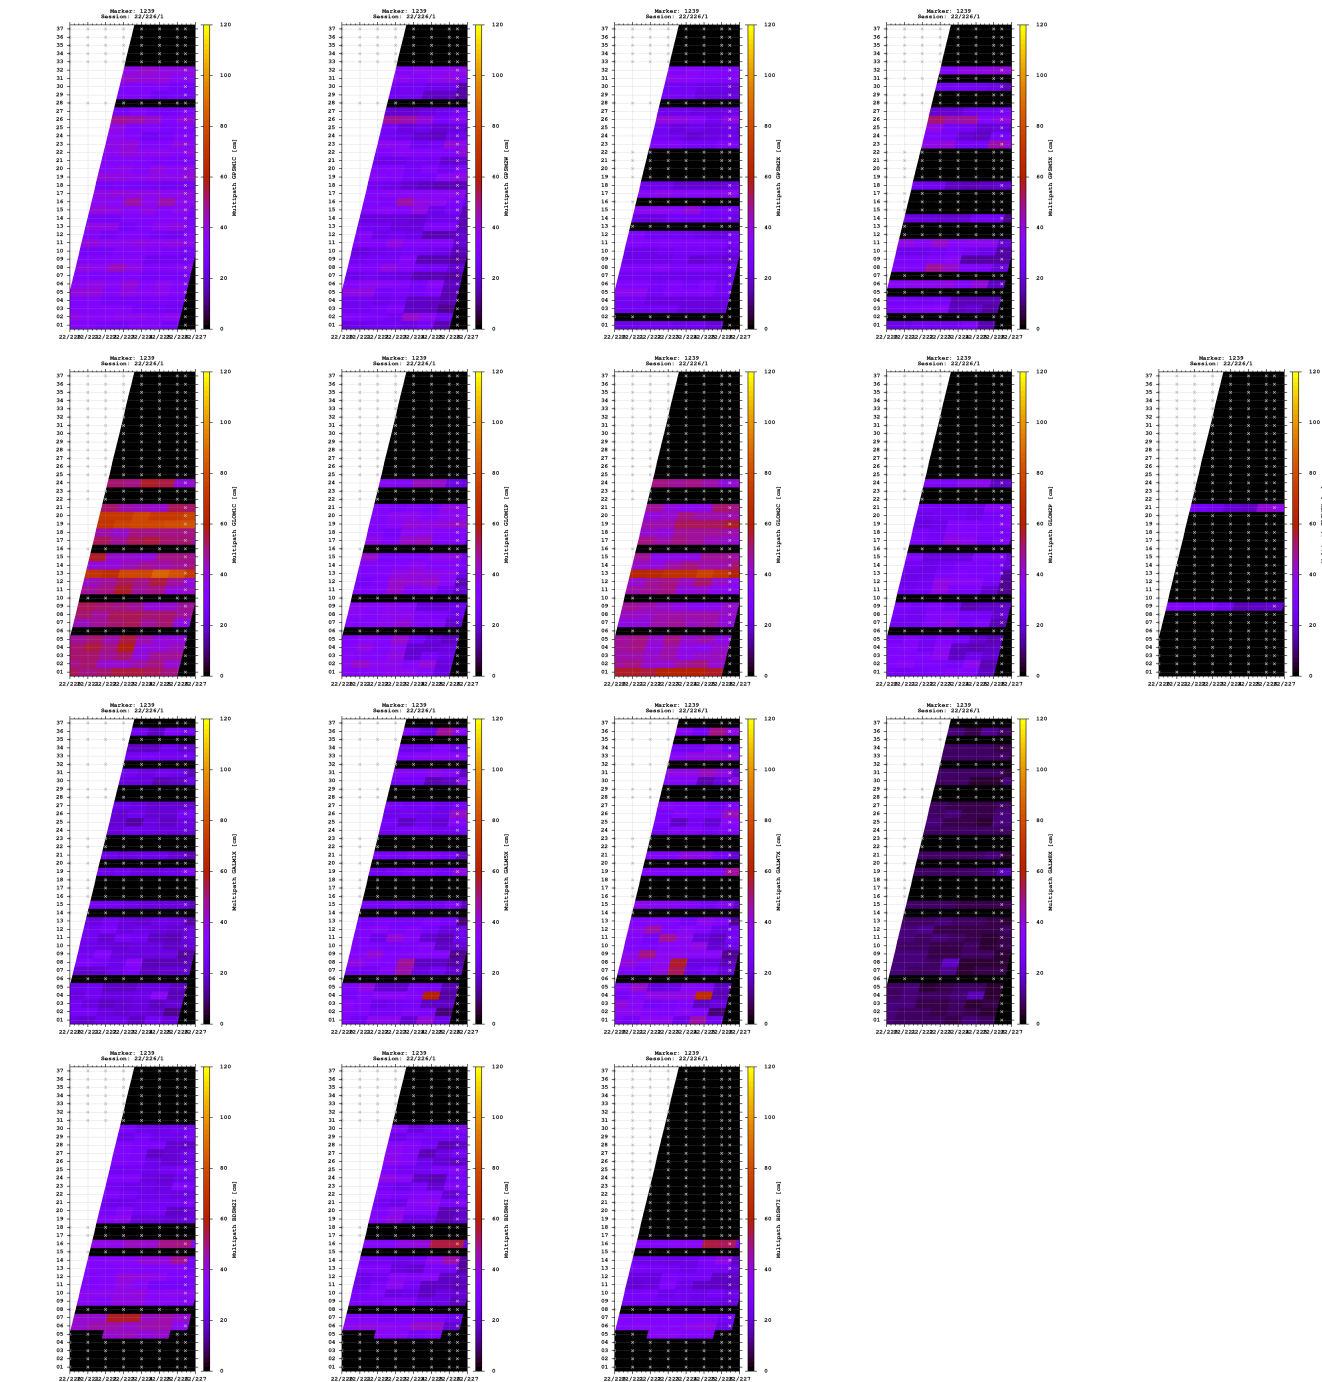


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

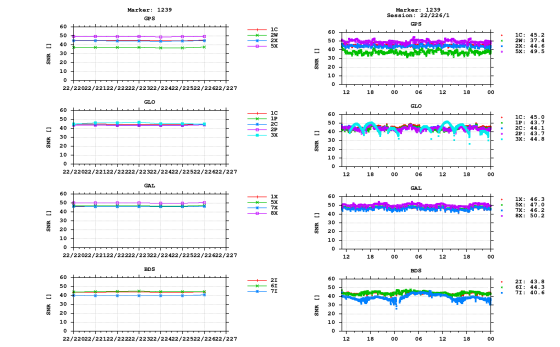


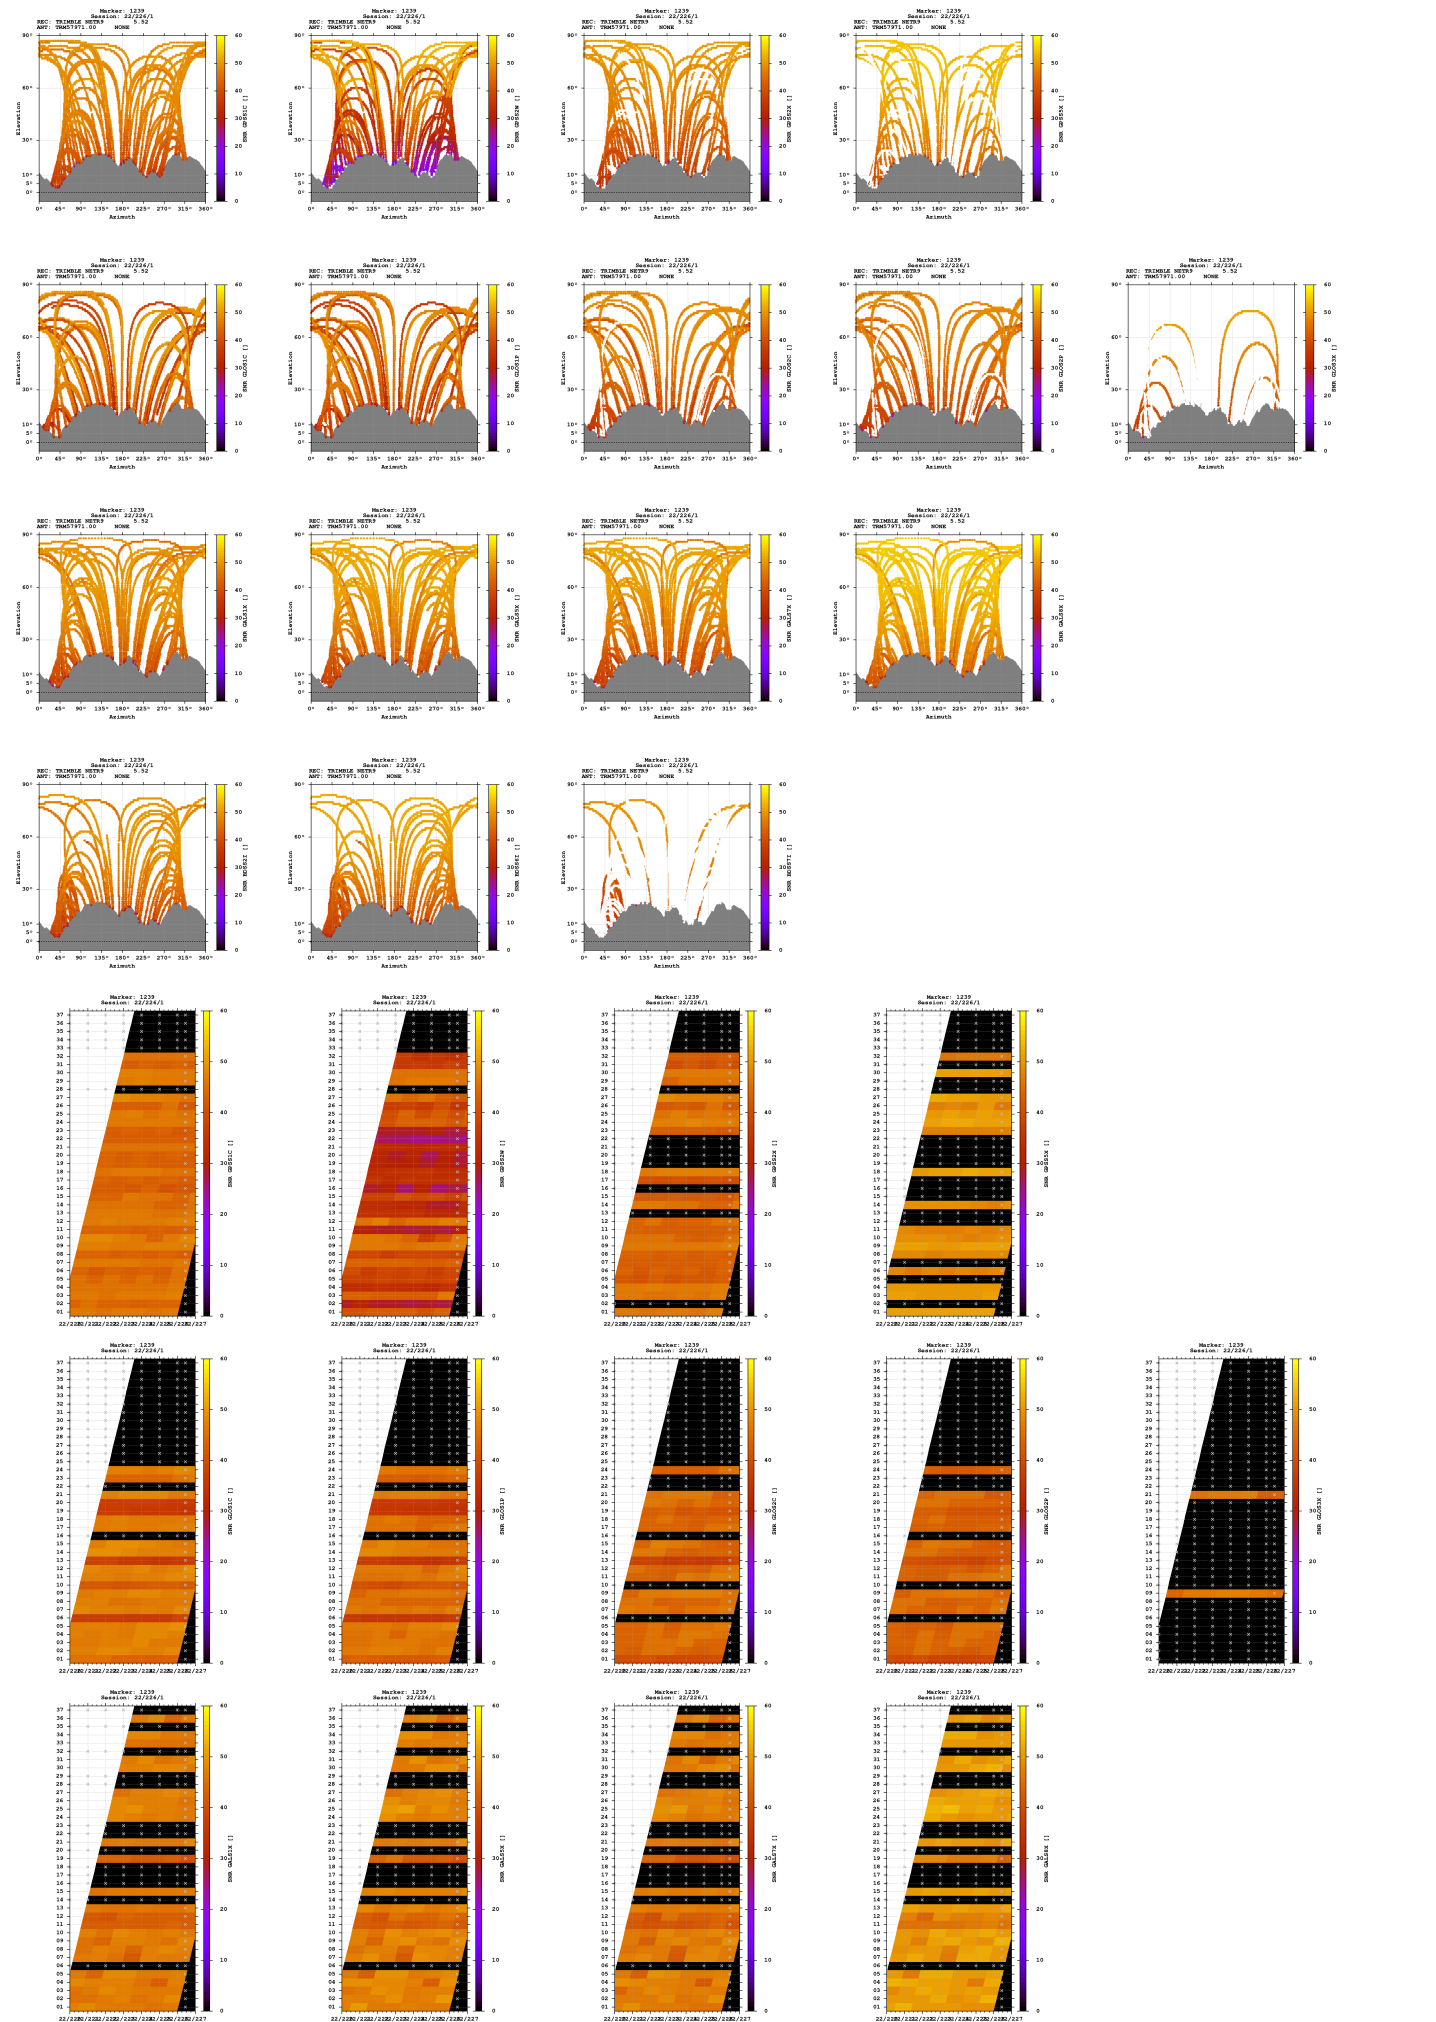

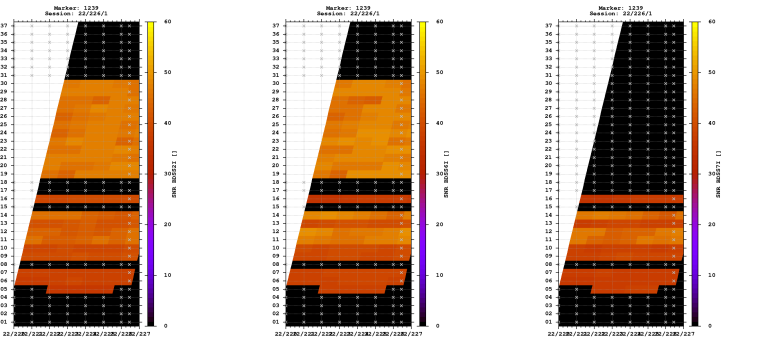



Estimates

2022-08-14 10:54:00	GPS	4318053.9760	794761.7996	4612800.5519	46.605964029	10.428887050	1403.4372
2022-08-14 10:54:00	GLO	4318054.5528	794761.6741	4612800.0513	46.605957378	10.428884076	1403.4476
2022-08-14 10:54:00	GAL	4318054.0892	794761.8157	4612800.2502	46.605961419	10.428886989	1403.2965
2022-08-14 10:54:00	BDS	4318053.7836	794758.7823	4612799.0423	46.605959508	10.428848780	1401.8351

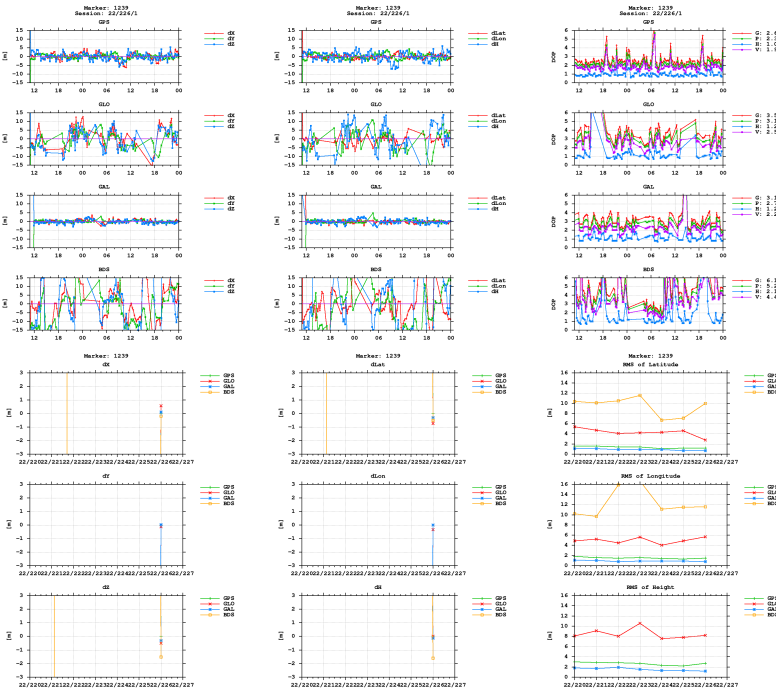

BNC

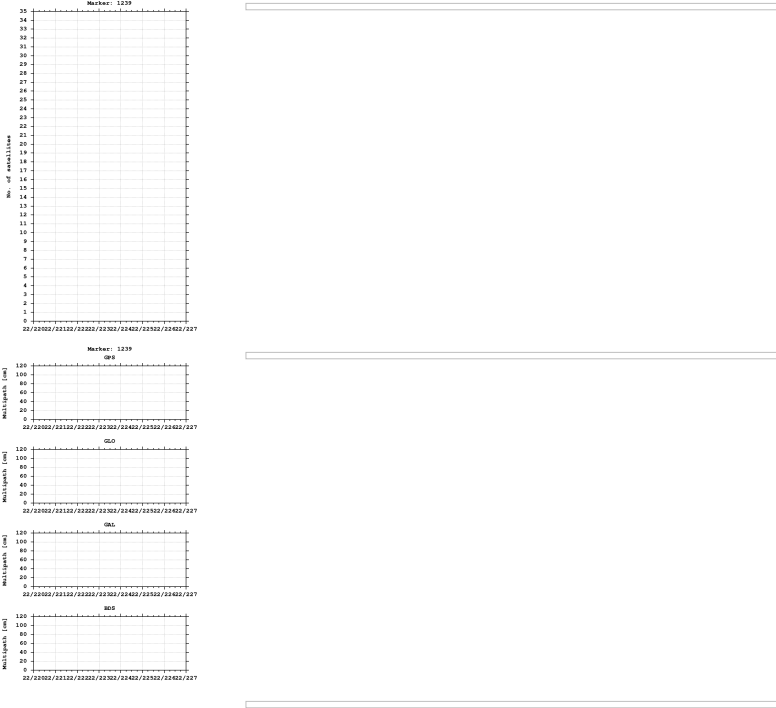

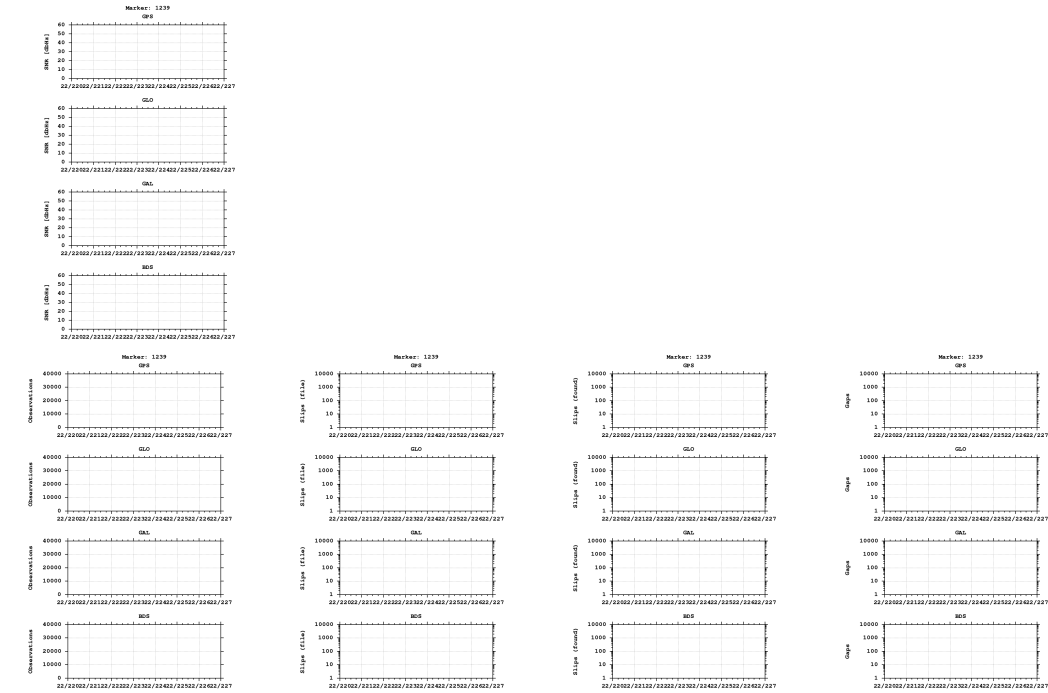

Equipment

2022-08-08 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)