


GNSS observation file monitoring for 0517


Last RINEX file: 05172201.22O
RINEX version: 3.02
Marker: 1195
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 517 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

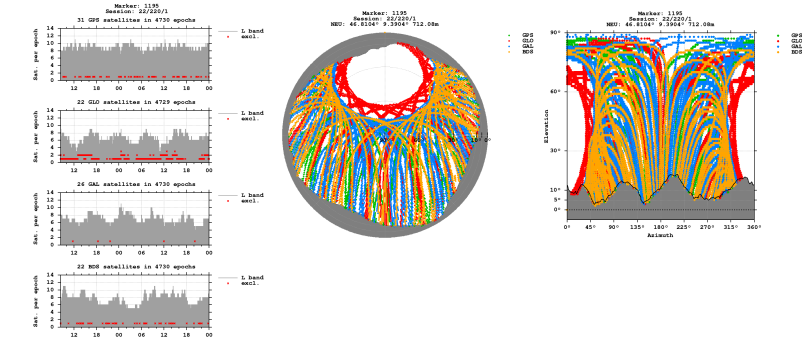


Bands

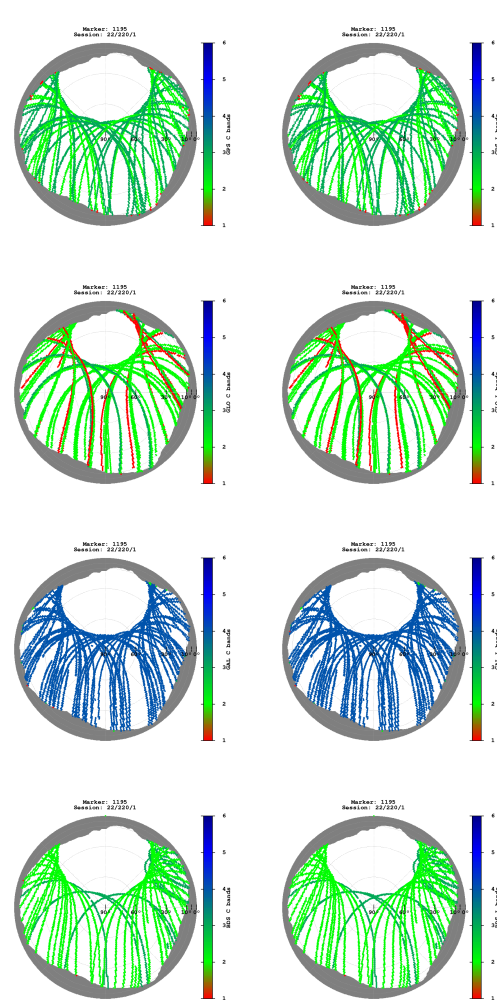

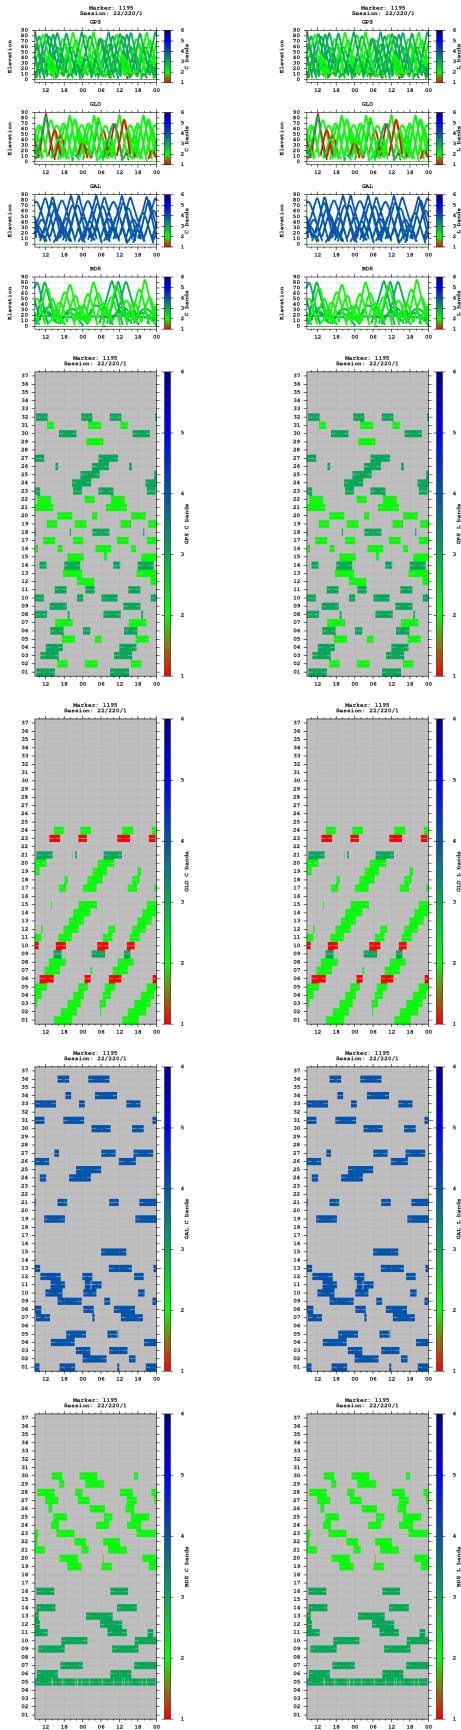



Multipath

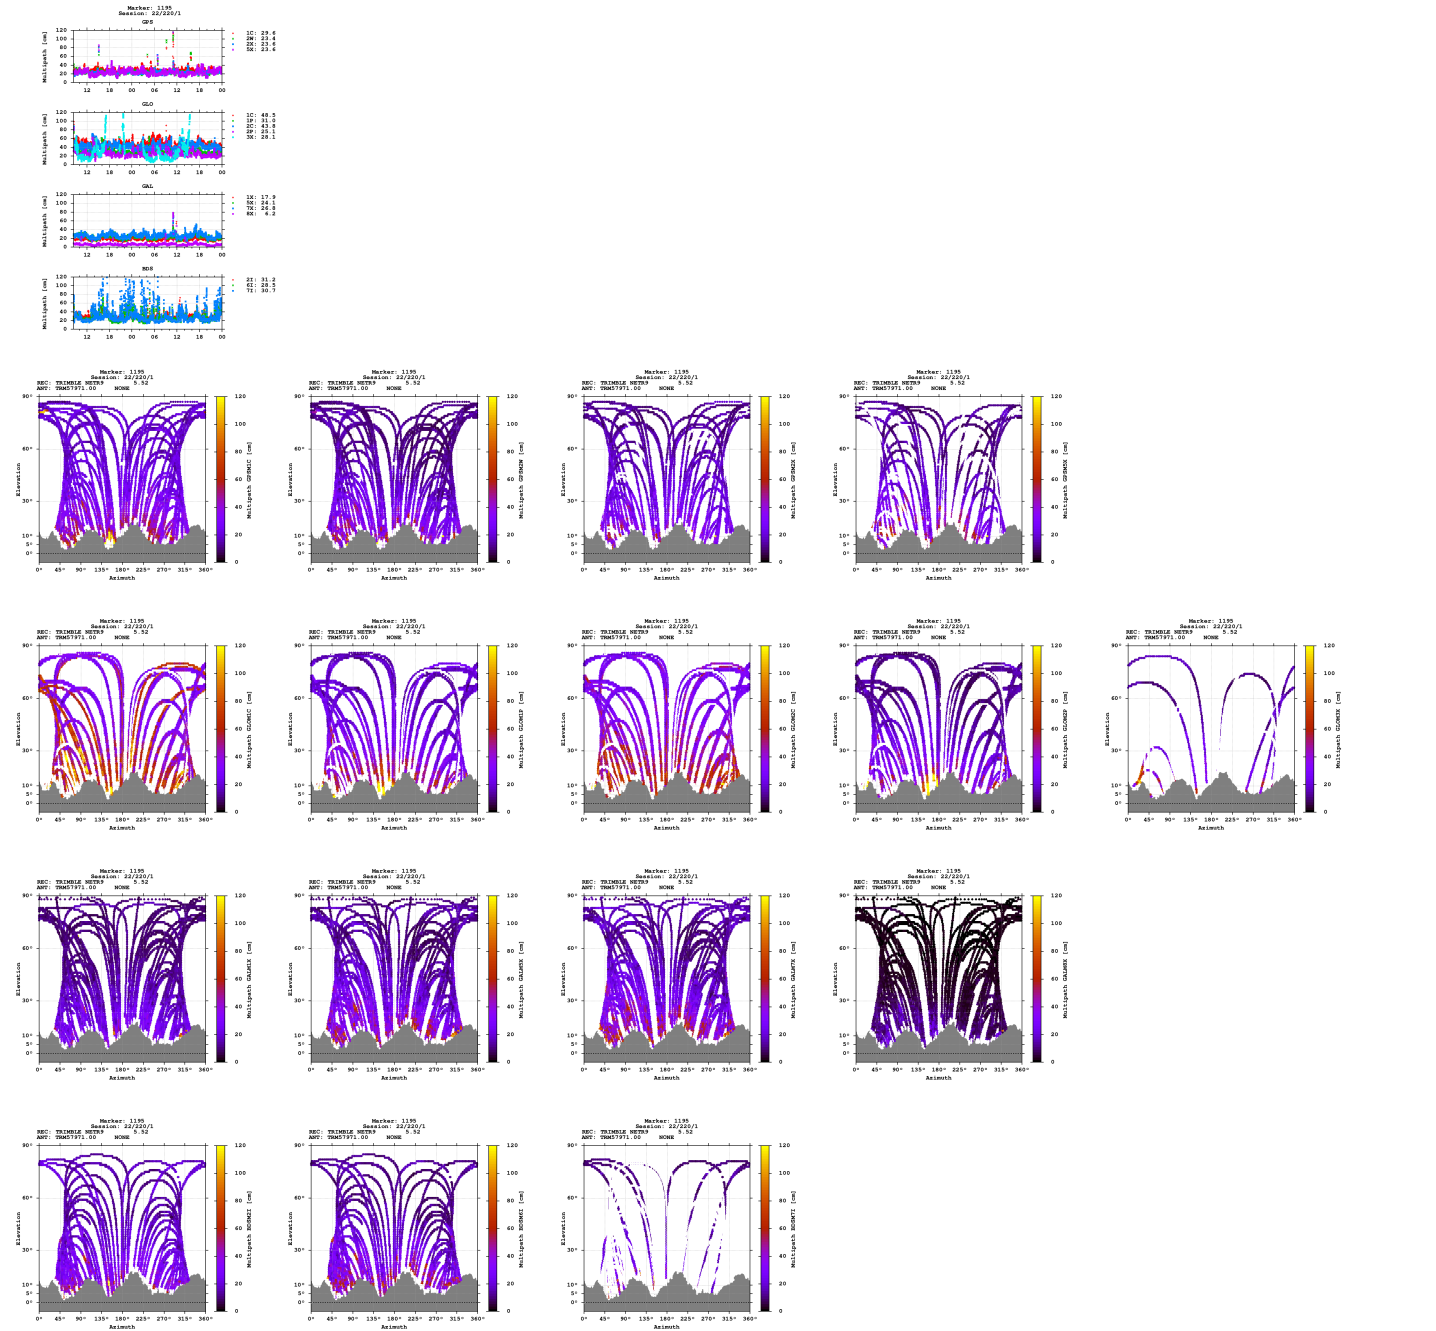

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

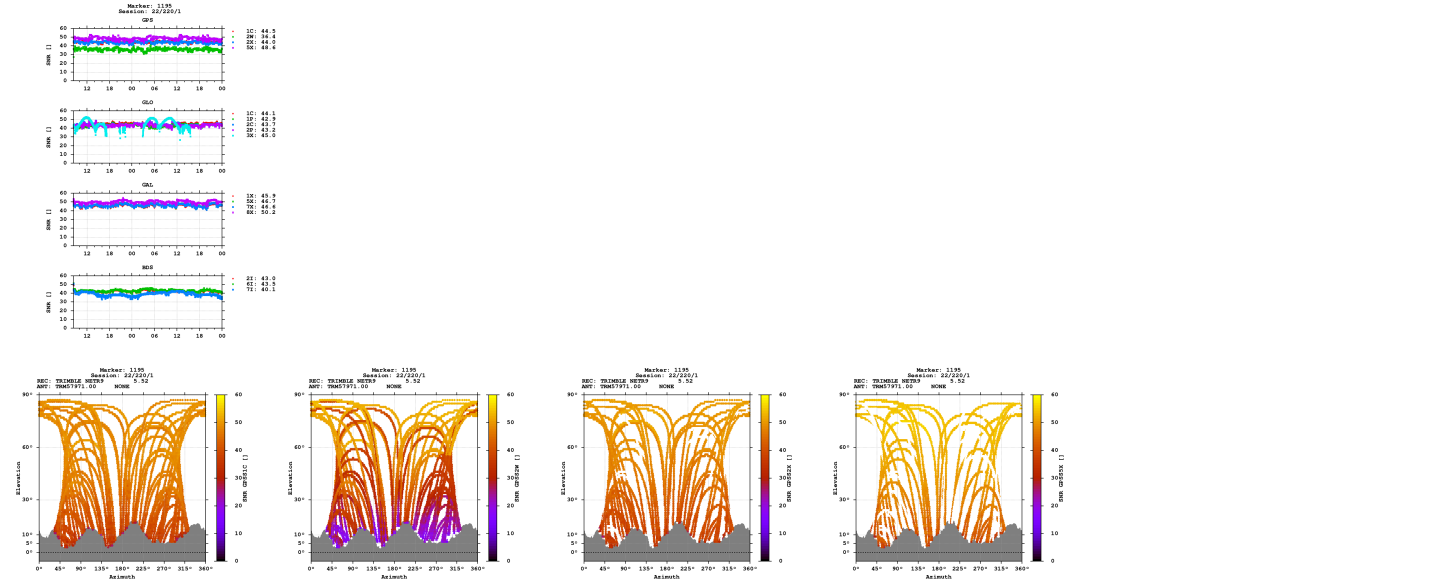

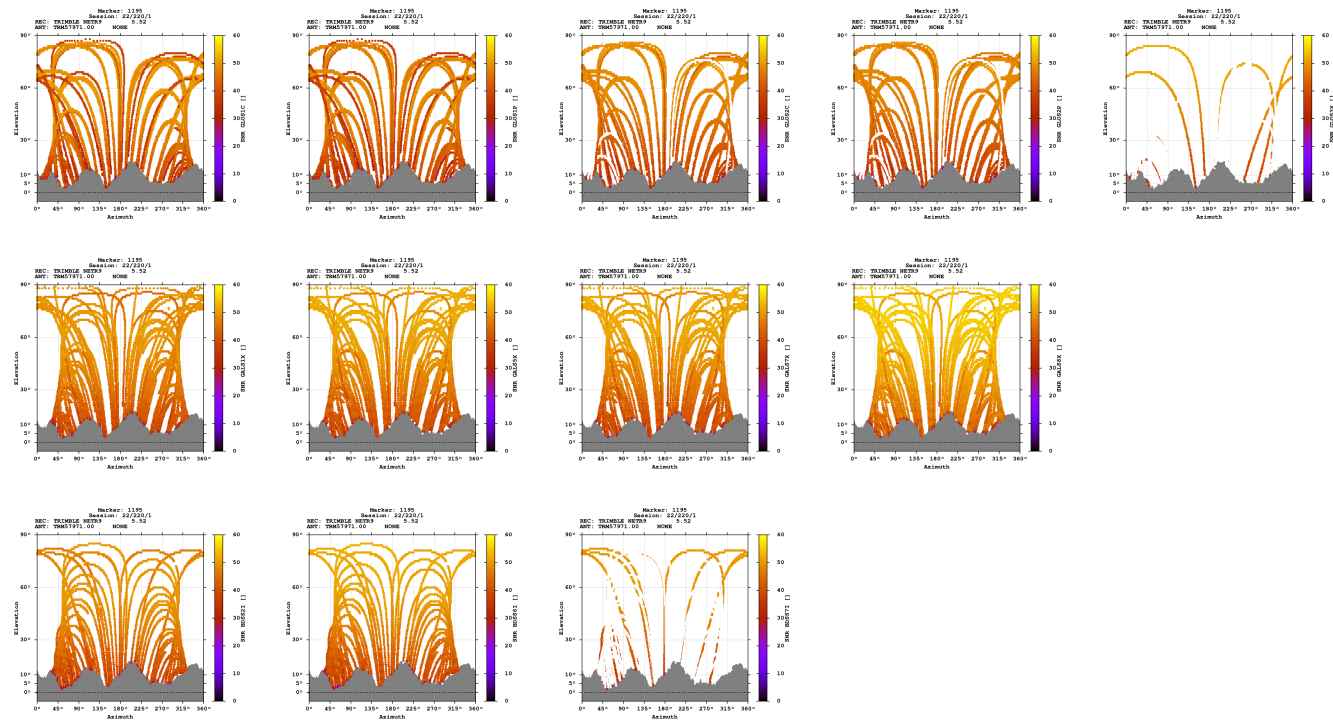

Estimates

2022-08-08 08:29:00	GPS	4314961.1137	713597.4313	4627880.6530	46.810361771	9.390439078	712.0750
2022-08-08 08:29:00	GLO	4314961.9719	713597.2364	4627880.7102	46.810356779	9.390434726	712.6745
2022-08-08 08:29:00	GAL	4314961.3959	713597.3675	4627880.5671	46.810359485	9.390437651	712.1958
2022-08-08 08:29:00	BDS	4314959.9685	713596.1214	4627881.5311	46.810375987	9.390424596	711.7957

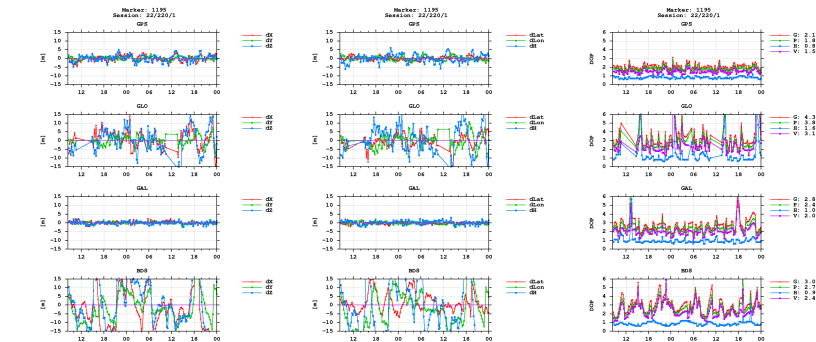

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)