


GNSS observation file monitoring for 0517


Last RINEX file: 05172211.220
RINEX version: 3.02
Marker: 1195
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 517 TRM57971.00 NONE

Epochs

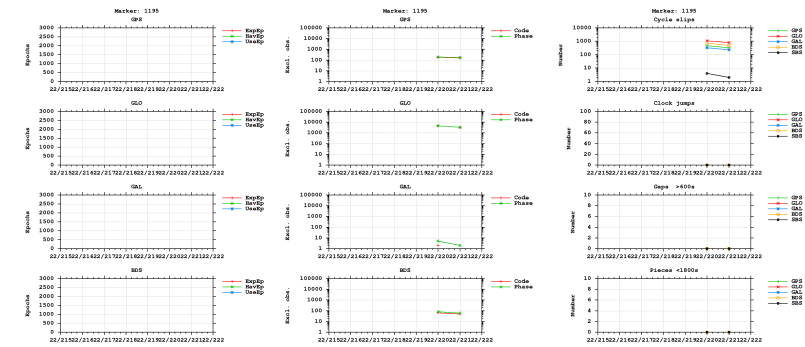



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

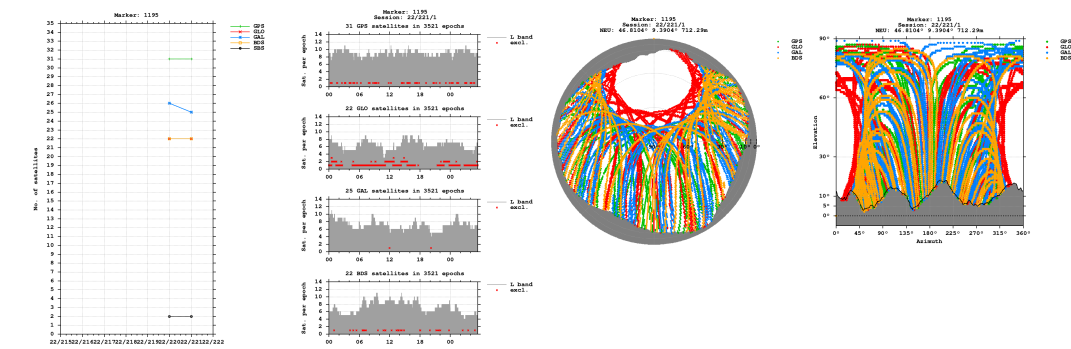


Bands

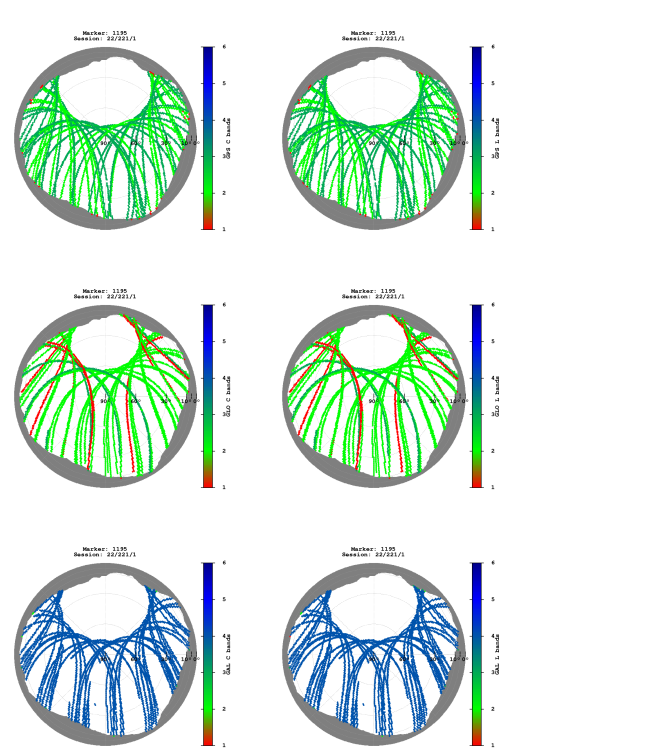


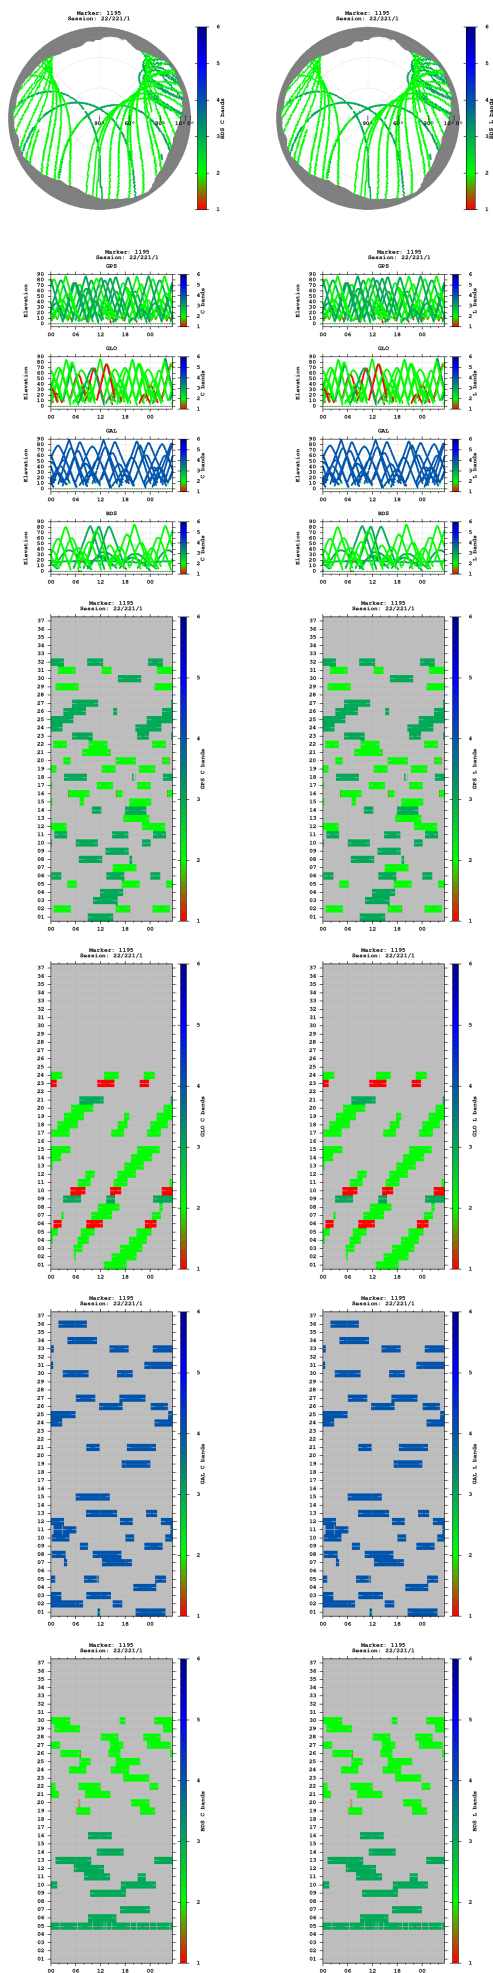


Observations

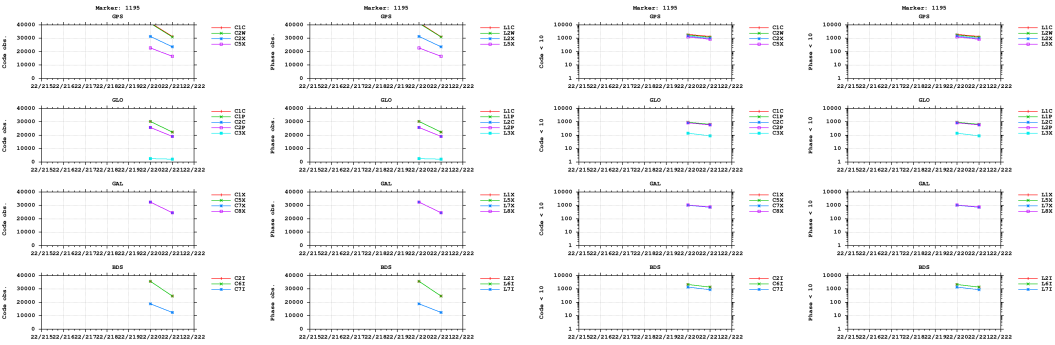


Multipath

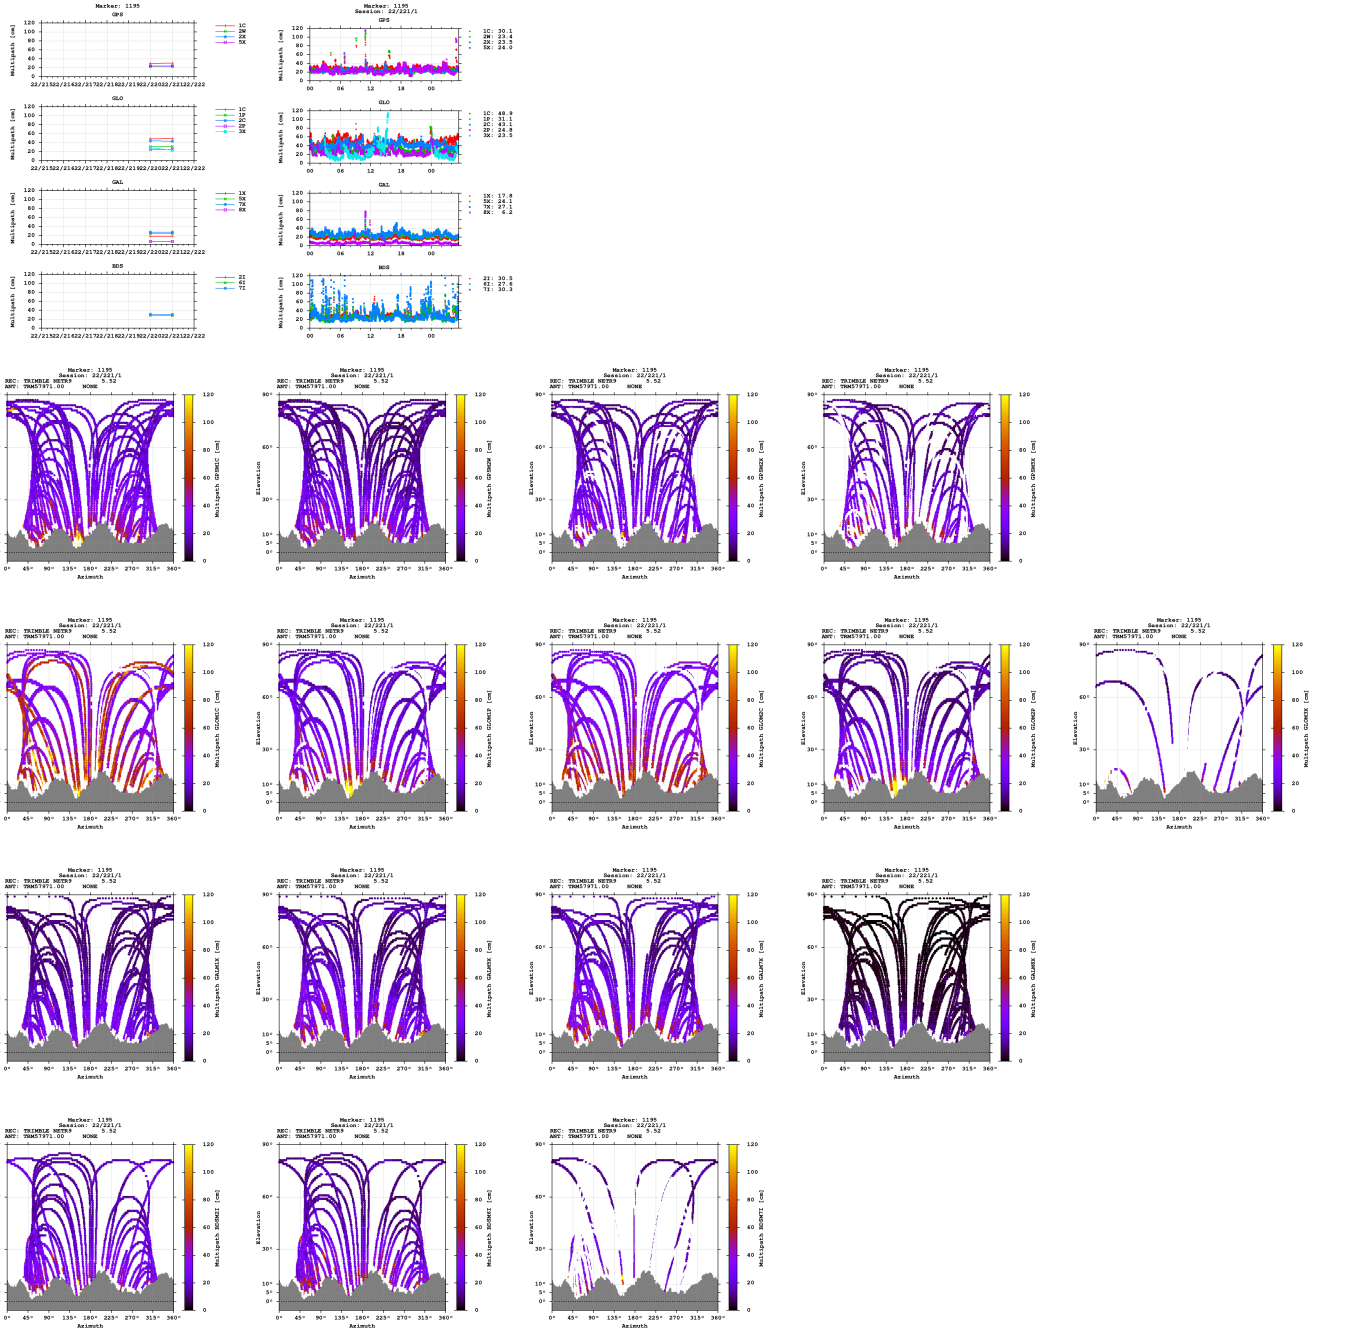


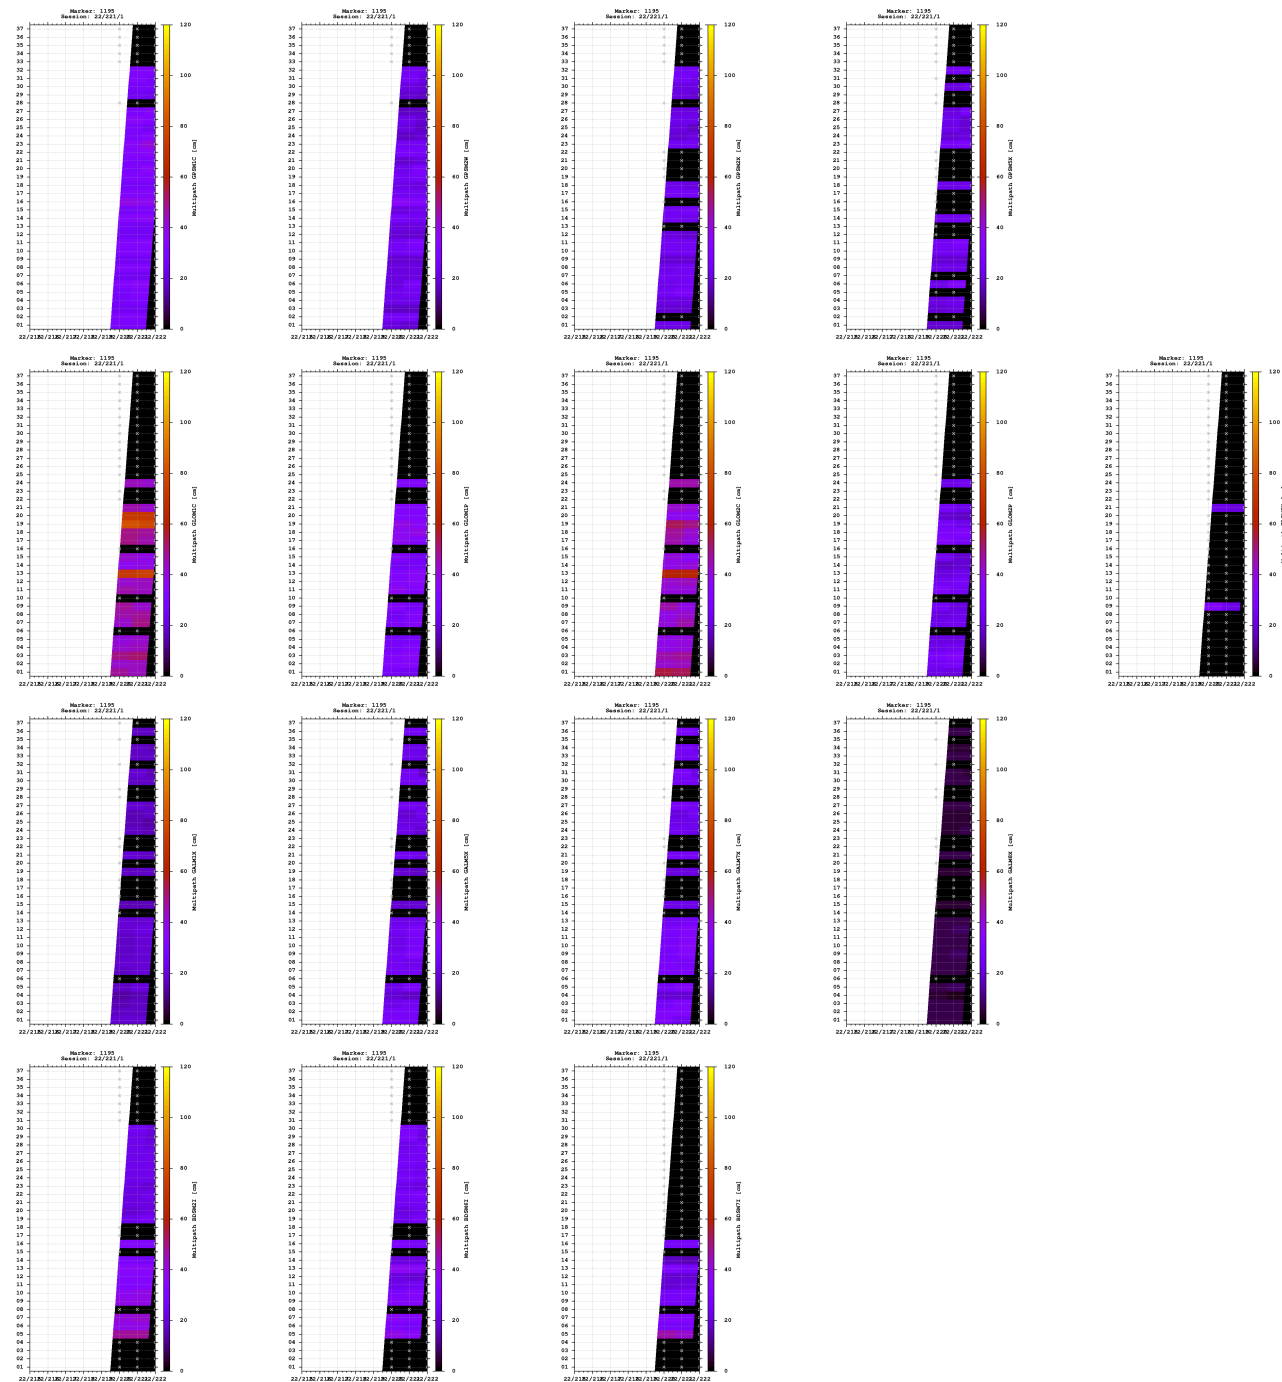


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

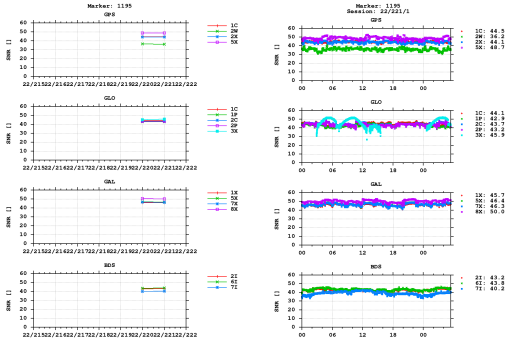


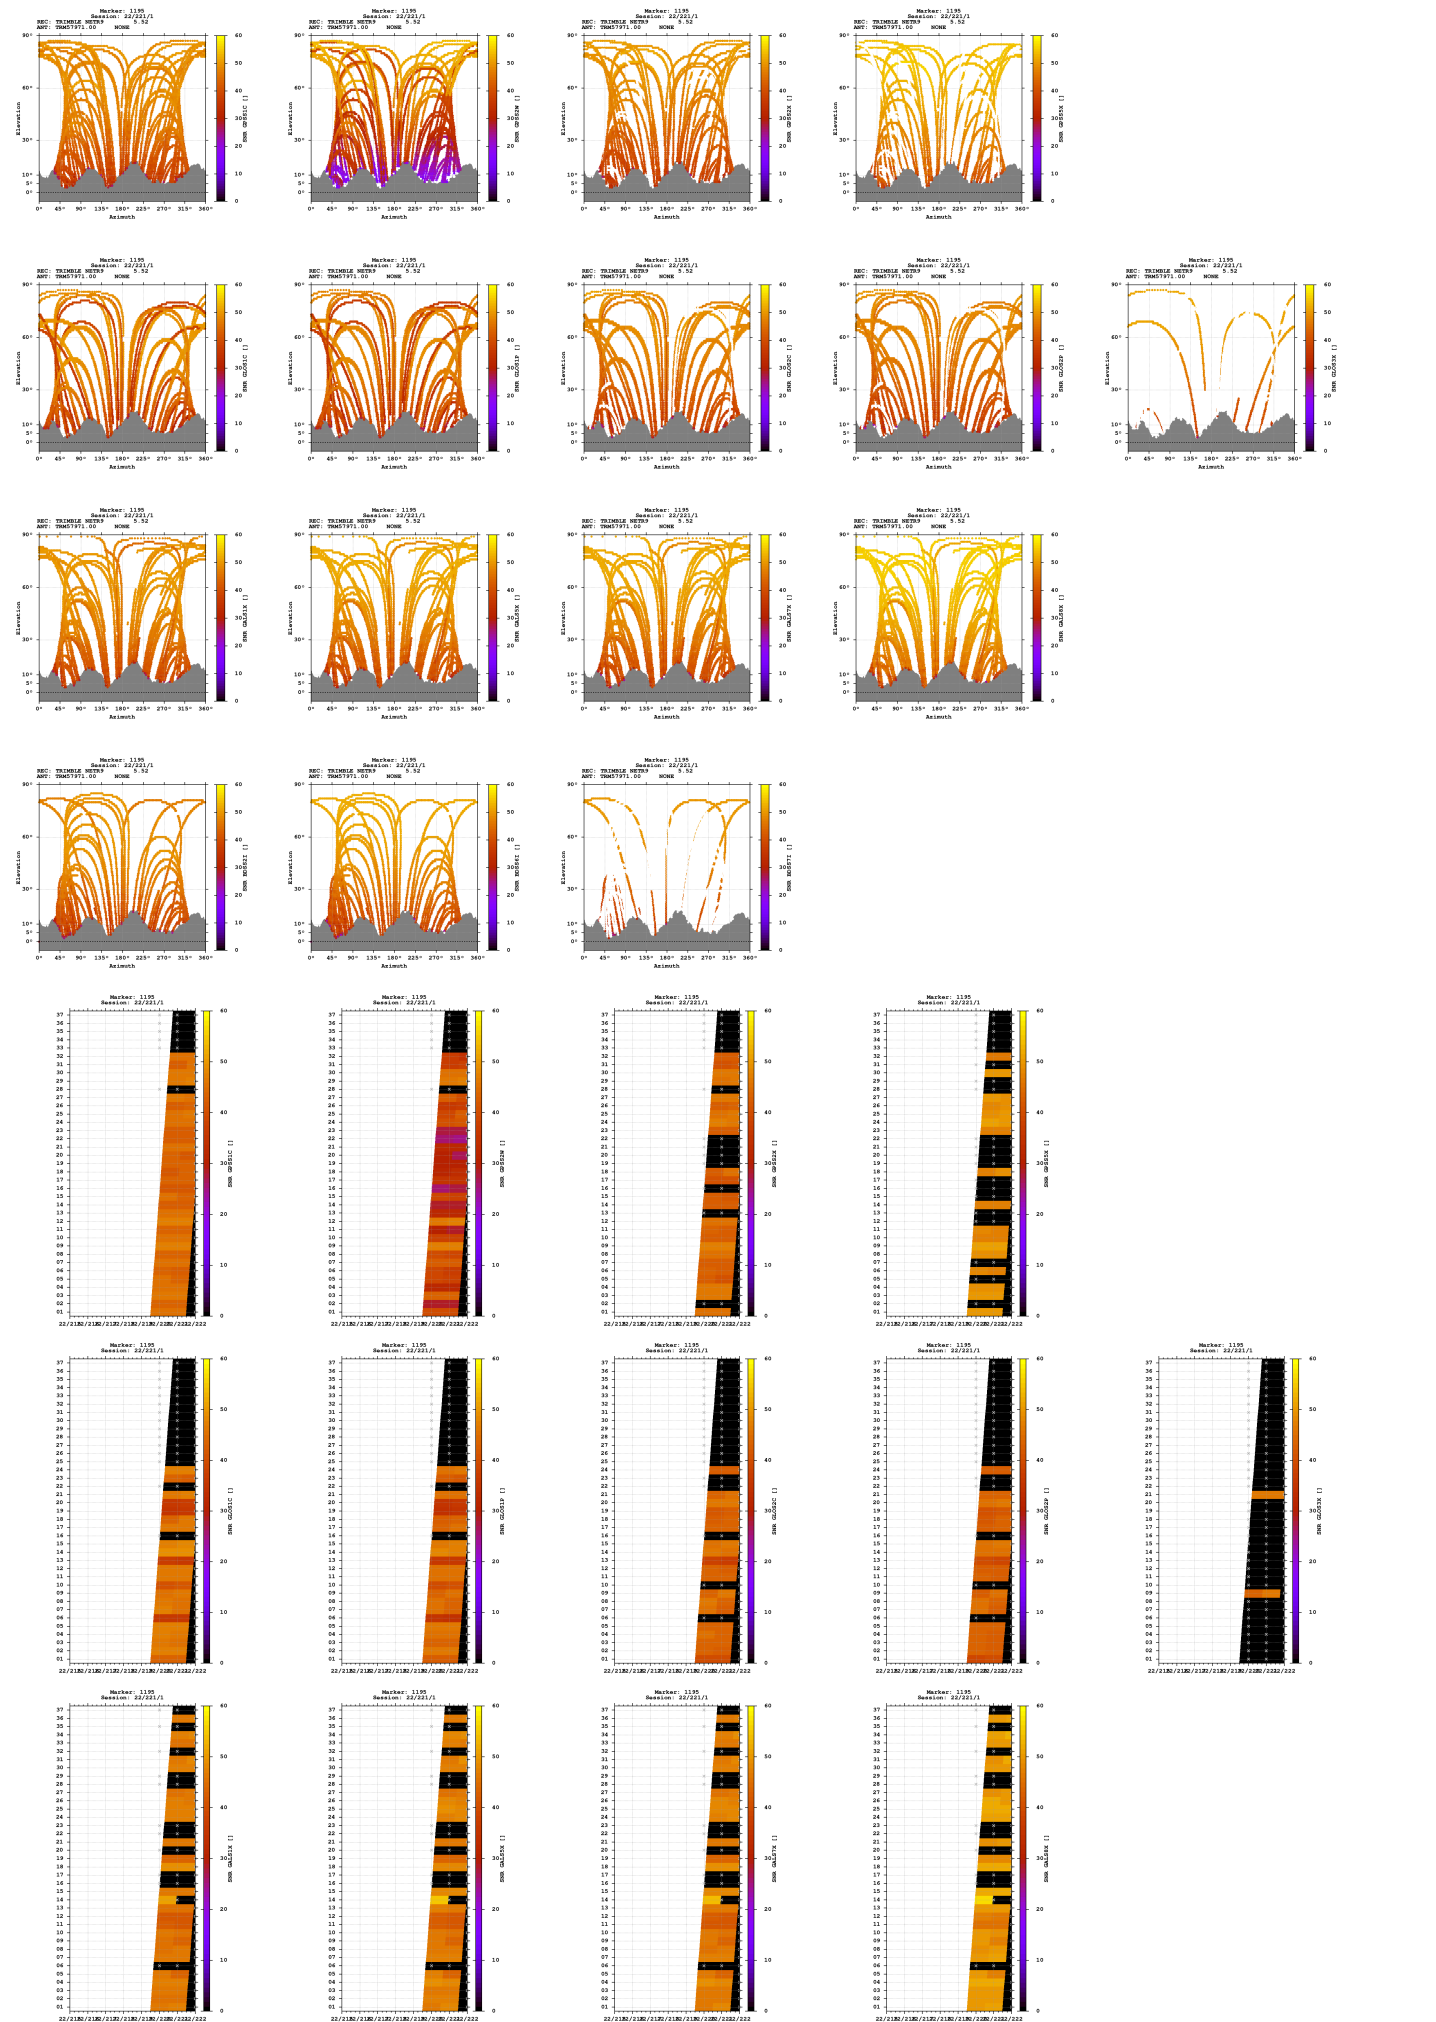

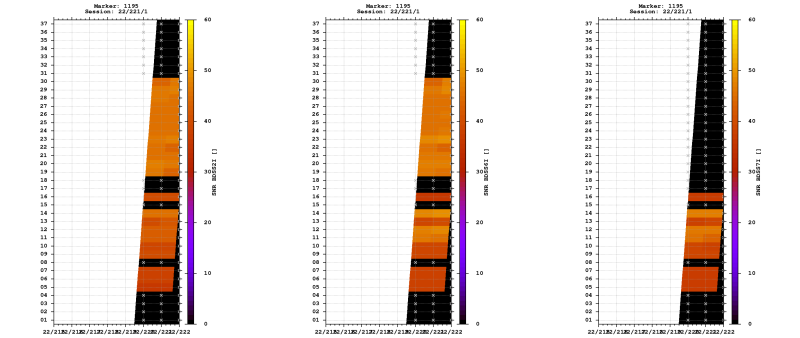


Estimates

2022-08-08 08:29:00	GPS	4314961.5173	713597.4464	4627880.5701	46.810358633	9.390438411	712.2888
2022-08-08 08:29:00	GLO	4314961.3945	713597.3113	4627881.0245	46.810362370	9.390436928	712.5221
2022-08-08 08:29:00	GAL	4314961.3021	713597.2575	4627880.5805	46.810360292	9.390436430	712.1300
2022-08-08 08:29:00	BDS	4314962.1237	713597.9449	4627883.8184	46.810374172	9.390443558	715.1223

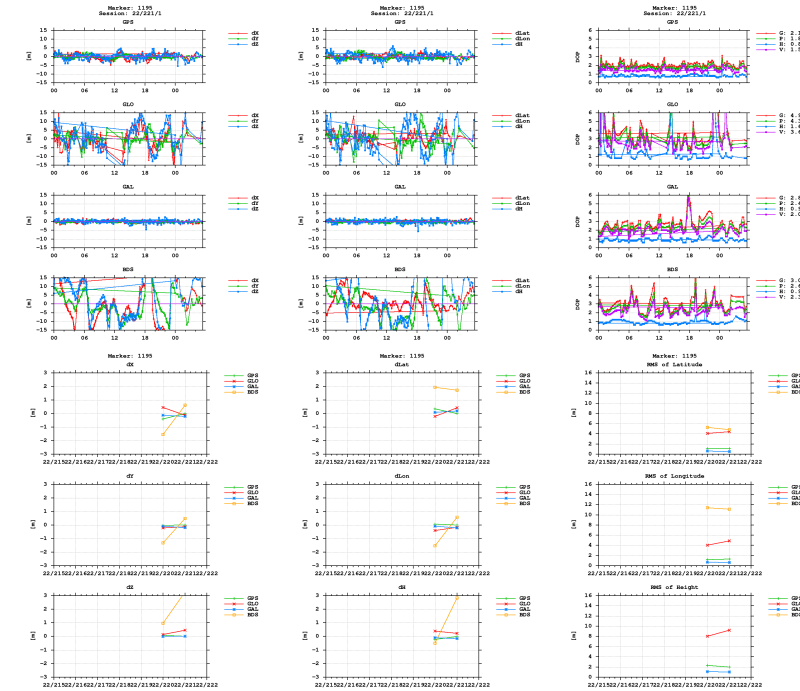

BNC



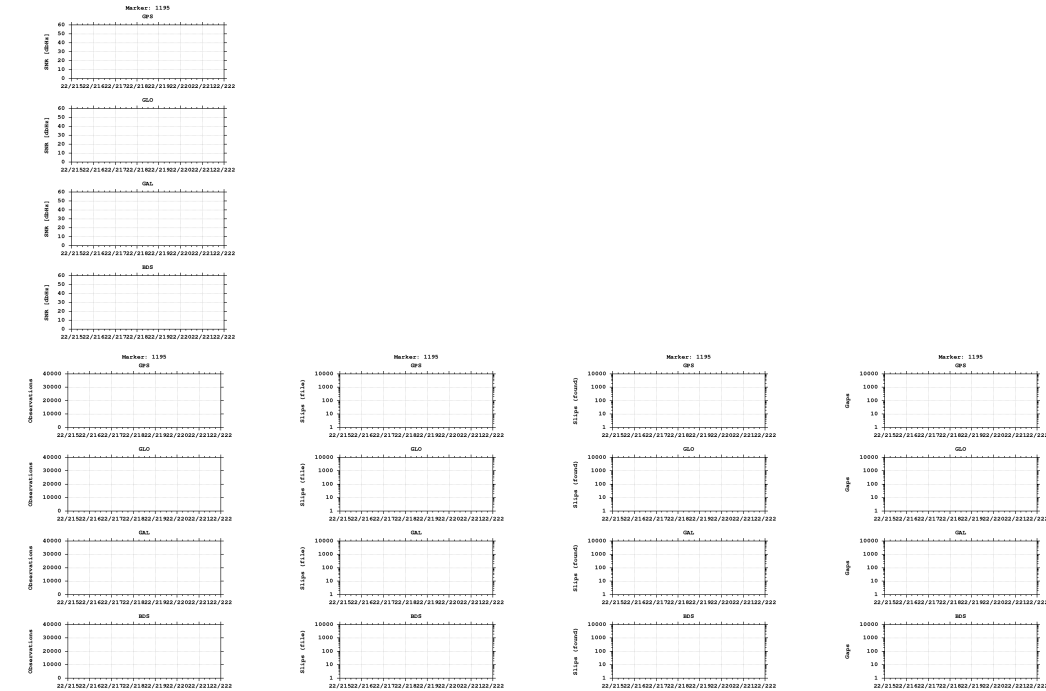

Equipment

2022-08-08 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 517

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)