

GNSS observation file monitoring for 0517

Last RINEX file: 05172221.220


RINEX version: 3.02

Marker: 1176

Receiver: 517 TRIMBLE NETR9 5.52

Antenna: 517 TRM57971.00 NONE


Epochs

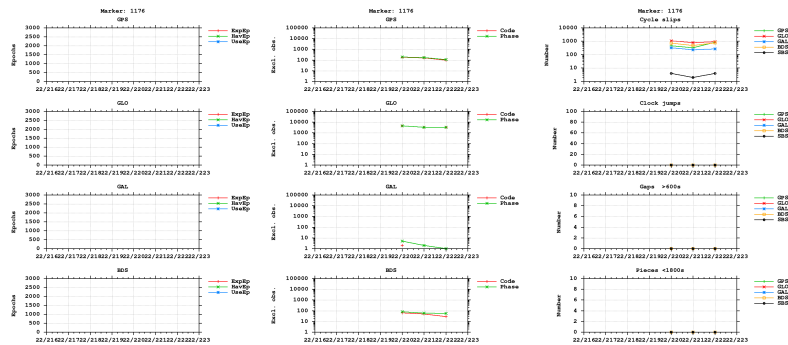


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

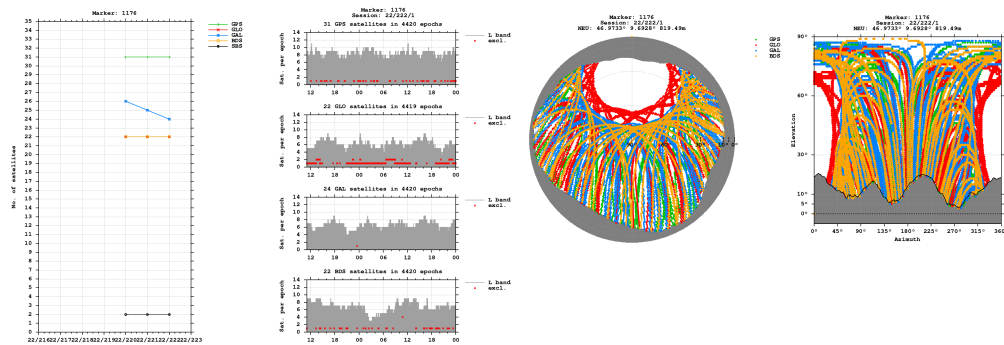


Bands

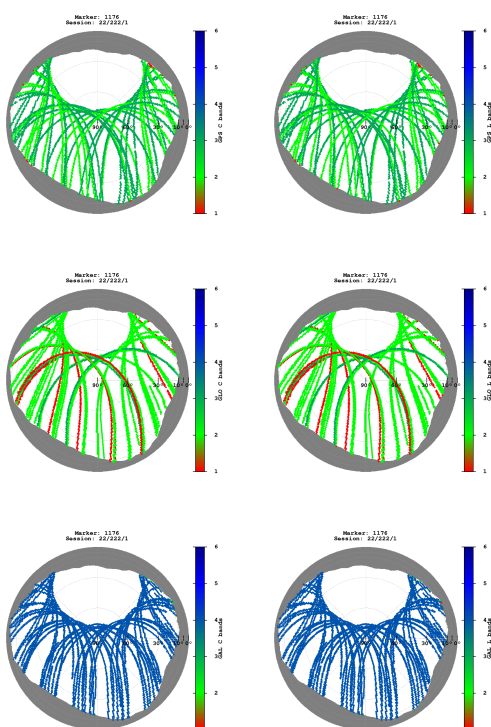


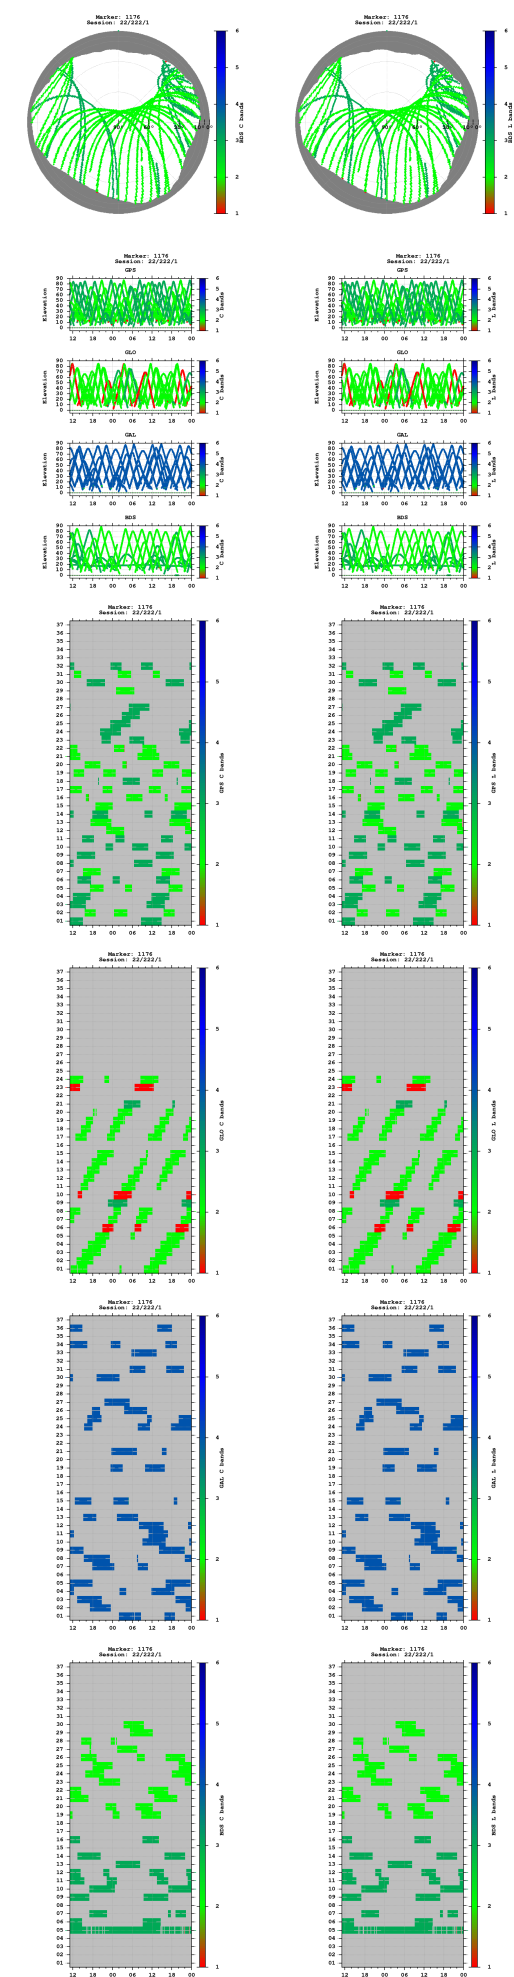


Observations

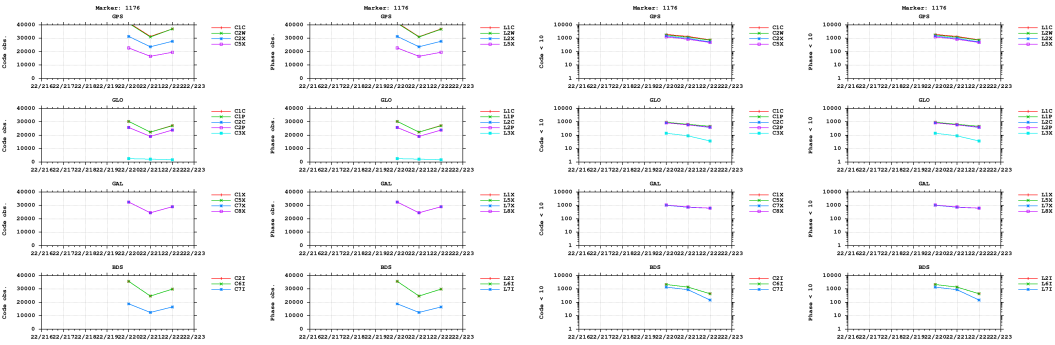


Multipath

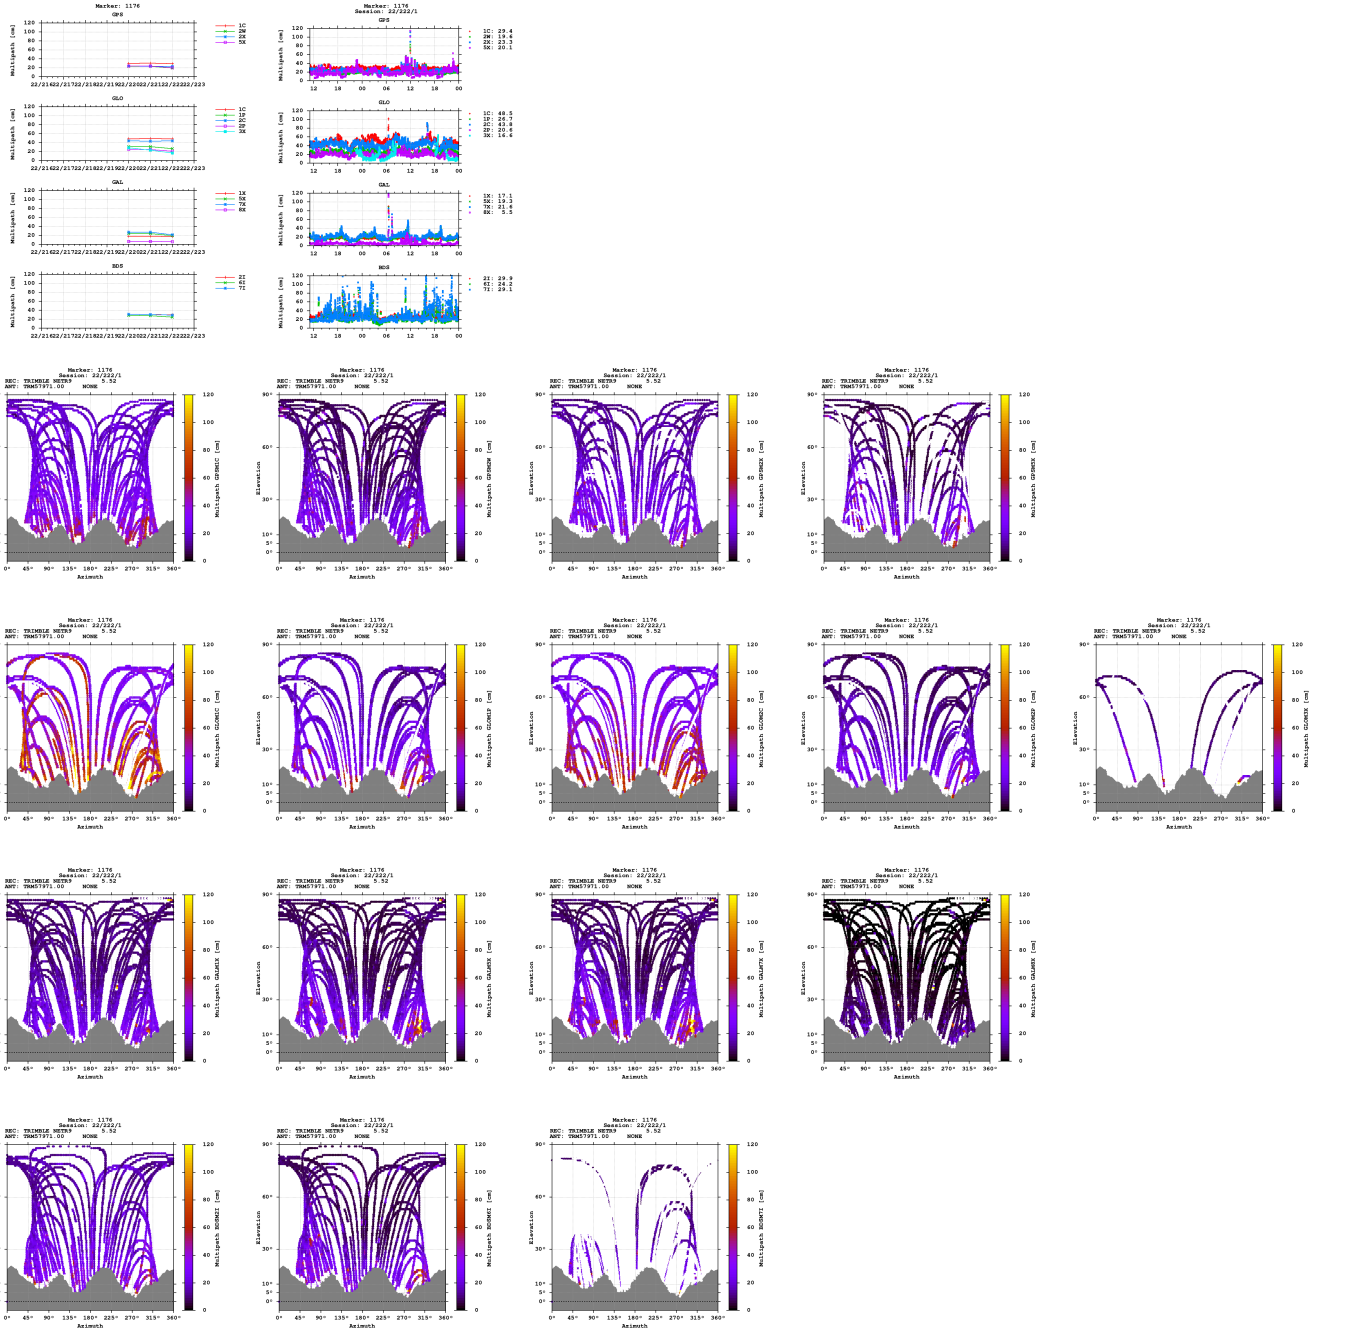


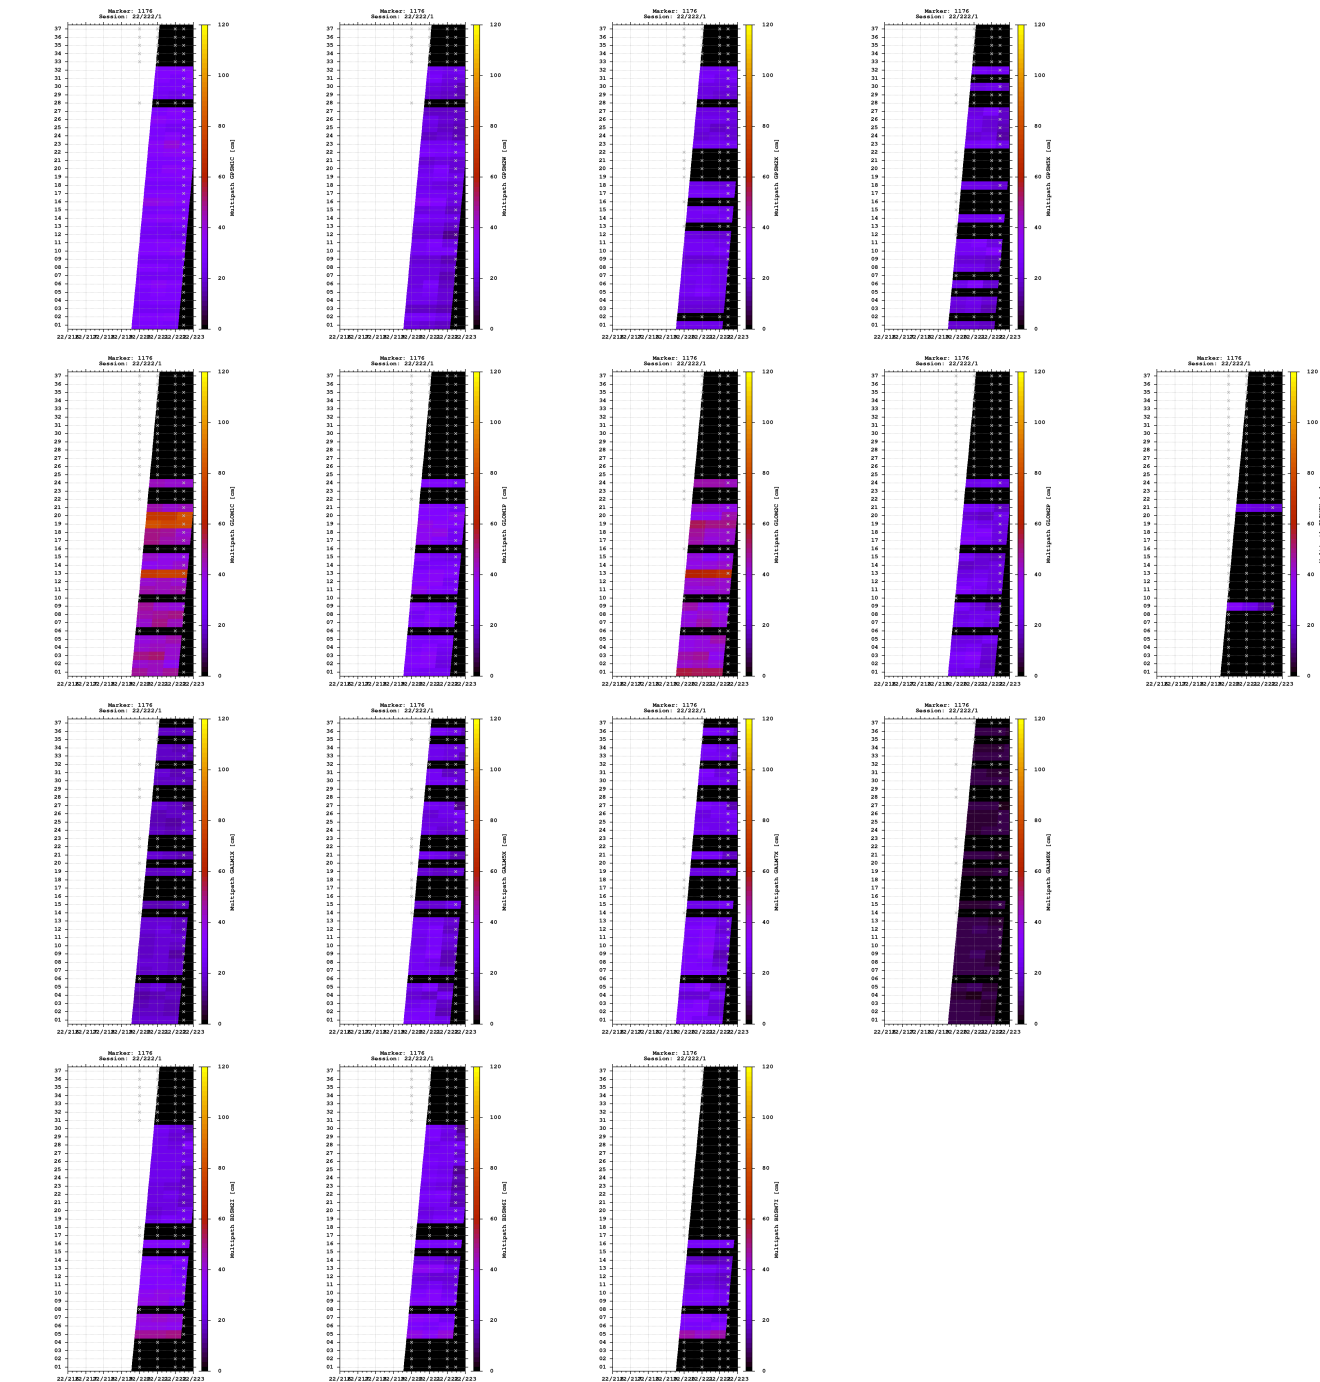


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

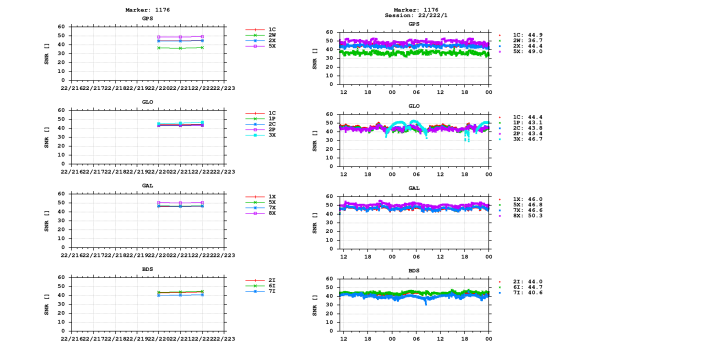


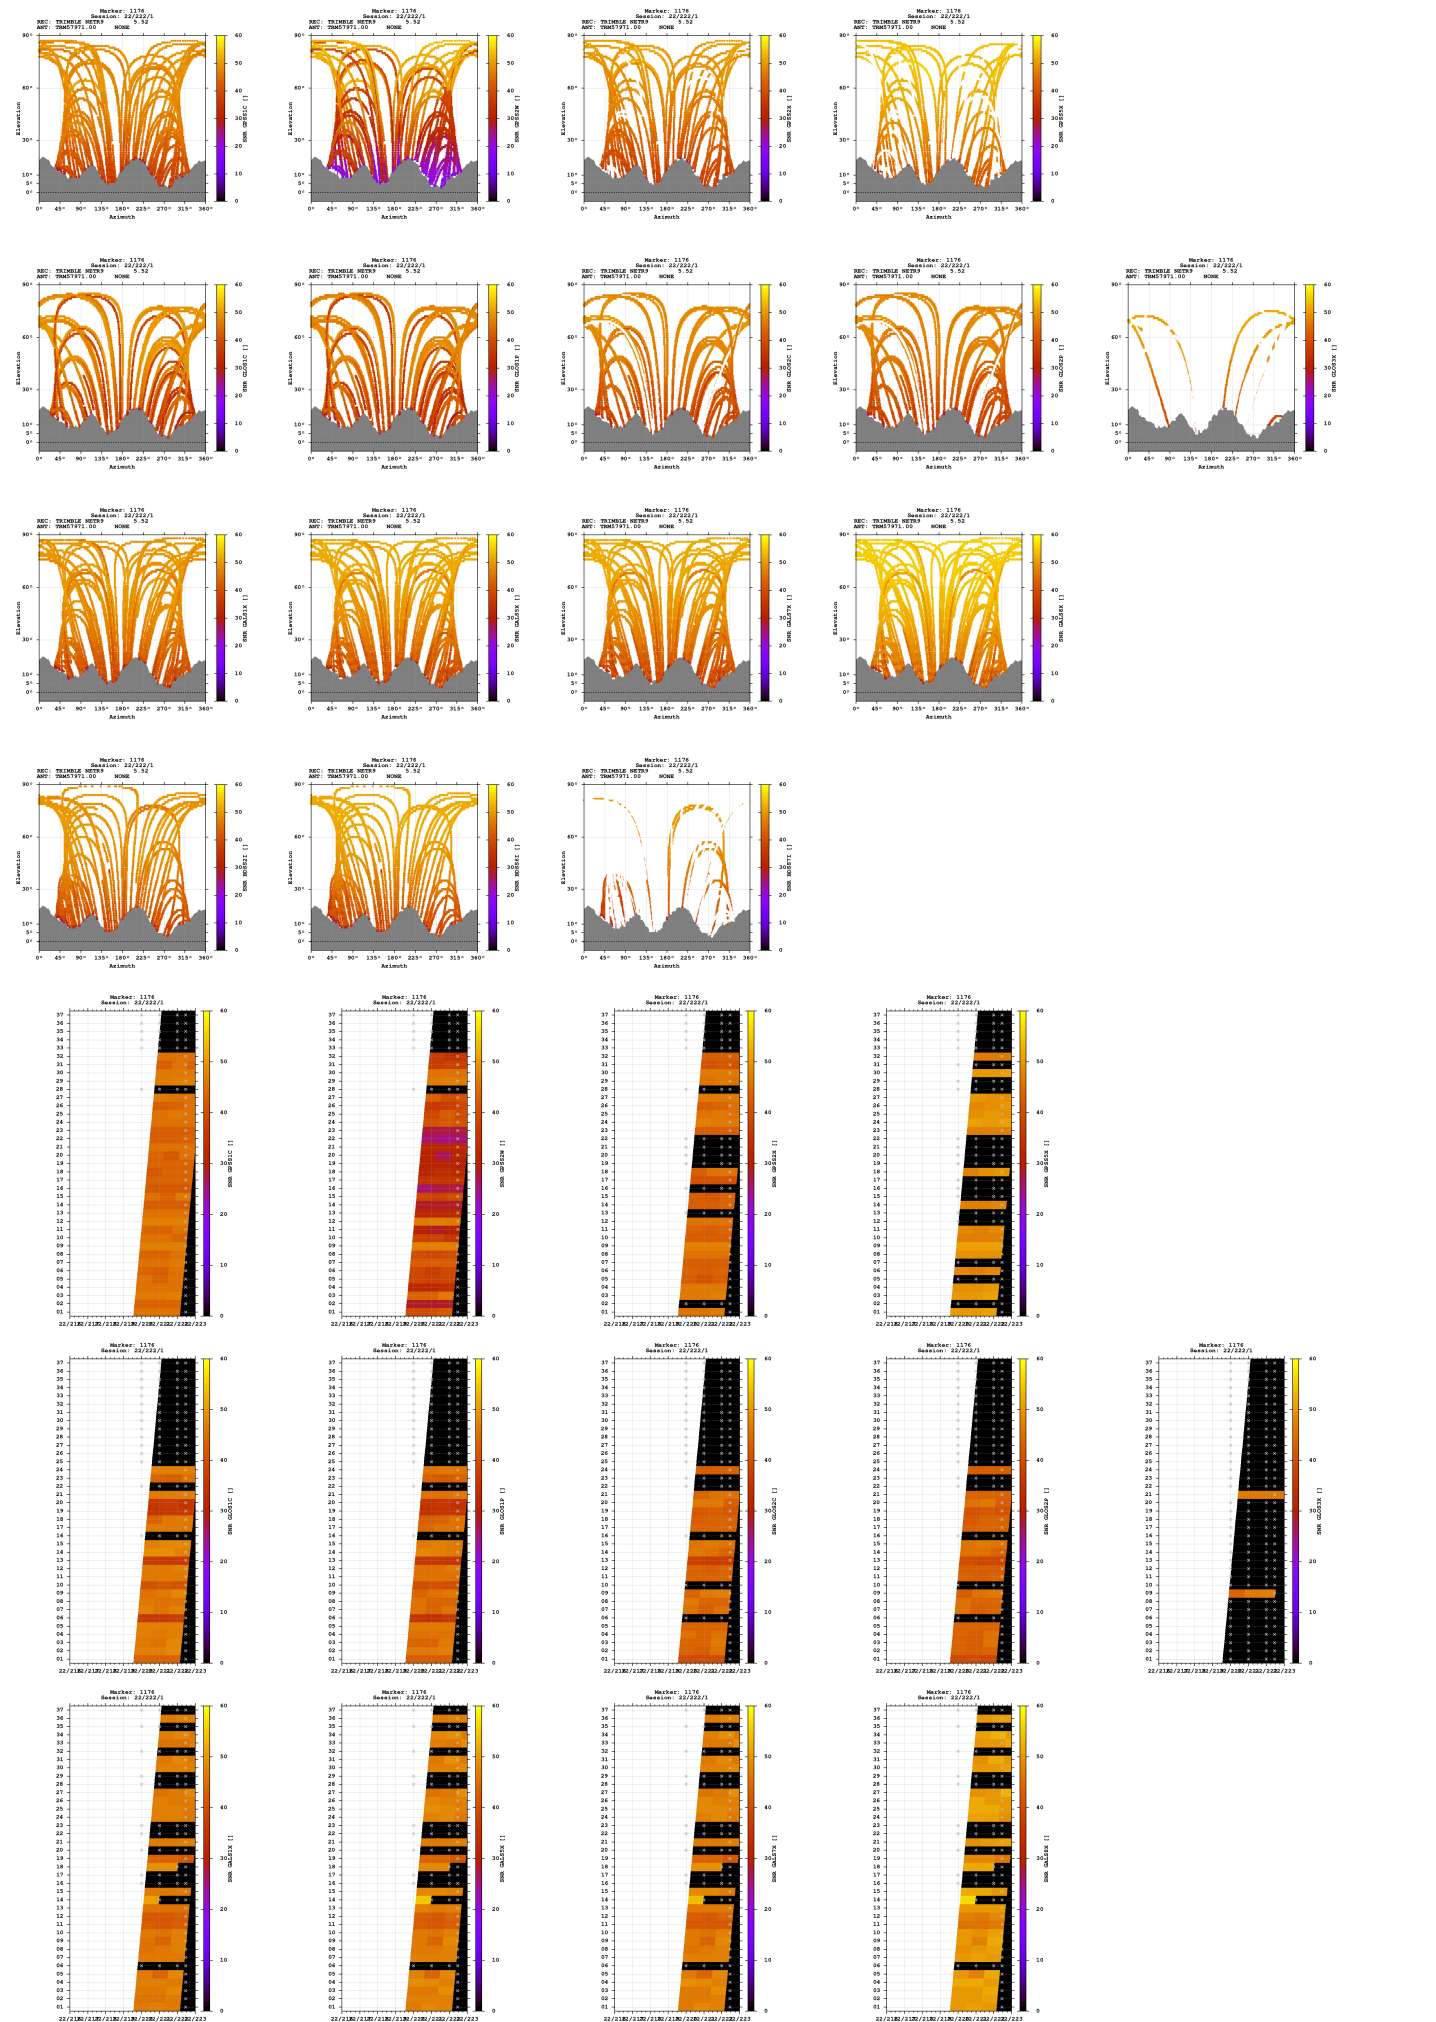

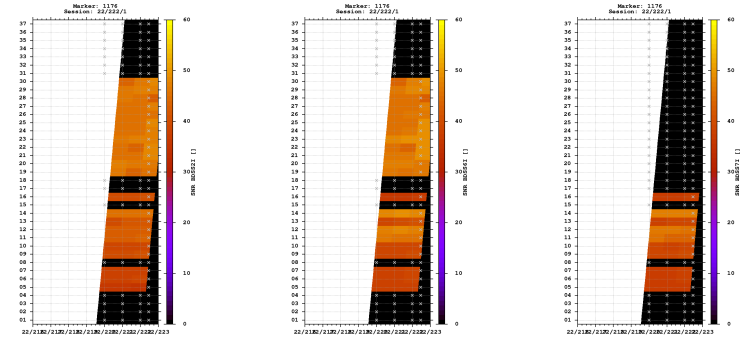



Estimates

2022-08-10 11:04:30	GPS	4298167.4911	734145.6264	4640341.6917	46.973335295	9.692829733	819.4888
2022-08-10 11:04:30	GLO	4298166.9362	734145.3089	4640340.8255	46.973333926	9.692826848	818.4459
2022-08-10 11:04:30	GAL	4298167.1348	734145.6612	4640341.1475	46.973334226	9.692830971	818.8553
2022-08-10 11:04:30	BDS	4298168.0480	734147.9619	4640343.2300	46.973338541	9.692858750	821.2562

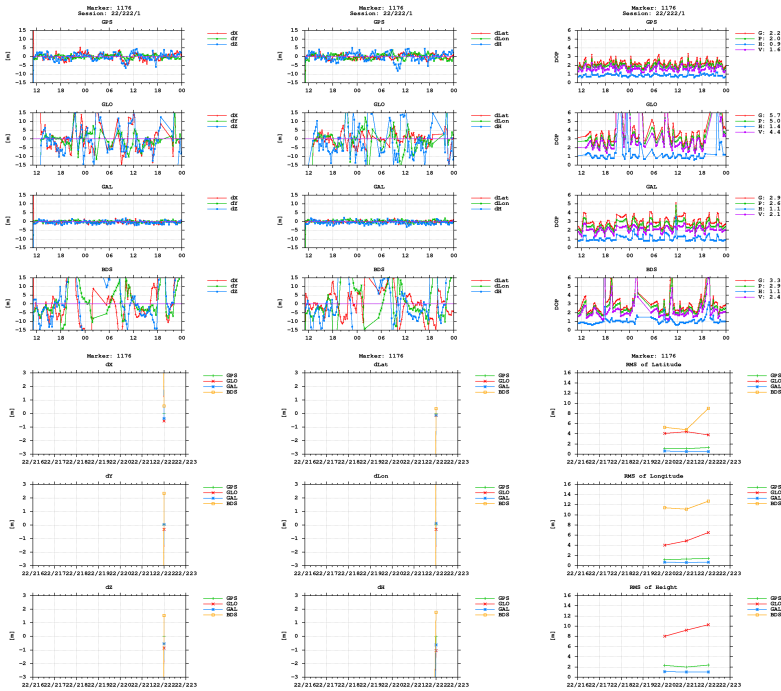

BNC

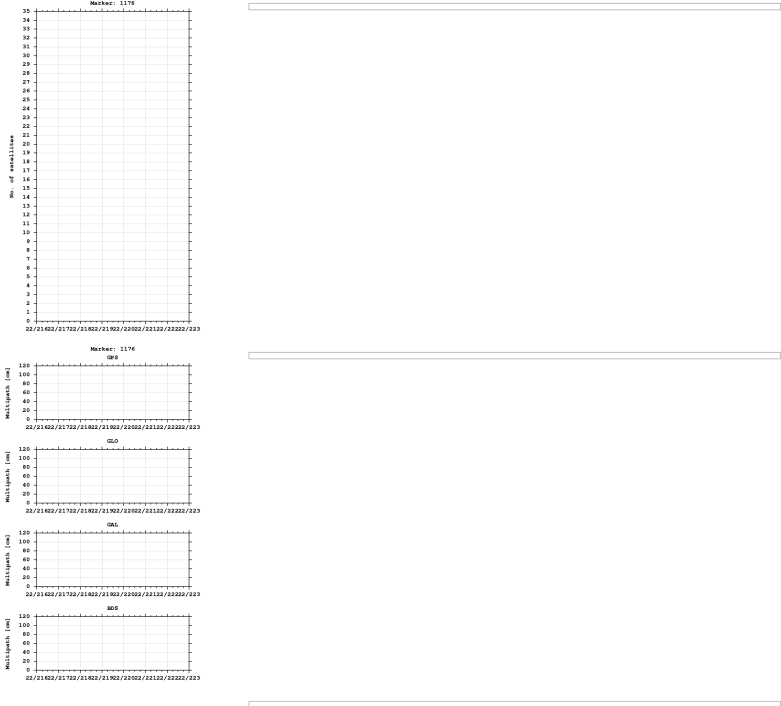

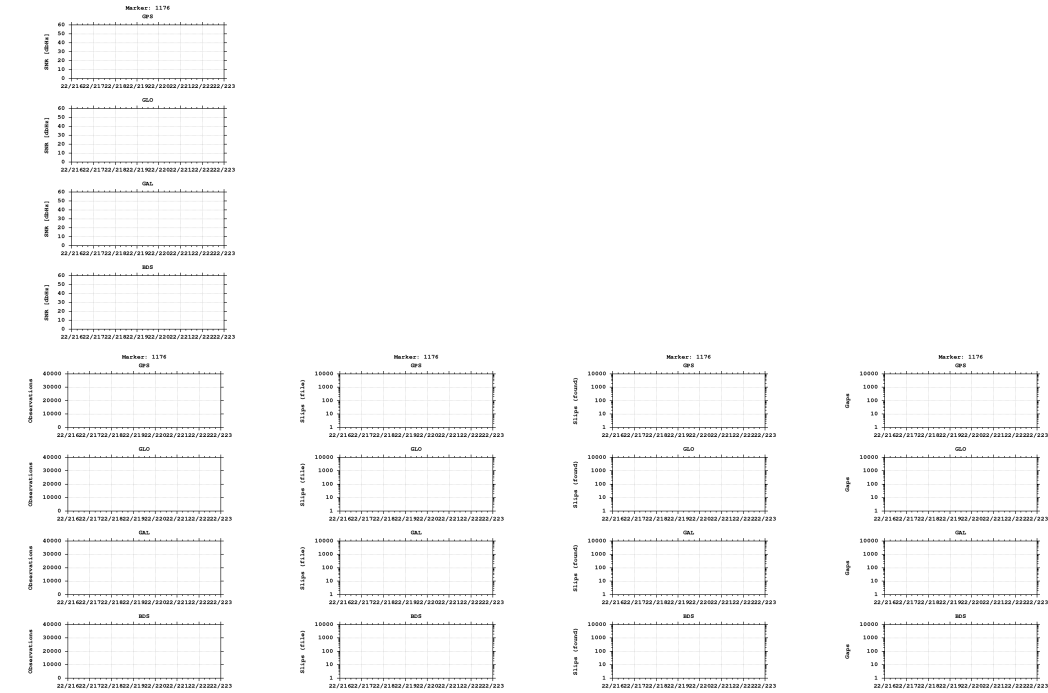

Equipment

2022-08-08 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 517

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)