


GNSS observation file monitoring for 0517


Last RINEX file: 05172231.220
RINEX version: 3.02
Marker: 1176
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 517 TRM57971.00 NONE

Epochs

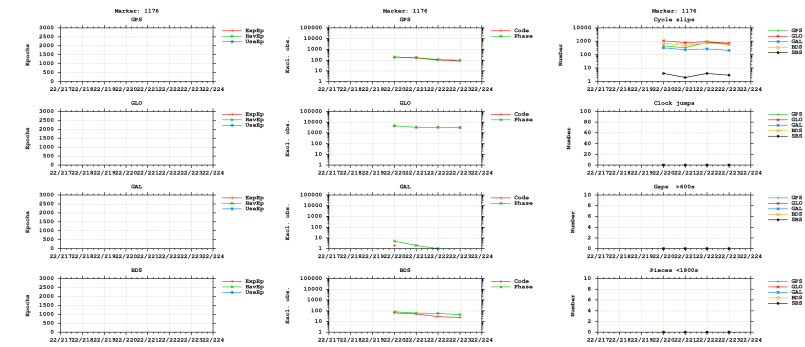



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

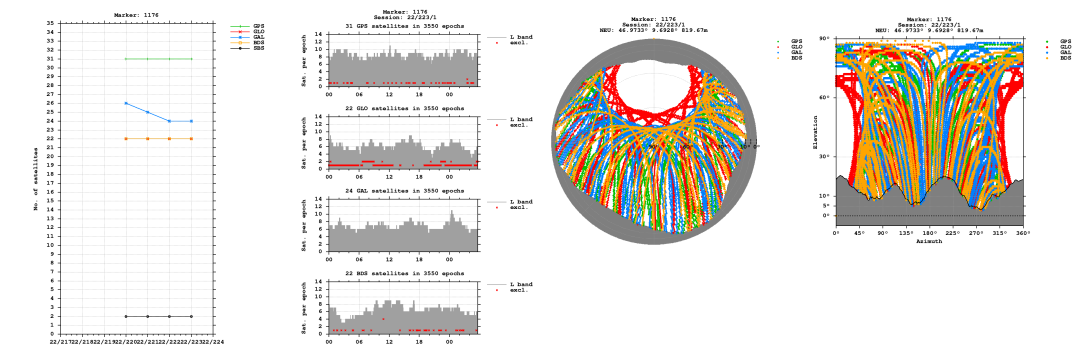


Bands

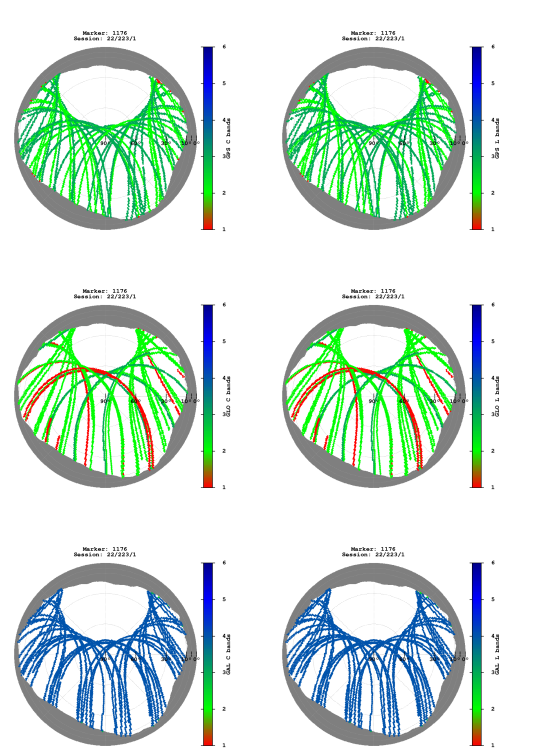


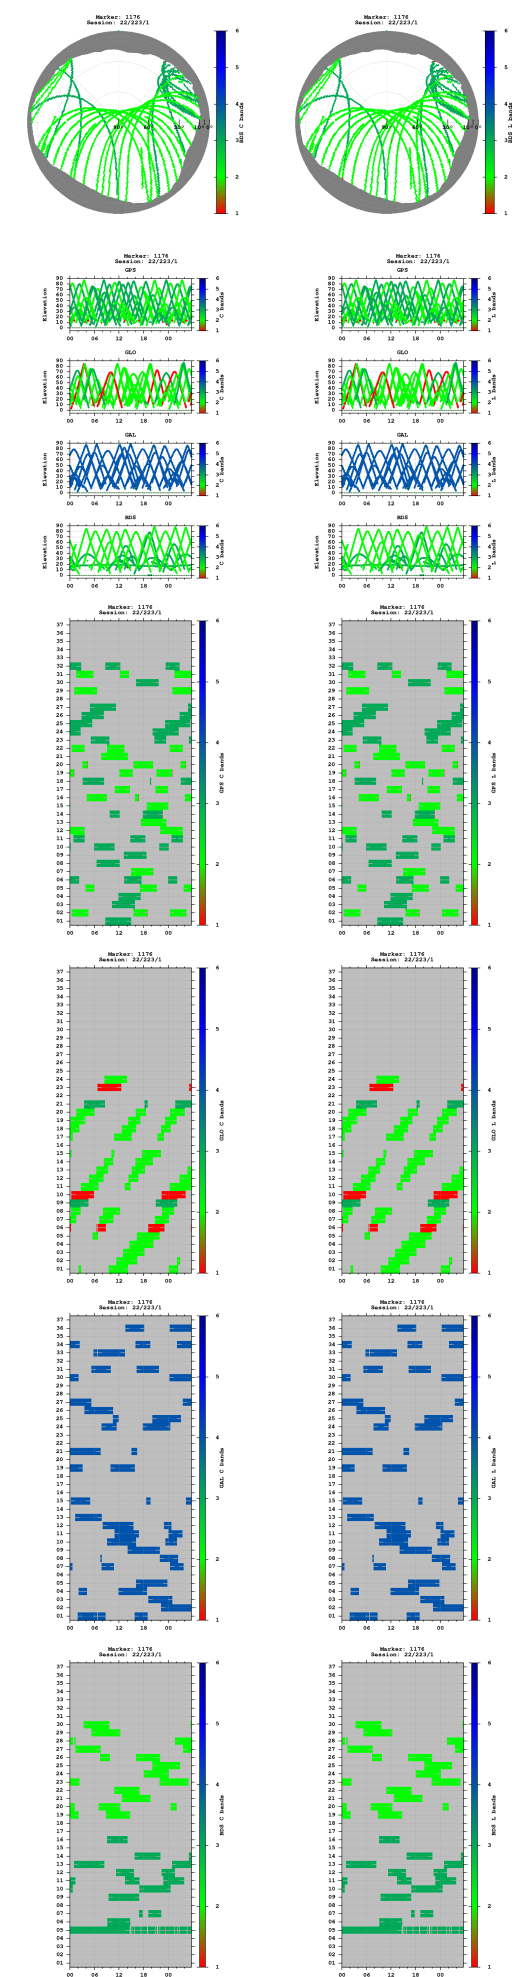


Observations

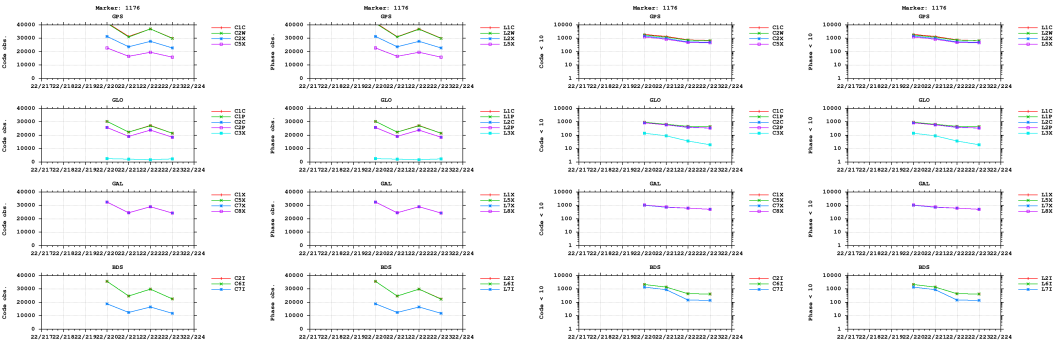



Multipath

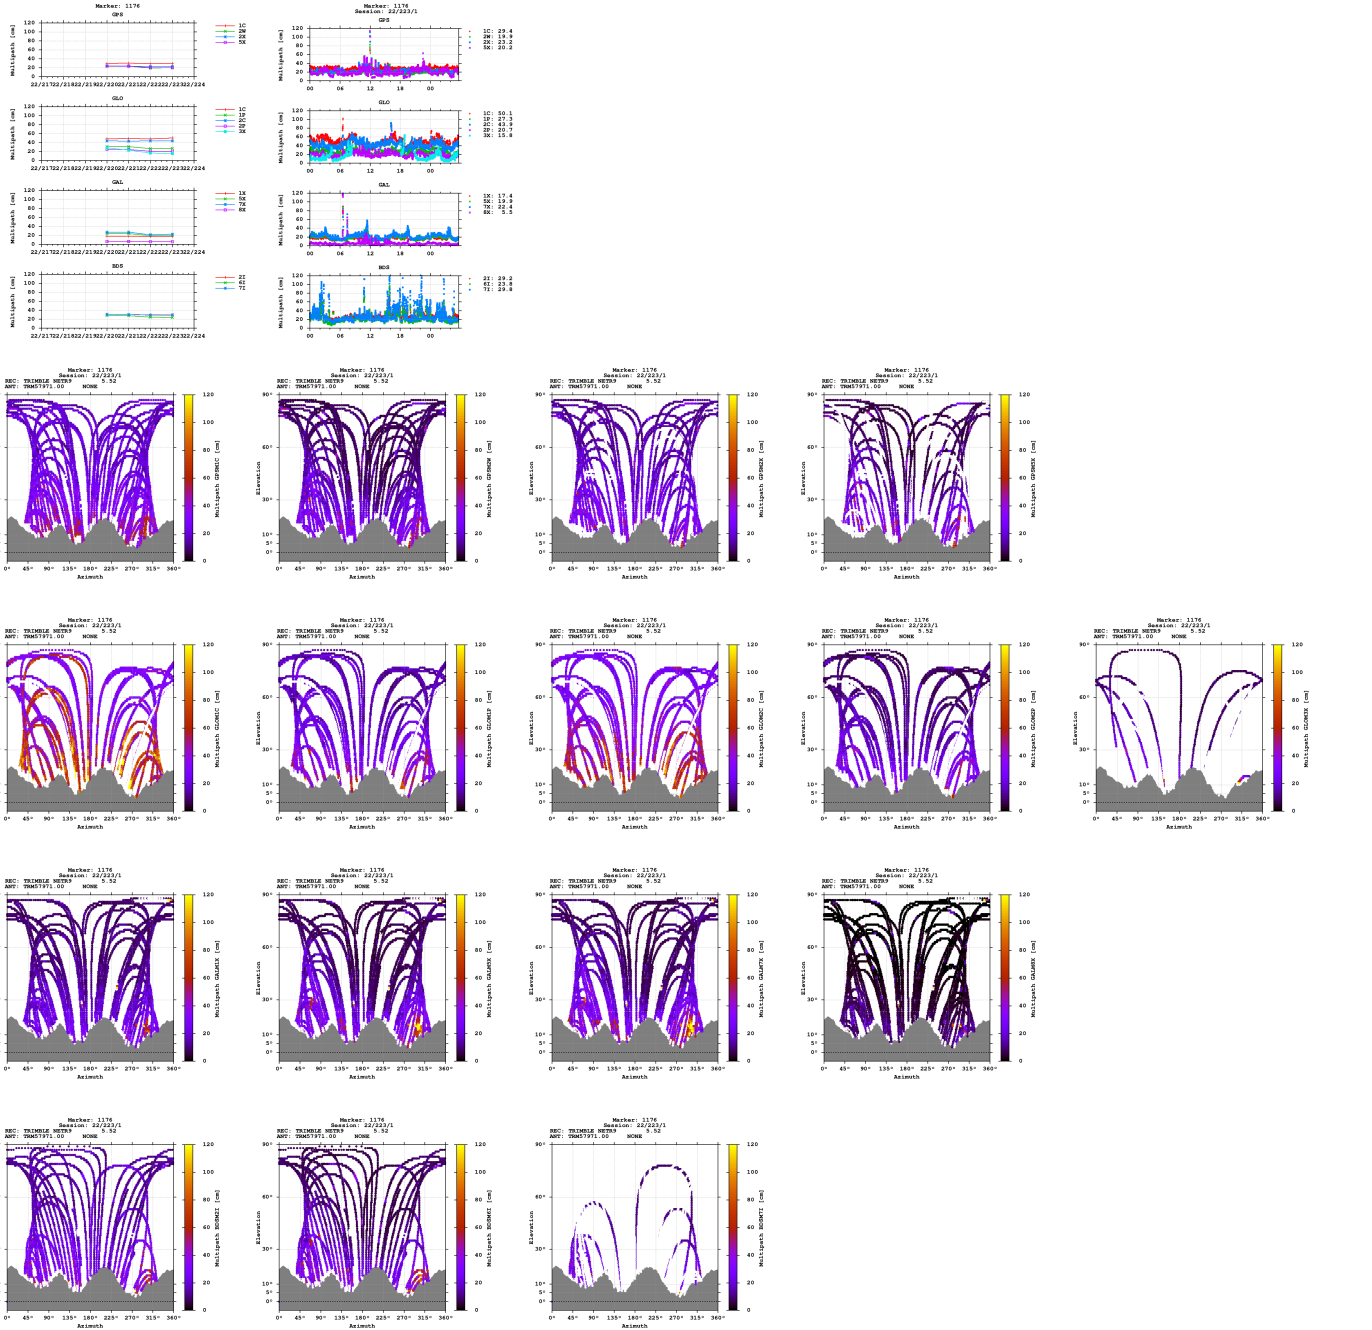


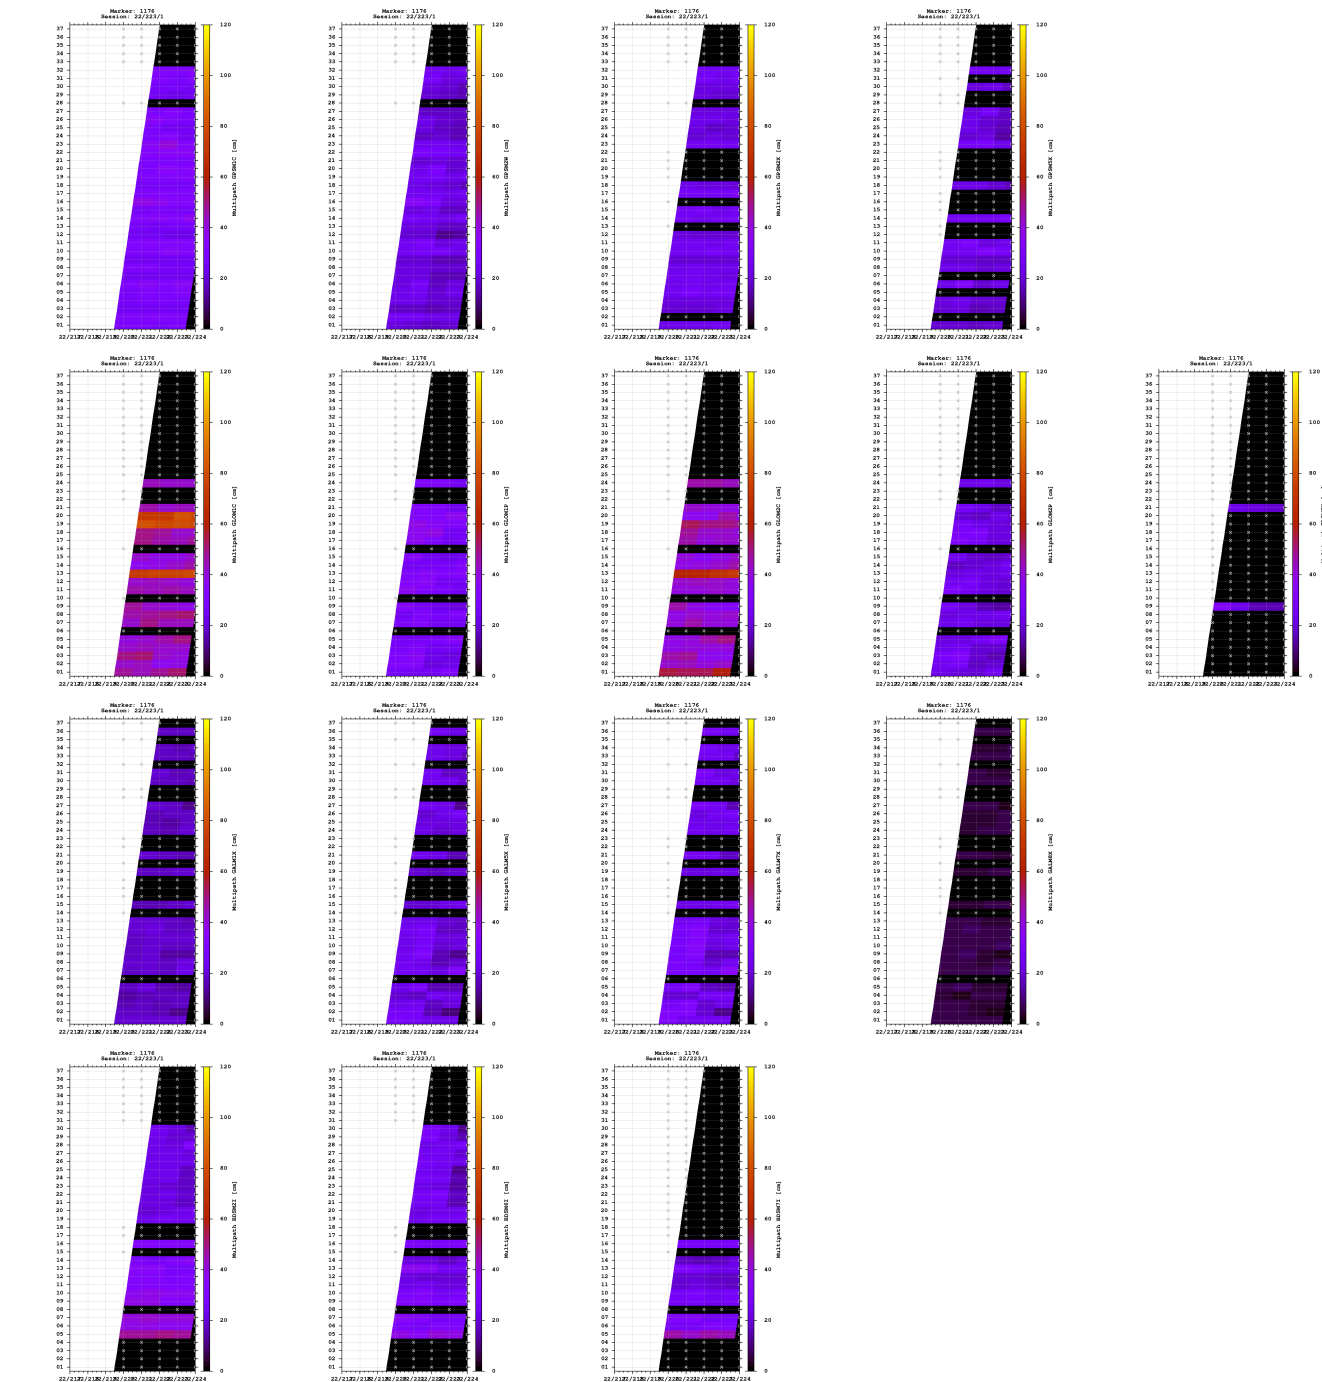


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

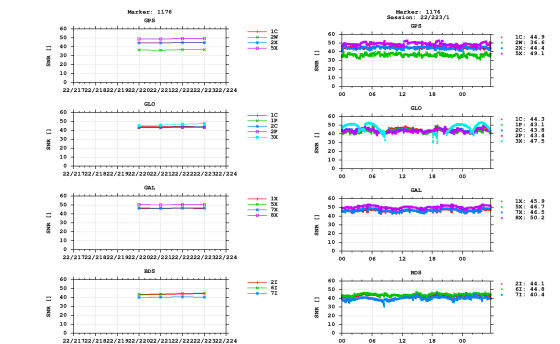


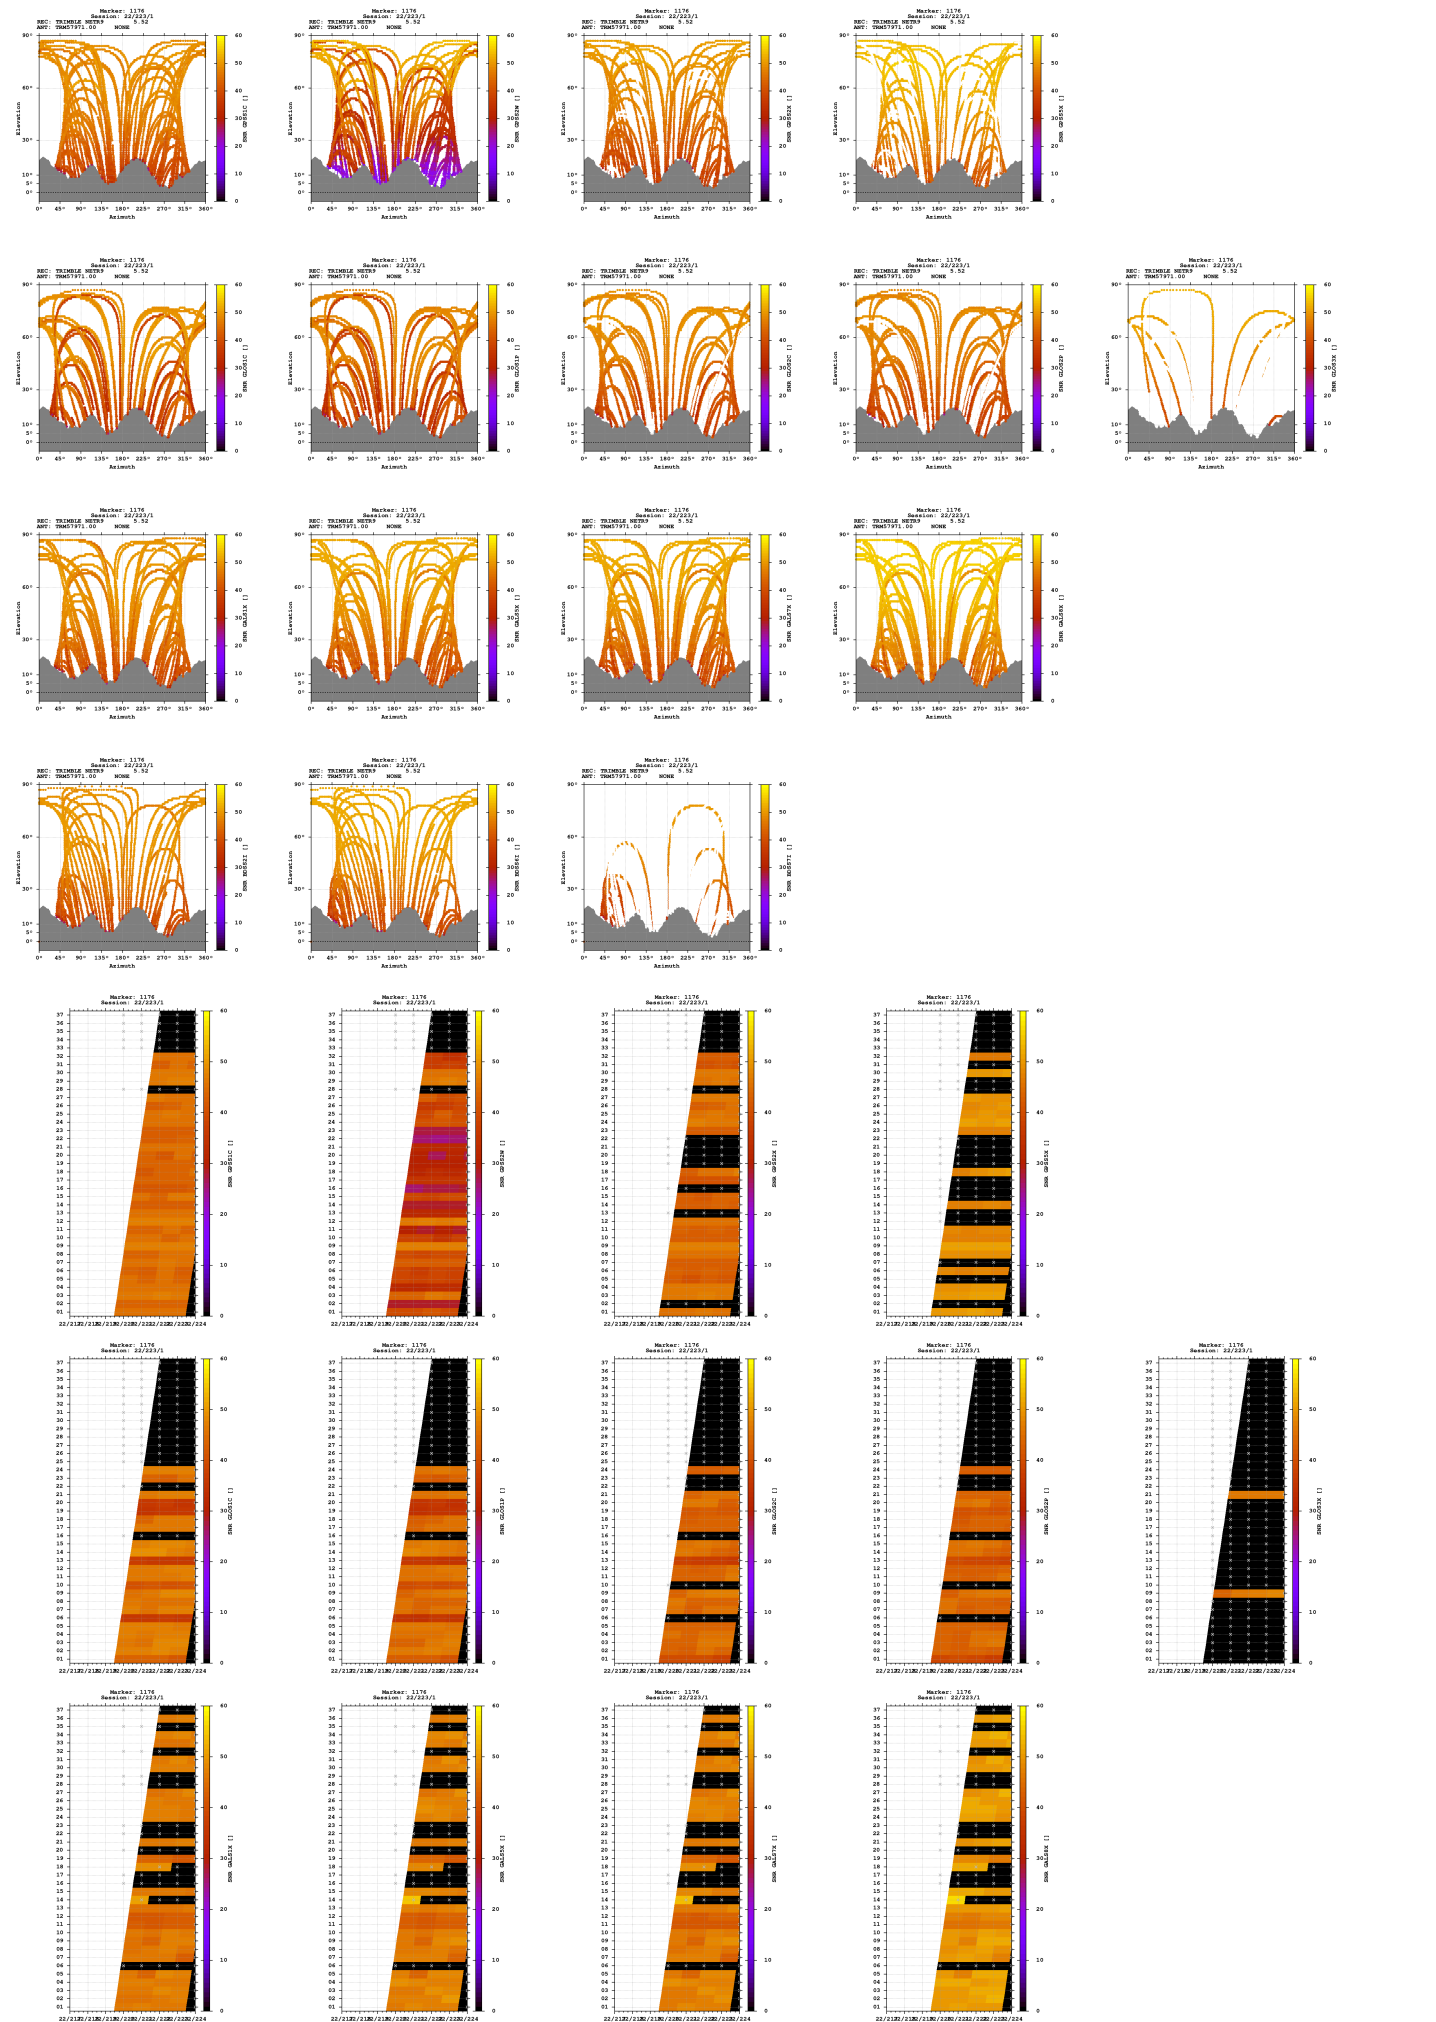

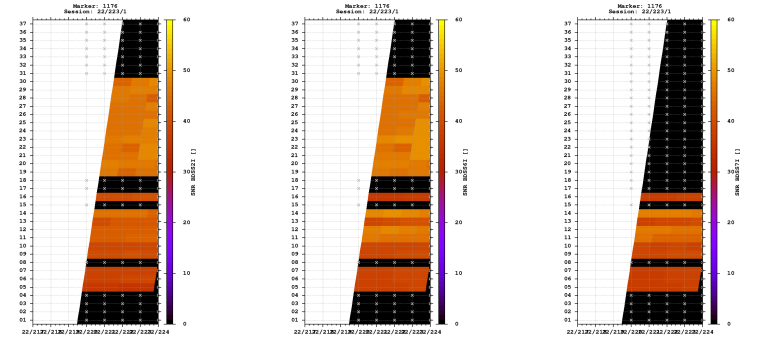



Estimates

2022-08-10 11:04:30	GPS	4298167.7149	734145.7012	4640341.7171	46.973333918	9.692830207	819.6665
2022-08-10 11:04:30	GLO	4298167.1643	734145.7381	4640341.7691	46.973337764	9.692831902	819.3384
2022-08-10 11:04:30	GAL	4298167.2353	734145.6519	4640341.1984	46.973333897	9.692830628	818.9591
2022-08-10 11:04:30	BDS	4298165.0685	734146.4469	4640342.6315	46.973355855	9.692845719	818.6407

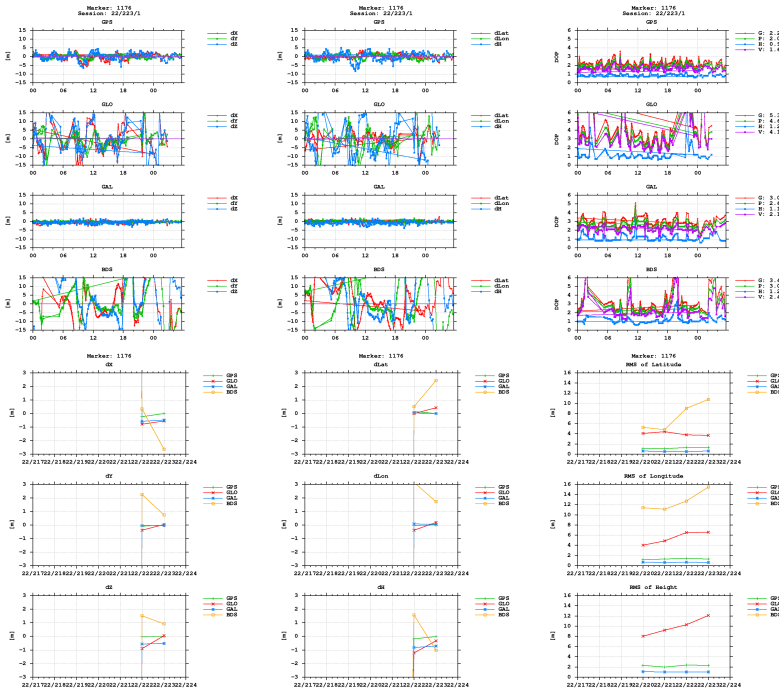

BNC

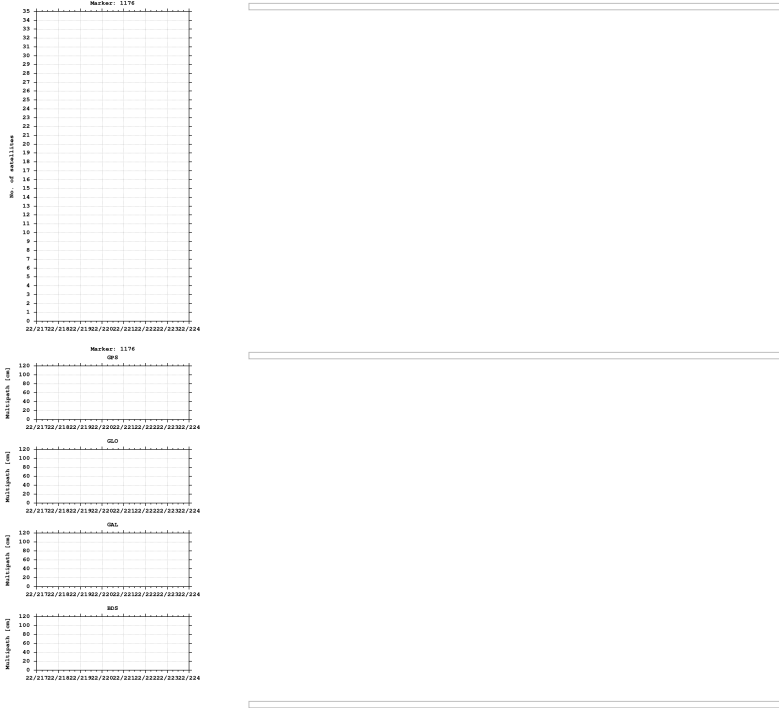

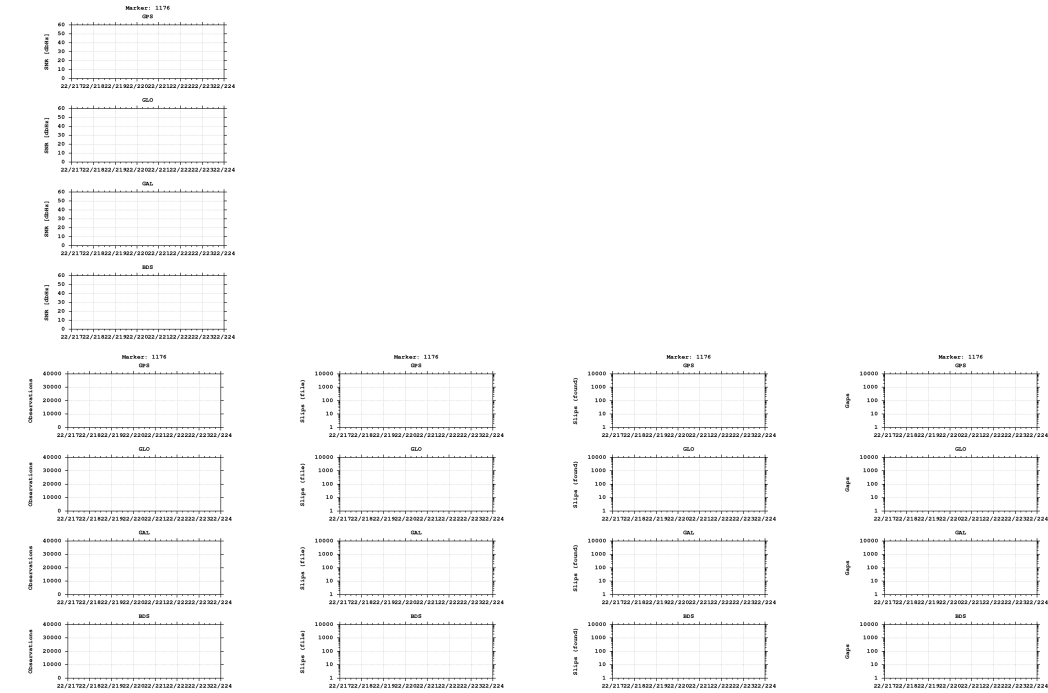

Equipment

2022-08-08 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 517

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)