

GNSS observation file monitoring for 0517

Last RINEX file: 05172251.220


RINEX version: 3.02

Marker: 1159

Receiver: 517 TRIMBLE NETR9 5.52


Antenna: 517 TRM57971.00 NONE

Epochs

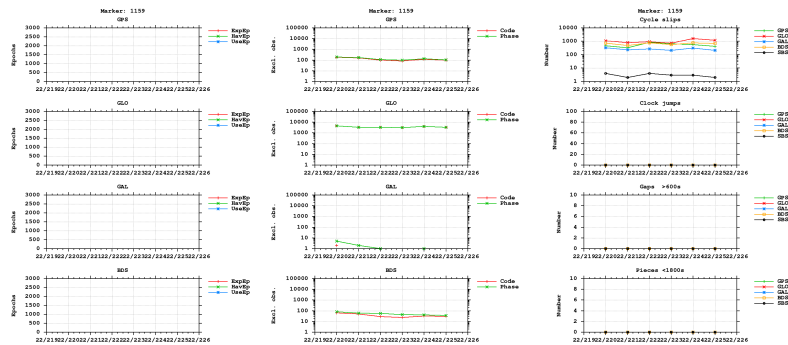



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

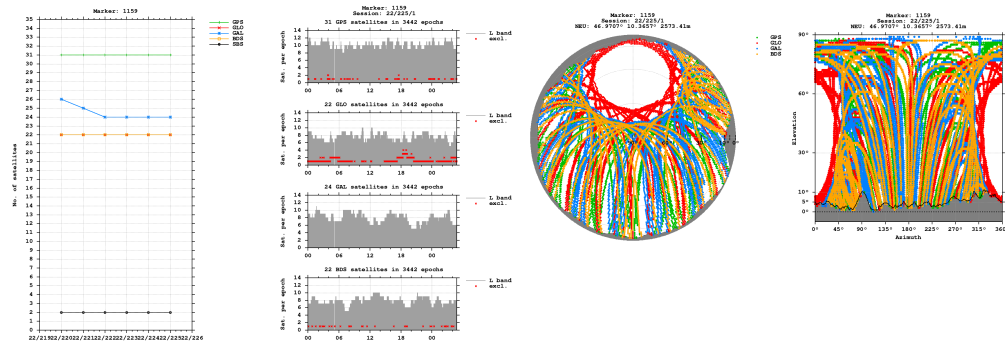


Bands

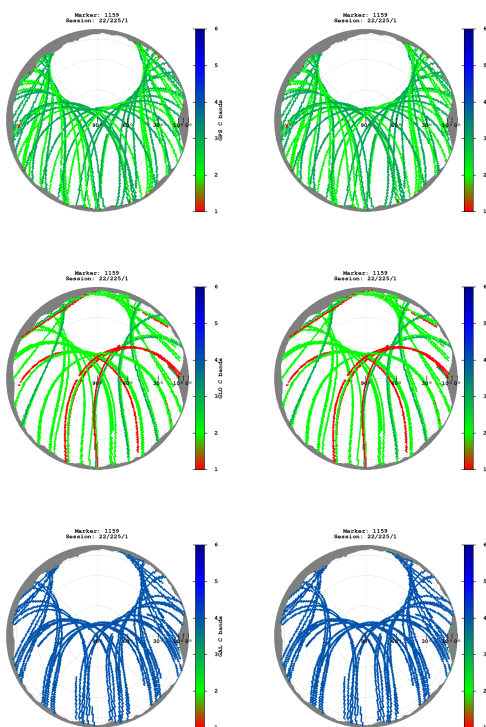


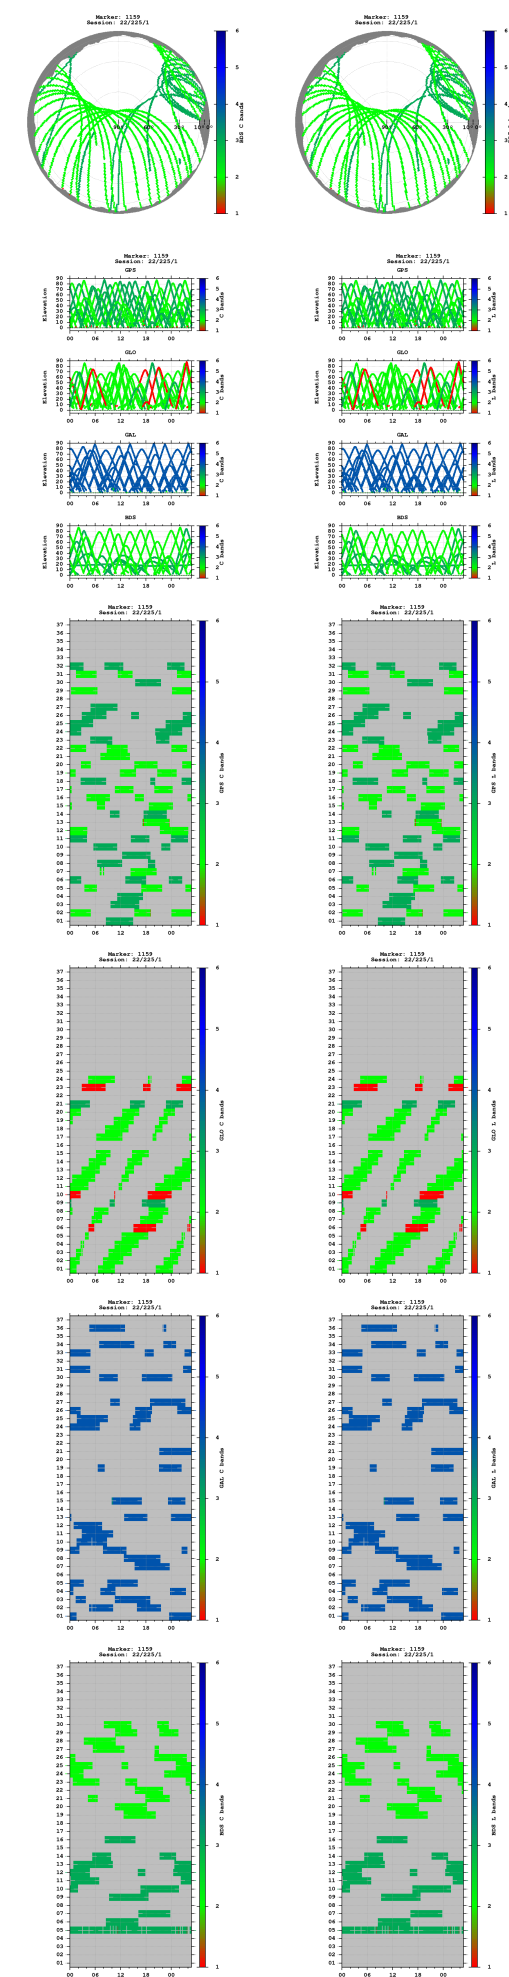


Observations

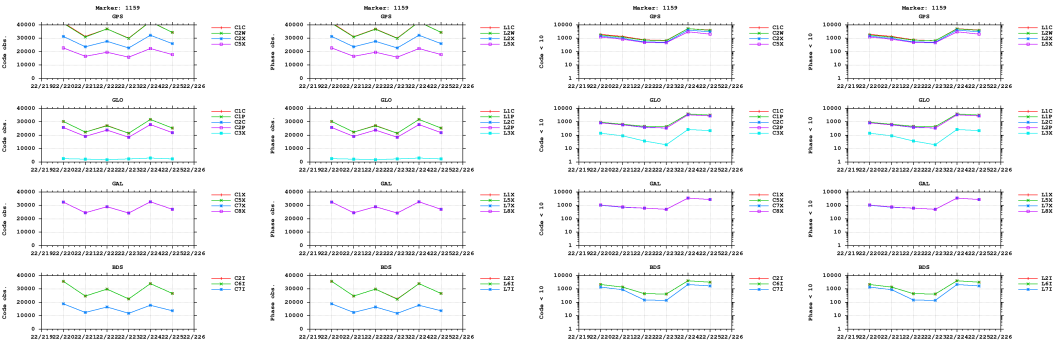


Multipath

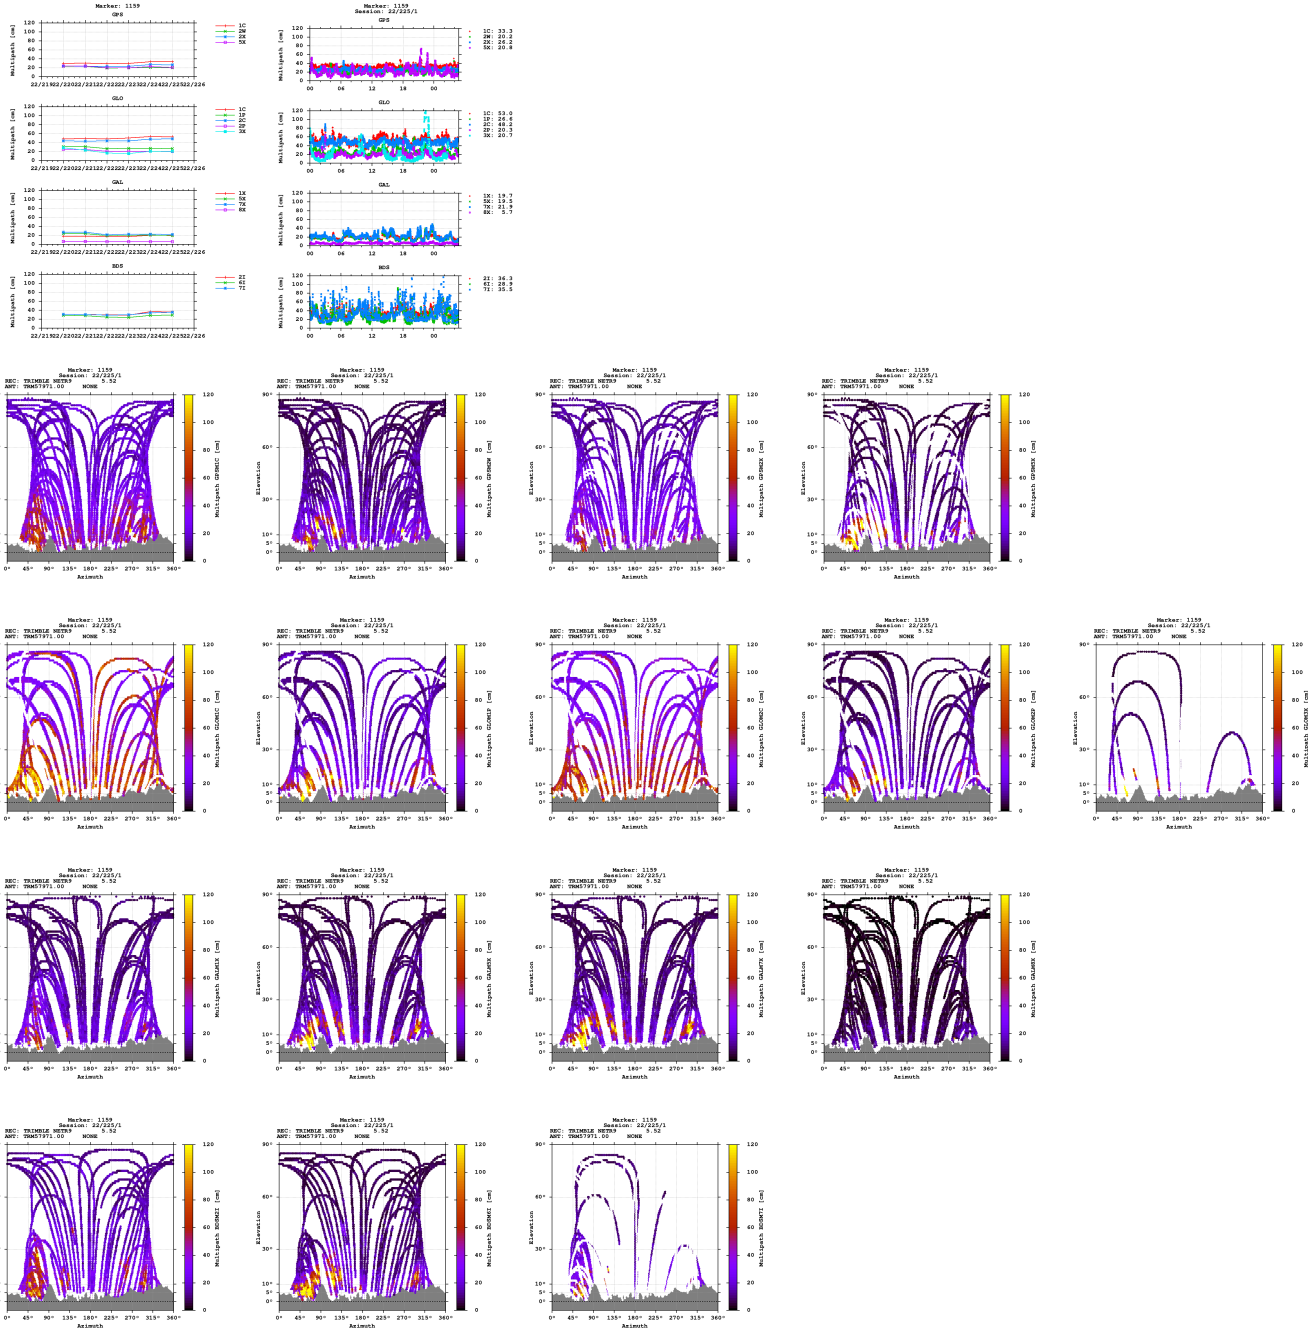


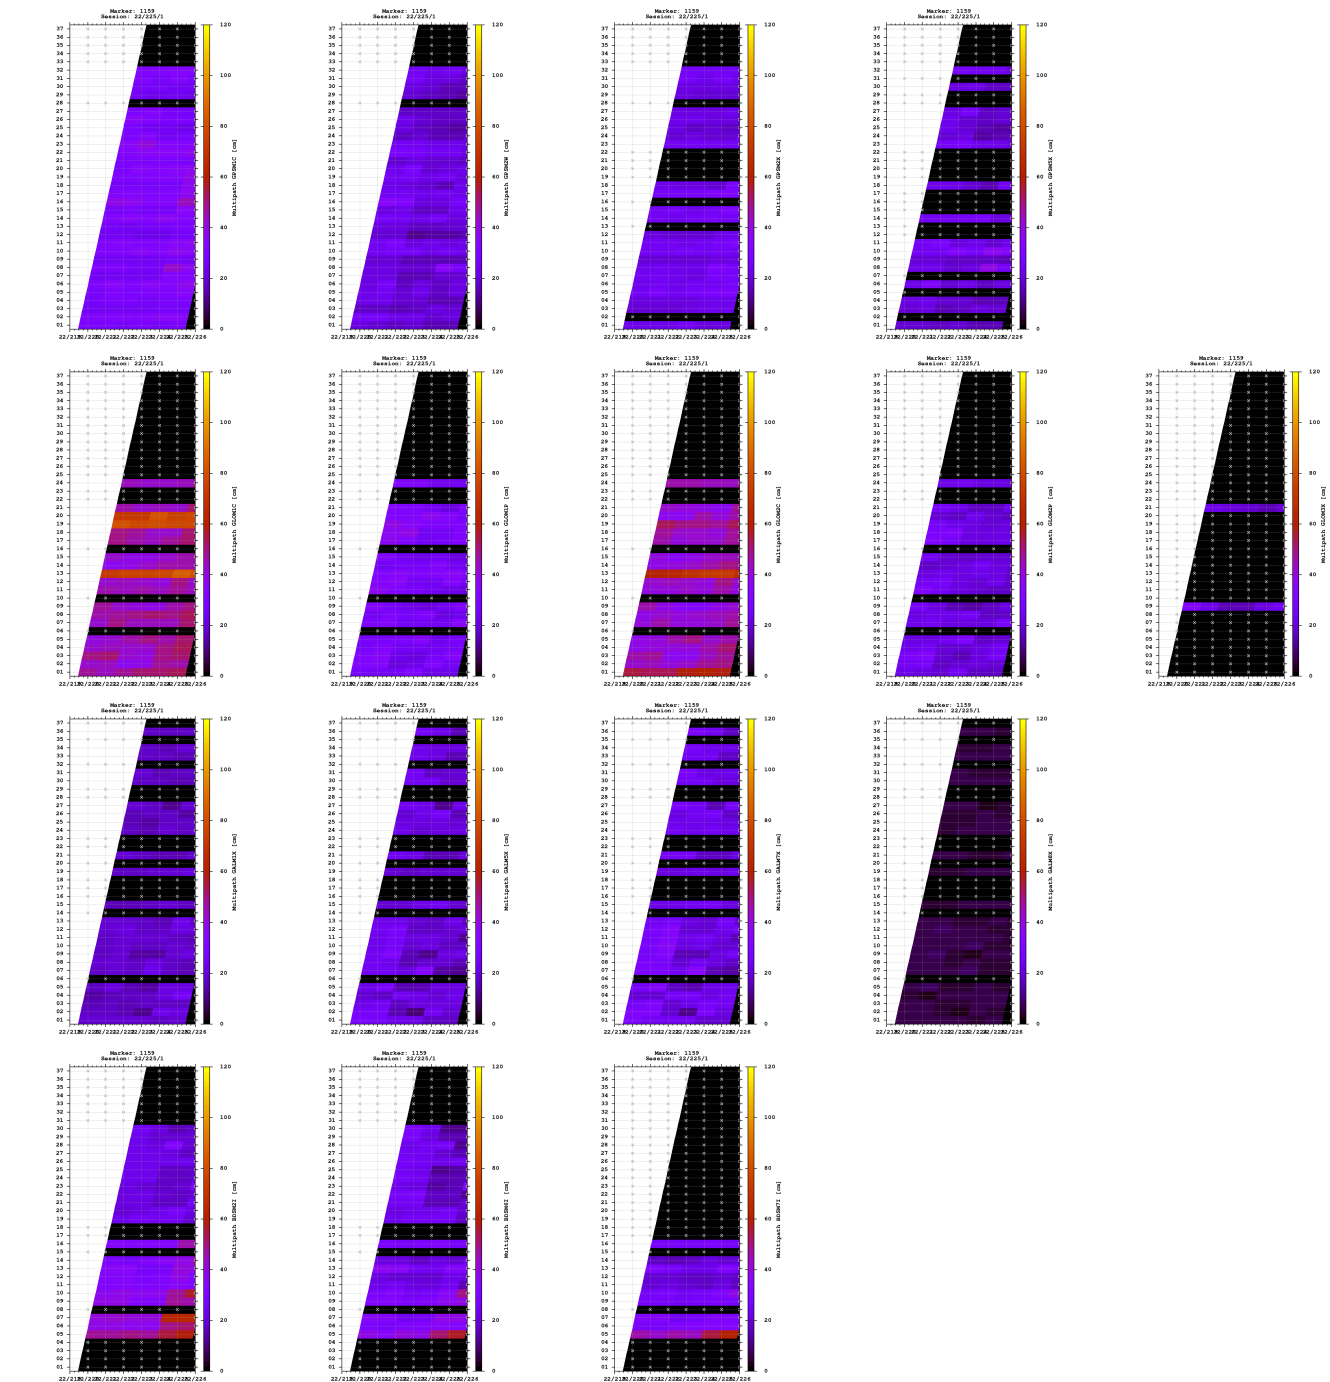


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

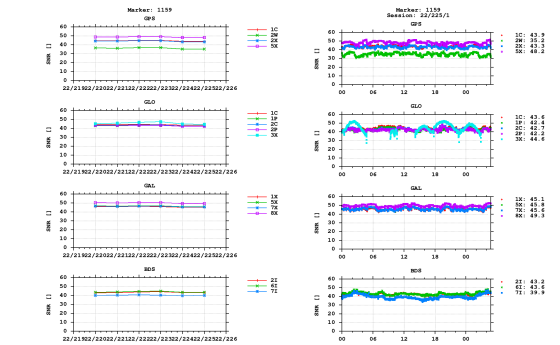


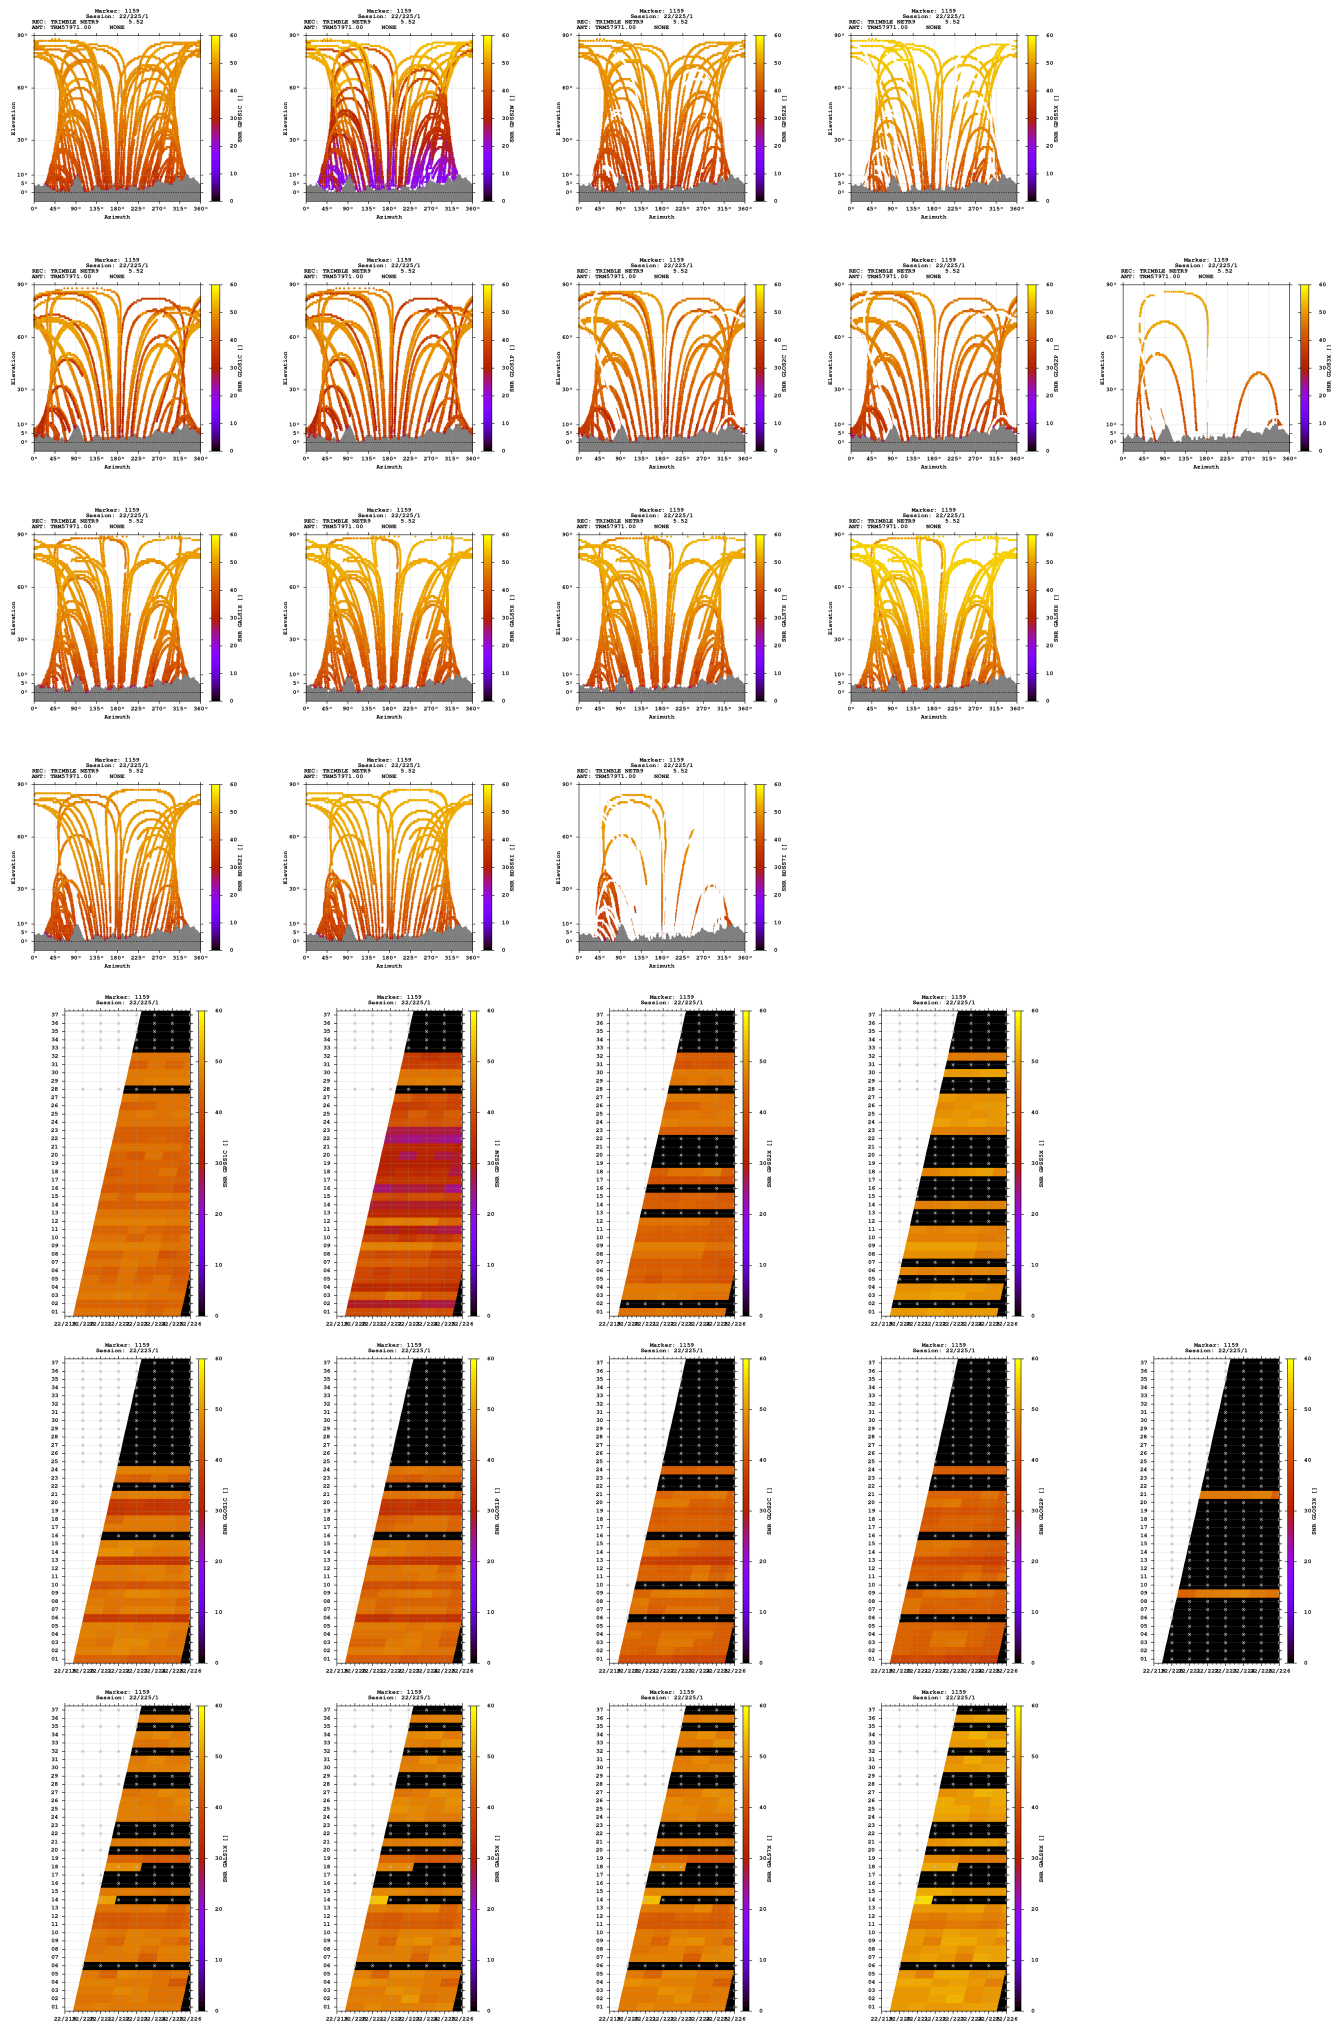

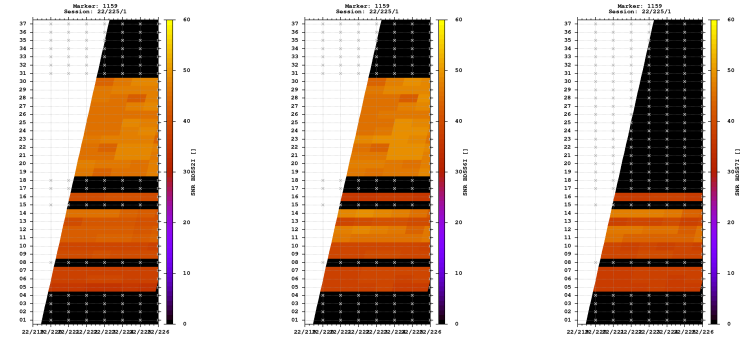



Estimates

2022-08-12 12:18:00	GPS	4290636.9430	784820.6656	4641425.1689	46.970716910	10.365651392	2573.4128
2022-08-12 12:18:00	GLO	4290637.4807	784819.9381	4641425.1134	46.970713954	10.365640722	2573.6438
2022-08-12 12:18:00	GAL	4290636.9056	784820.6352	4641425.0825	46.970716658	10.365651088	2573.3207
2022-08-12 12:18:00	BDS	4290637.8666	784820.8437	4641427.5188	46.970725146	10.365651512	2575.7723

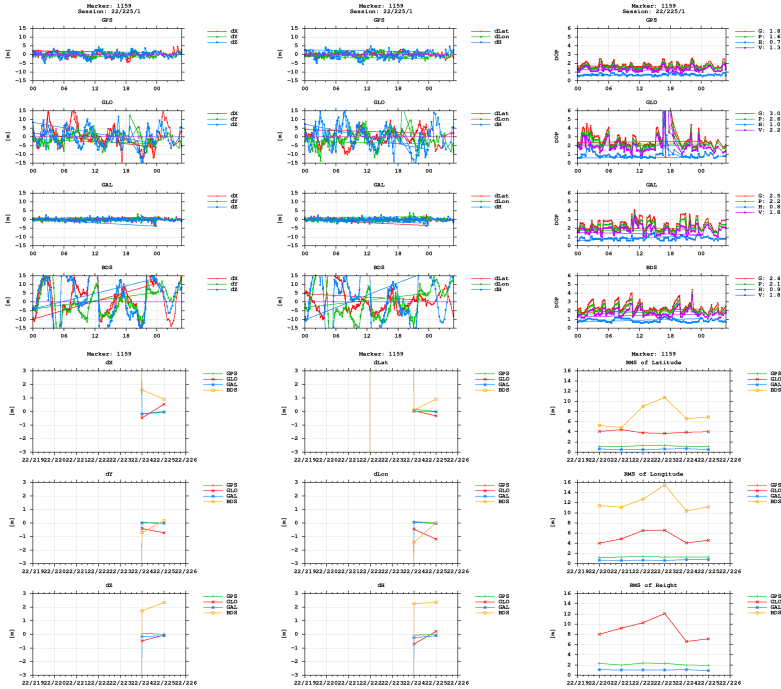

BNC

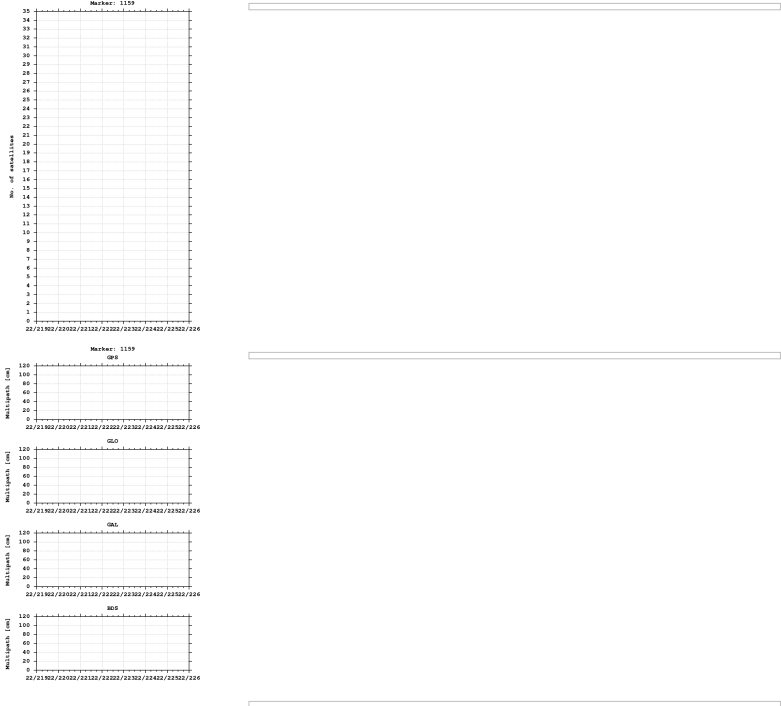

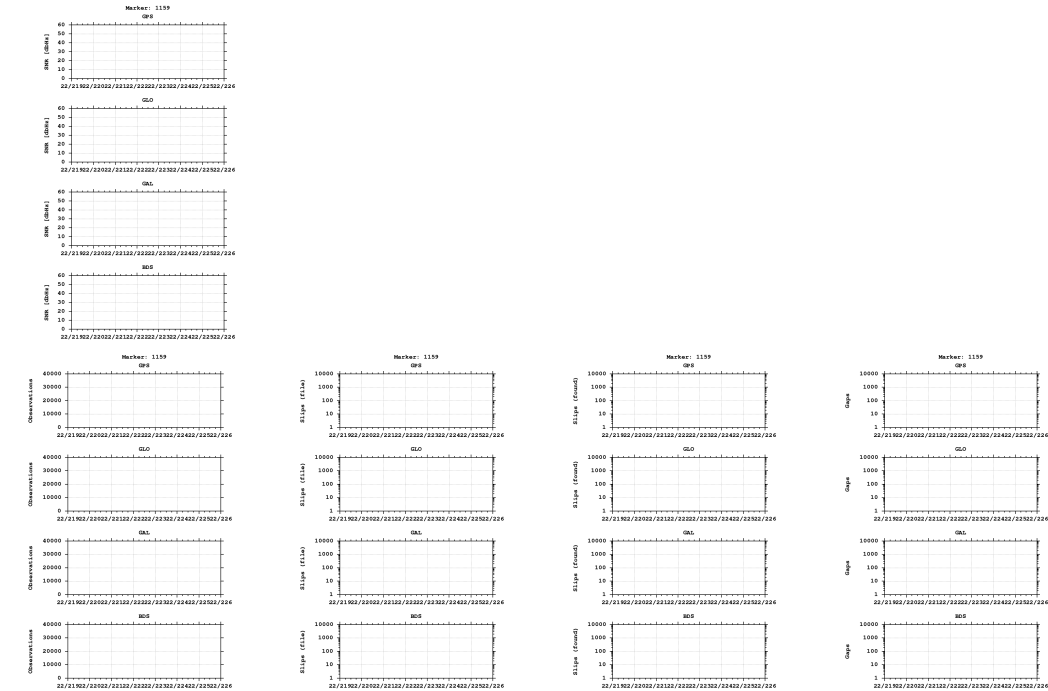

Equipment

2022-08-08 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 517

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)