


GNSS observation file monitoring for 0517


Last RINEX file: 05172271.220
RINEX version: 3.02
Marker: 1239
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 517 TRM57971.00 NONE

Epochs

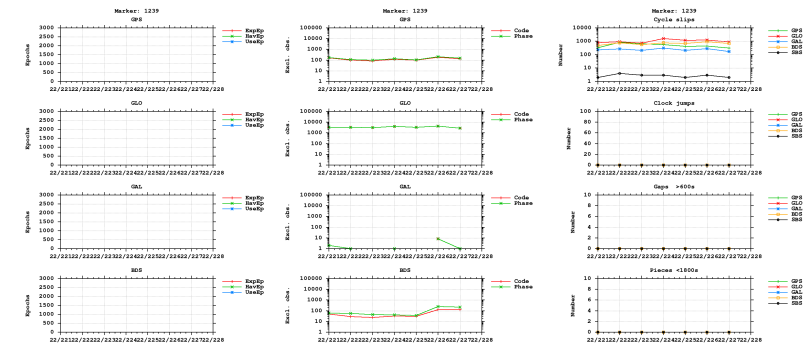



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

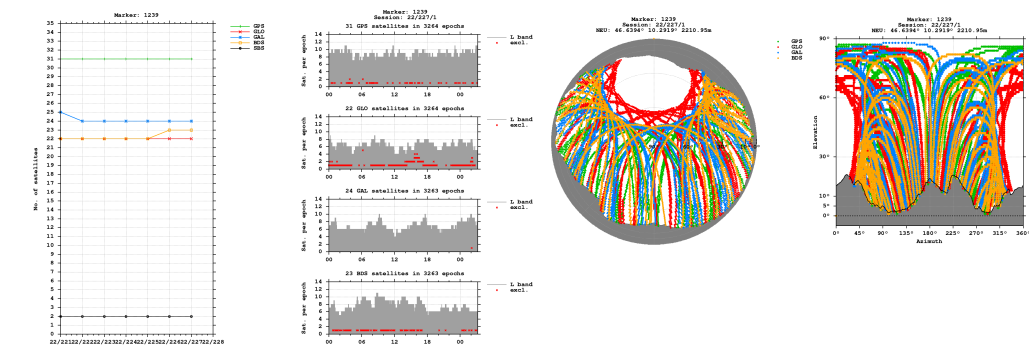


Bands


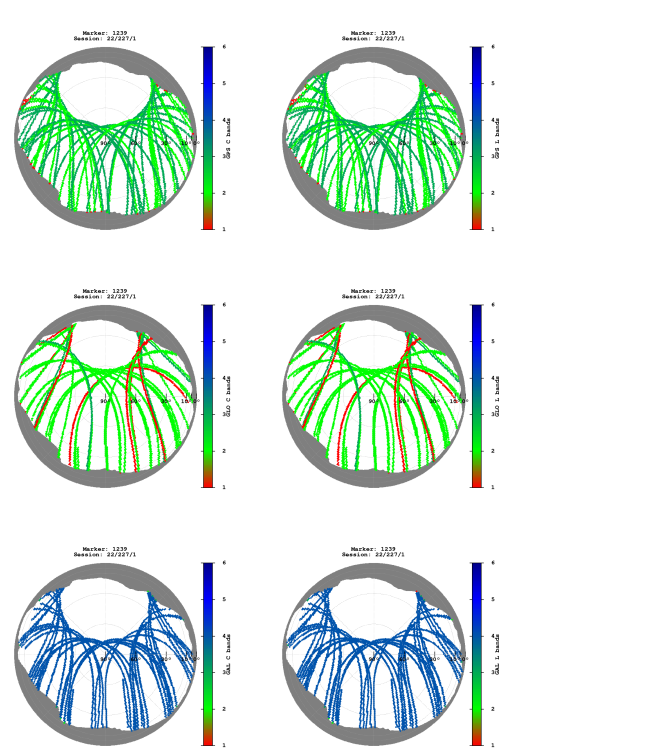


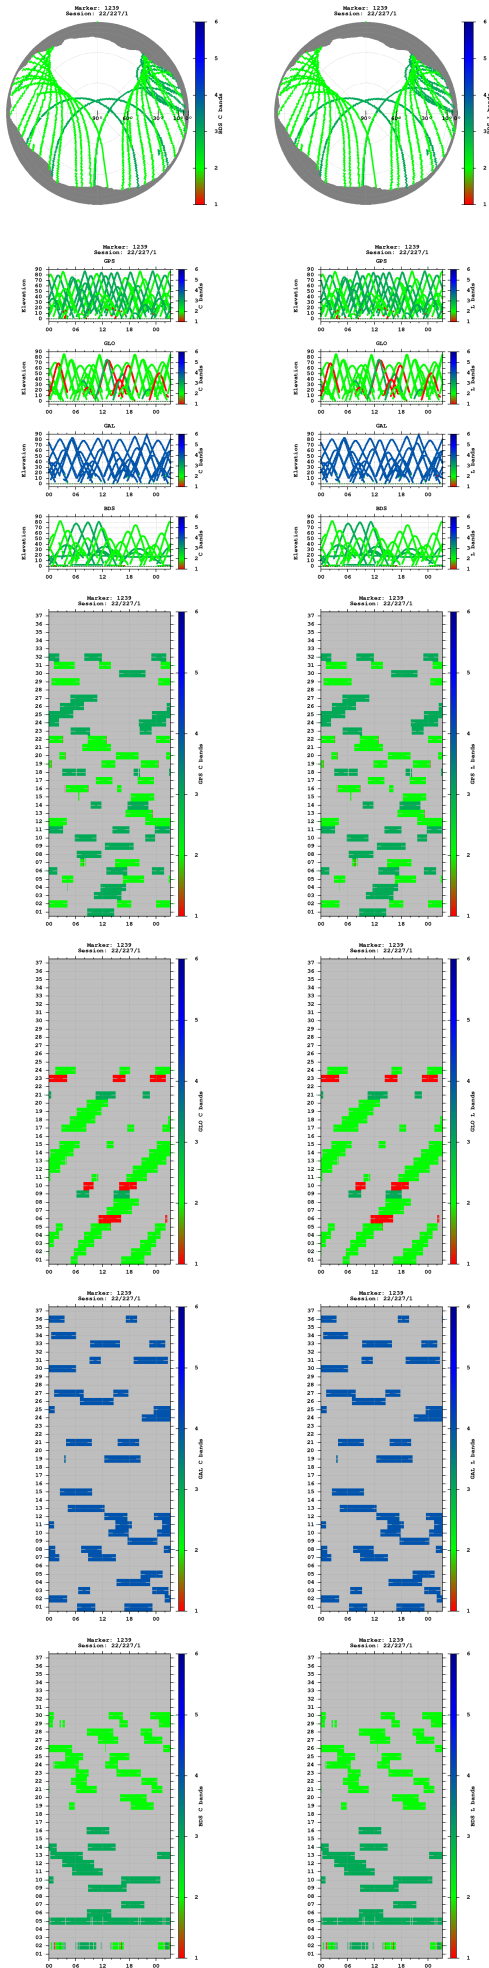


Observations

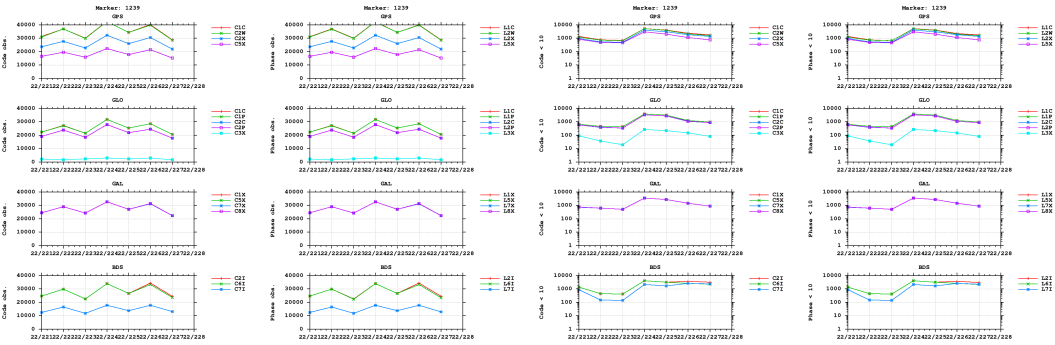


Multipath

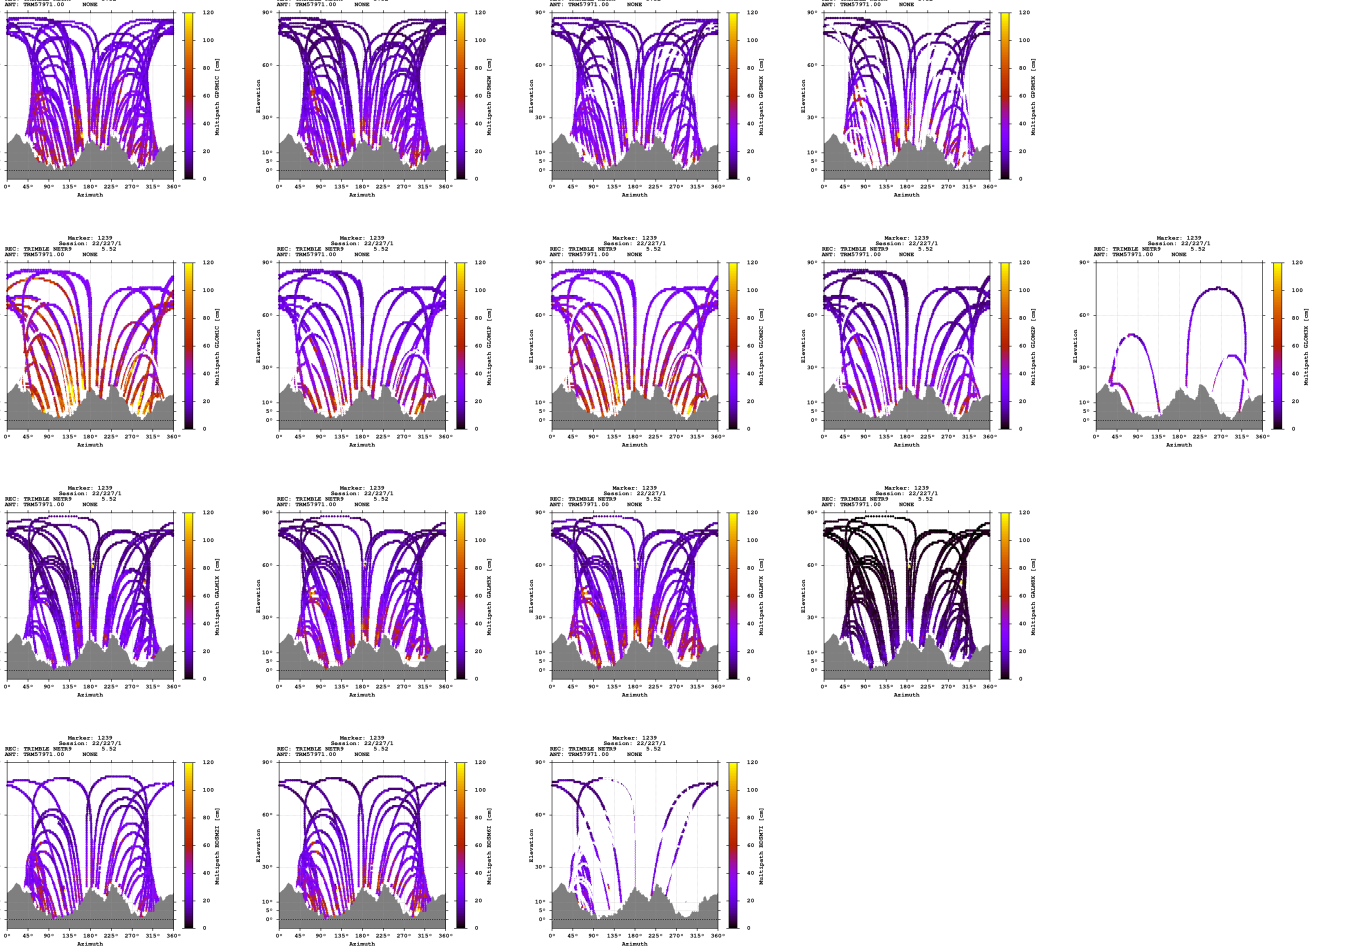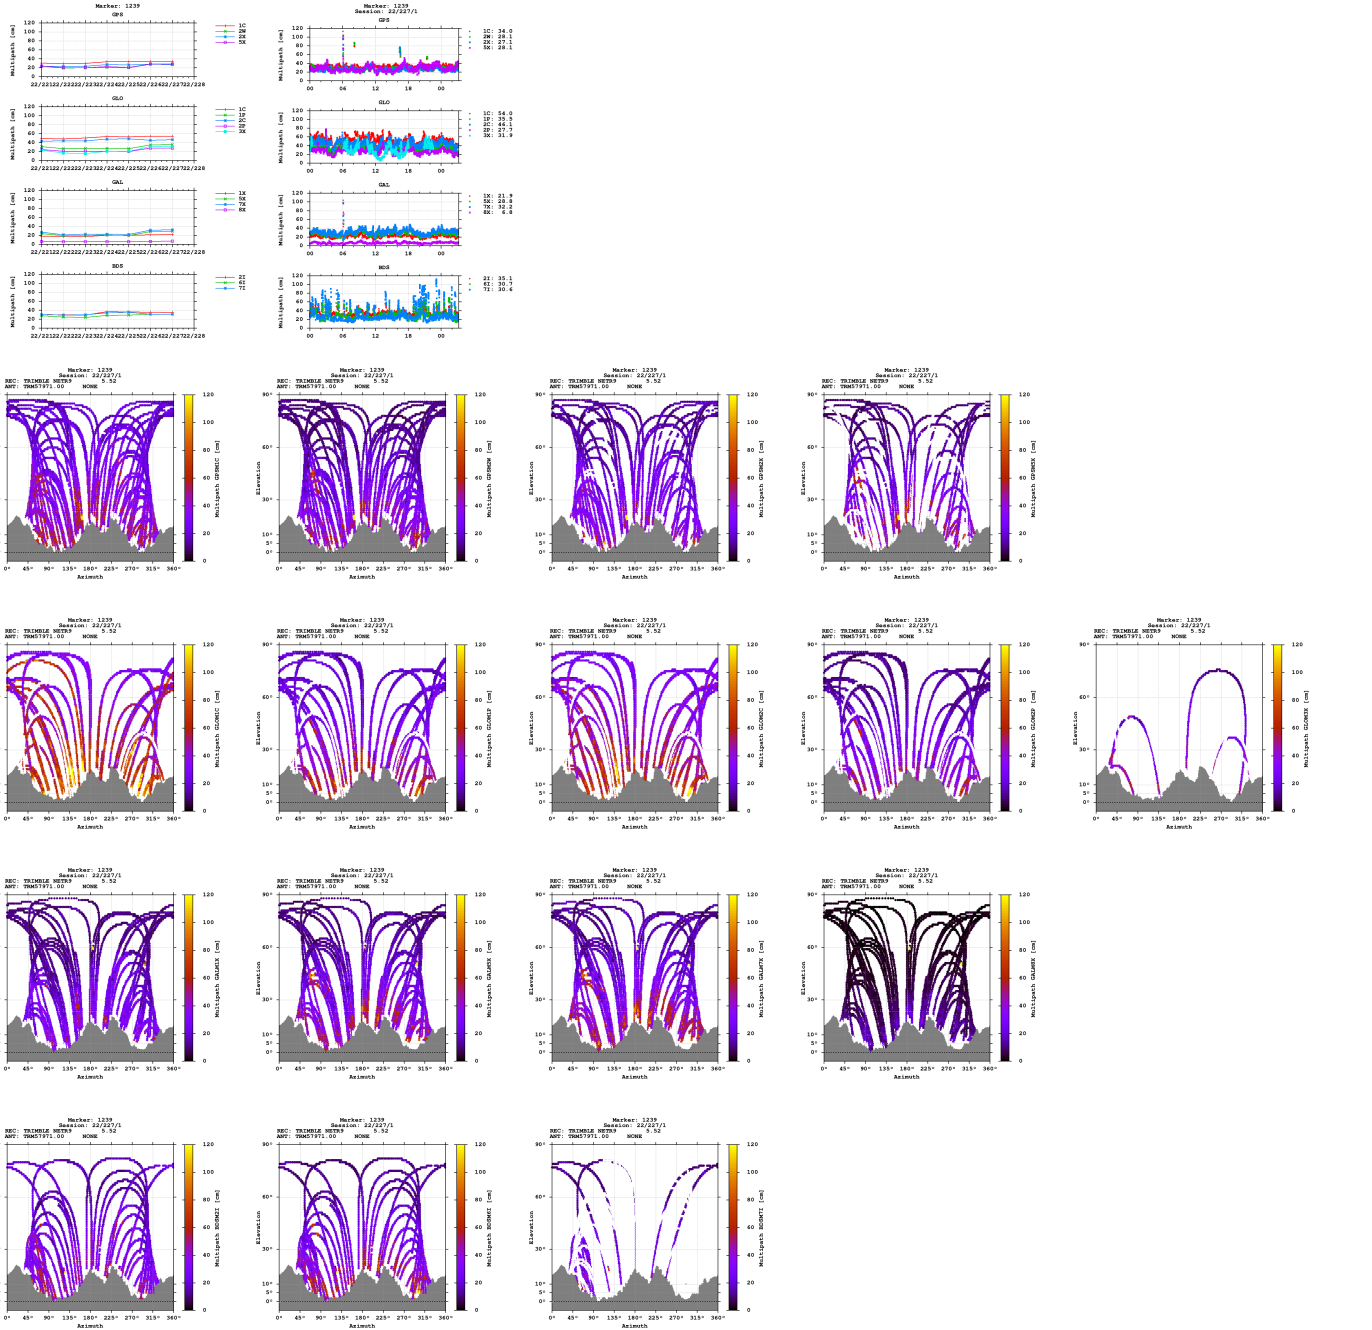


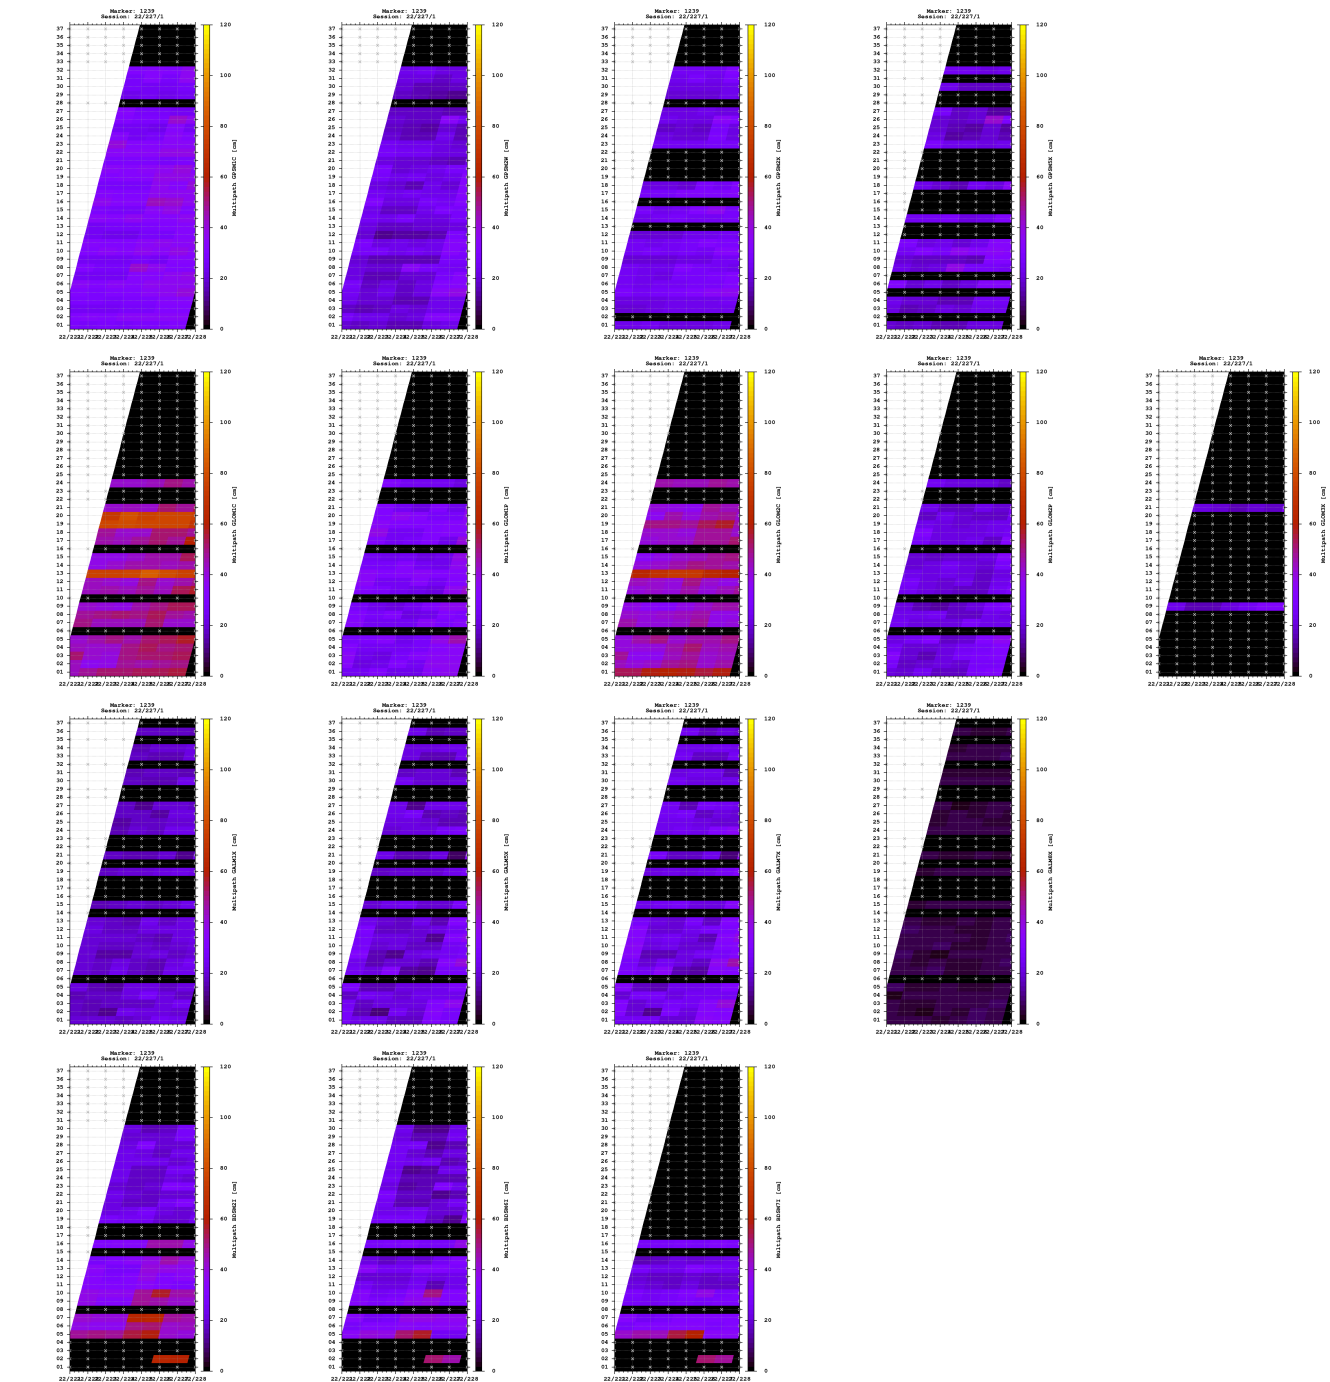


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

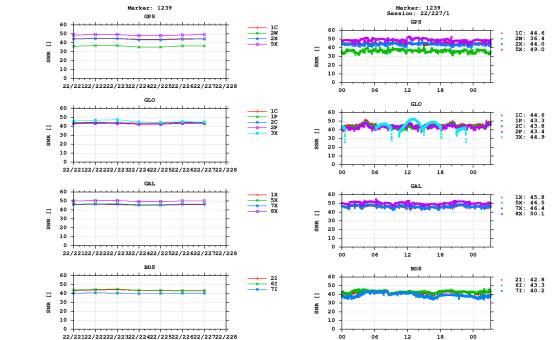


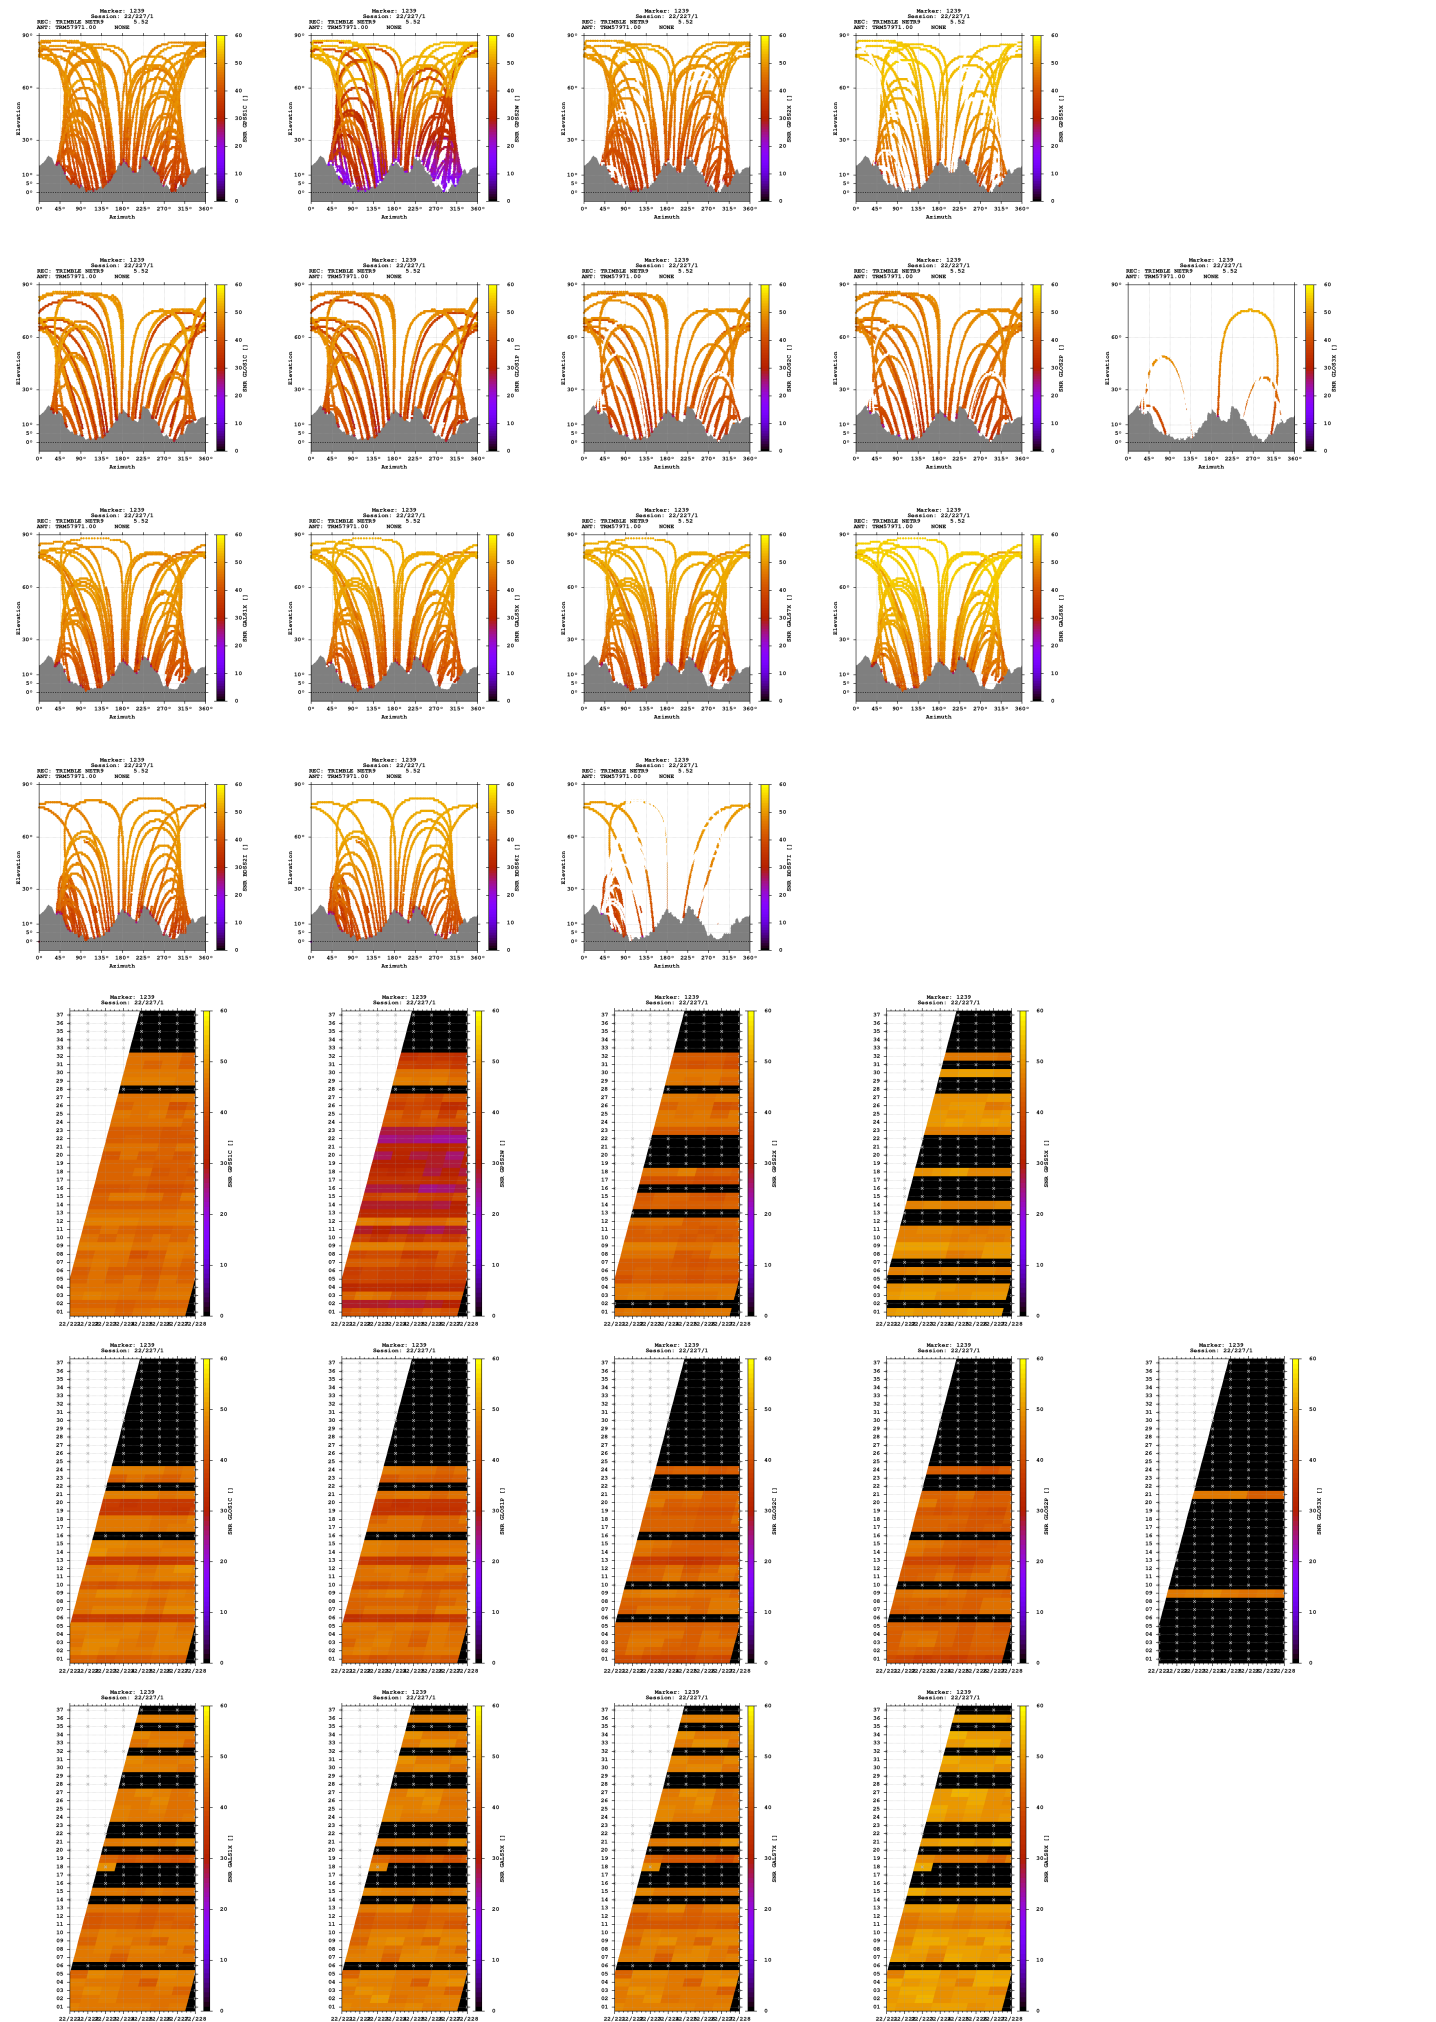

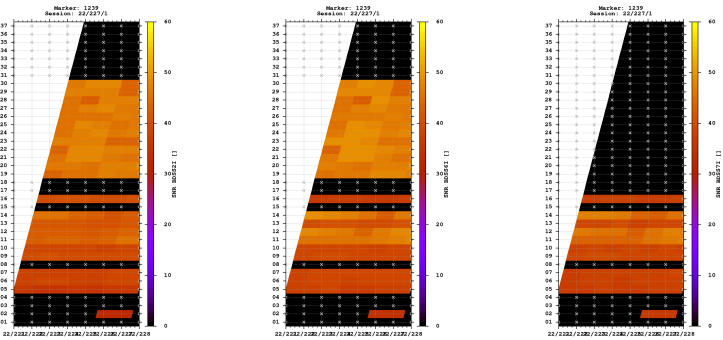



Estimates

2022-08-14 09:42:30	GPS	4317827.7579	784052.9117	4615941.5772	46.639408159	10.291915168	2210.9532
2022-08-14 09:42:30	GLO	4317827.7527	784052.5546	4615941.9928	46.639411175	10.291910593	2211.2080
2022-08-14 09:42:30	GAL	4317828.0073	784052.9885	4615941.8595	46.639408207	10.291915573	2211.3364
2022-08-14 09:42:30	BDS	4317829.0411	784052.6005	4615947.0250	46.639433903	10.291908178	2215.7427

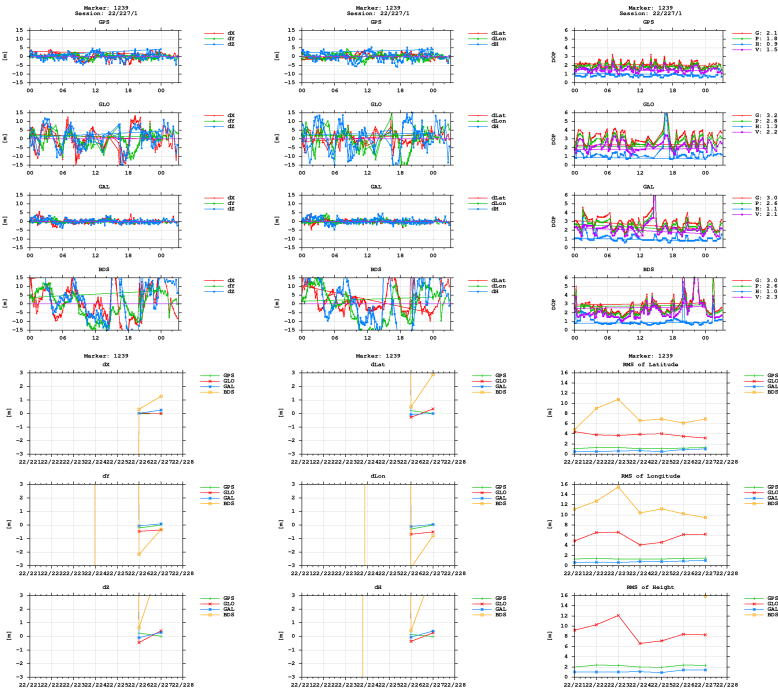

BNC

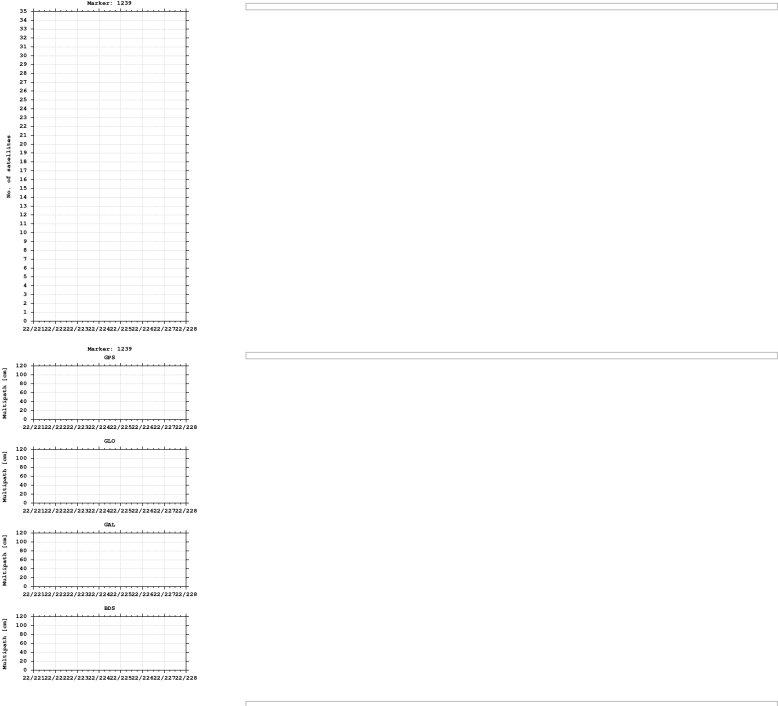

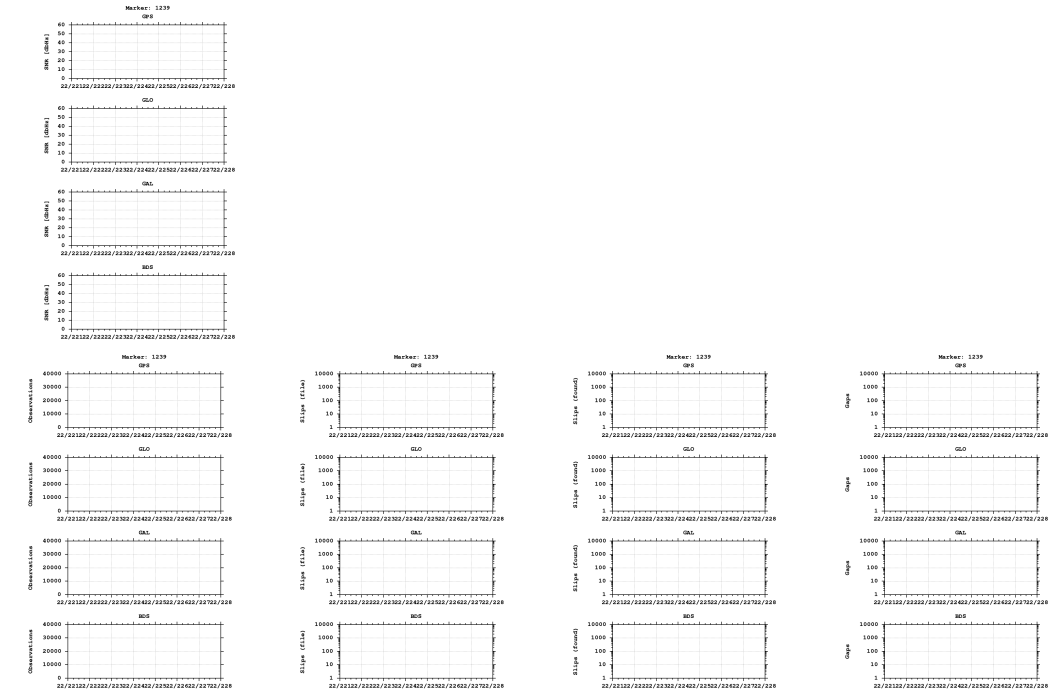

Equipment

2022-08-09 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 517

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)