


GNSS observation file monitoring for 0518


Last RINEX file: 05182201.22O
RINEX version: 3.02
Marker: 1215
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

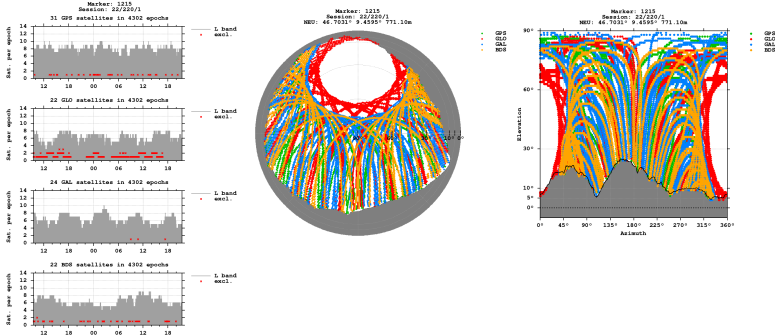


Bands

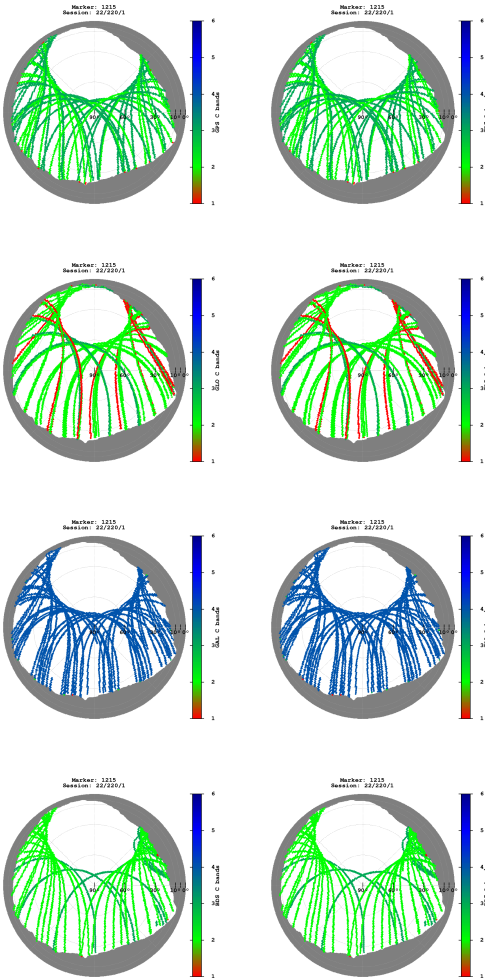

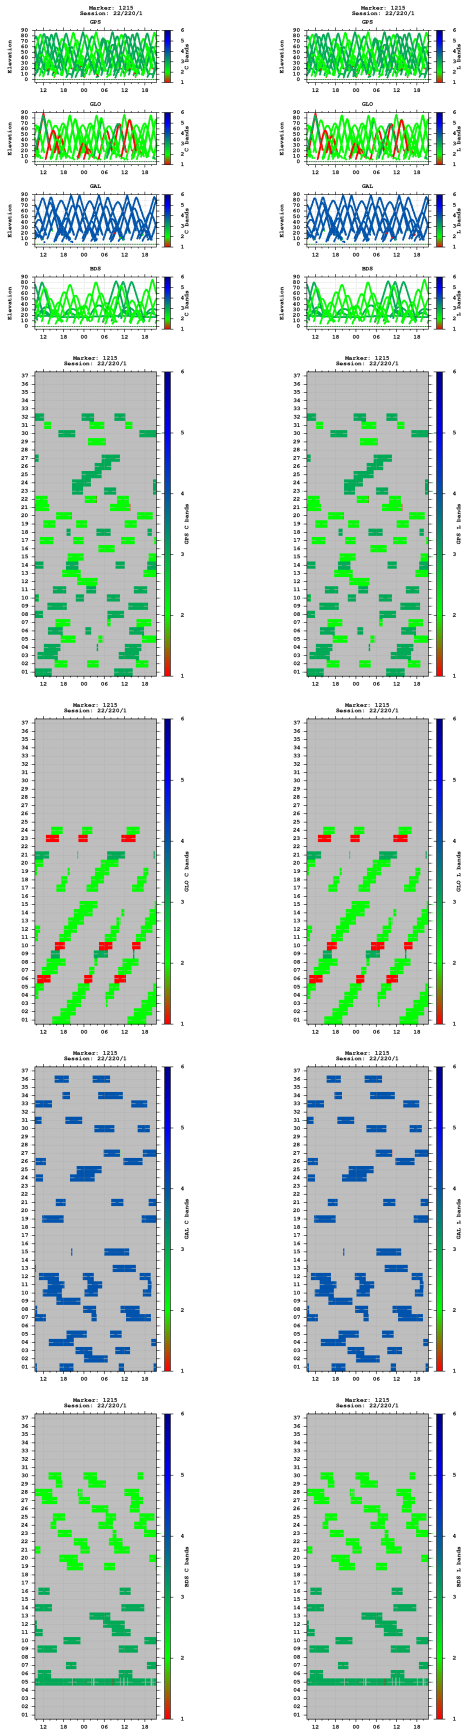



Multipath

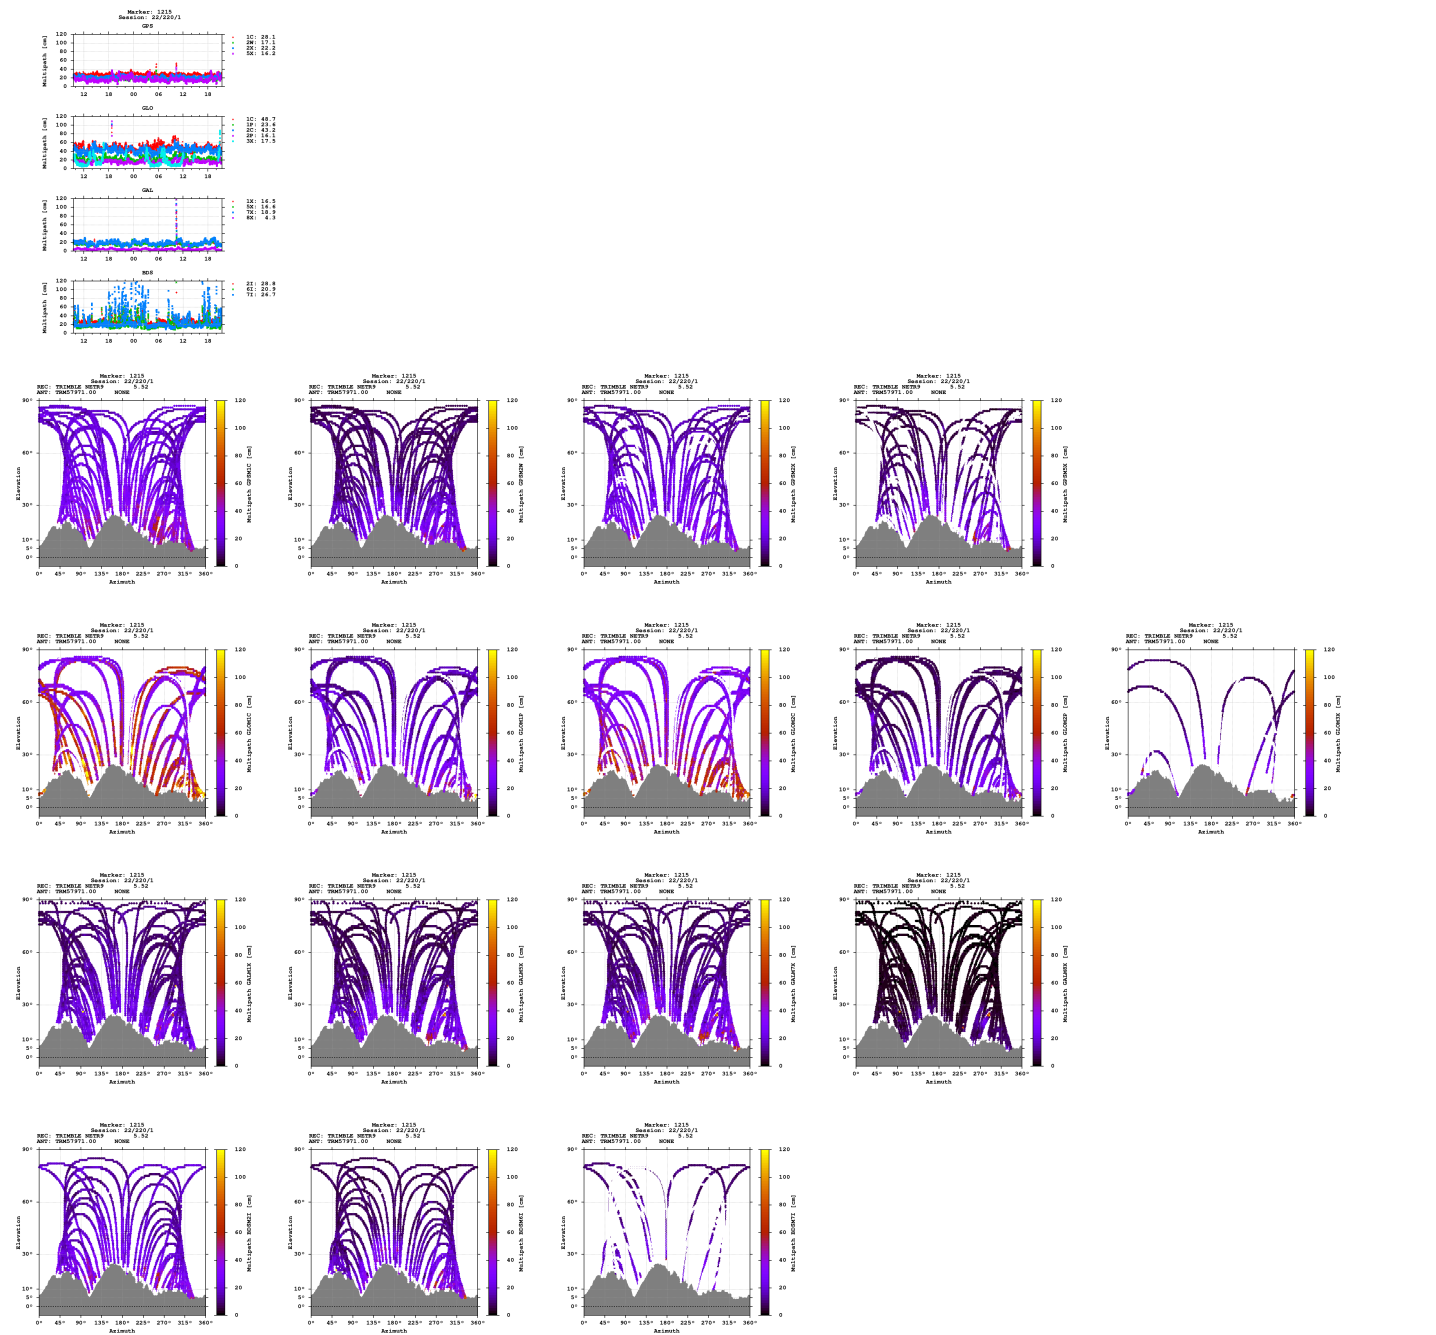

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

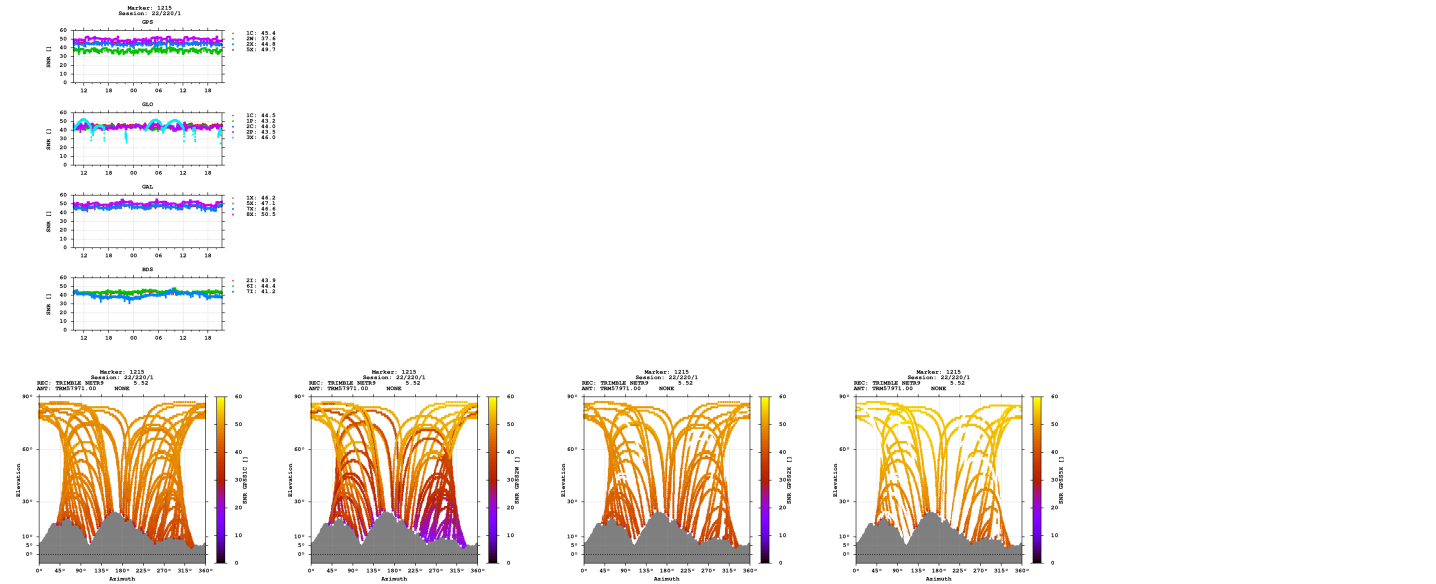

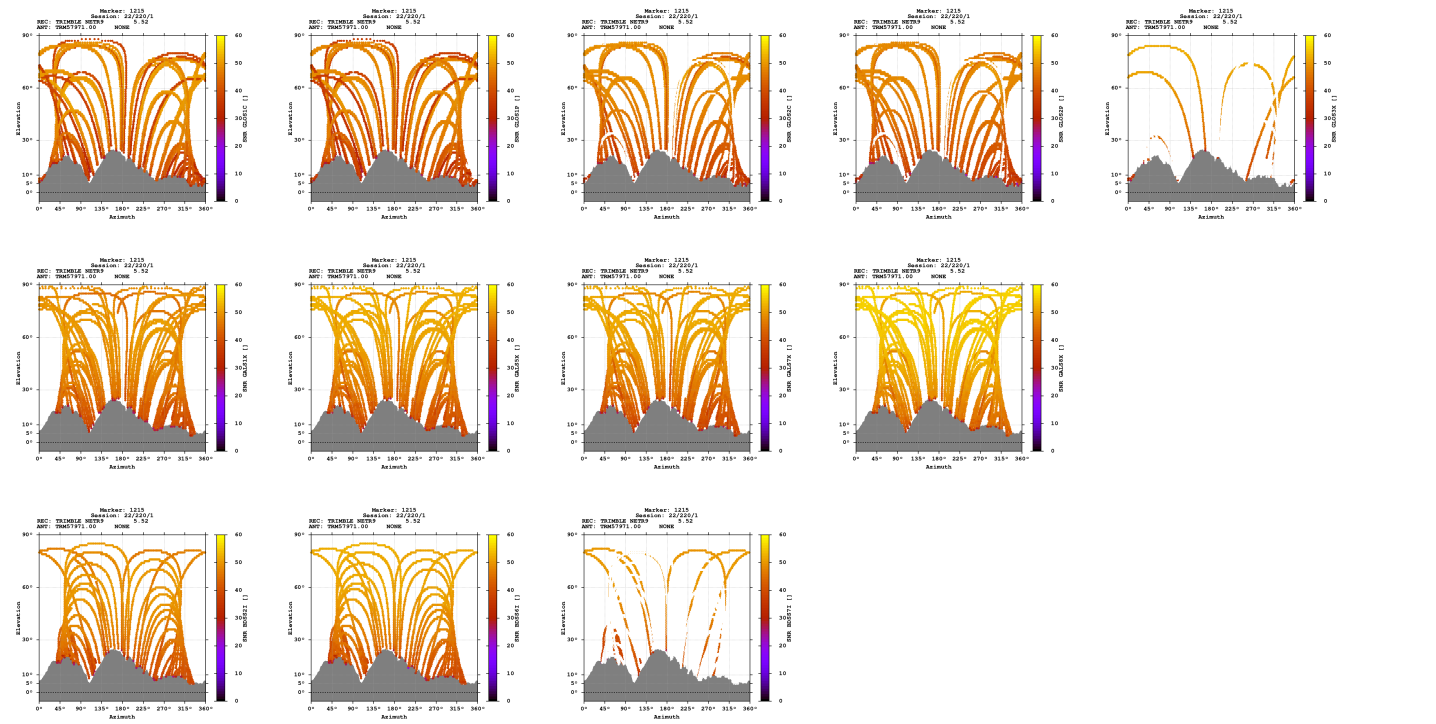

Estimates

2022-08-08 09:32:00	GPS	4322707.7719	720231.8096	4619752.6527	46.703086460	9.459491615	771.0990
2022-08-08 09:32:00	GLO	4322709.2571	720231.7115	4619753.7346	46.703083648	9.459487159	772.8801
2022-08-08 09:32:00	GAL	4322708.2236	720231.9188	4619752.7596	46.703084084	9.459492053	771.4947
2022-08-08 09:32:00	BDS	4322707.1005	720230.5925	4619754.1044	46.703101059	9.459477361	771.5642

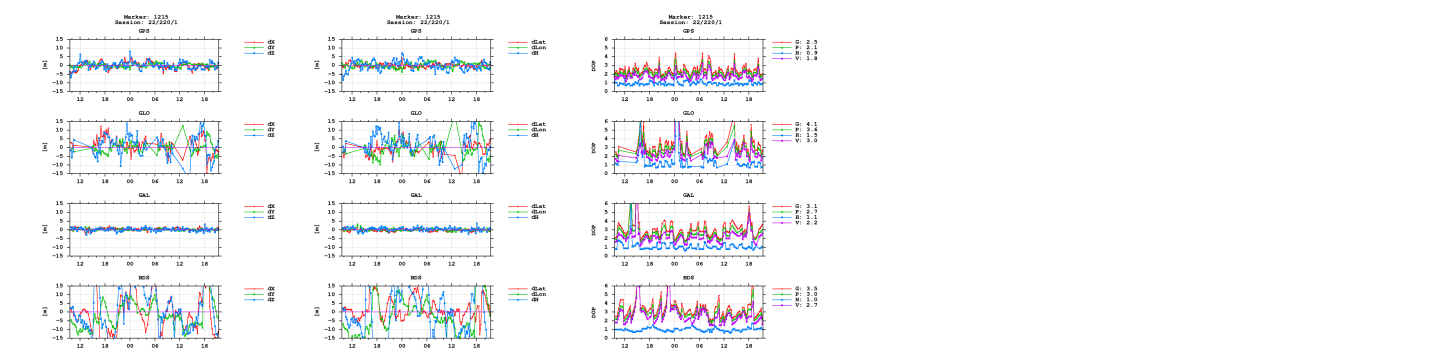

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)