

GNSS observation file monitoring for 0518

Last RINEX file: 05182211.220

RINEX version: 3.02

Marker: 1215

Receiver: 518

Antenna: 518


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

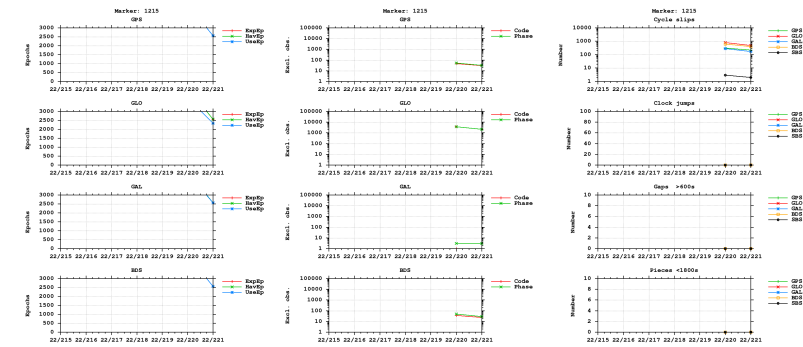



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

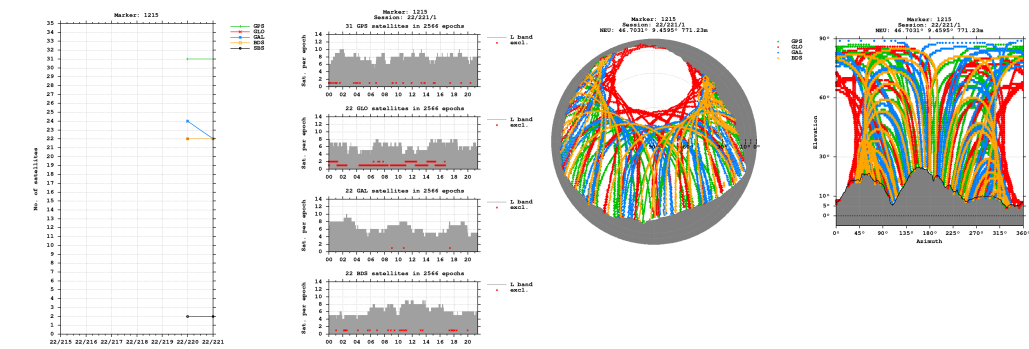


Bands

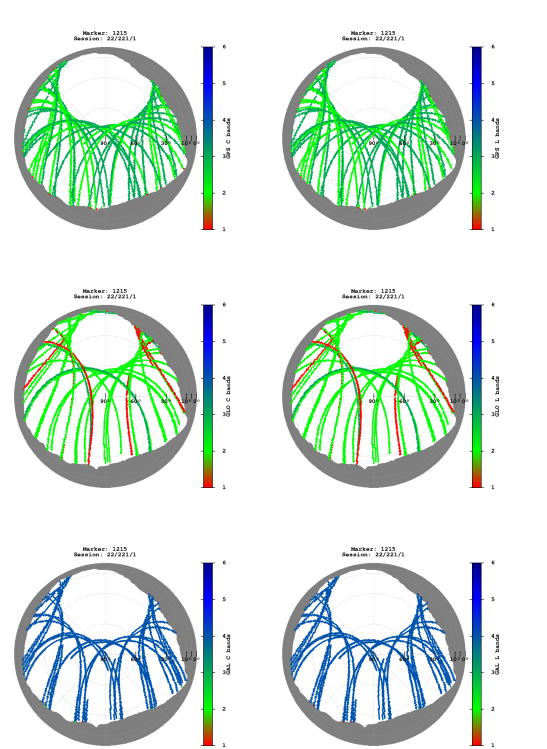

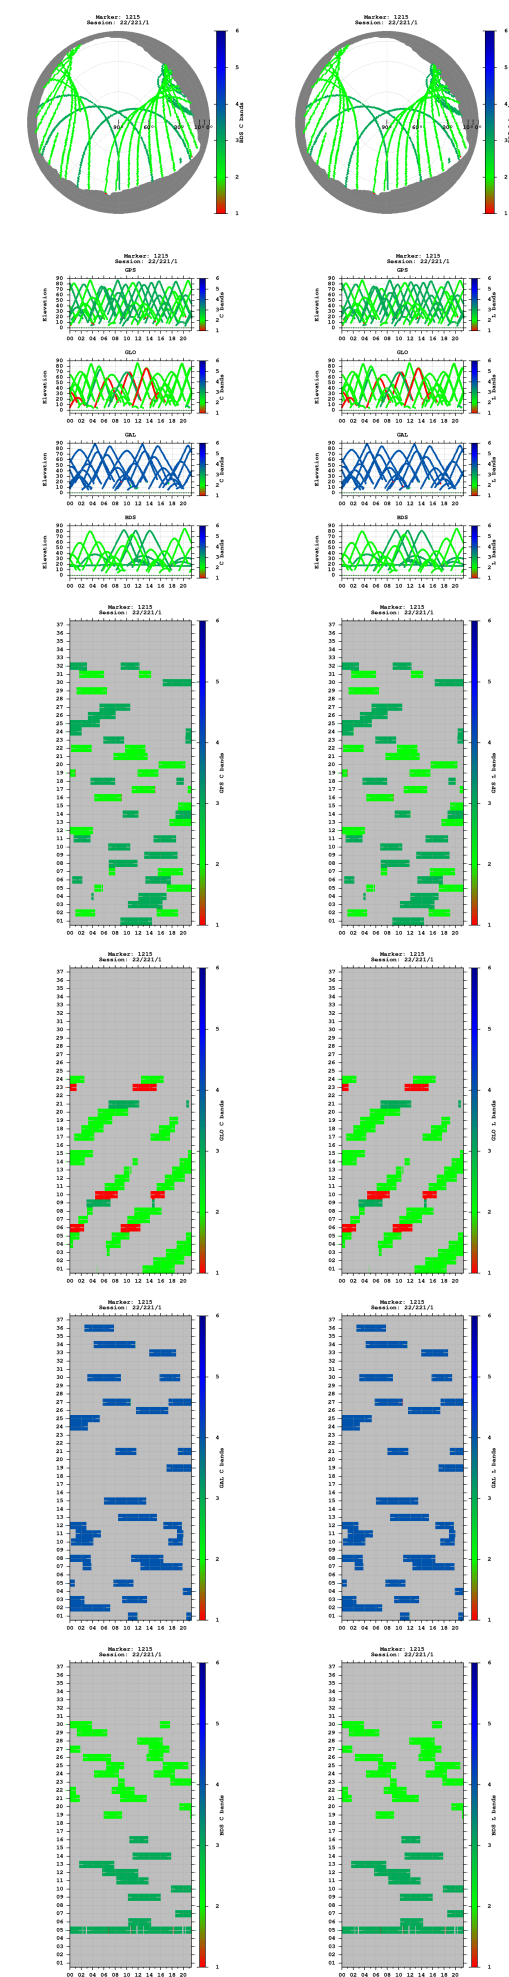


Observations




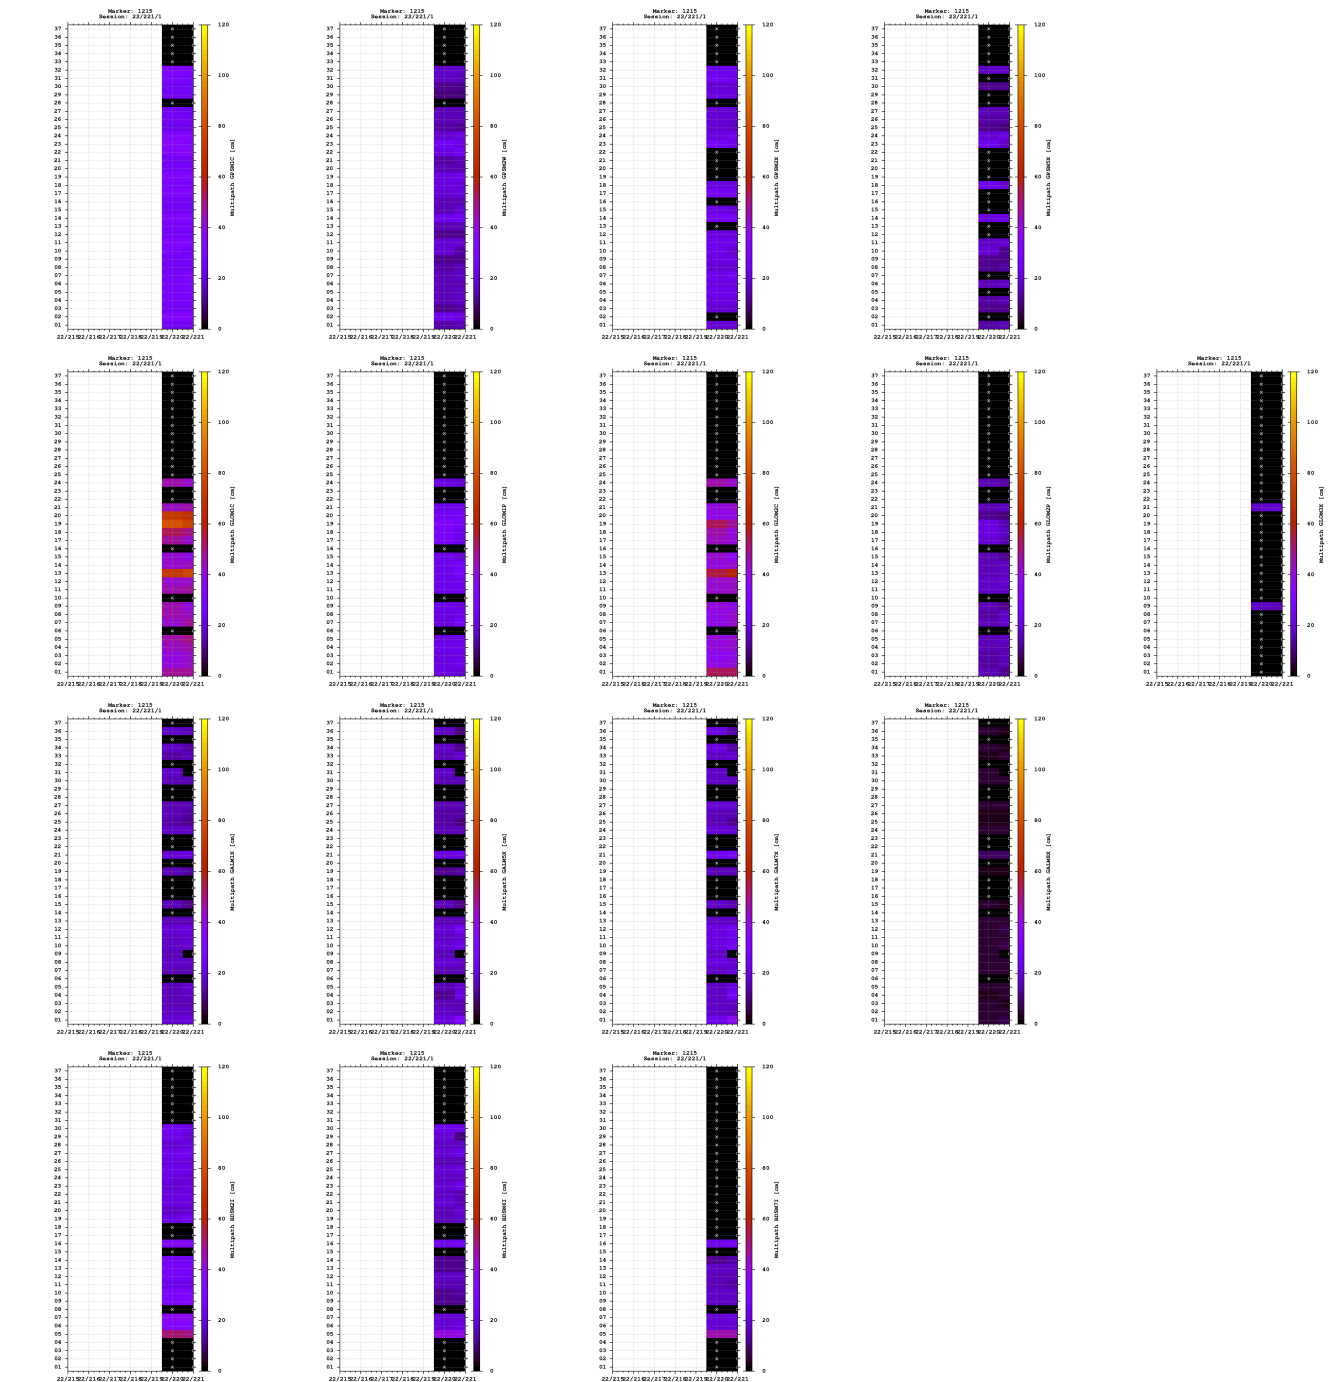


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

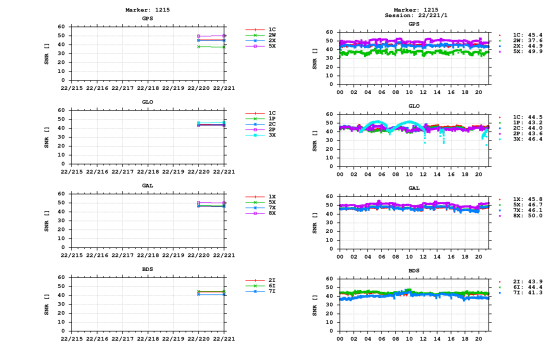


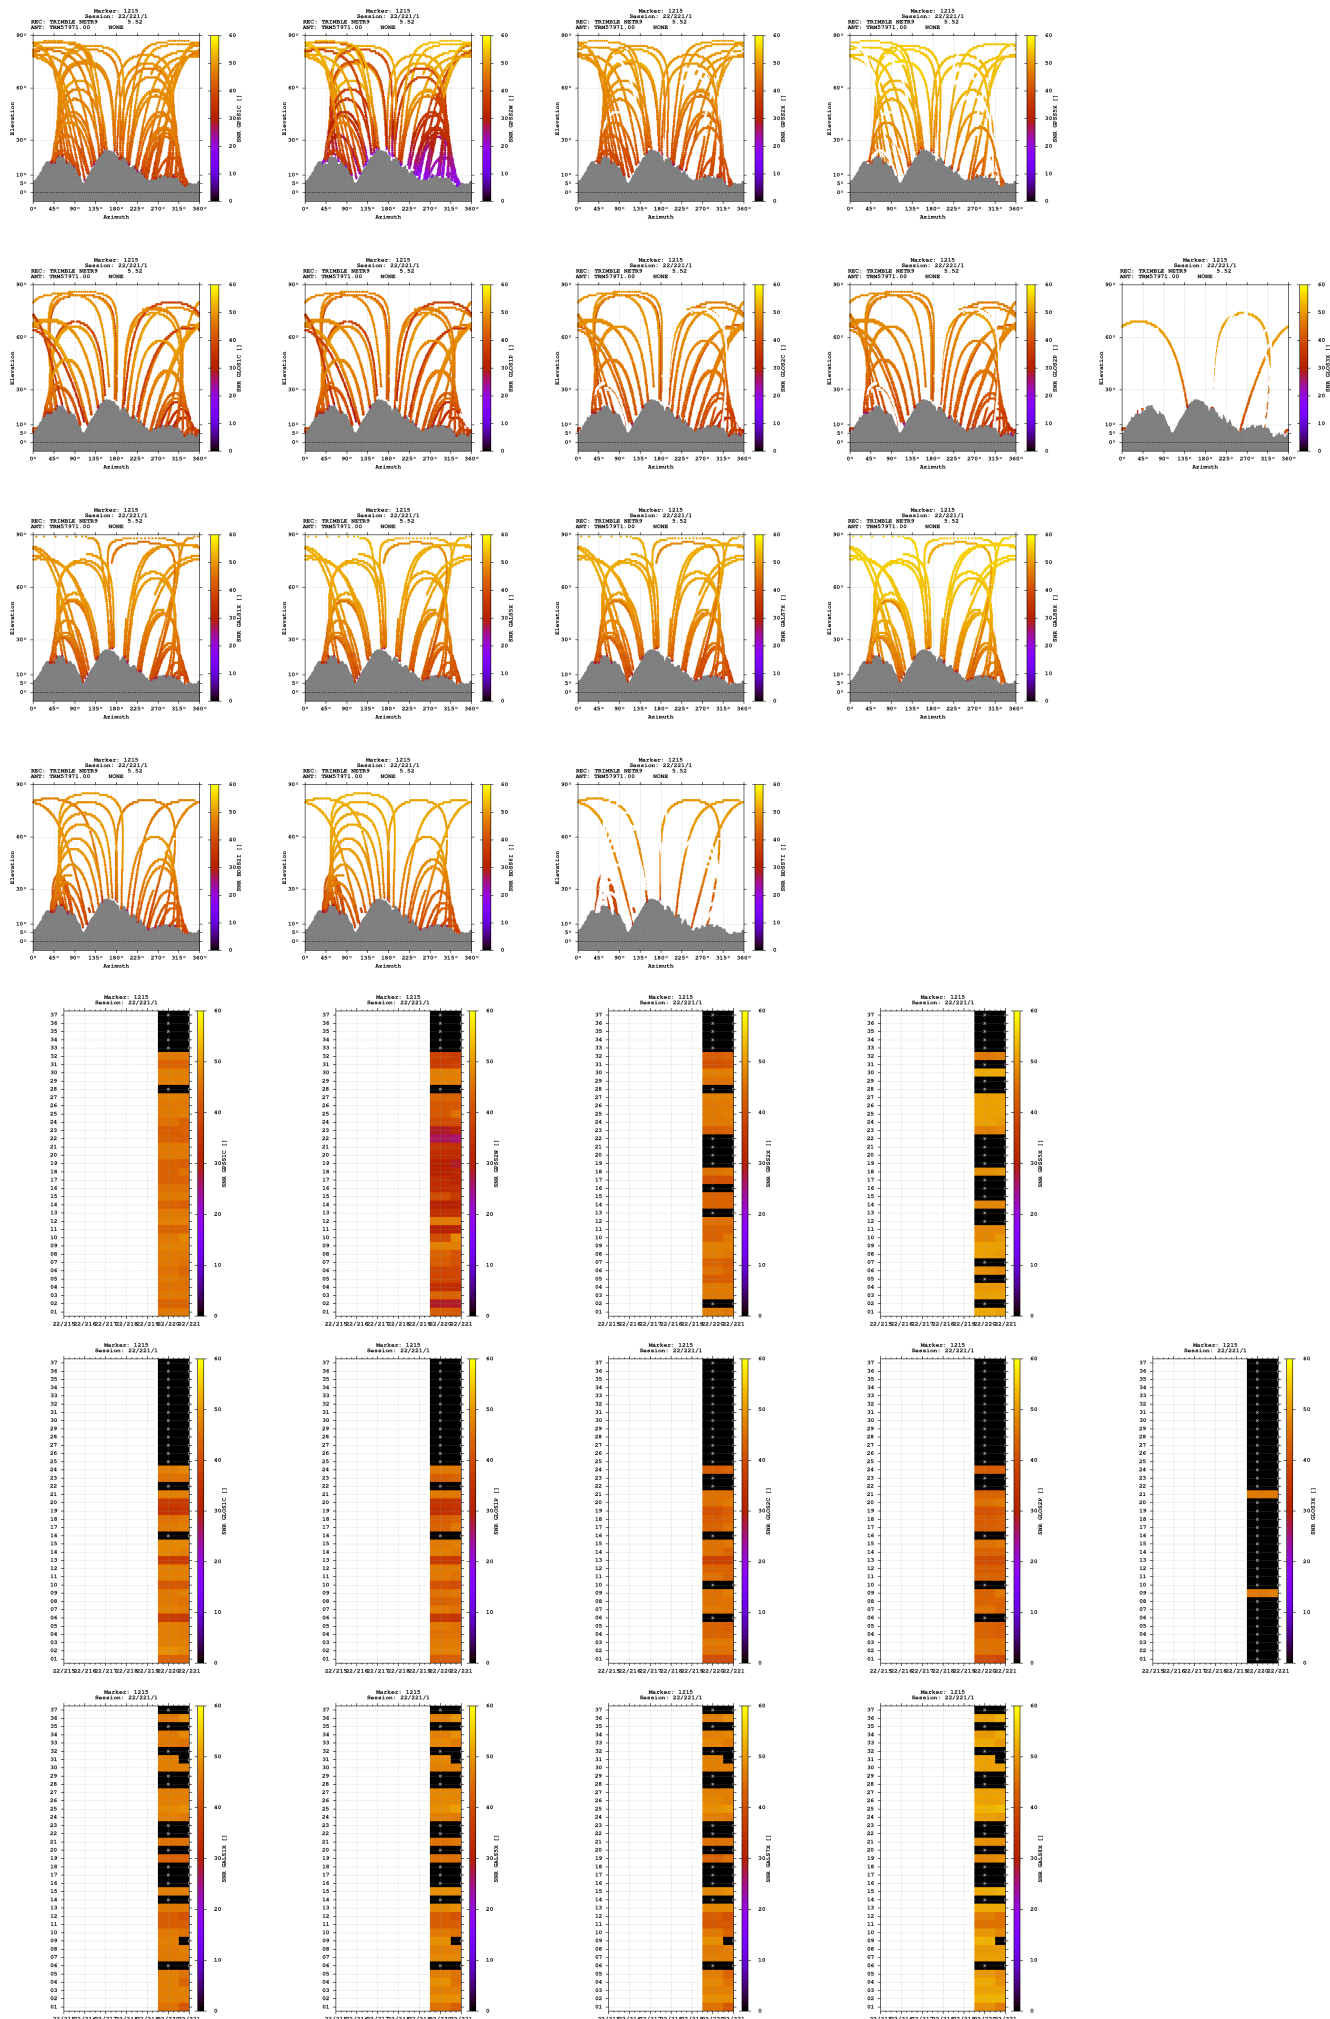

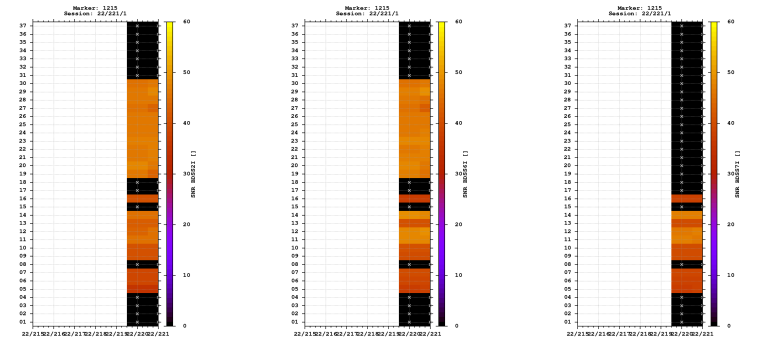



Estimates

2022-08-08 09:32:00	GPS	4322708.0895	720231.9702	4619752.5183	46.703083407	9.459493004	771.2341
2022-08-08 09:32:00	GLO	4322708.0345	720231.9214	4619753.2969	46.703088617	9.459492493	771.7581
2022-08-08 09:32:00	GAL	4322708.0958	720231.8205	4619752.8311	46.703085457	9.459491060	771.4492
2022-08-08 09:32:00	BDS	4322708.9770	720232.9166	4619756.3145	46.703100074	9.459503302	774.7041

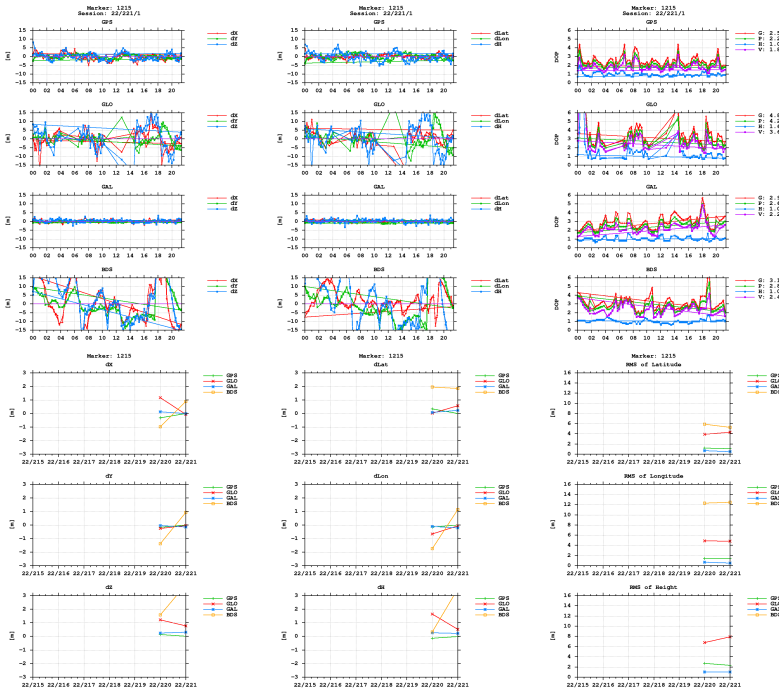

BNC

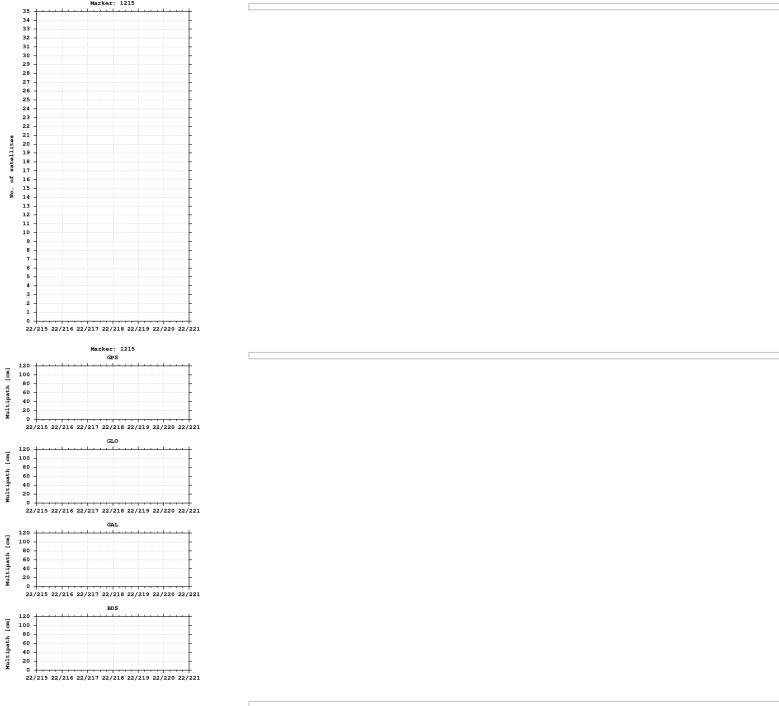

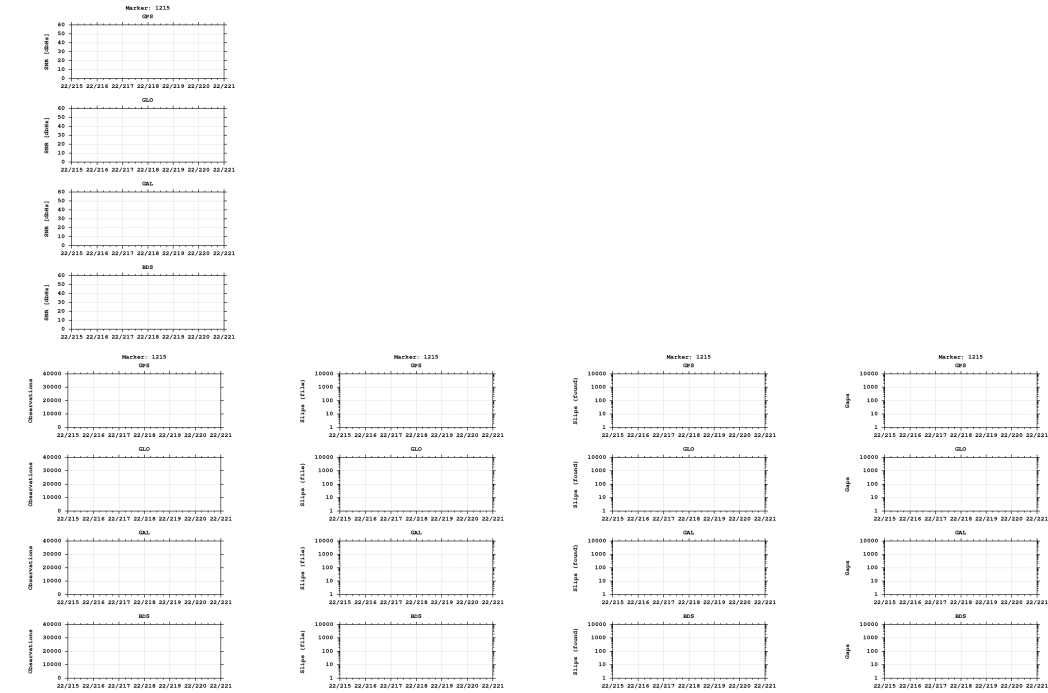

Equipment

2022-08-08 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)