

GNSS observation file monitoring for POSC

Last RINEX file: POSC2211.220


RINEX version: 3.04

Marker: POSC POSC

Receiver: 1831154 LEICA GR50 4.52.518


Antenna: 726192 LEIAR25.R4 NONE

Epochs

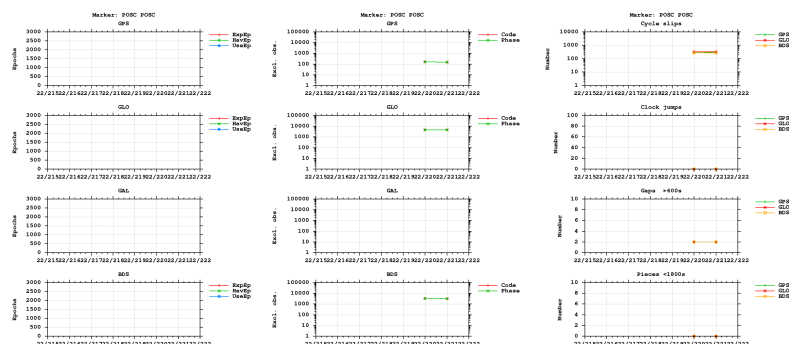



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

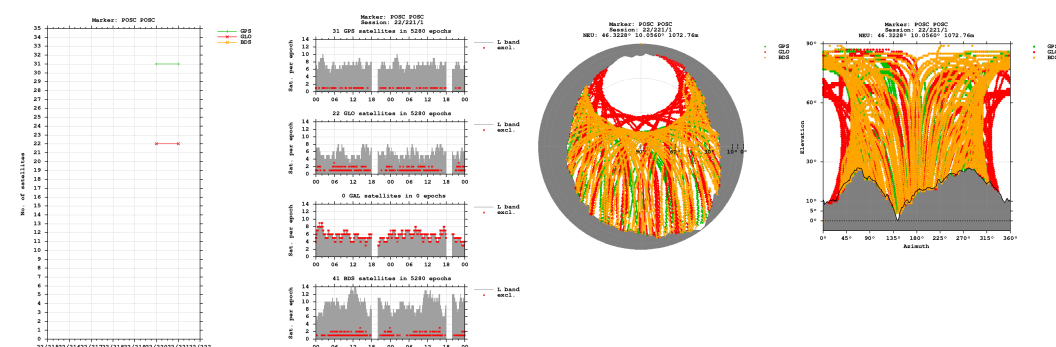


Bands

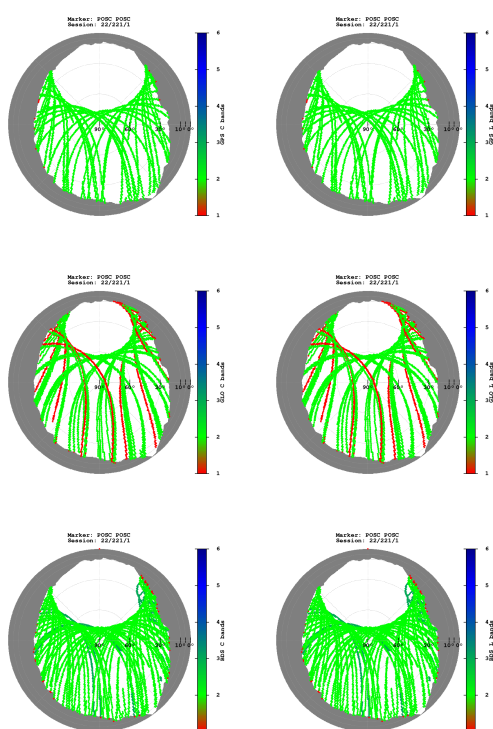


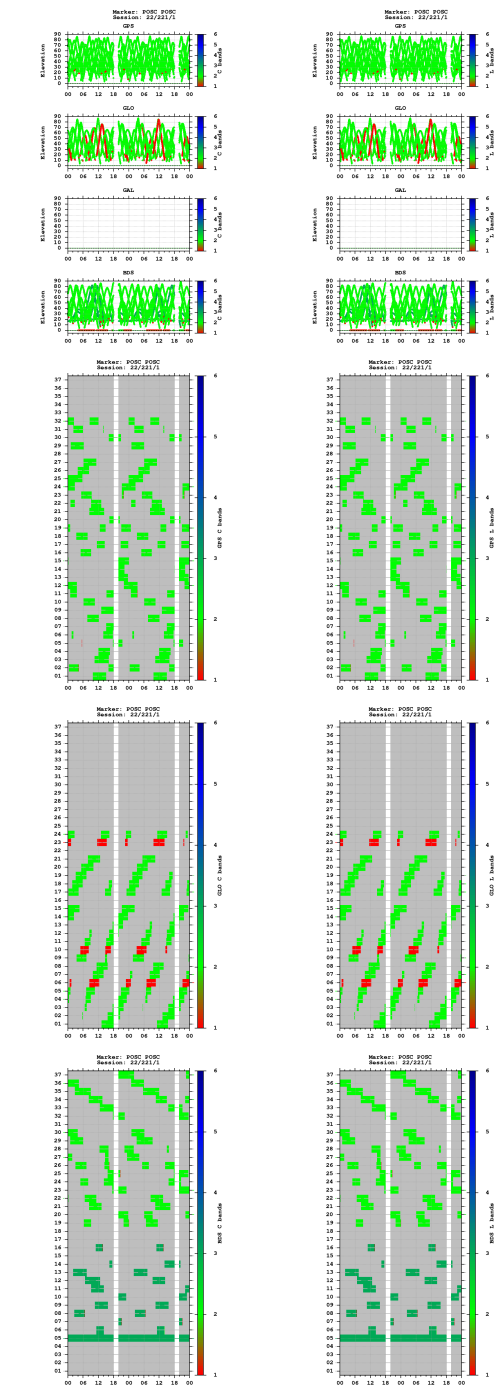


Observations

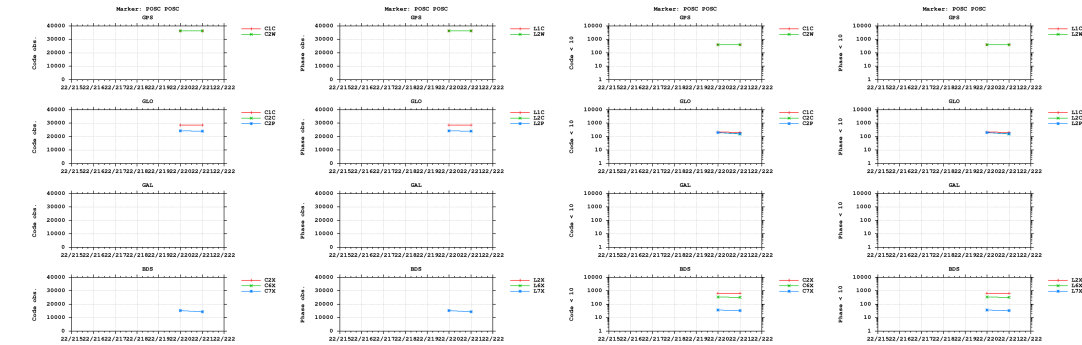

Multipath

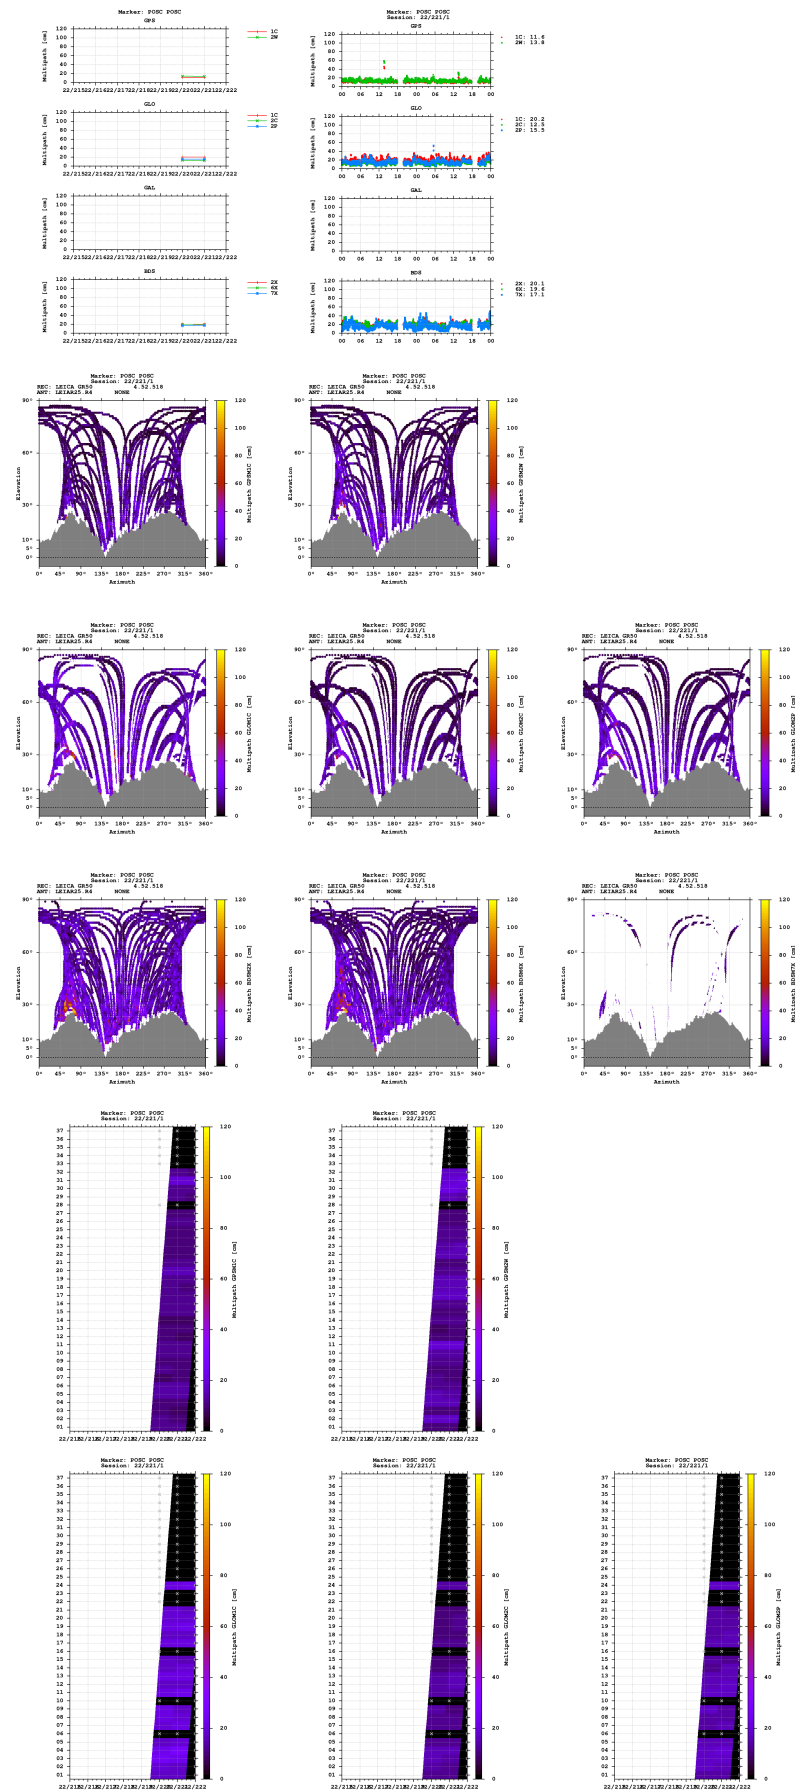

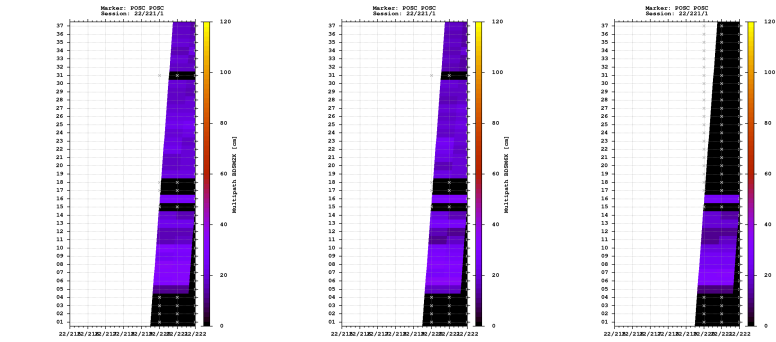

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

