

GNSS observation file monitoring for POSC

Last RINEX file: POSC2251.220


RINEX version: 3.04

Marker: POSC POSC

Receiver: 1831154 LEICA GR50 4.52.518


Antenna: 726192 LEIAR25.R4 NONE

Epochs

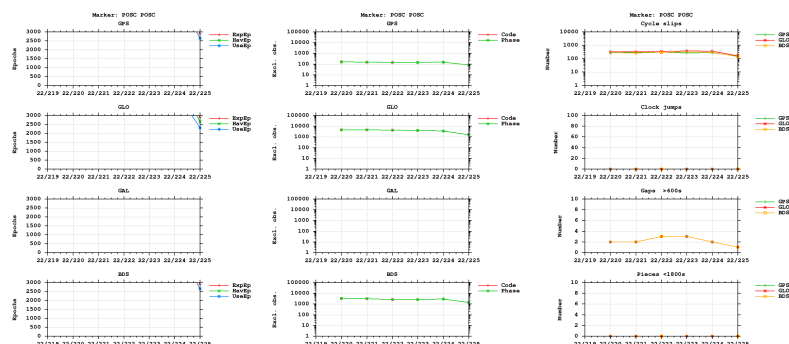



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

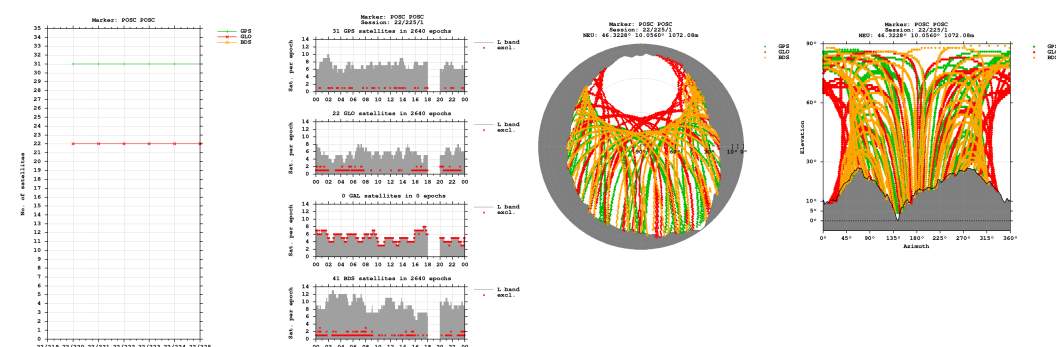


Bands

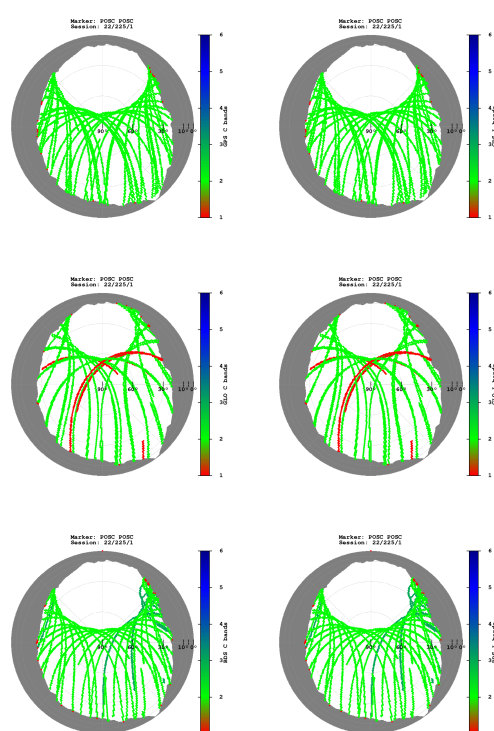


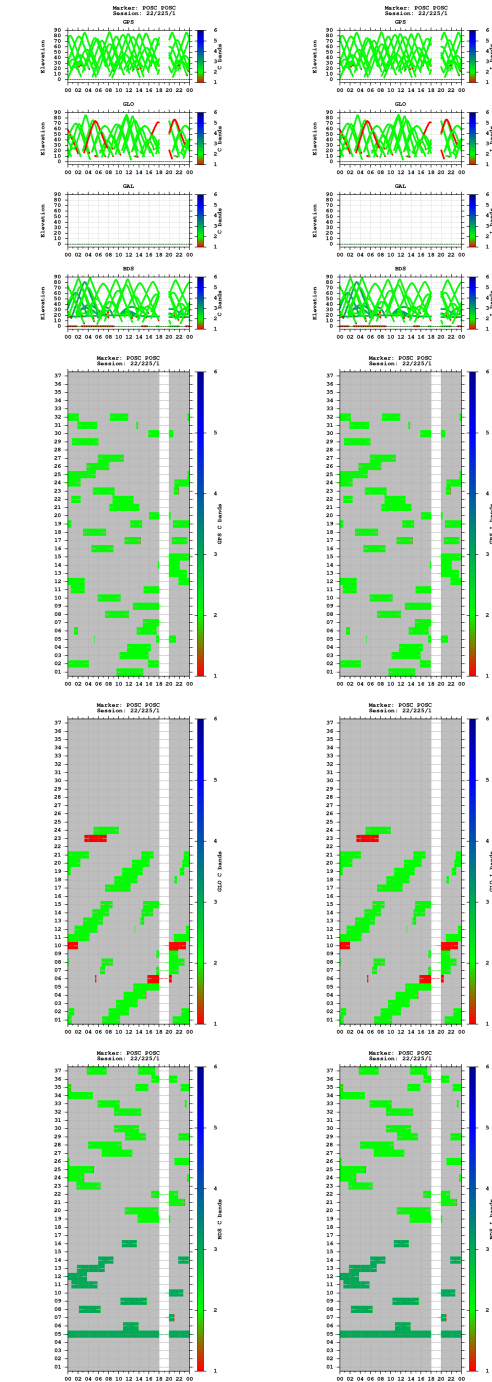


Observations

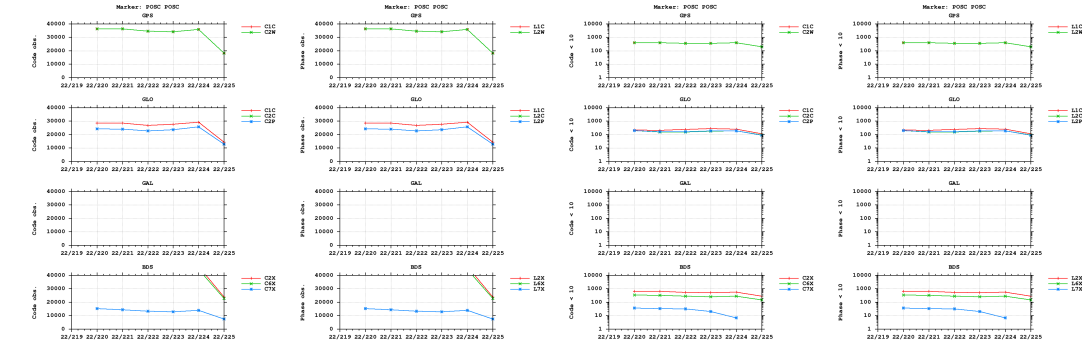


Multipath

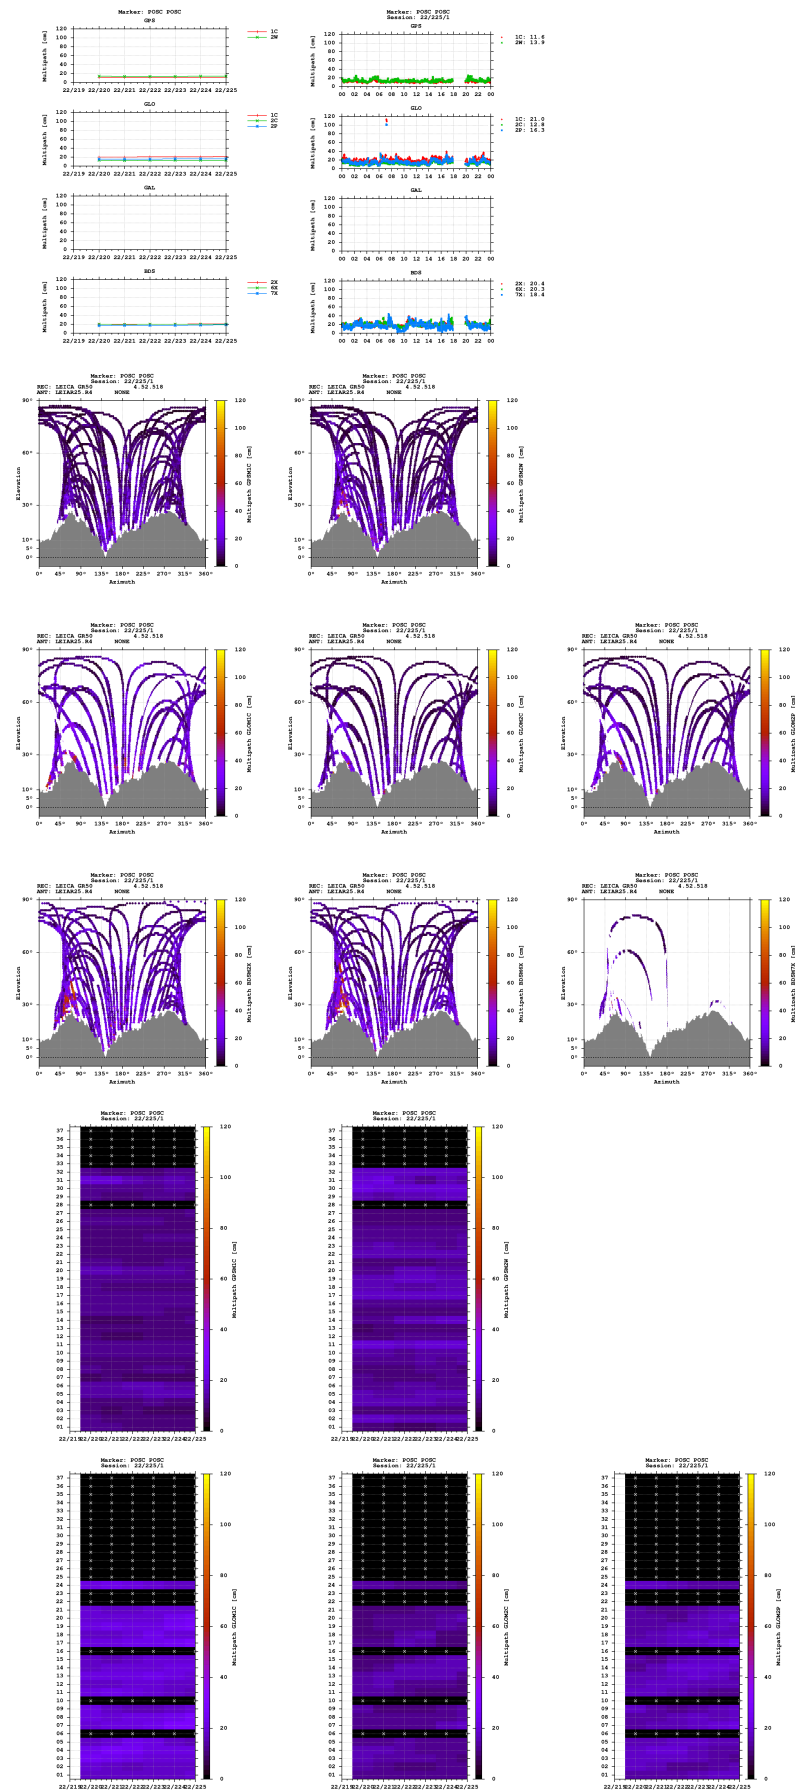


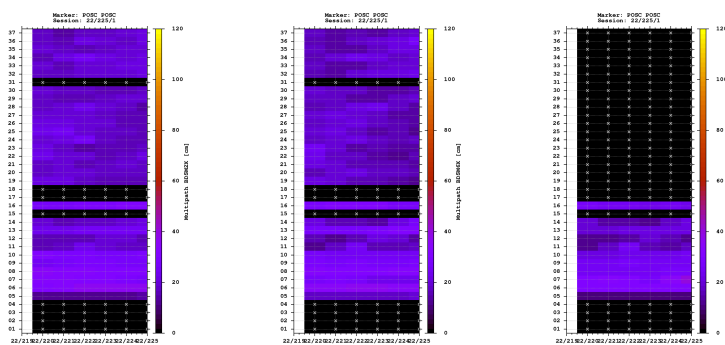

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

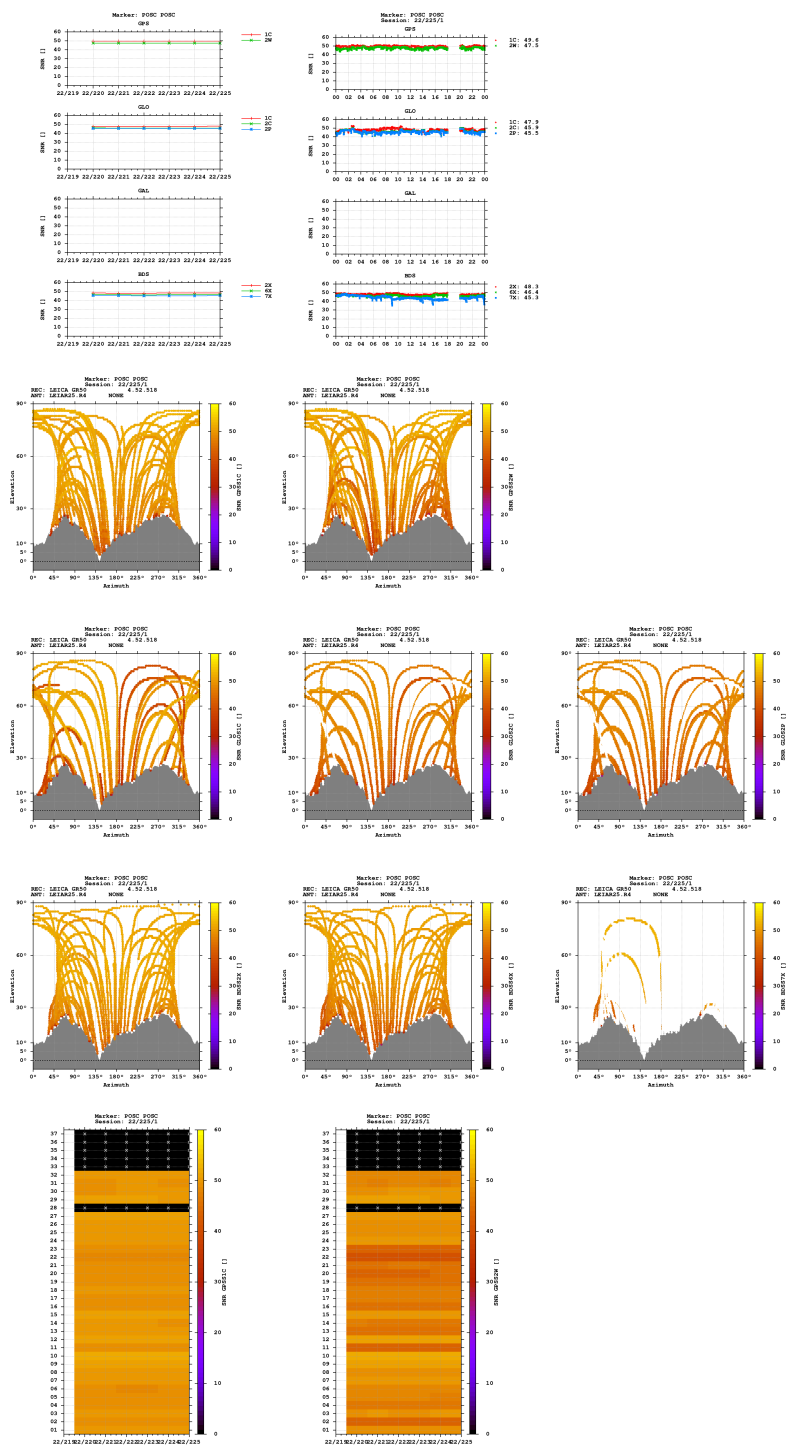

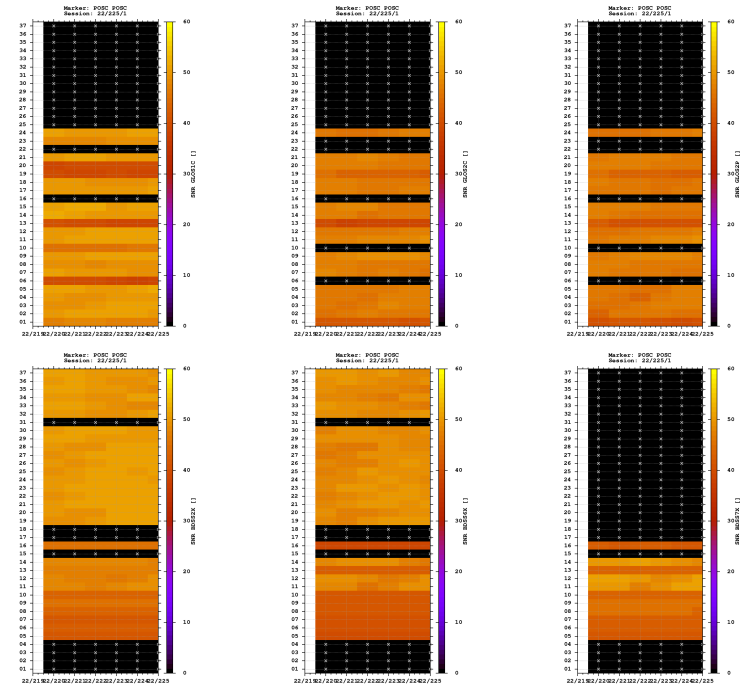



Estimates

2022-08-12 00:00:00	GPS	4345381.2598	770584.2951	4590876.9776	46.322827325	10.055954310	1072.0823
2022-08-12 00:00:00	GLO	4345381.6144	770583.2642	4590875.6370	46.322817897	10.055940328	1071.2295
2022-08-12 00:00:00	BDS	4345386.1096	770589.2775	4590883.8786	46.322833467	10.056007008	1080.9719

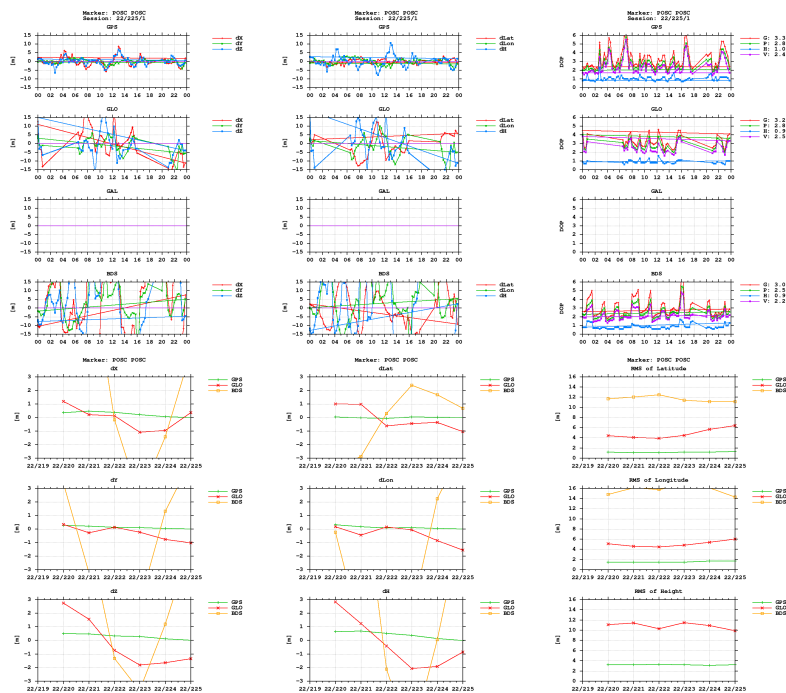

BNC

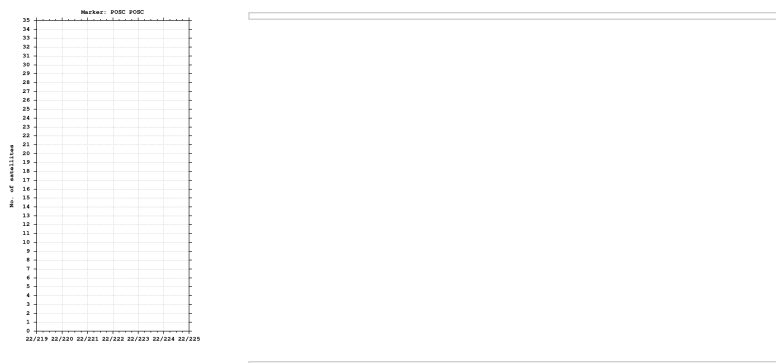

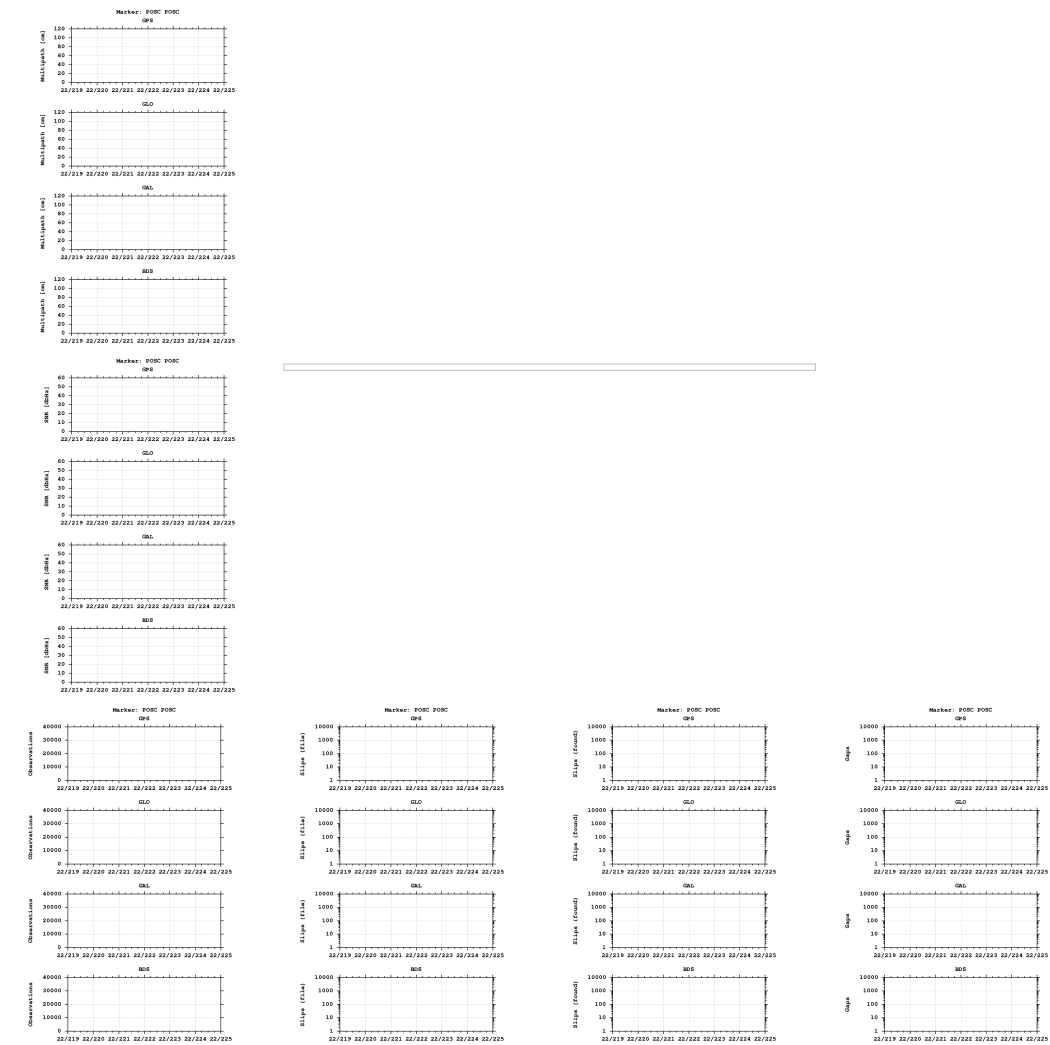

Equipment

2022-08-08 00:00:00 LEICA GR50 4.52.518 1831154 LEIAR25.R4 NONE 726192

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)