

GNSS observation file monitoring for 0515

Last RINEX file: 05152411.220


RINEX version: 3.02

Marker: 1011

Receiver: 515 TRIMBLE NETR9 5.52


Antenna: 515 TRM57971.00 NONE

Epochs

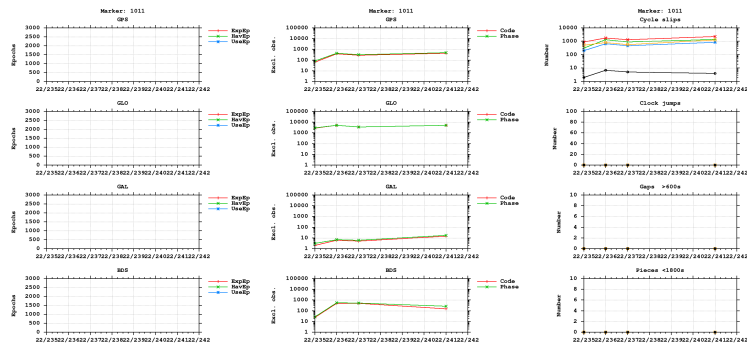



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

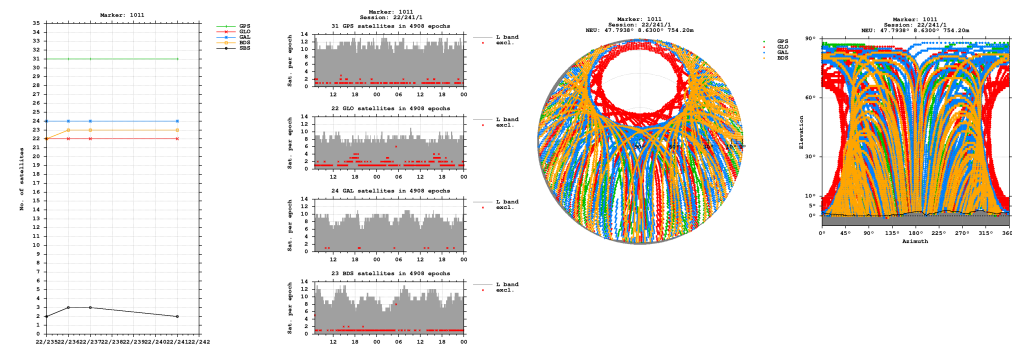


Bands

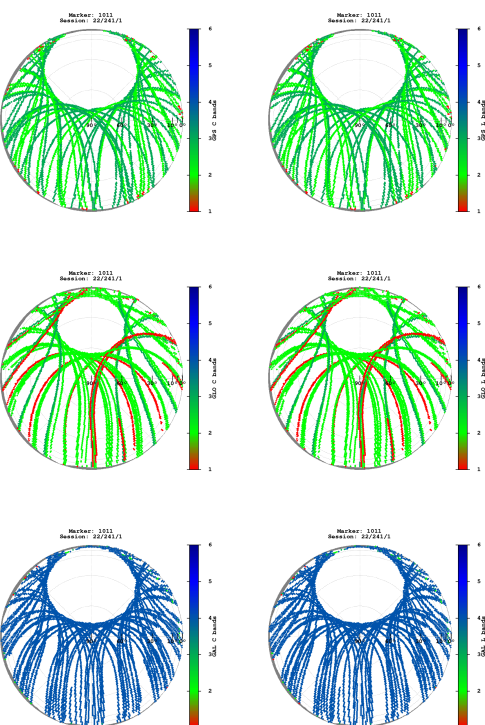


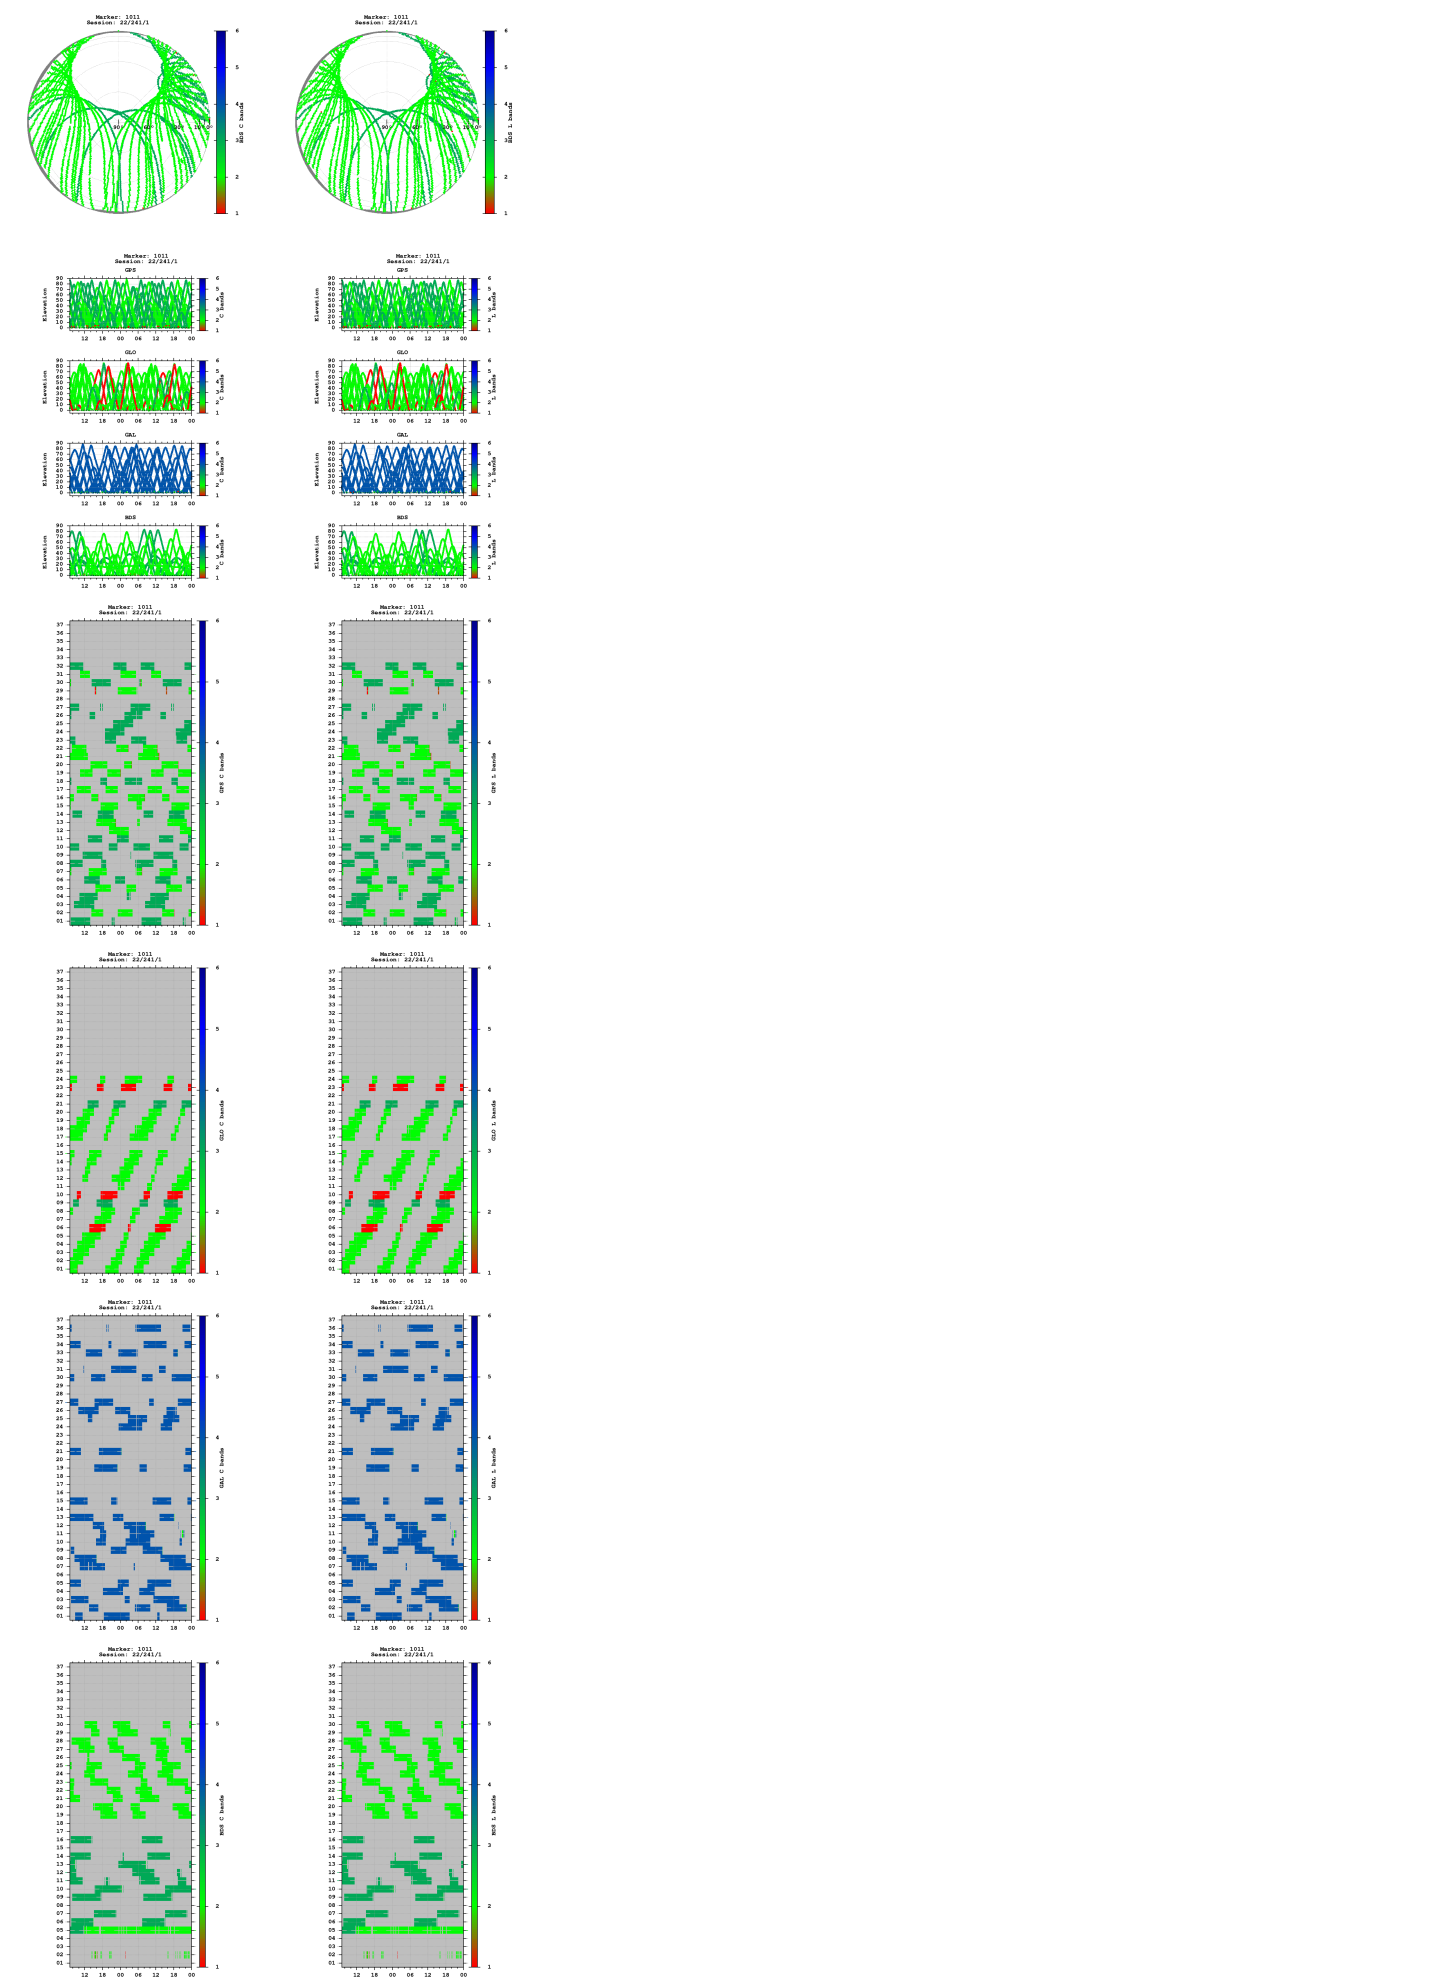





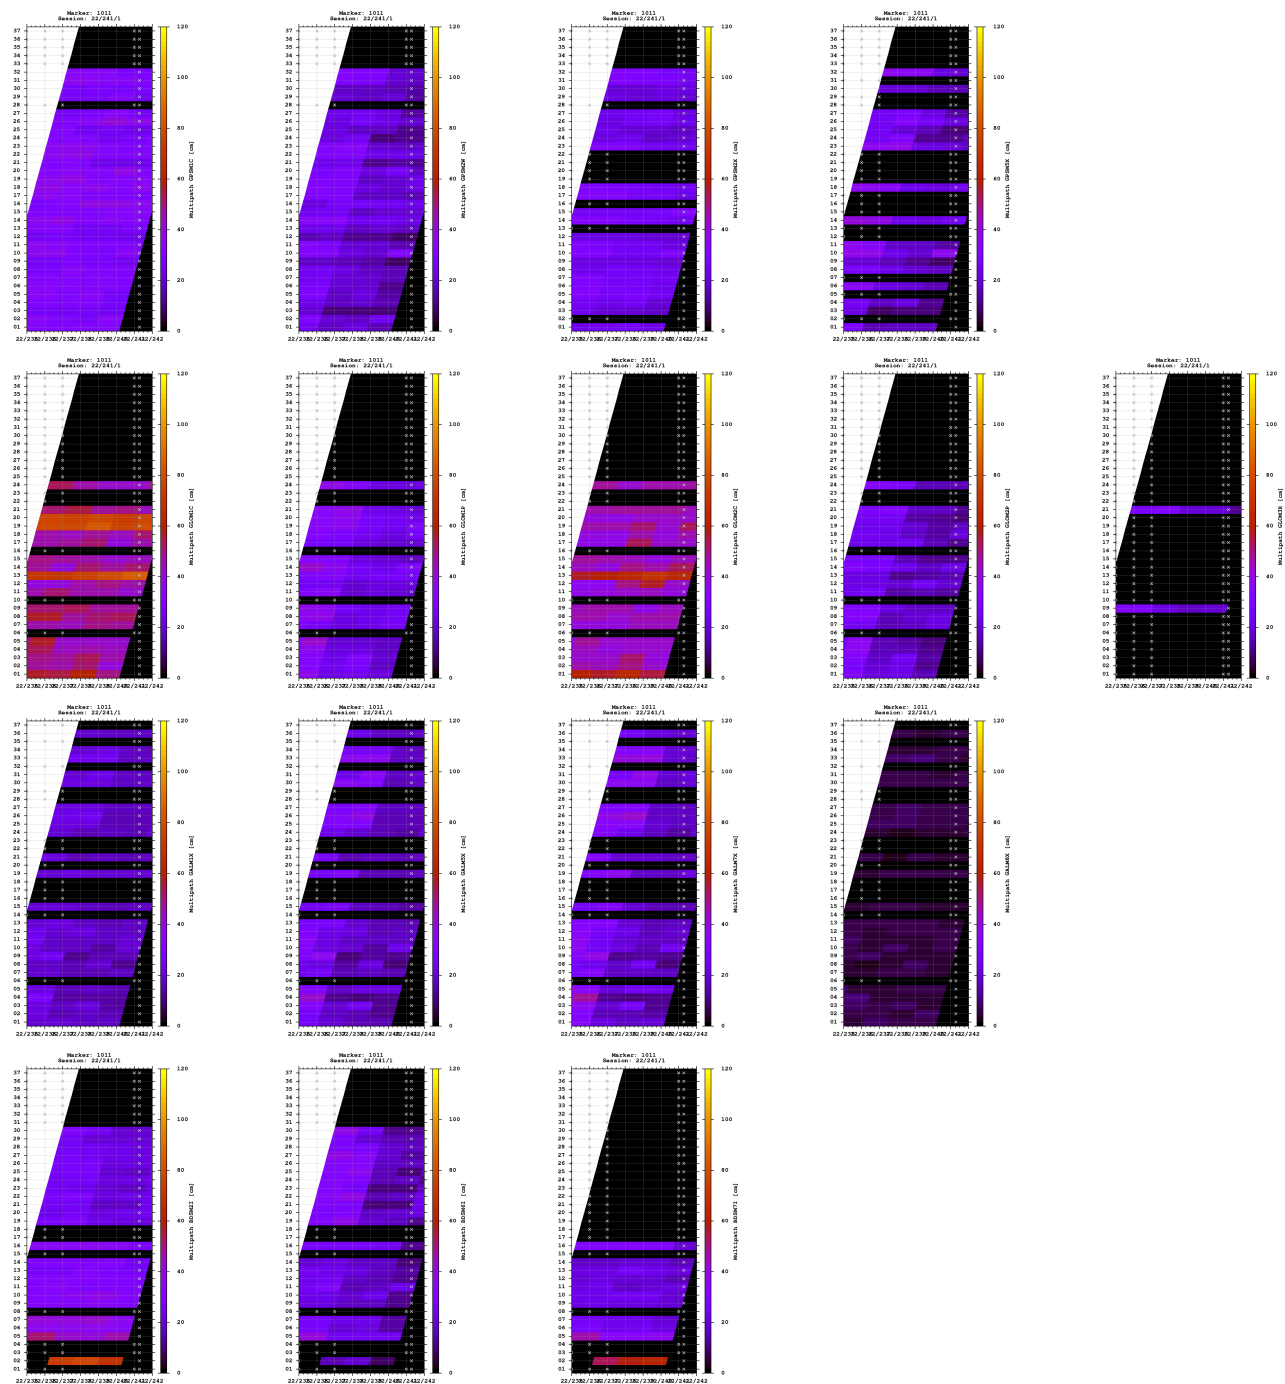


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

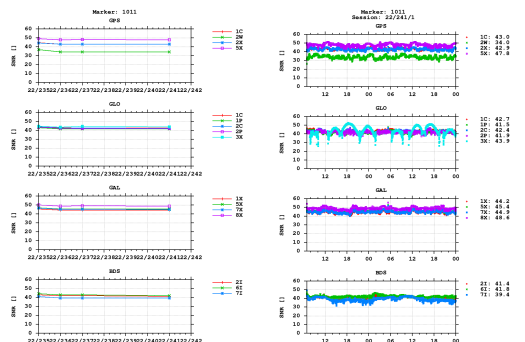


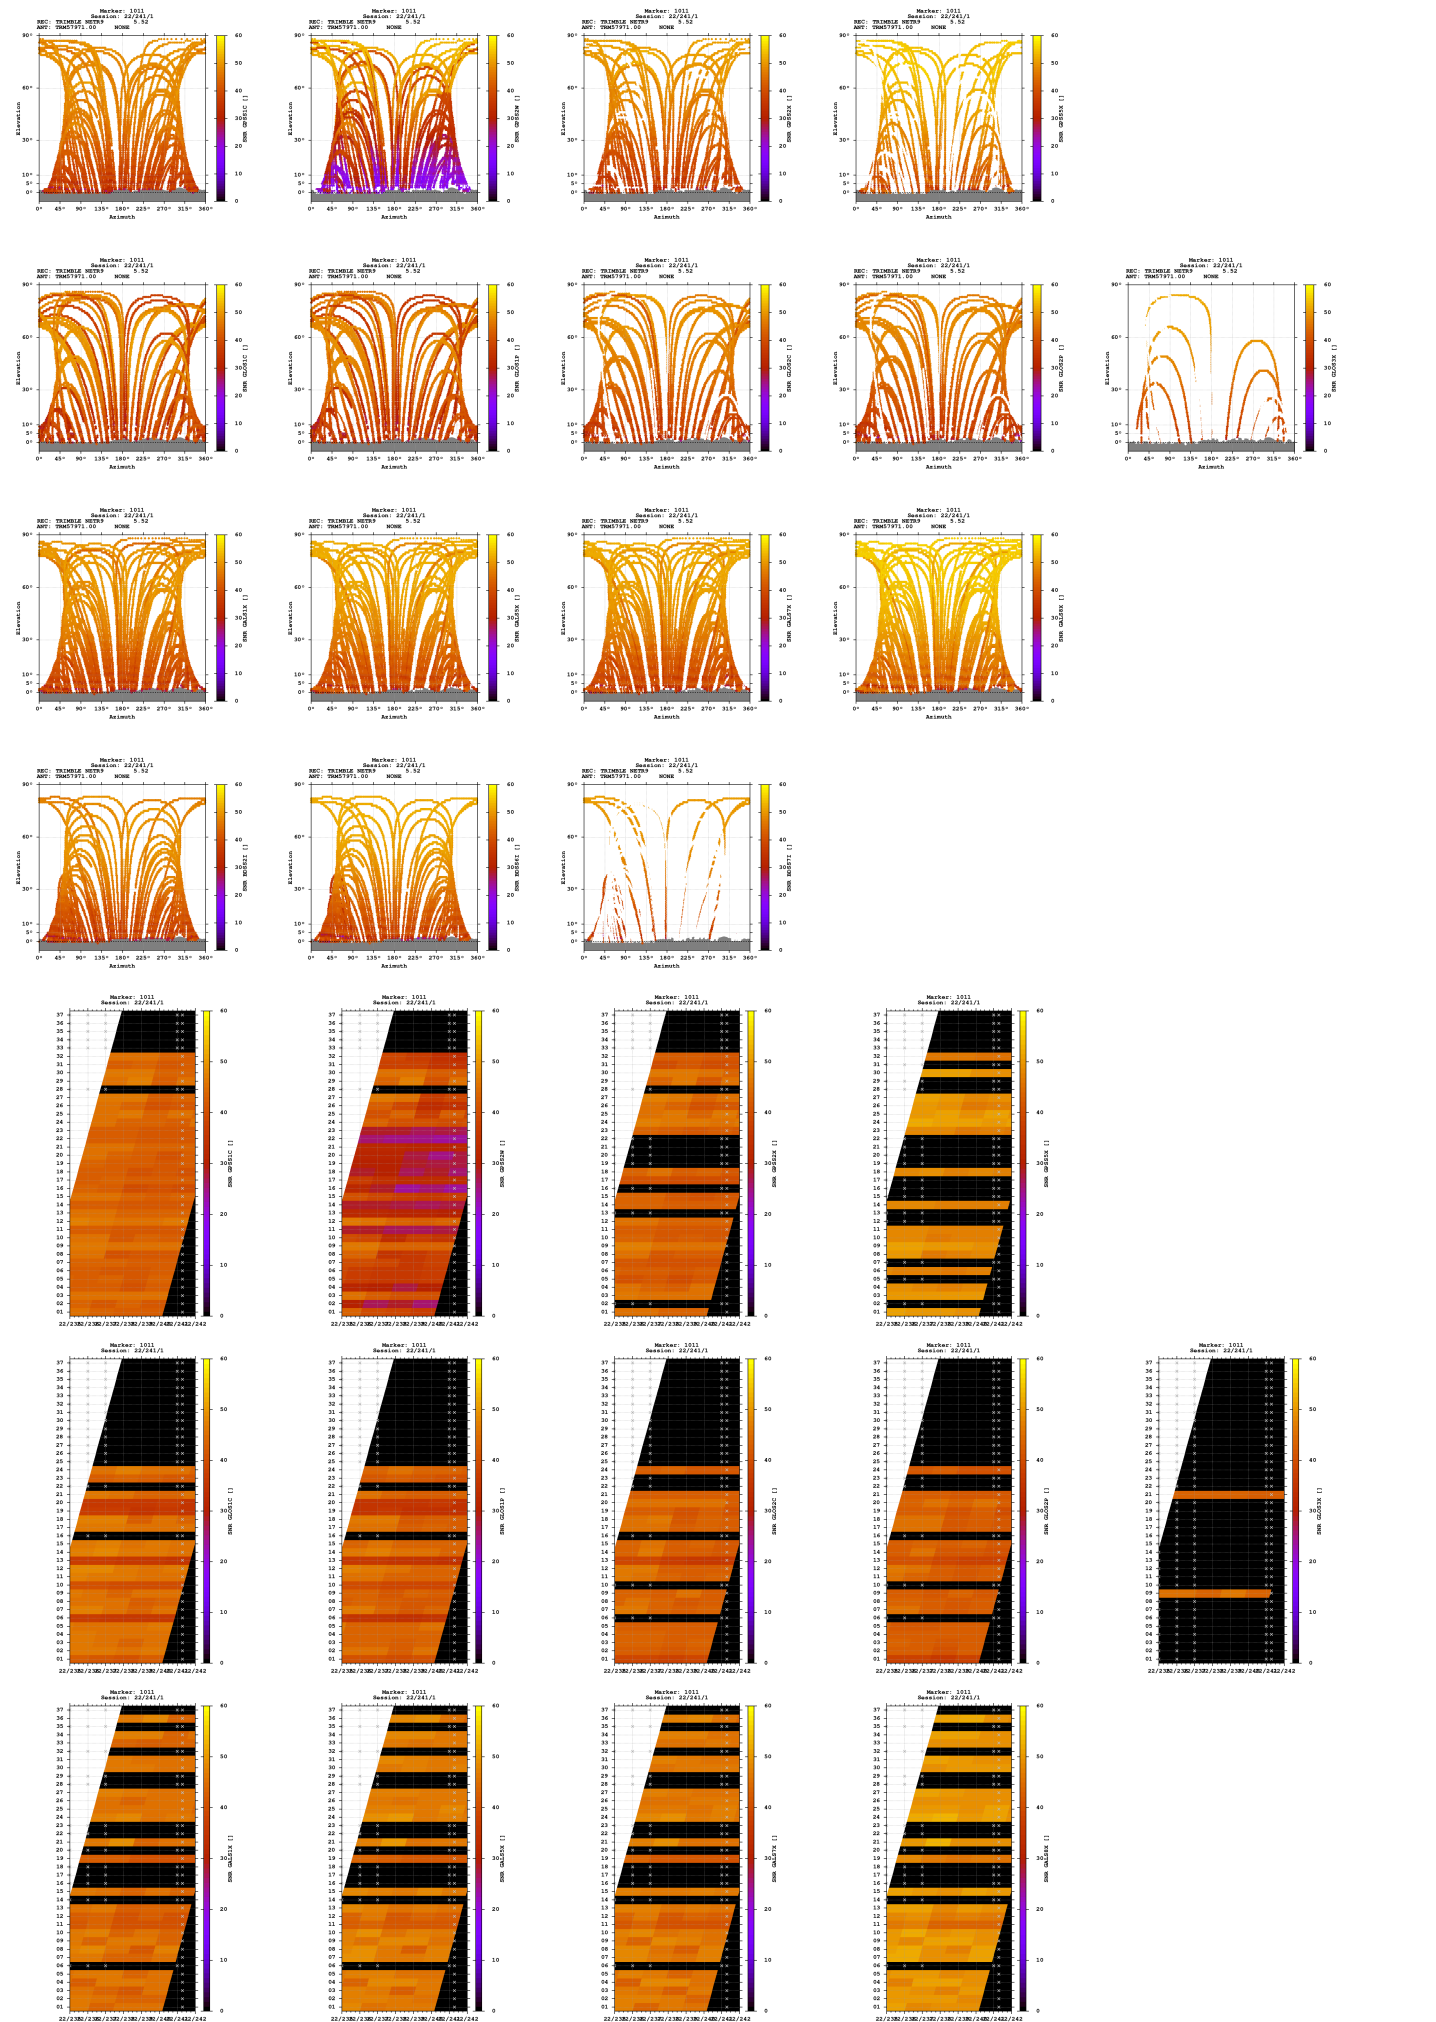

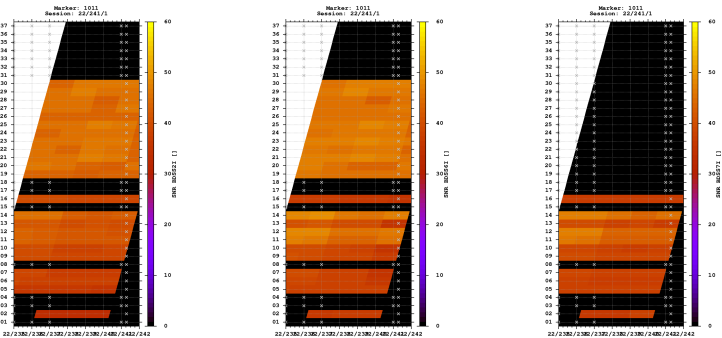



Estimates

2022-08-29 06:59:30	GPS	4244622.3476	644214.7438	4702066.8577	47.793849119	8.630032668	754.2026
2022-08-29 06:59:30	GLO	4244622.8276	644214.1428	4702066.8244	47.793846357	8.630023777	754.4361
2022-08-29 06:59:30	GAL	4244623.7862	644215.0918	4702066.6536	47.793838064	8.630034379	755.0420
2022-08-29 06:59:30	BDS	4244624.1102	644212.3935	4702061.2954	47.793806256	8.629998127	751.0161

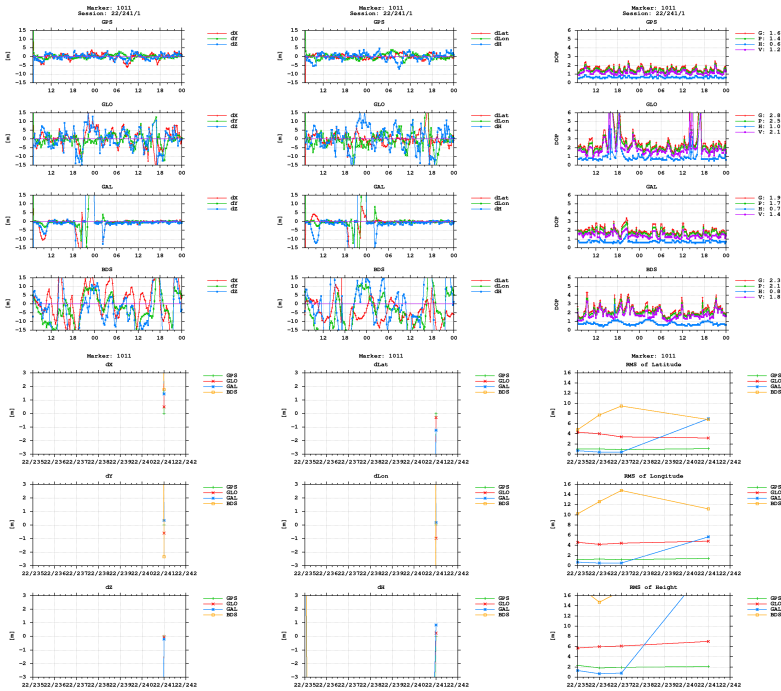

BNC

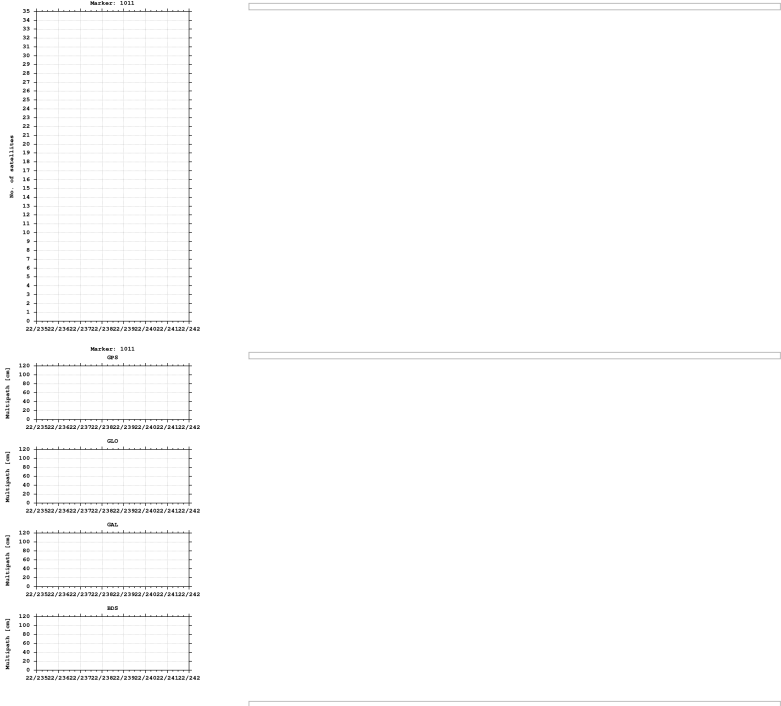

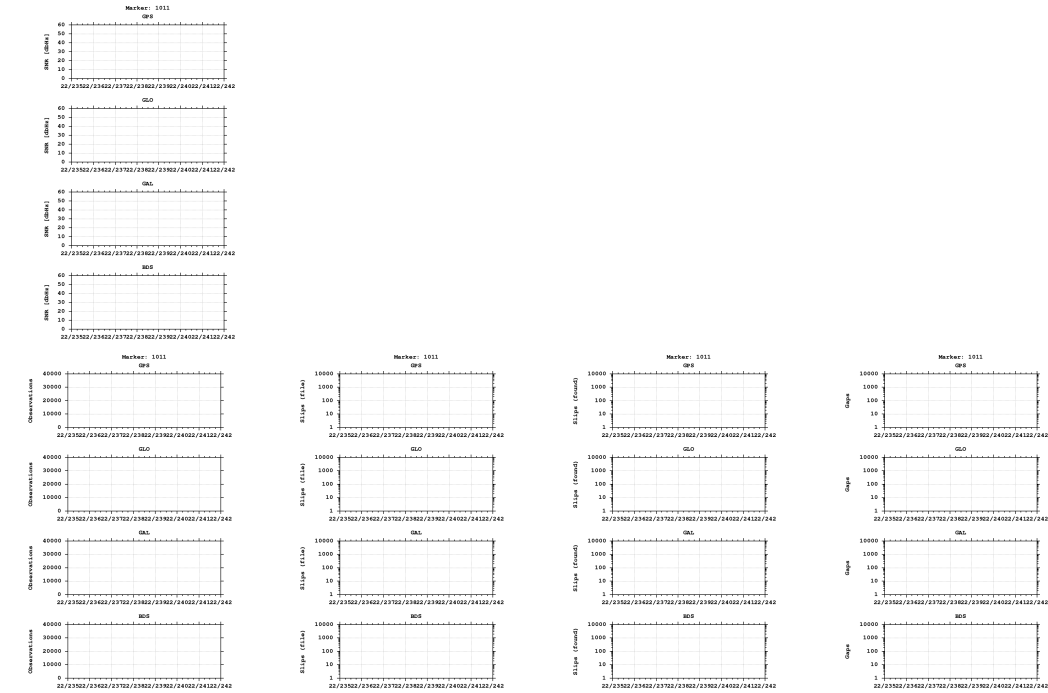

Equipment

2022-08-22 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)