

GNSS observation file monitoring for 0515

Last RINEX file: 05152421.220

RINEX version: 3.02

Marker: 1011

Receiver: 515

Antenna: 515


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

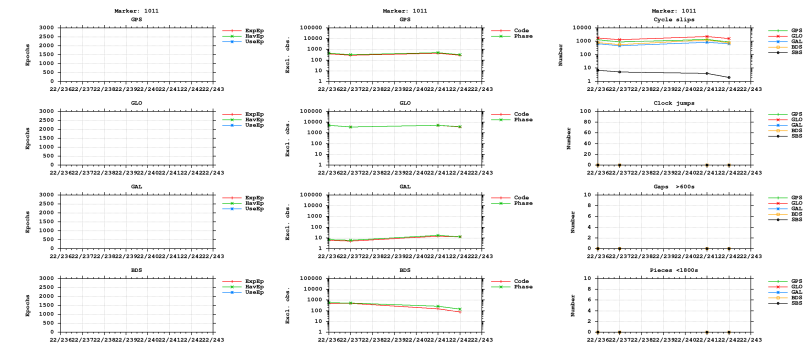



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

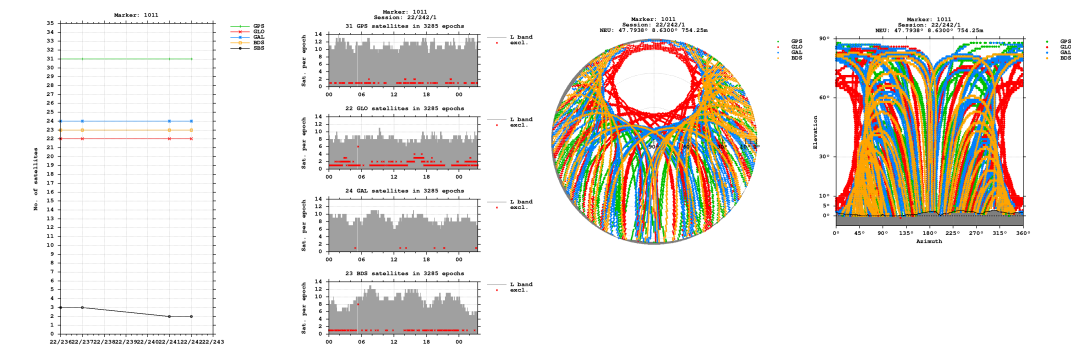


Bands

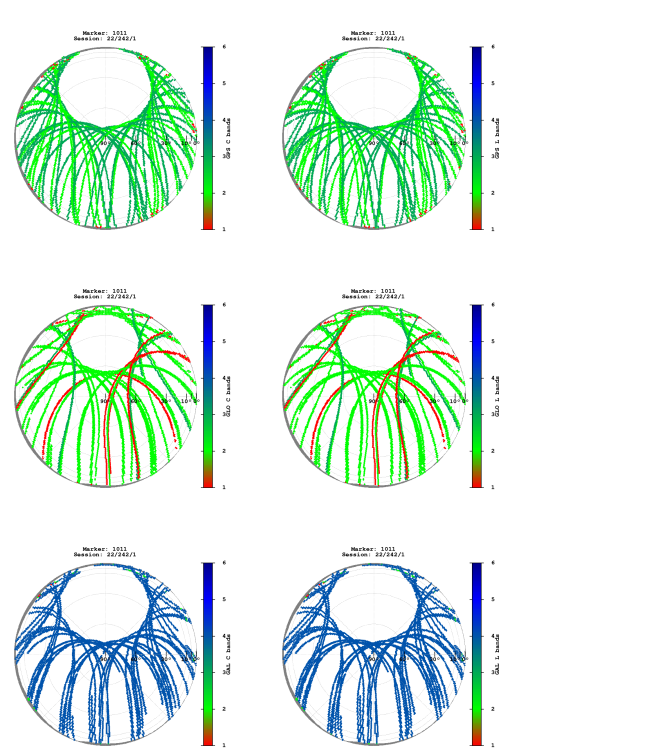


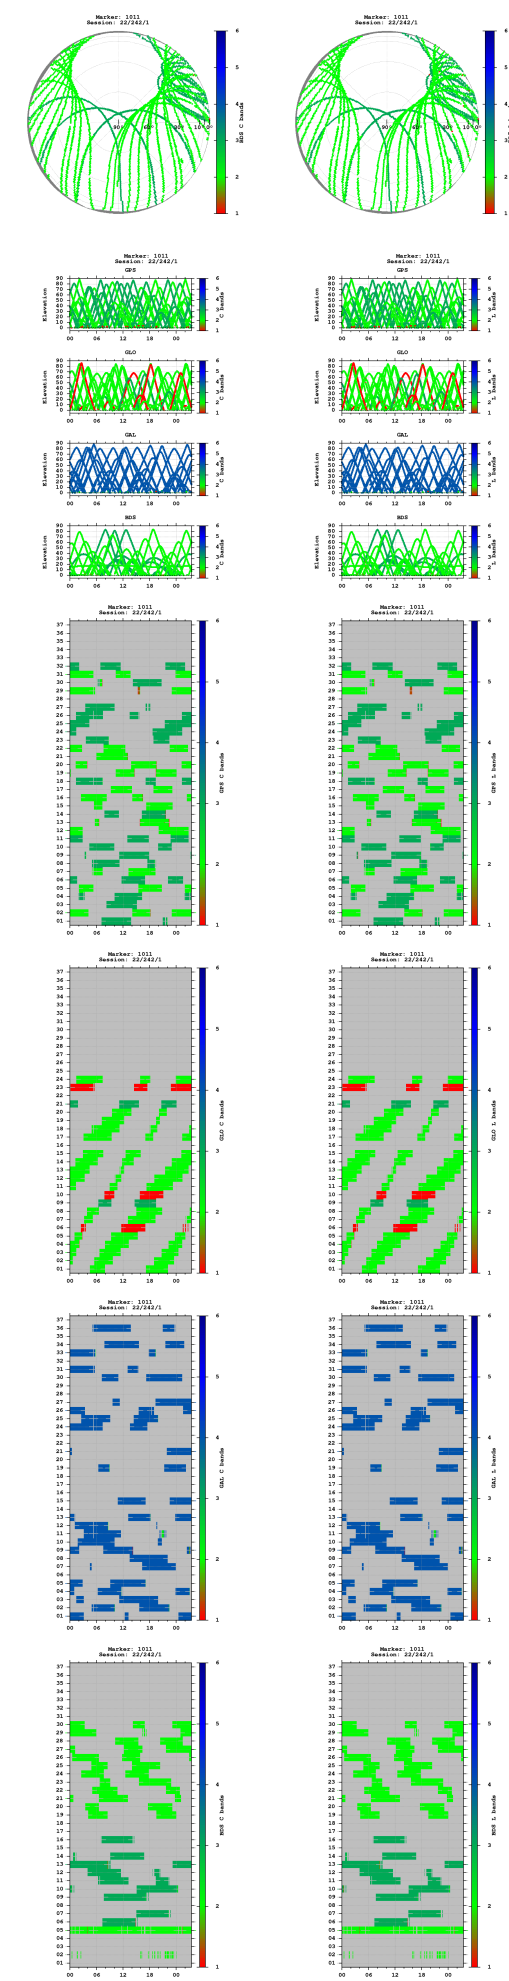


Observations

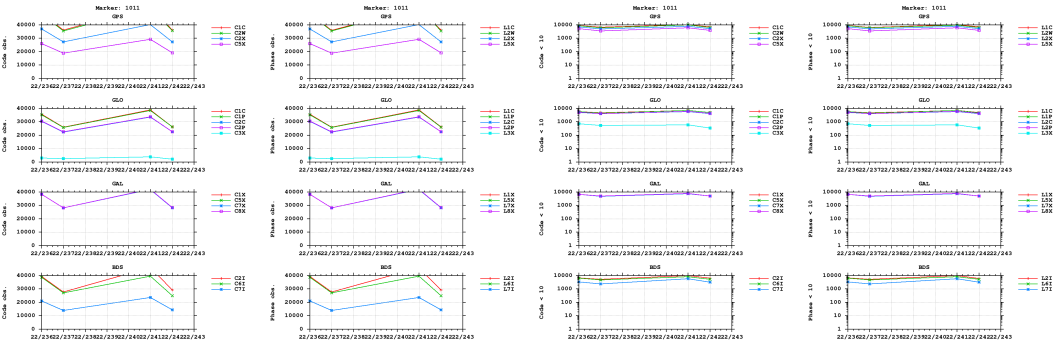



Multipath

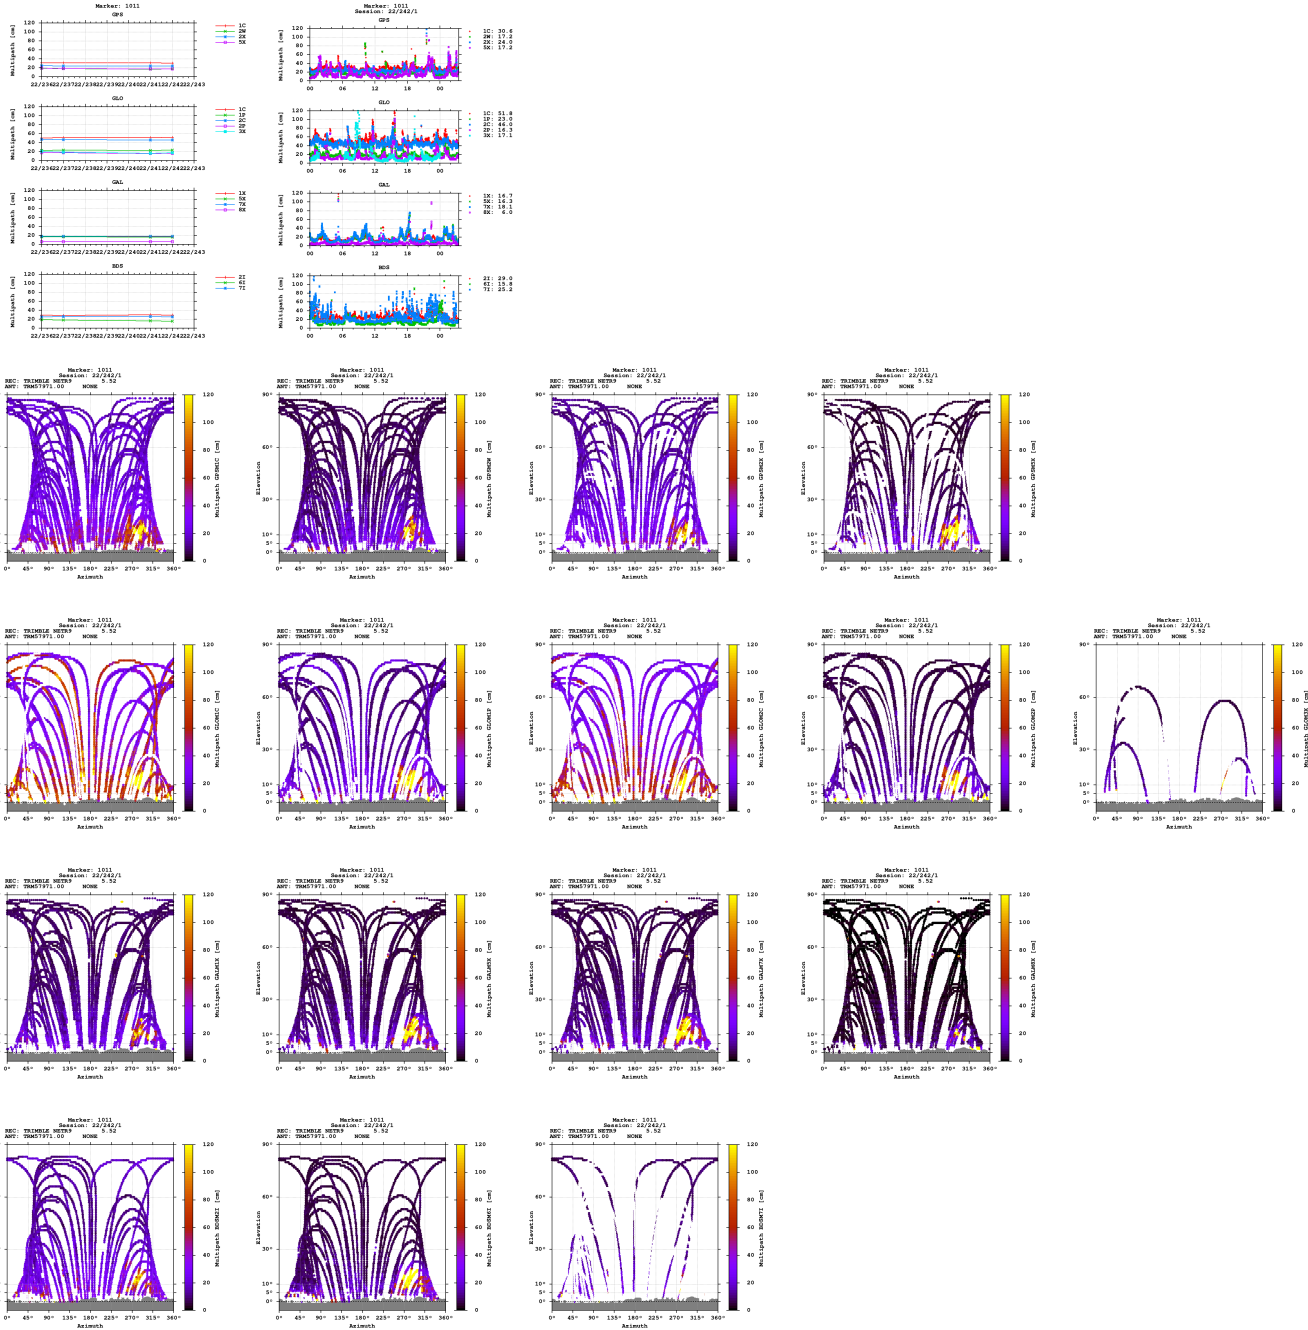


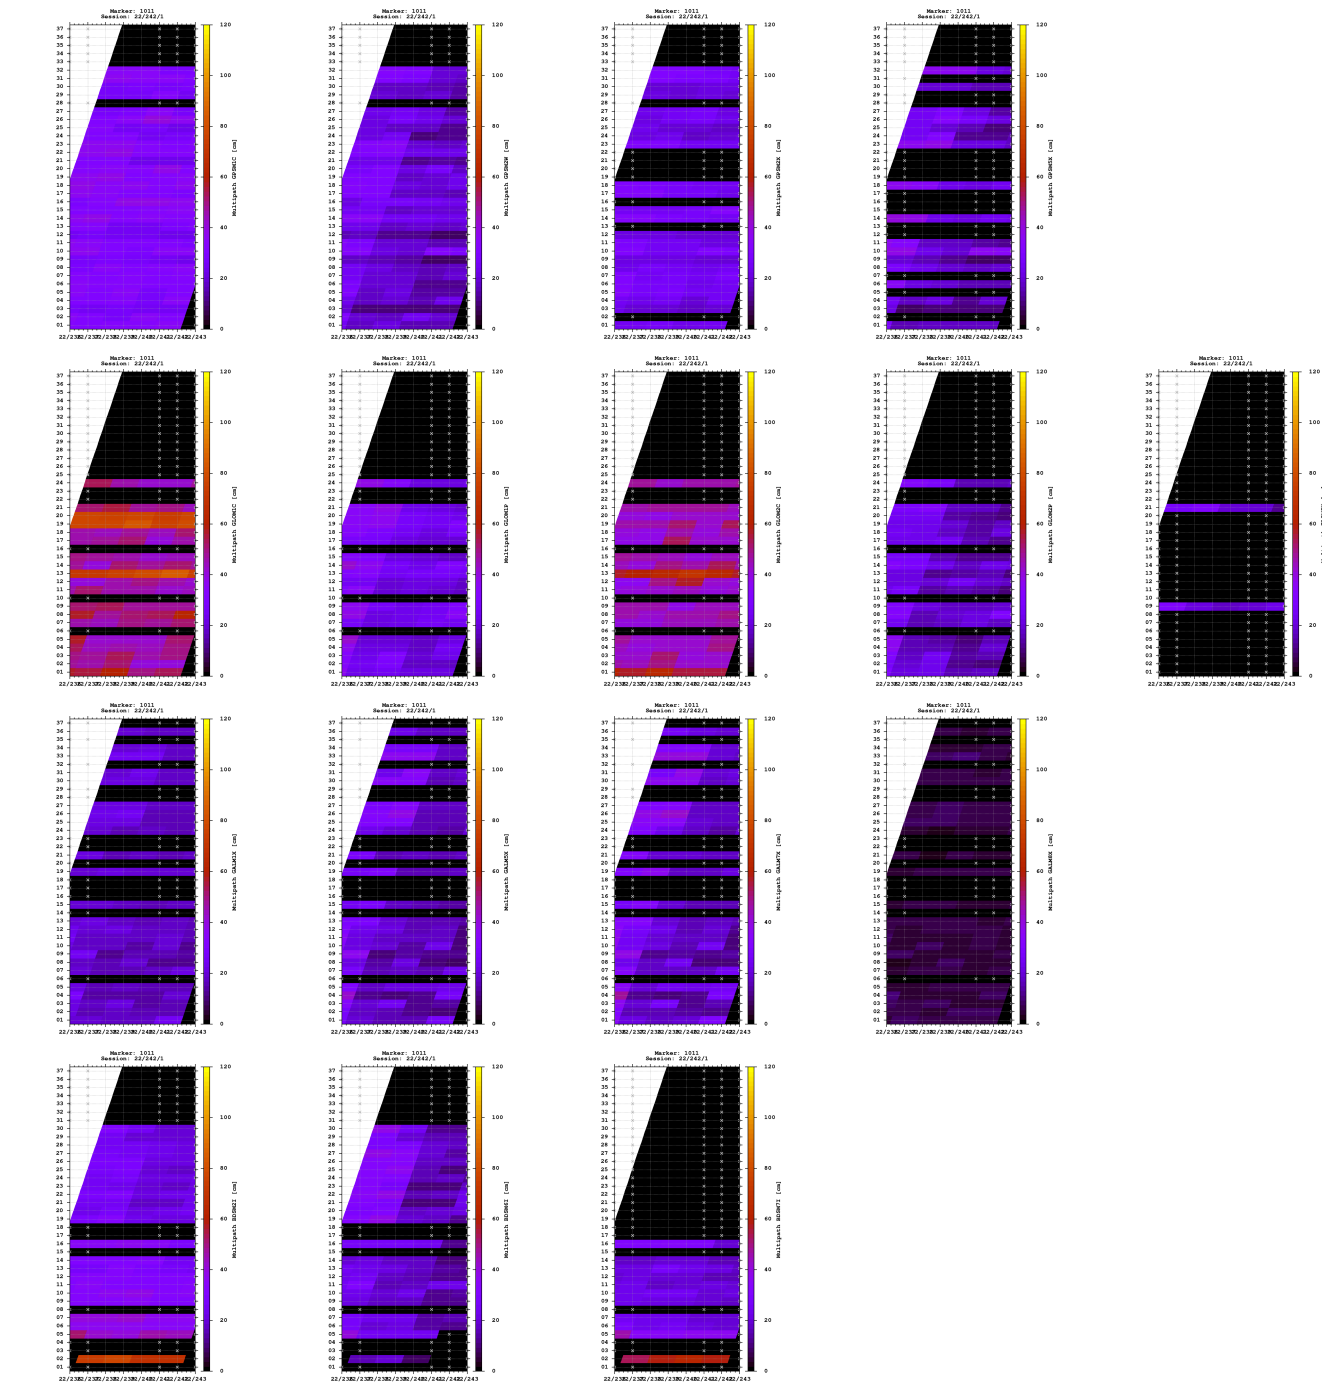

Signal-to-noise ratio

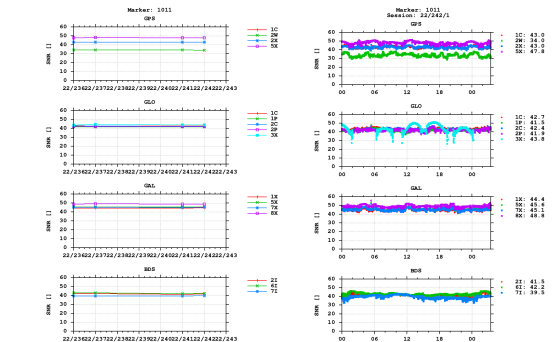


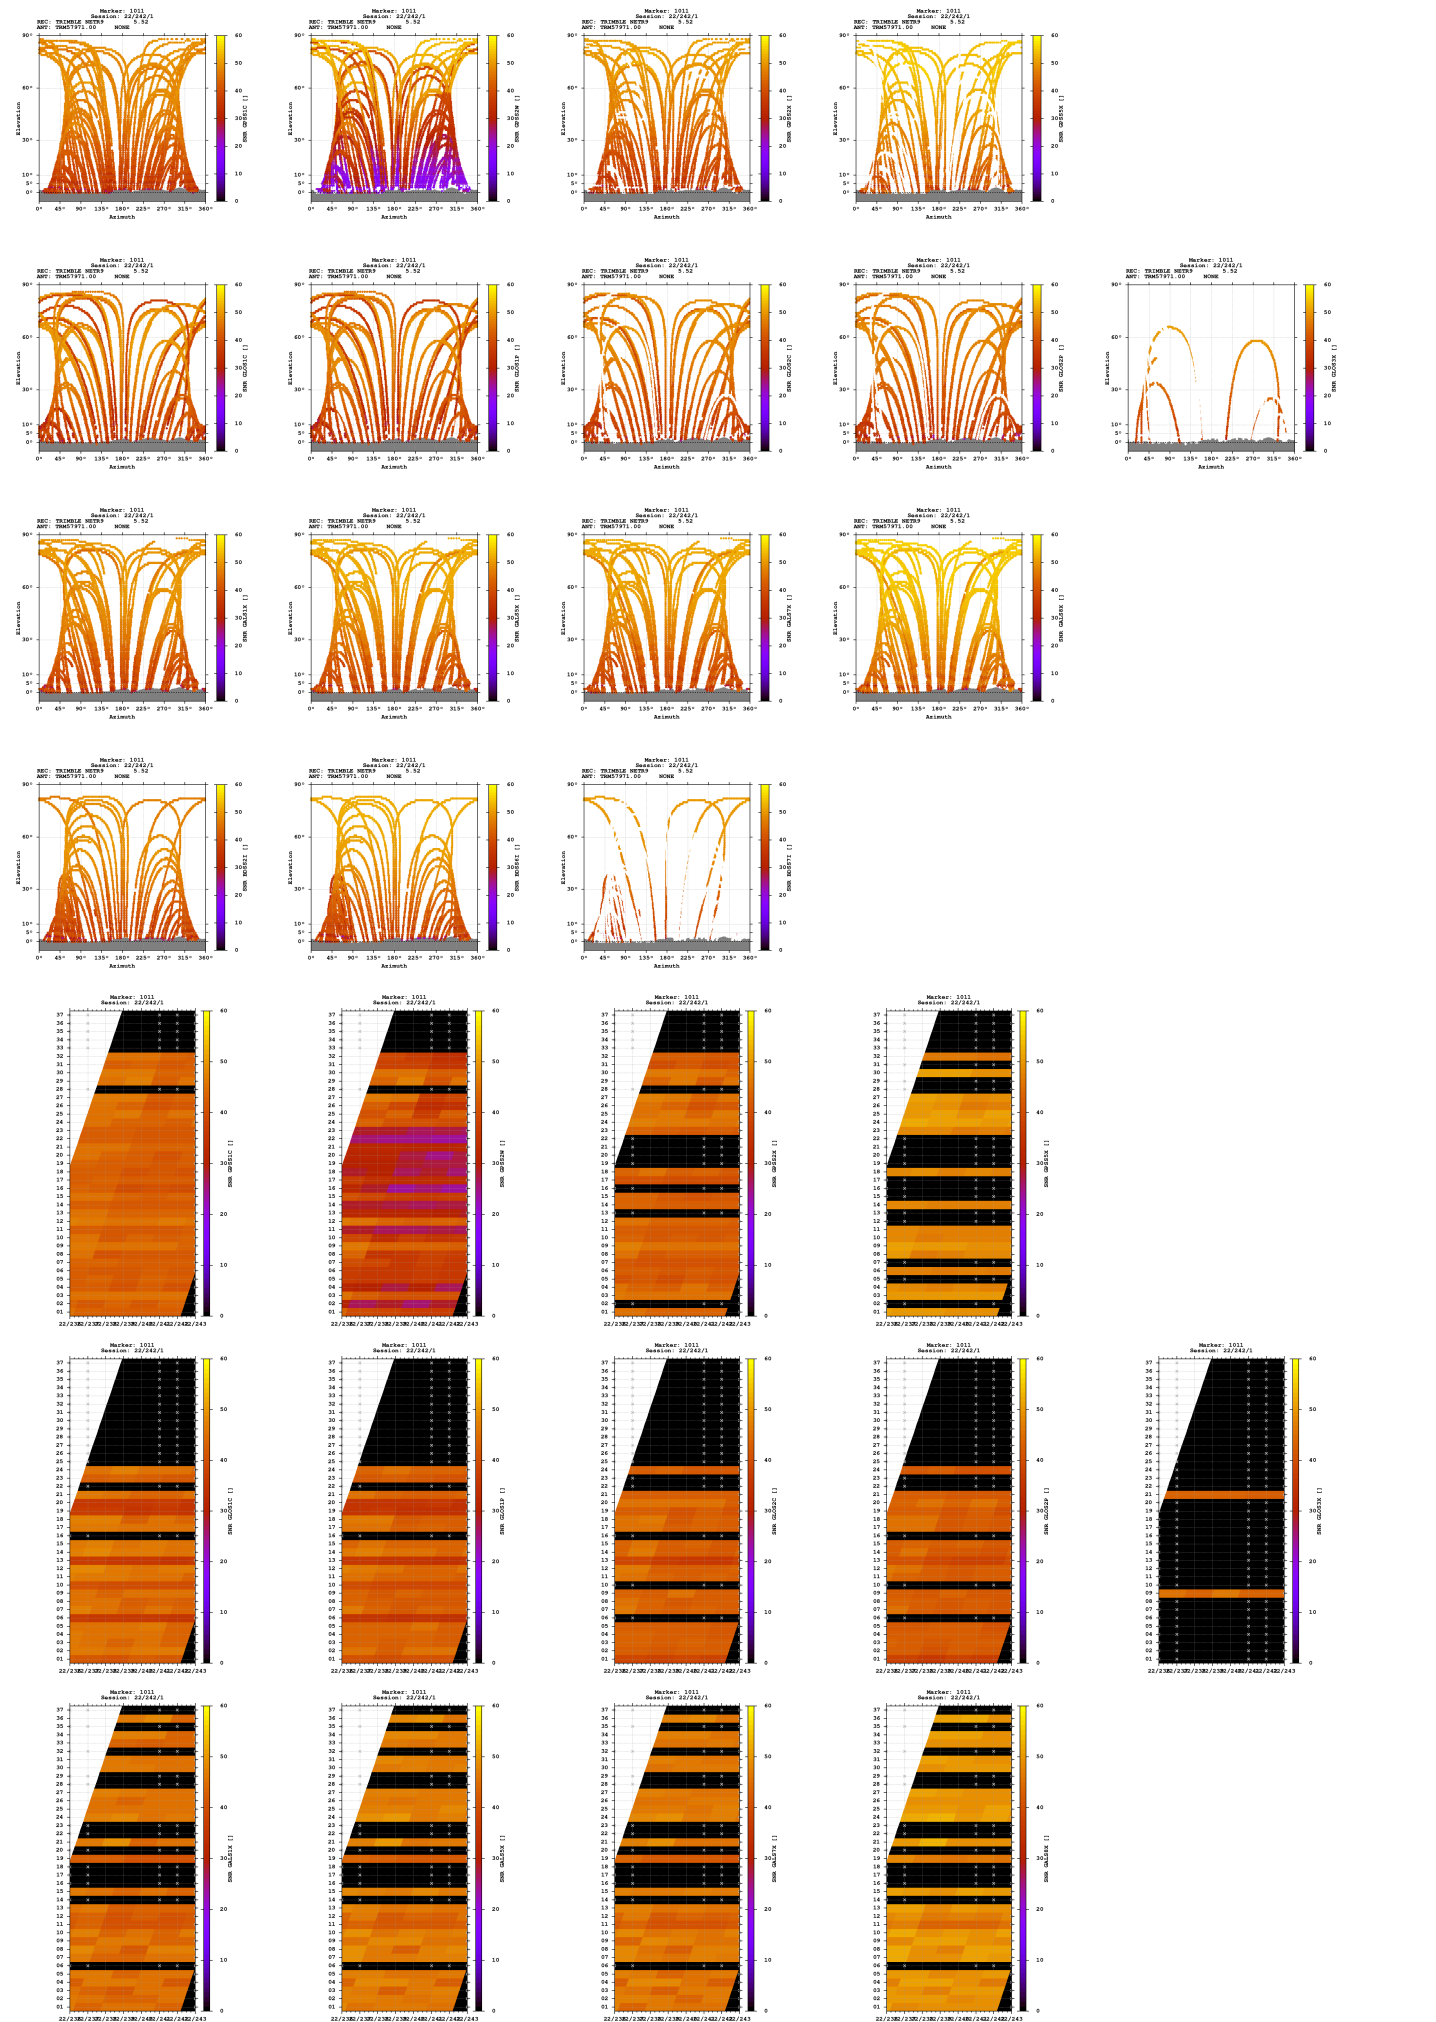

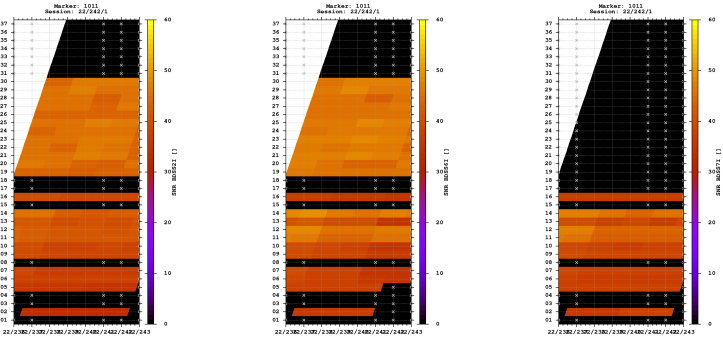



Estimates

2022-08-29 06:59:30	GPS	4244622.5071	644214.8861	4702066.7525	47.793847291	8.630034226	754.2449
2022-08-29 06:59:30	GLO	4244623.0209	644214.7631	4702067.2880	47.793847265	8.630031574	754.9704
2022-08-29 06:59:30	GAL	4244621.7903	644214.6611	4702065.9117	47.793847157	8.630032693	753.1233
2022-08-29 06:59:30	BDS	4244626.0308	644214.7299	4702062.7590	47.793800114	8.630025109	753.6115

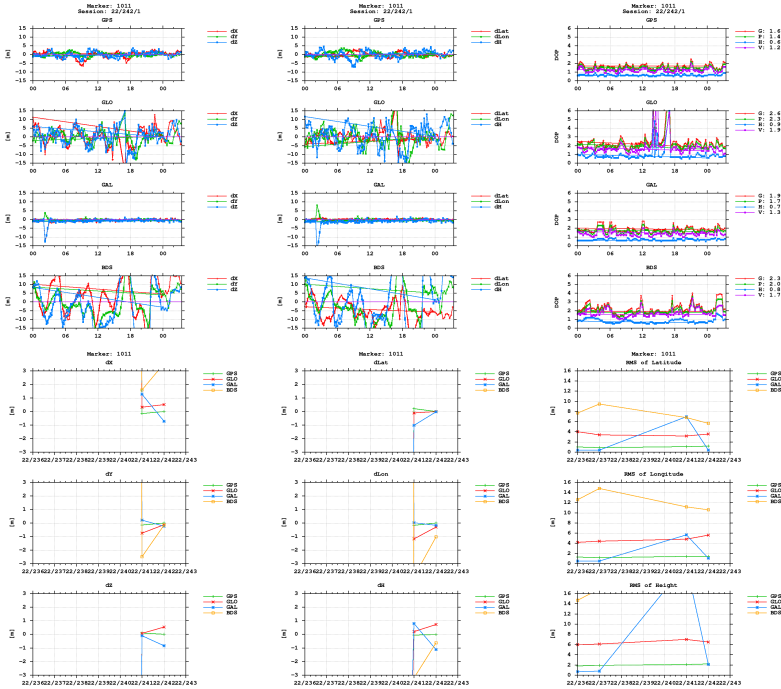

BNC

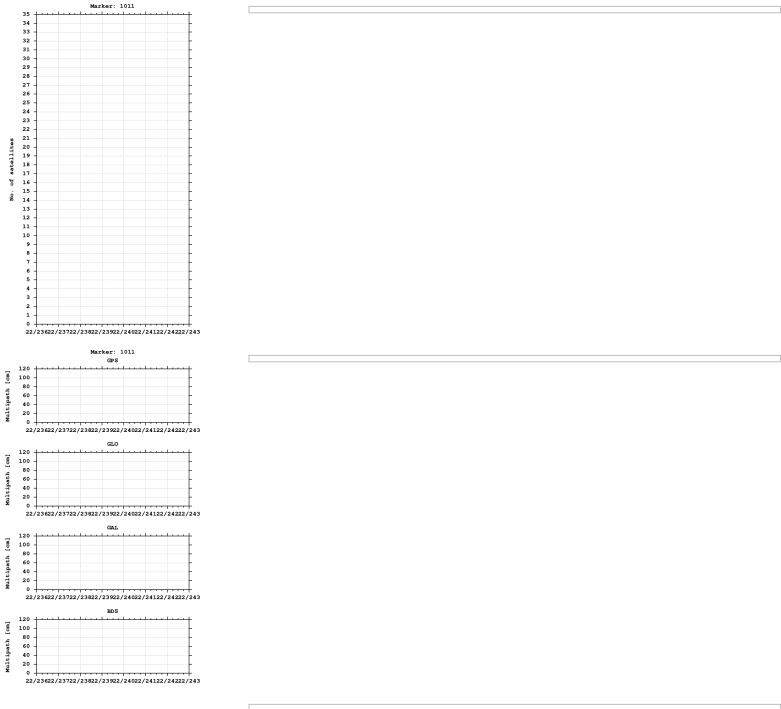

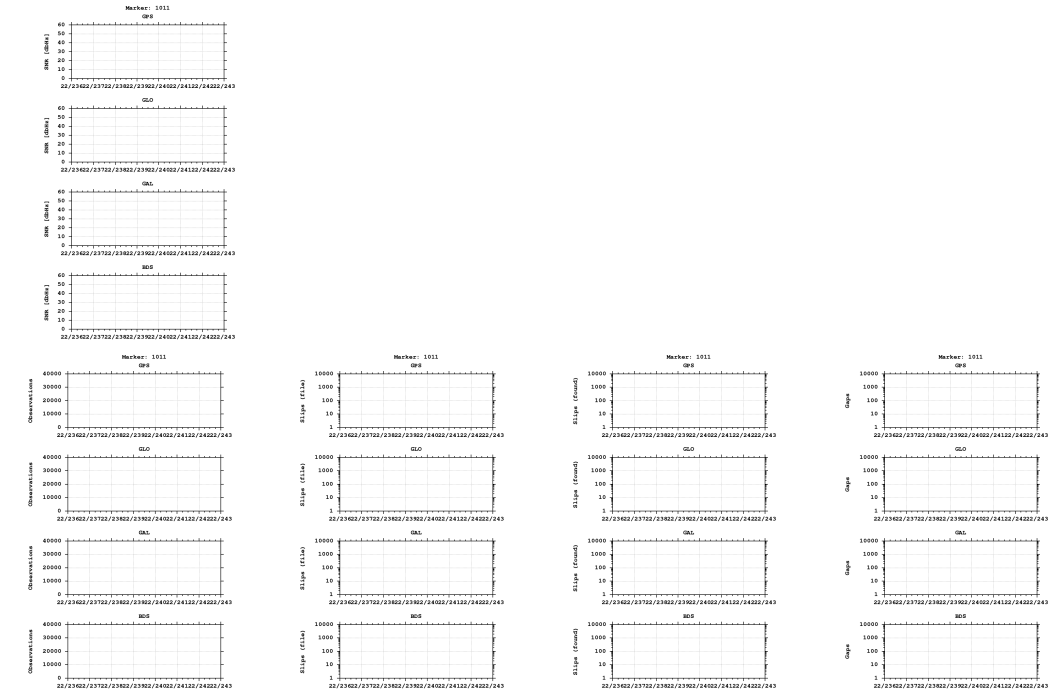

Equipment

2022-08-22 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)