


GNSS observation file monitoring for 0515


Last RINEX file: 05152431.220
RINEX version: 3.02
Marker: 1052
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE

Epochs

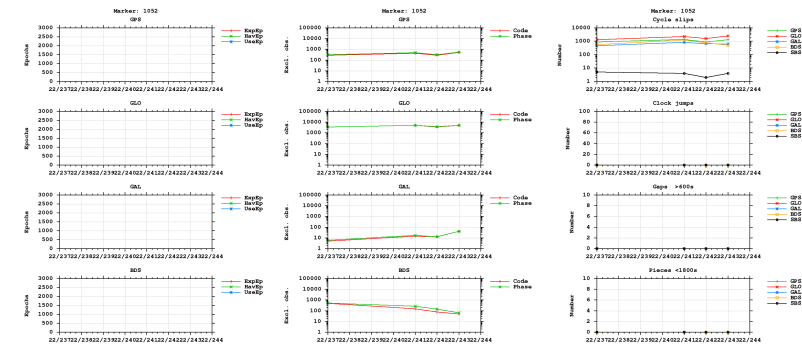



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

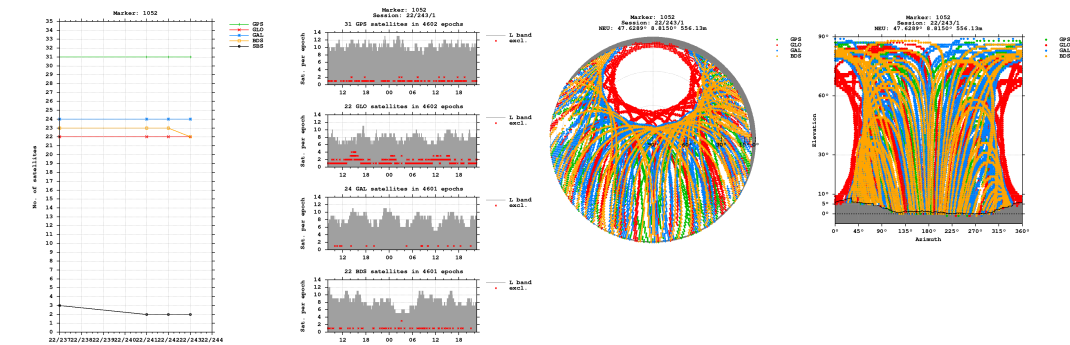


Bands

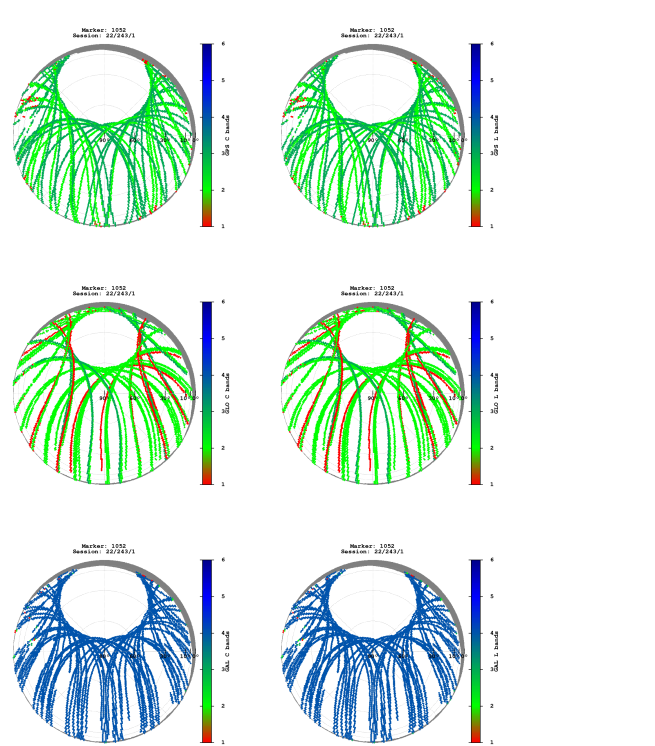


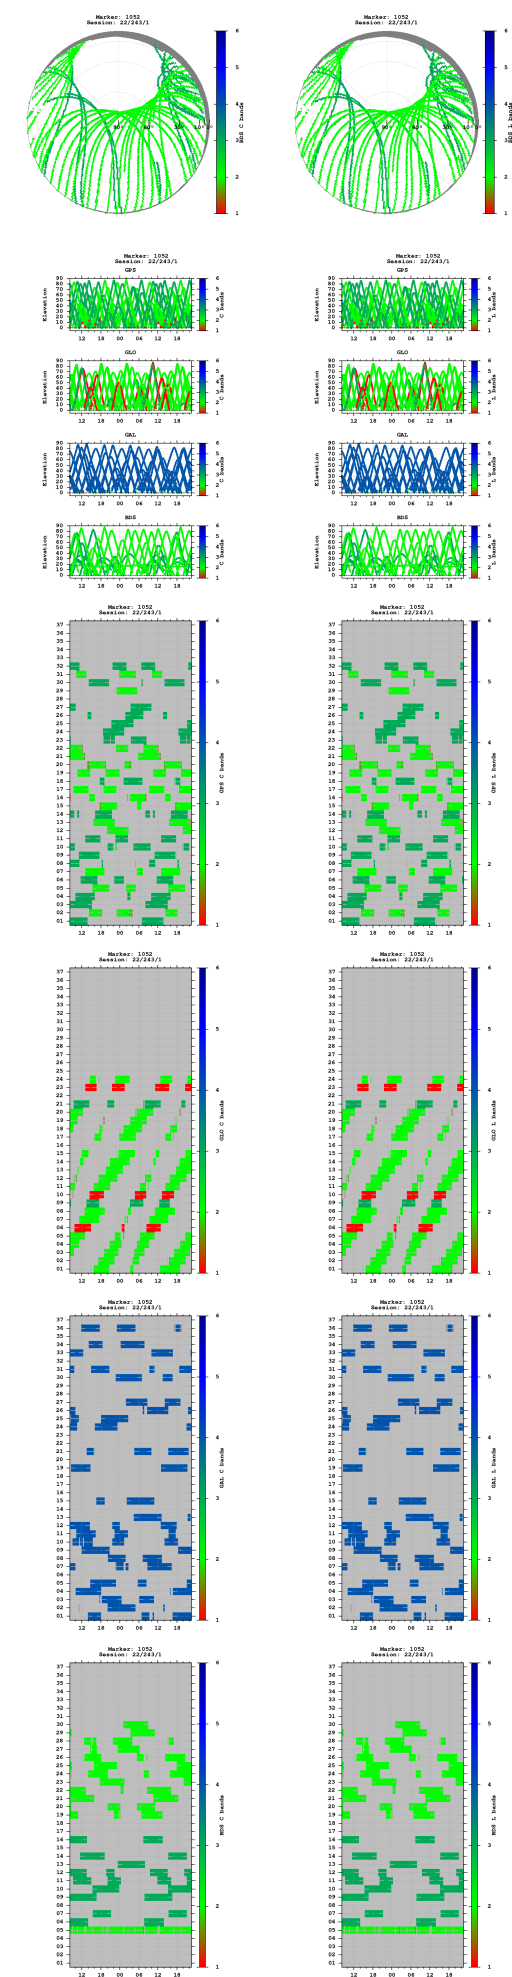


Observations

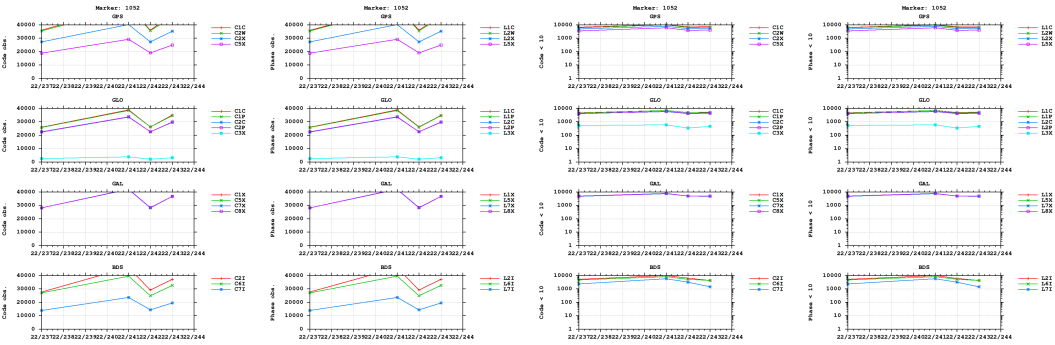


Multipath

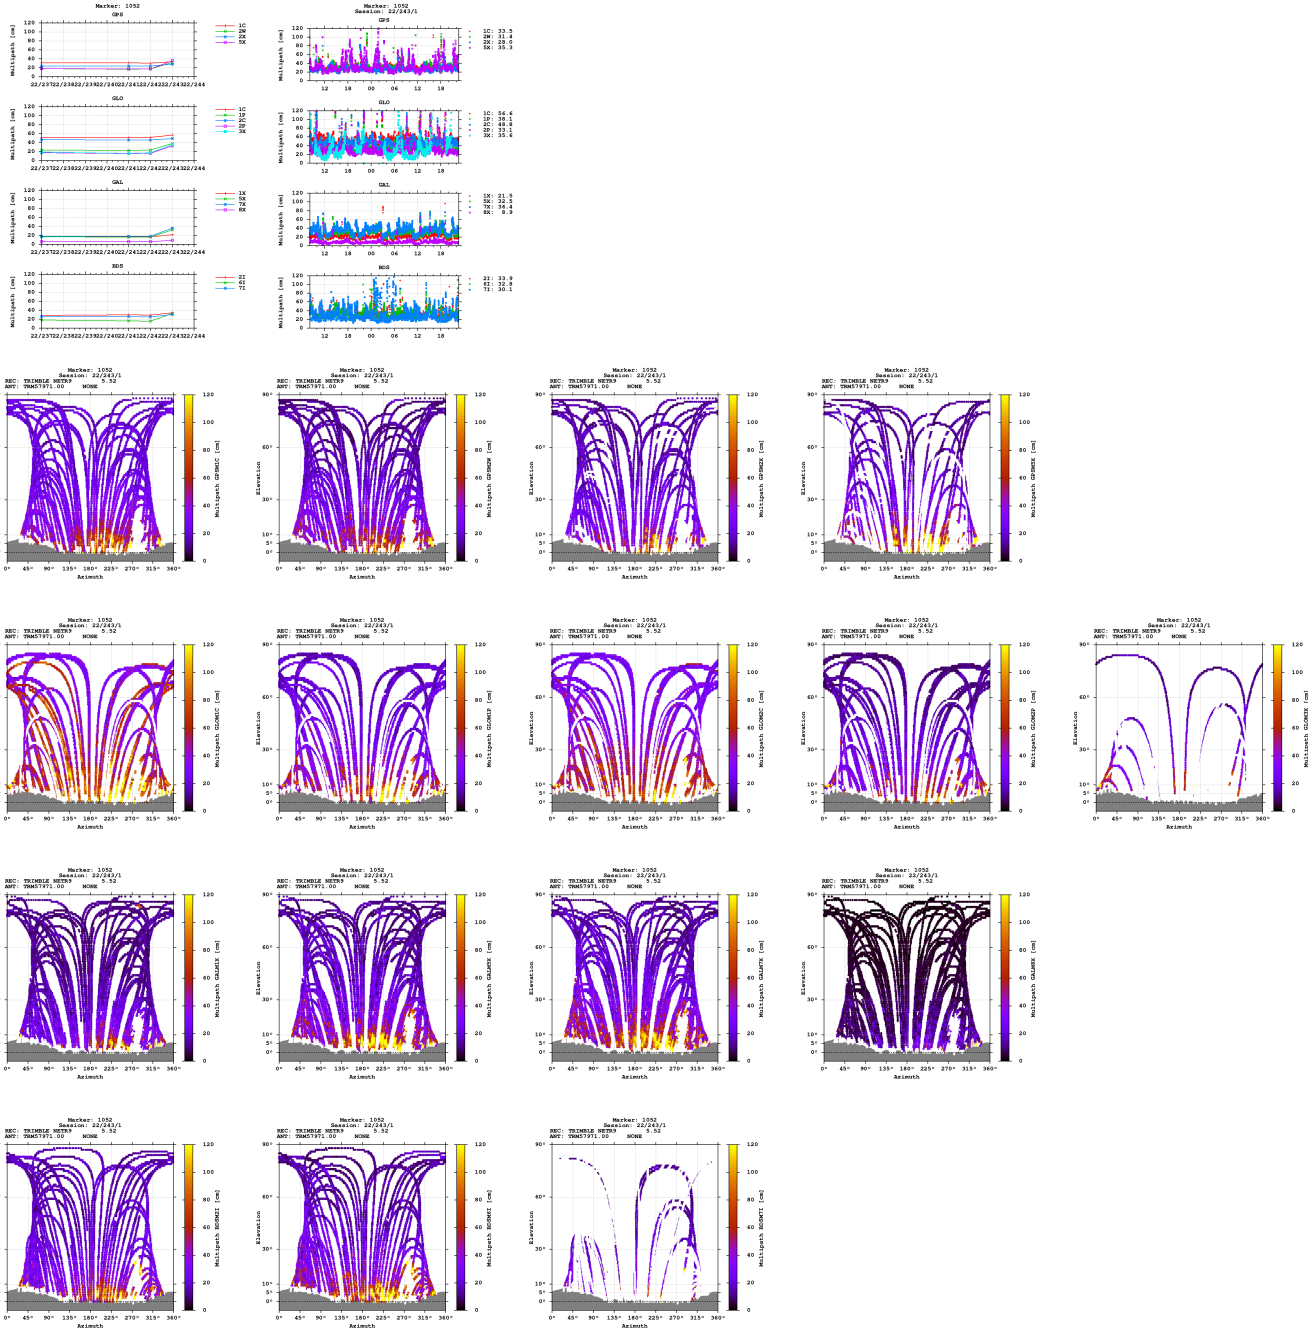


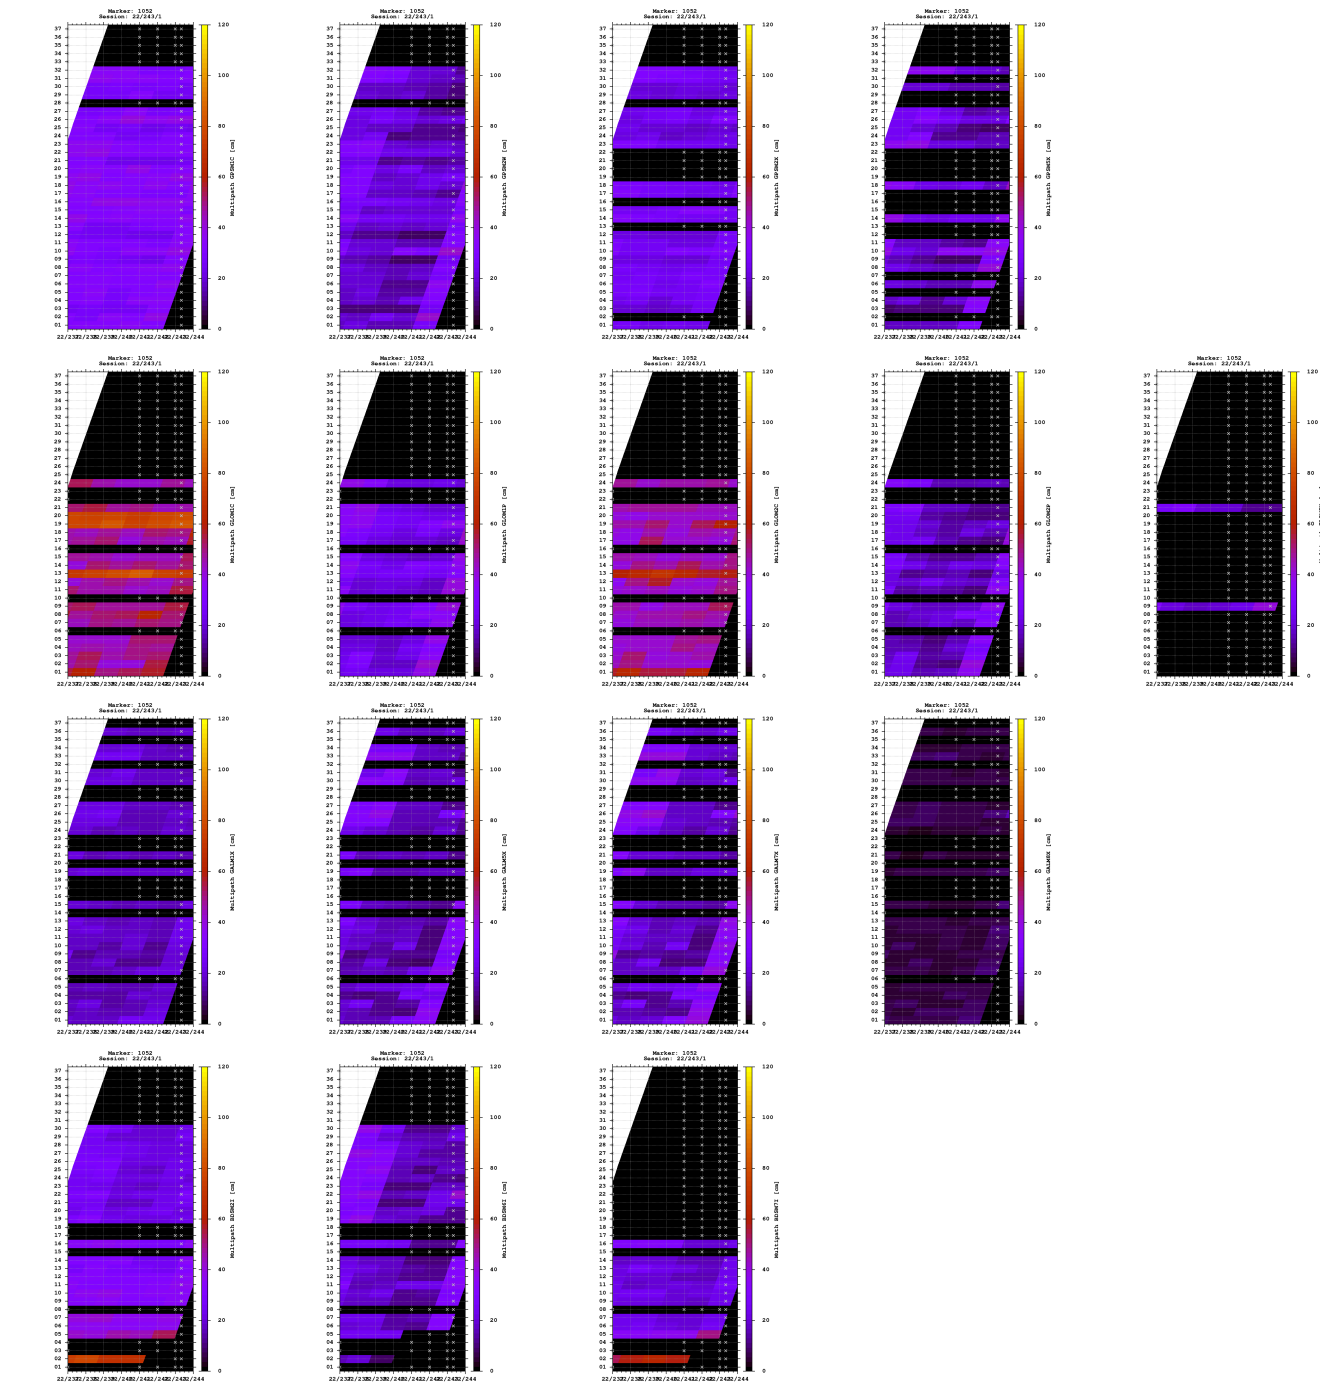


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

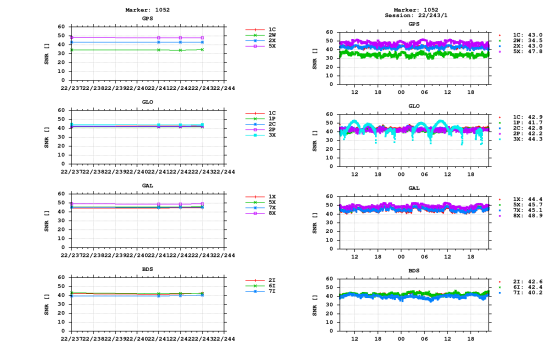


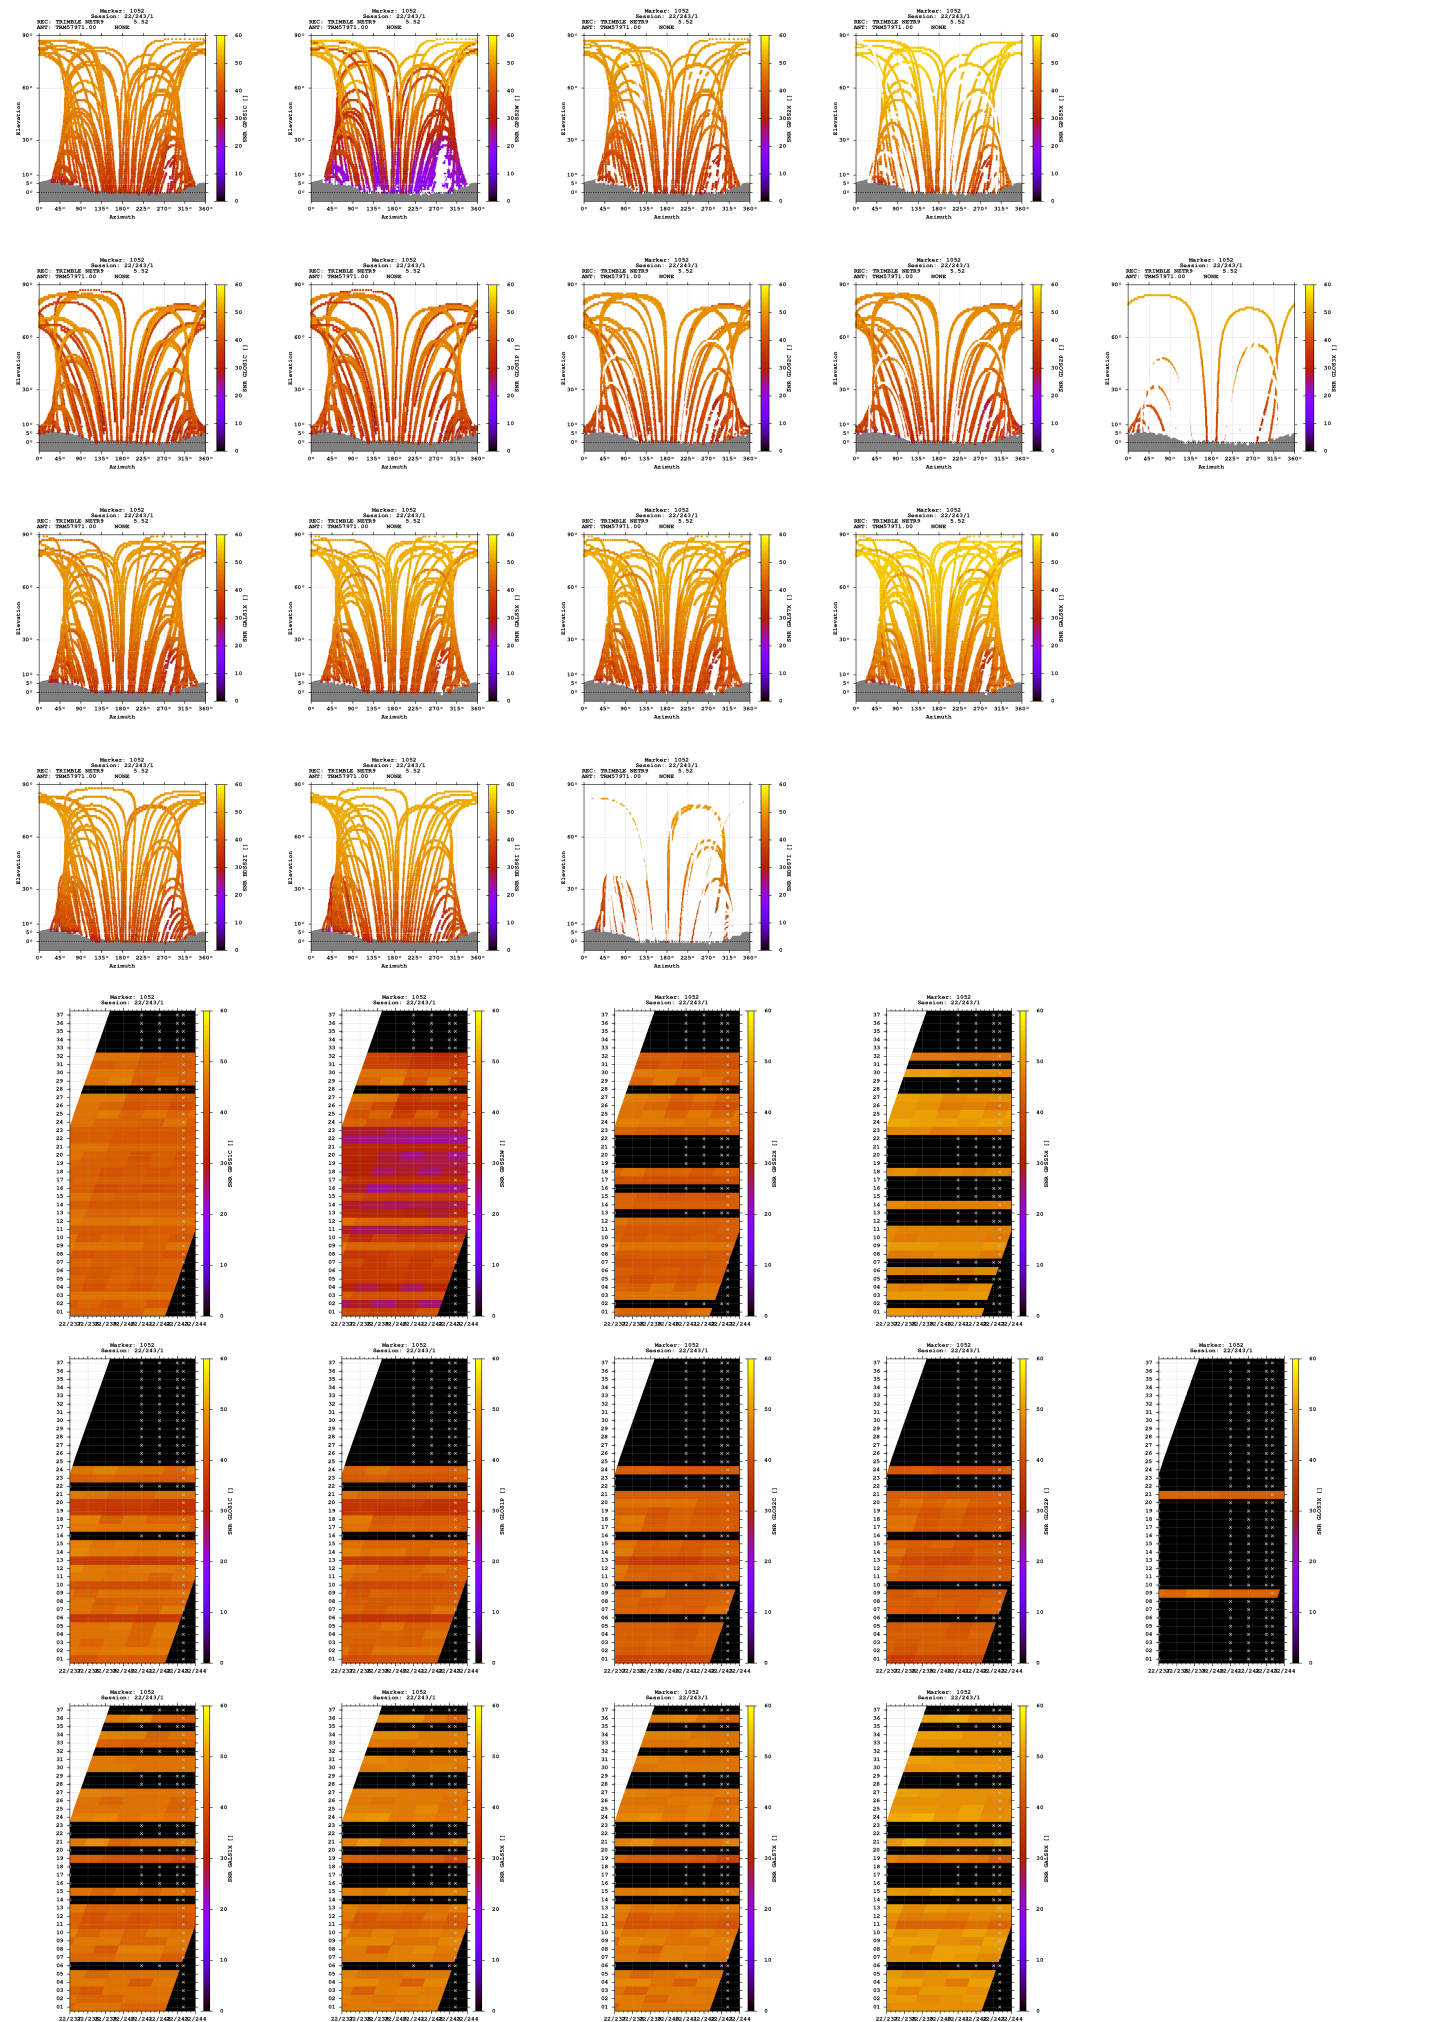

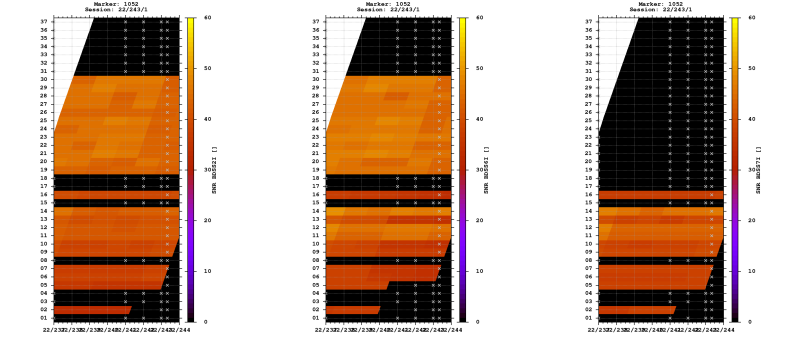


Estimates

2022-08-31 08:12:00	GPS	4255798.3754	659974.9554	4689577.4168	47.628881132	8.815021626	556.1292
2022-08-31 08:12:00	GLO	4255799.8438	659974.9728	4689578.0441	47.628875275	8.815018861	557.5722
2022-08-31 08:12:00	GAL	4255798.4972	659975.0989	4689577.2472	47.628879158	8.815023264	556.0998
2022-08-31 08:12:00	BDS	4255807.4738	659978.5957	4689575.5592	47.628806429	8.815050934	561.1920

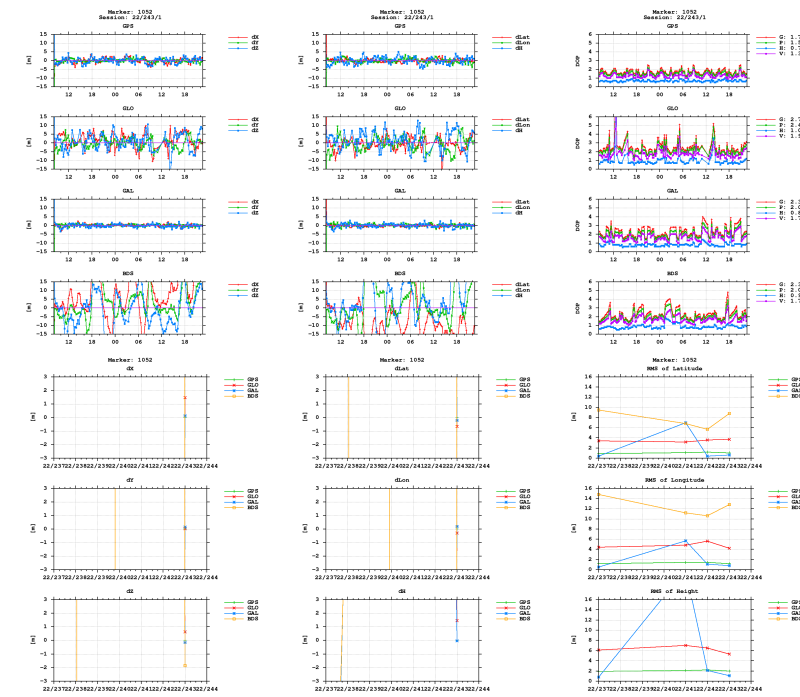

BNC



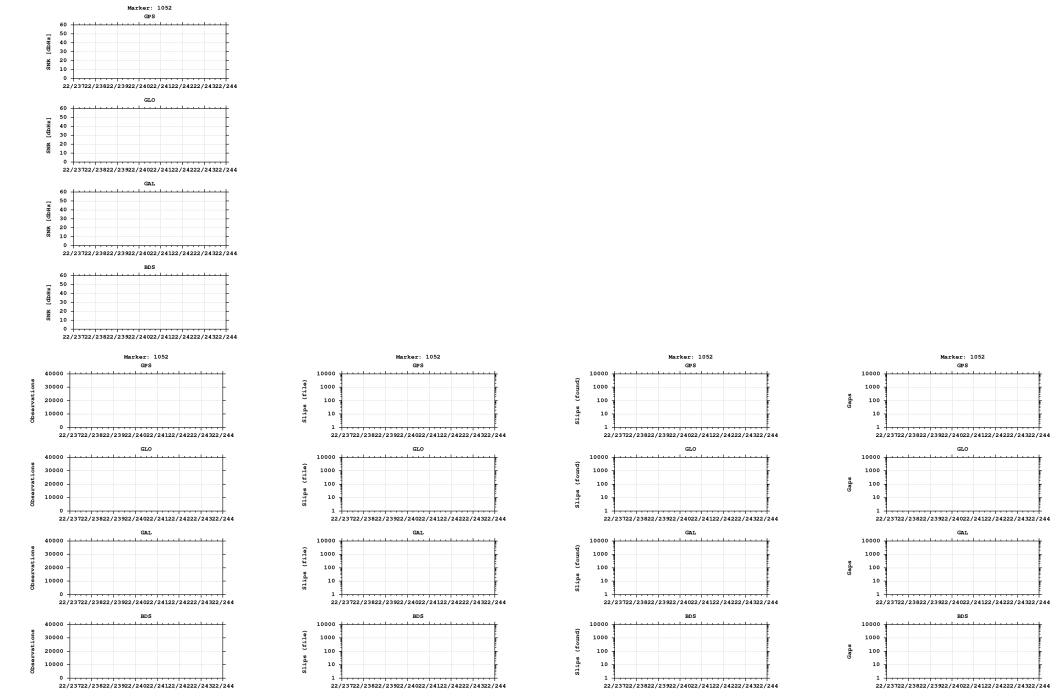

Equipment

2022-08-22 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)