


GNSS observation file monitoring for 0516


Last RINEX file: 05162341.22O
RINEX version: 3.02
Marker: 1053
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

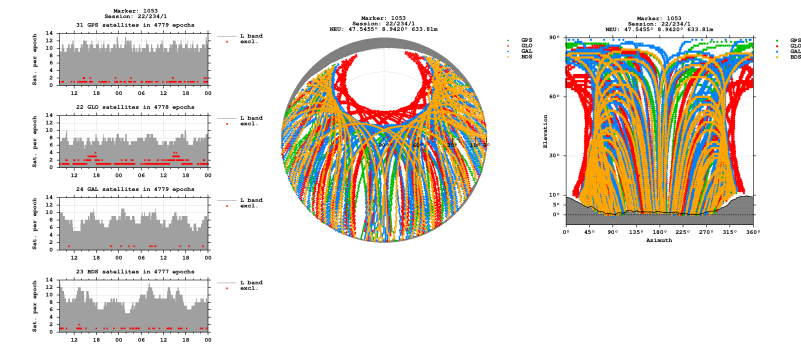


Bands

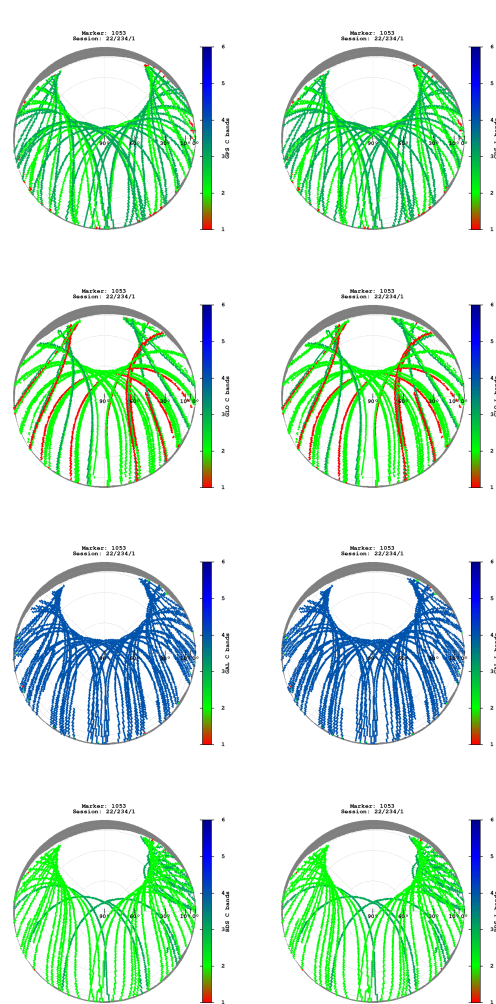

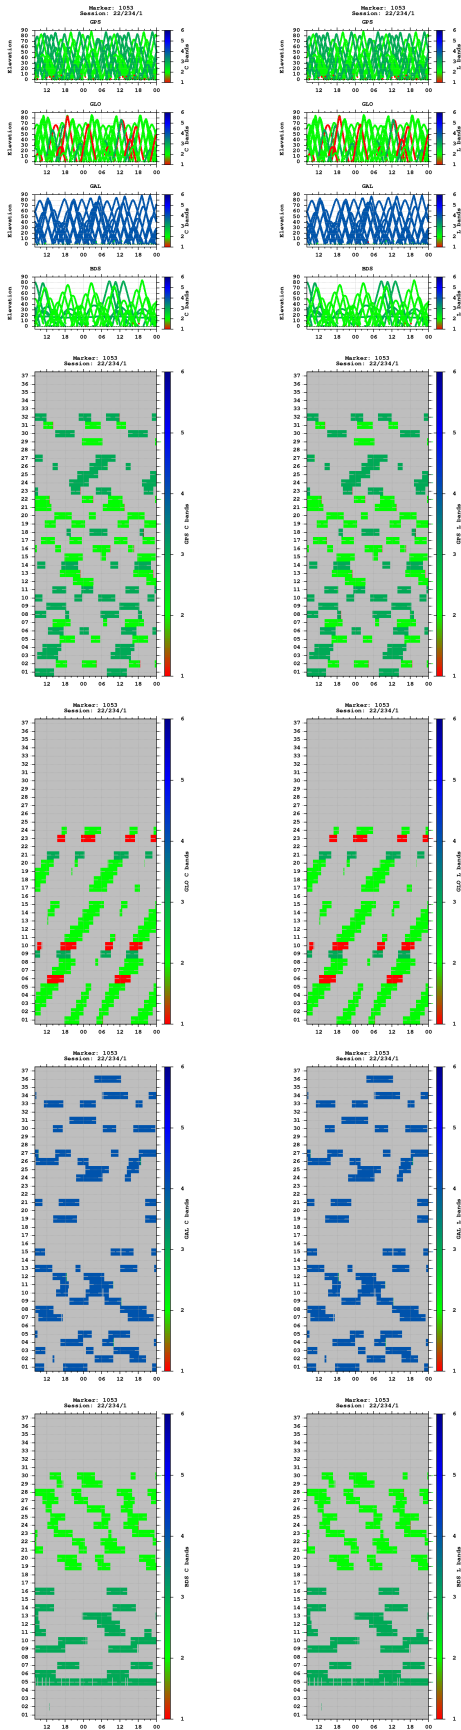



Multipath

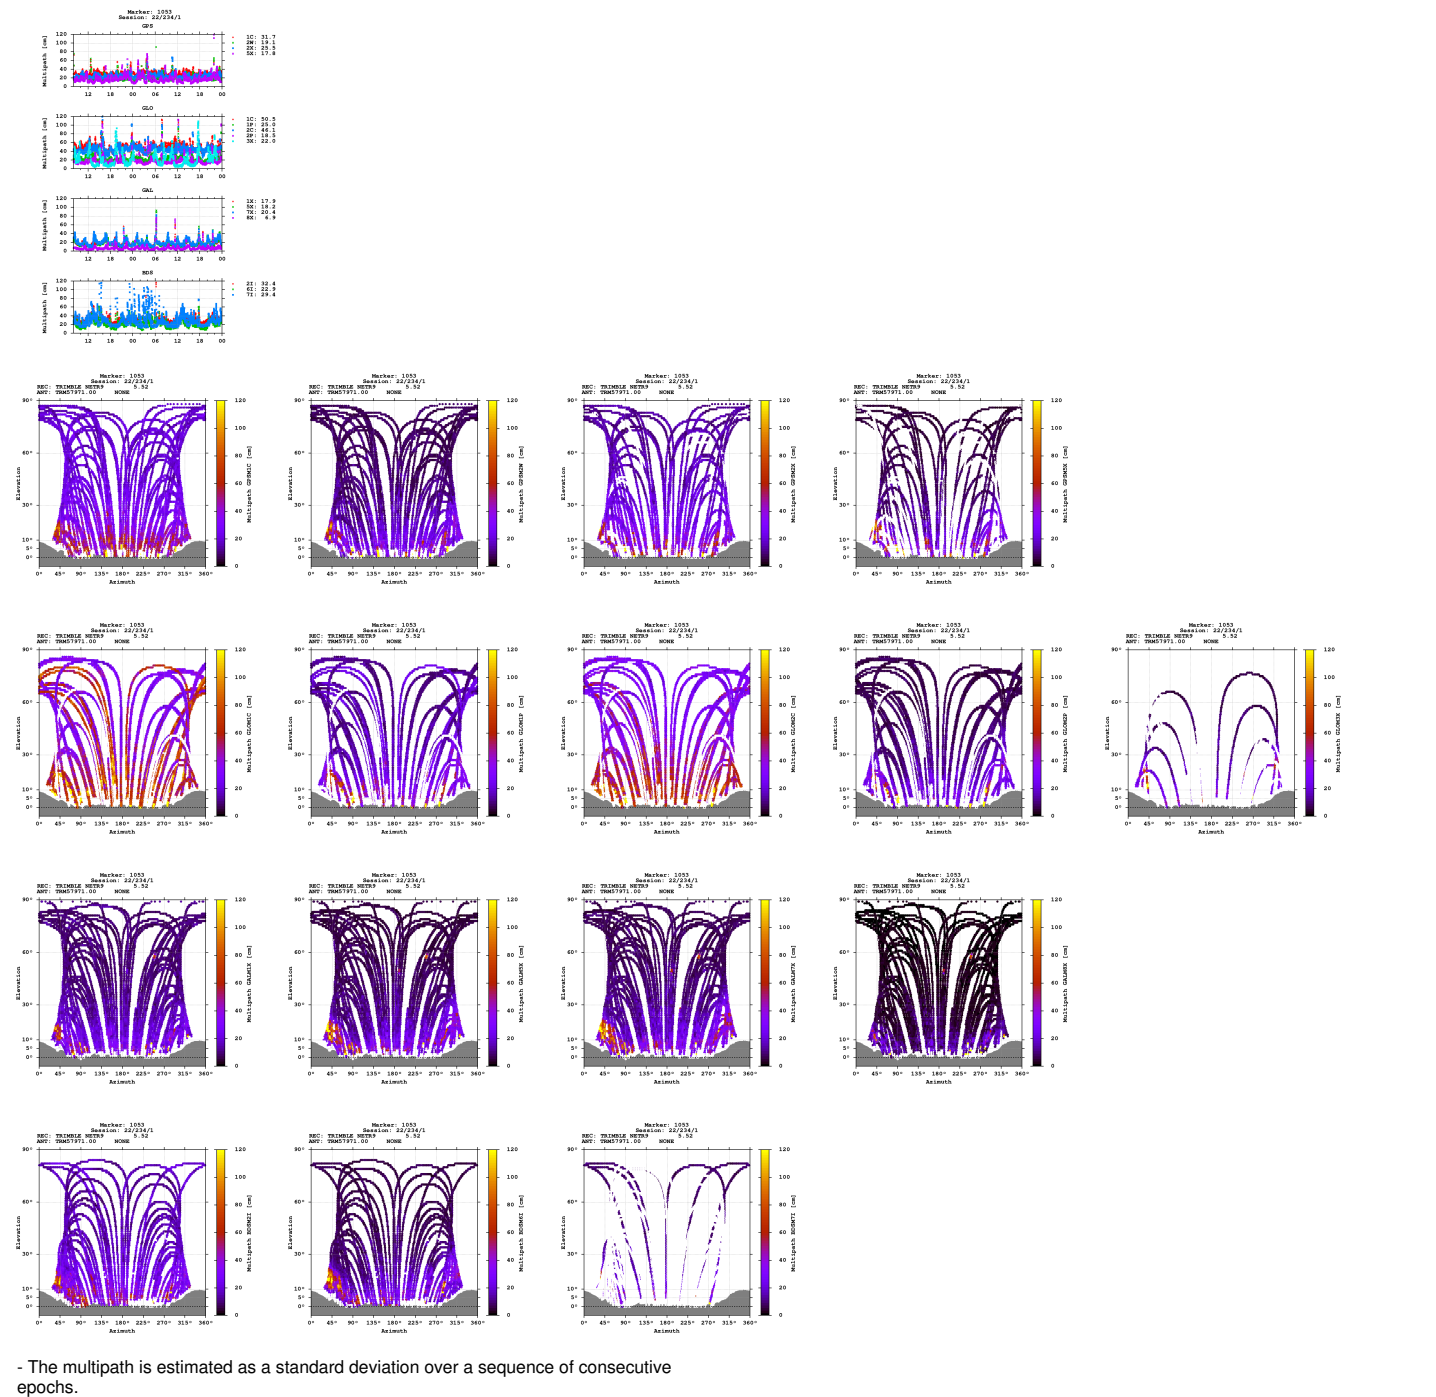

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

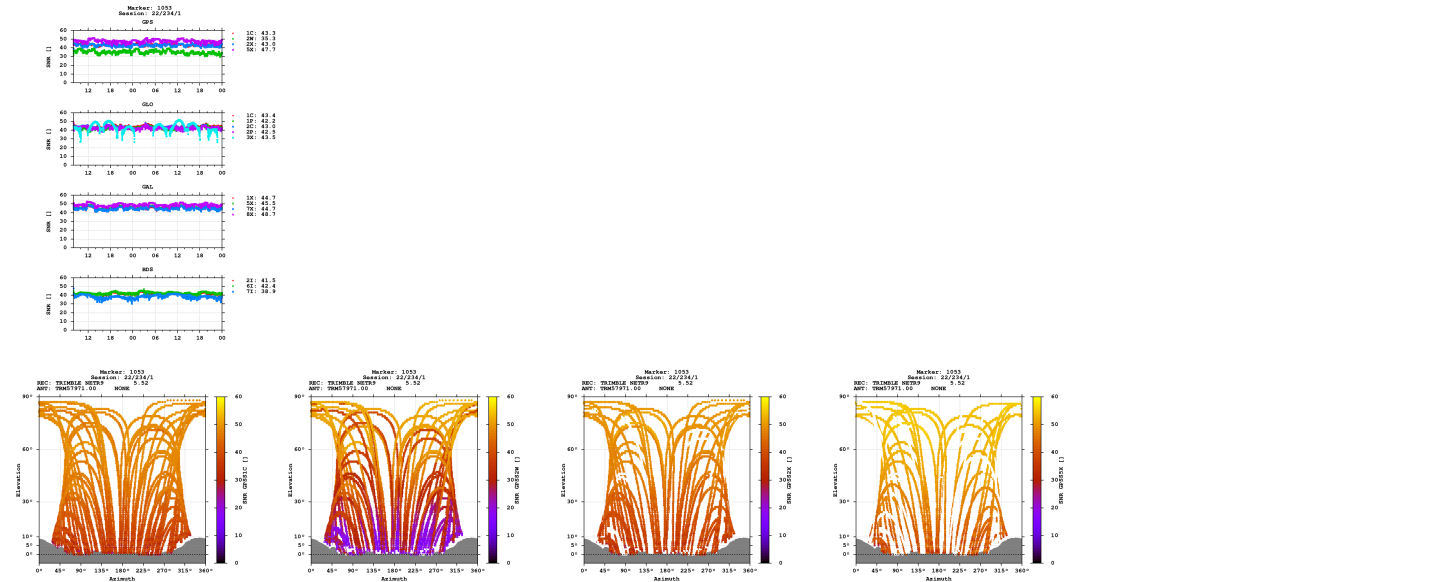

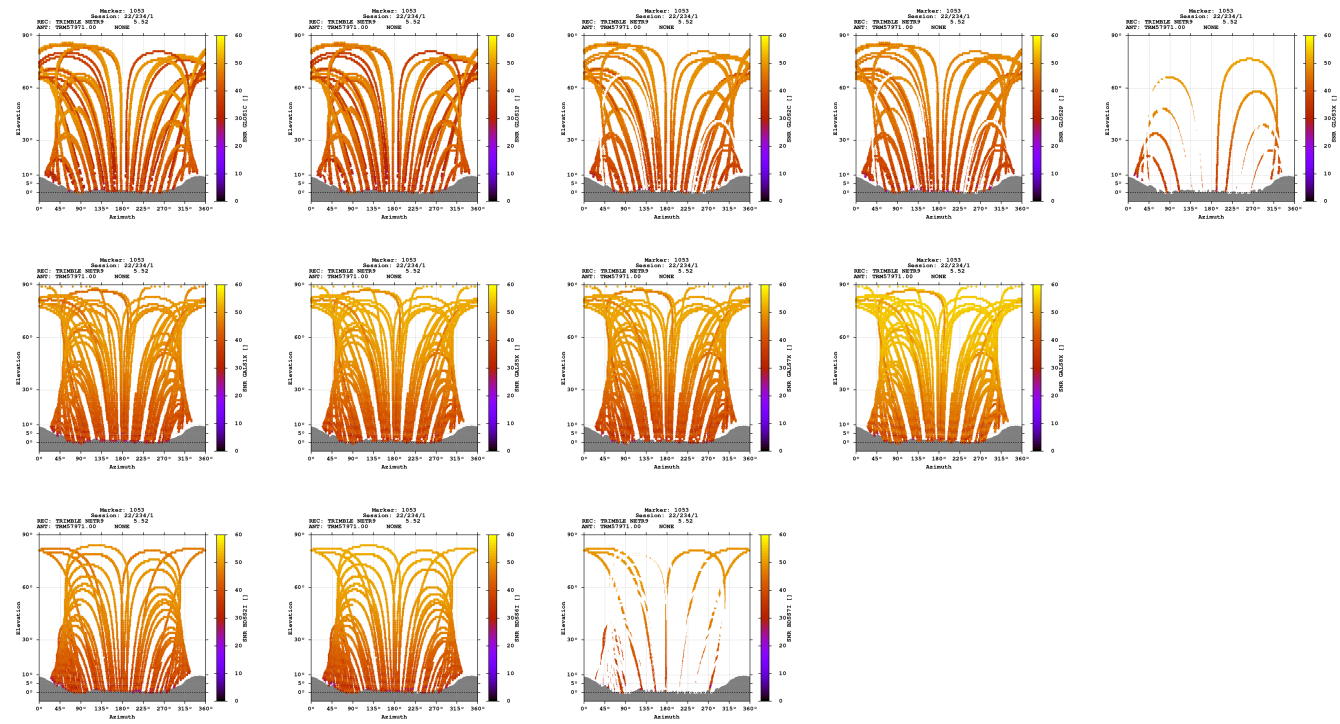

Estimates

2022-08-22 08:07:00	GPS	4261135.1967	670479.5279	4683384.5833	47.545540636	8.942039666	633.8125
2022-08-22 08:07:00	GLO	4261135.3933	670479.2639	4683384.8052	47.545540967	8.942035797	634.0797
2022-08-22 08:07:00	GAL	4261135.3332	670479.4973	4683384.4886	47.545539197	8.942038983	633.8305
2022-08-22 08:07:00	BDS	4261134.8630	670478.5976	4683386.2862	47.545554120	8.942028149	634.7489

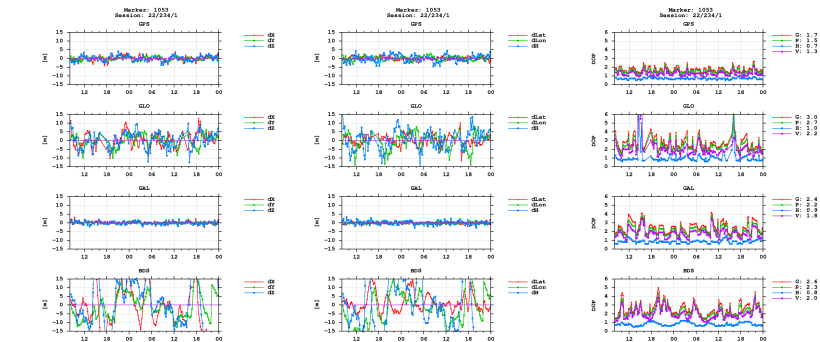

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)