


GNSS observation file monitoring for 0516


Last RINEX file: 05162361.220
RINEX version: 3.02
Marker: 1033
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

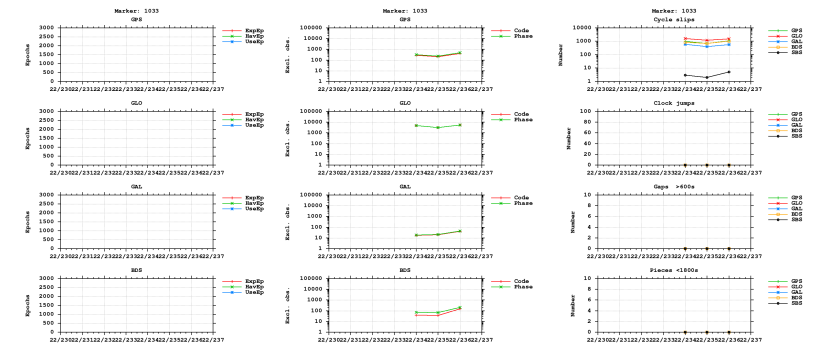



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

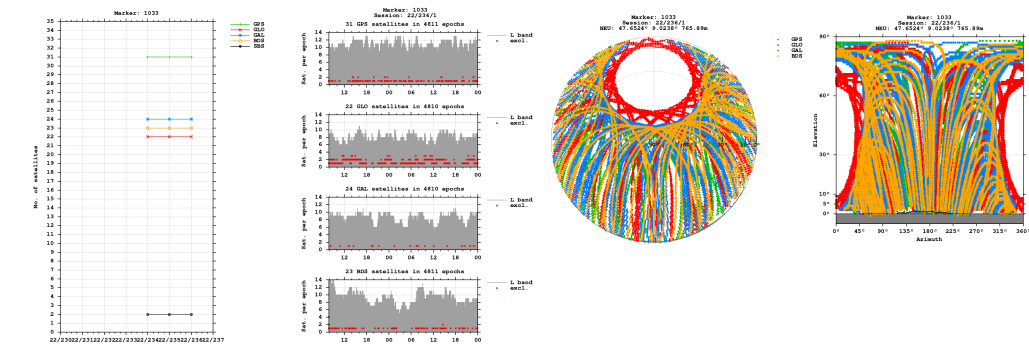


Bands

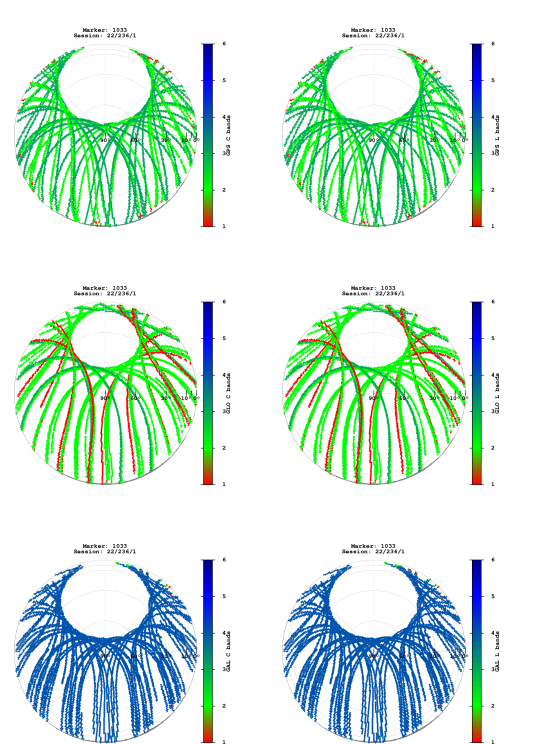


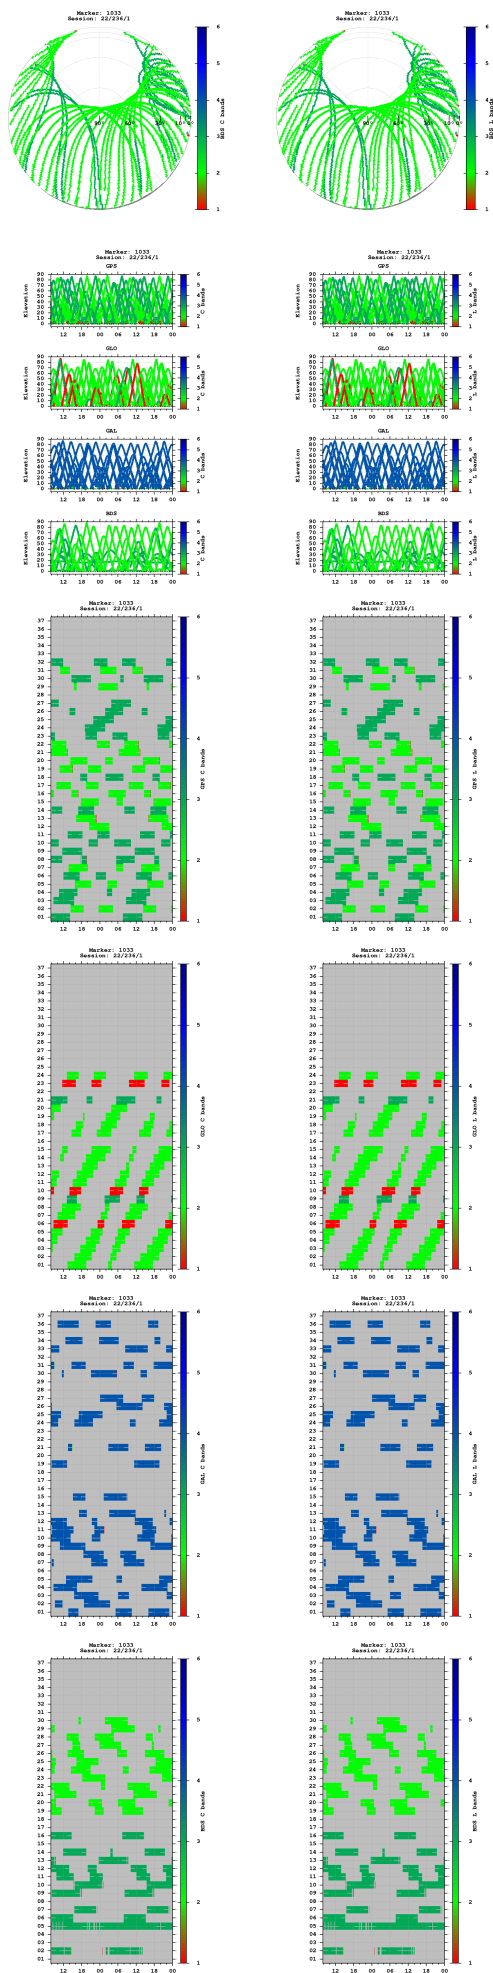


Observations

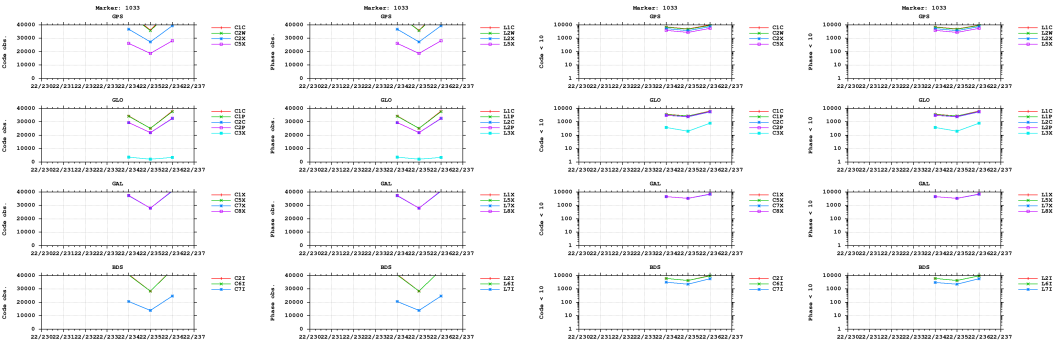


Multipath

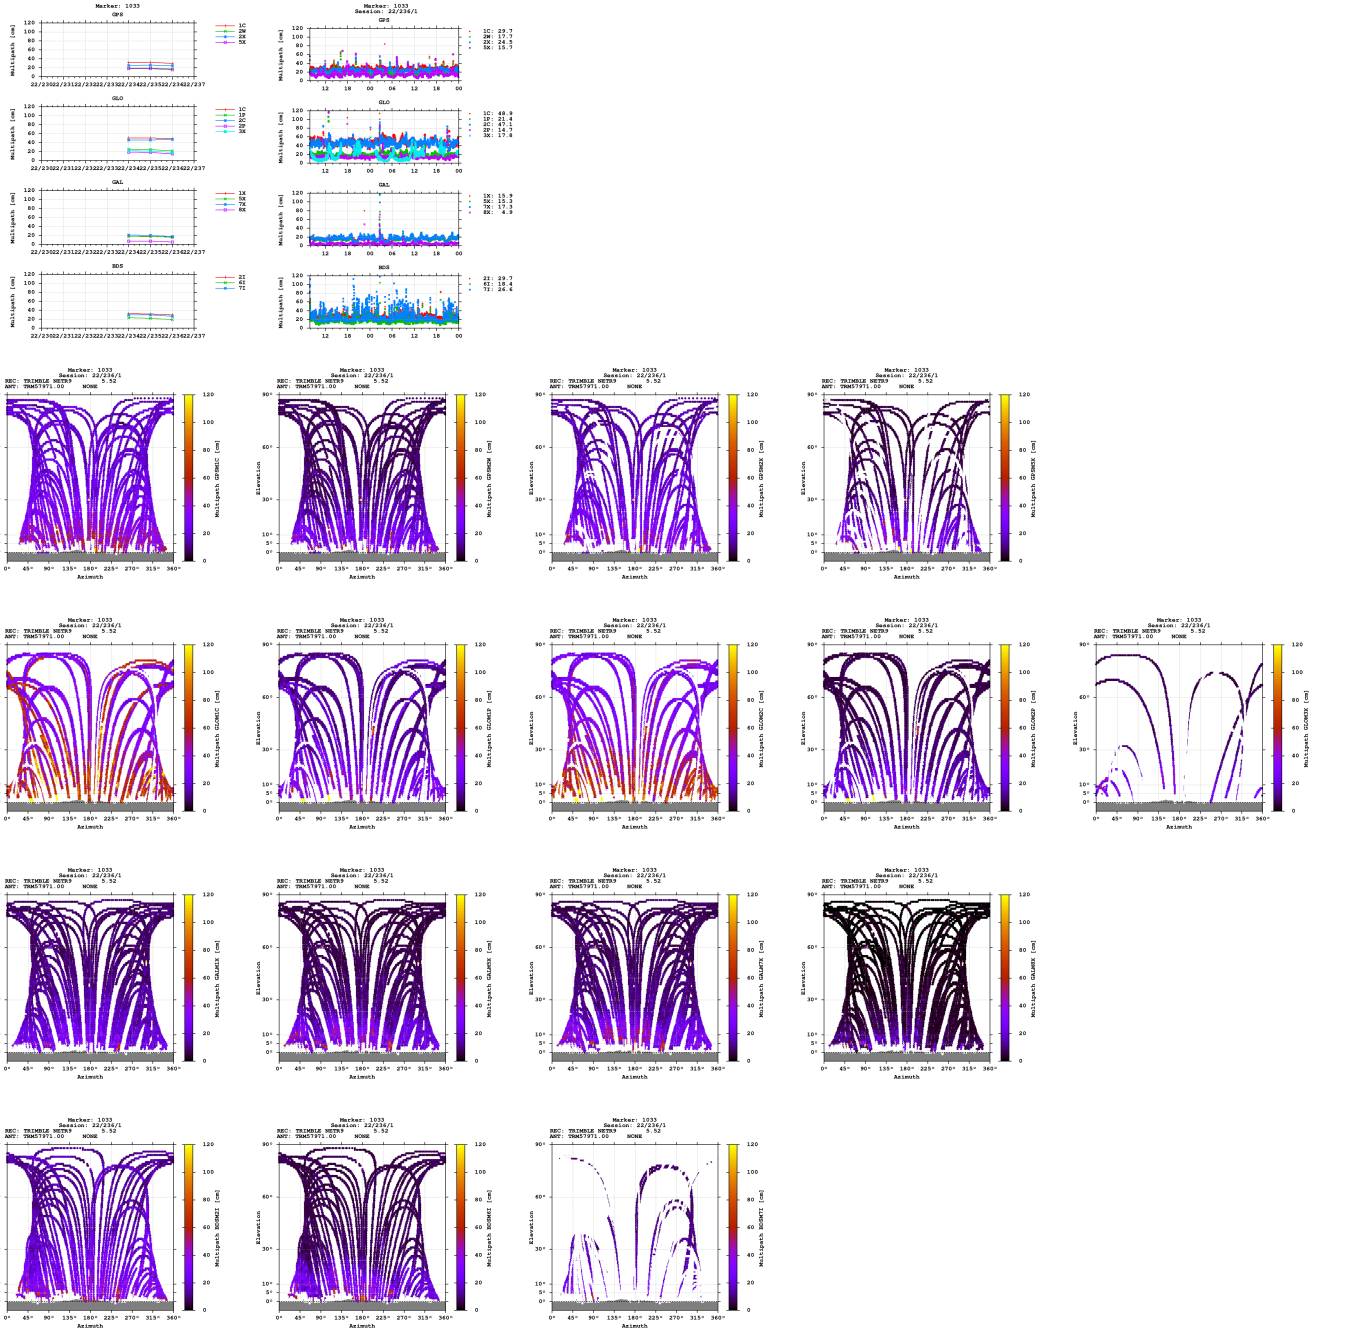


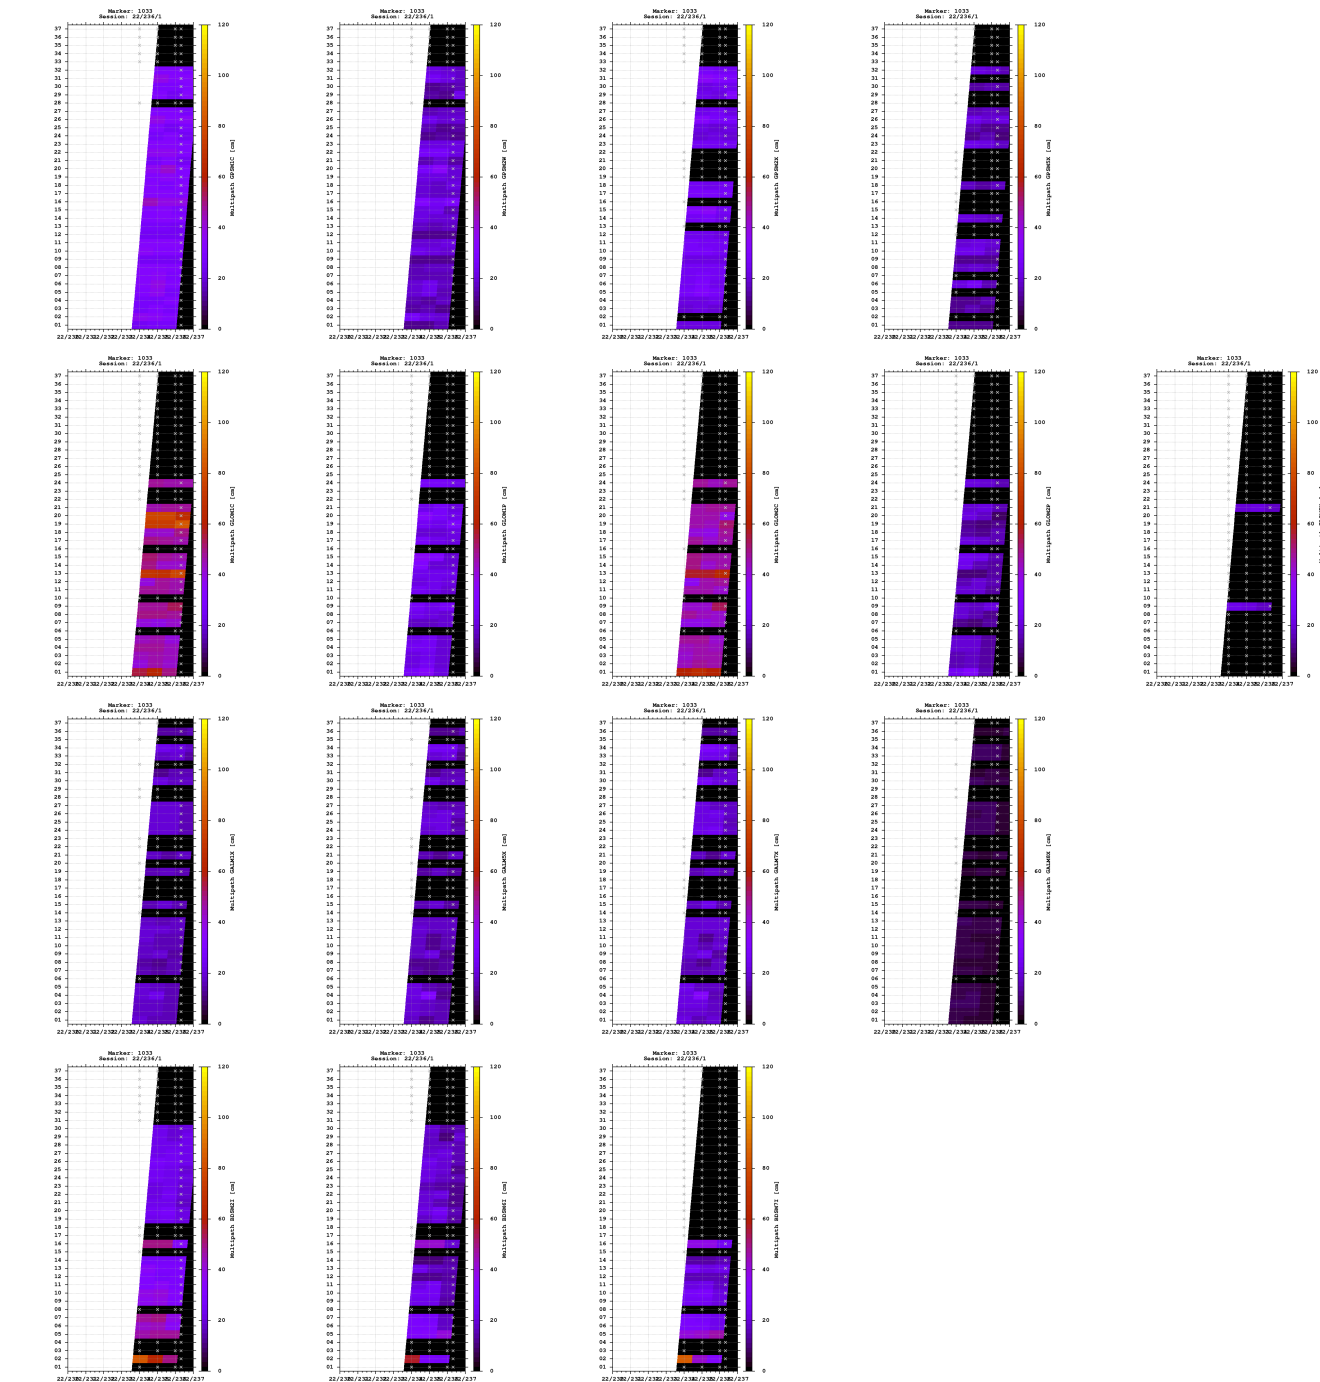


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

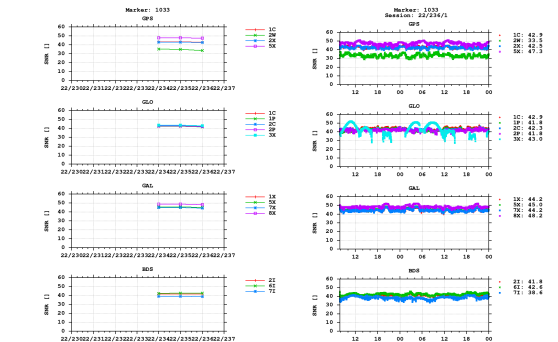


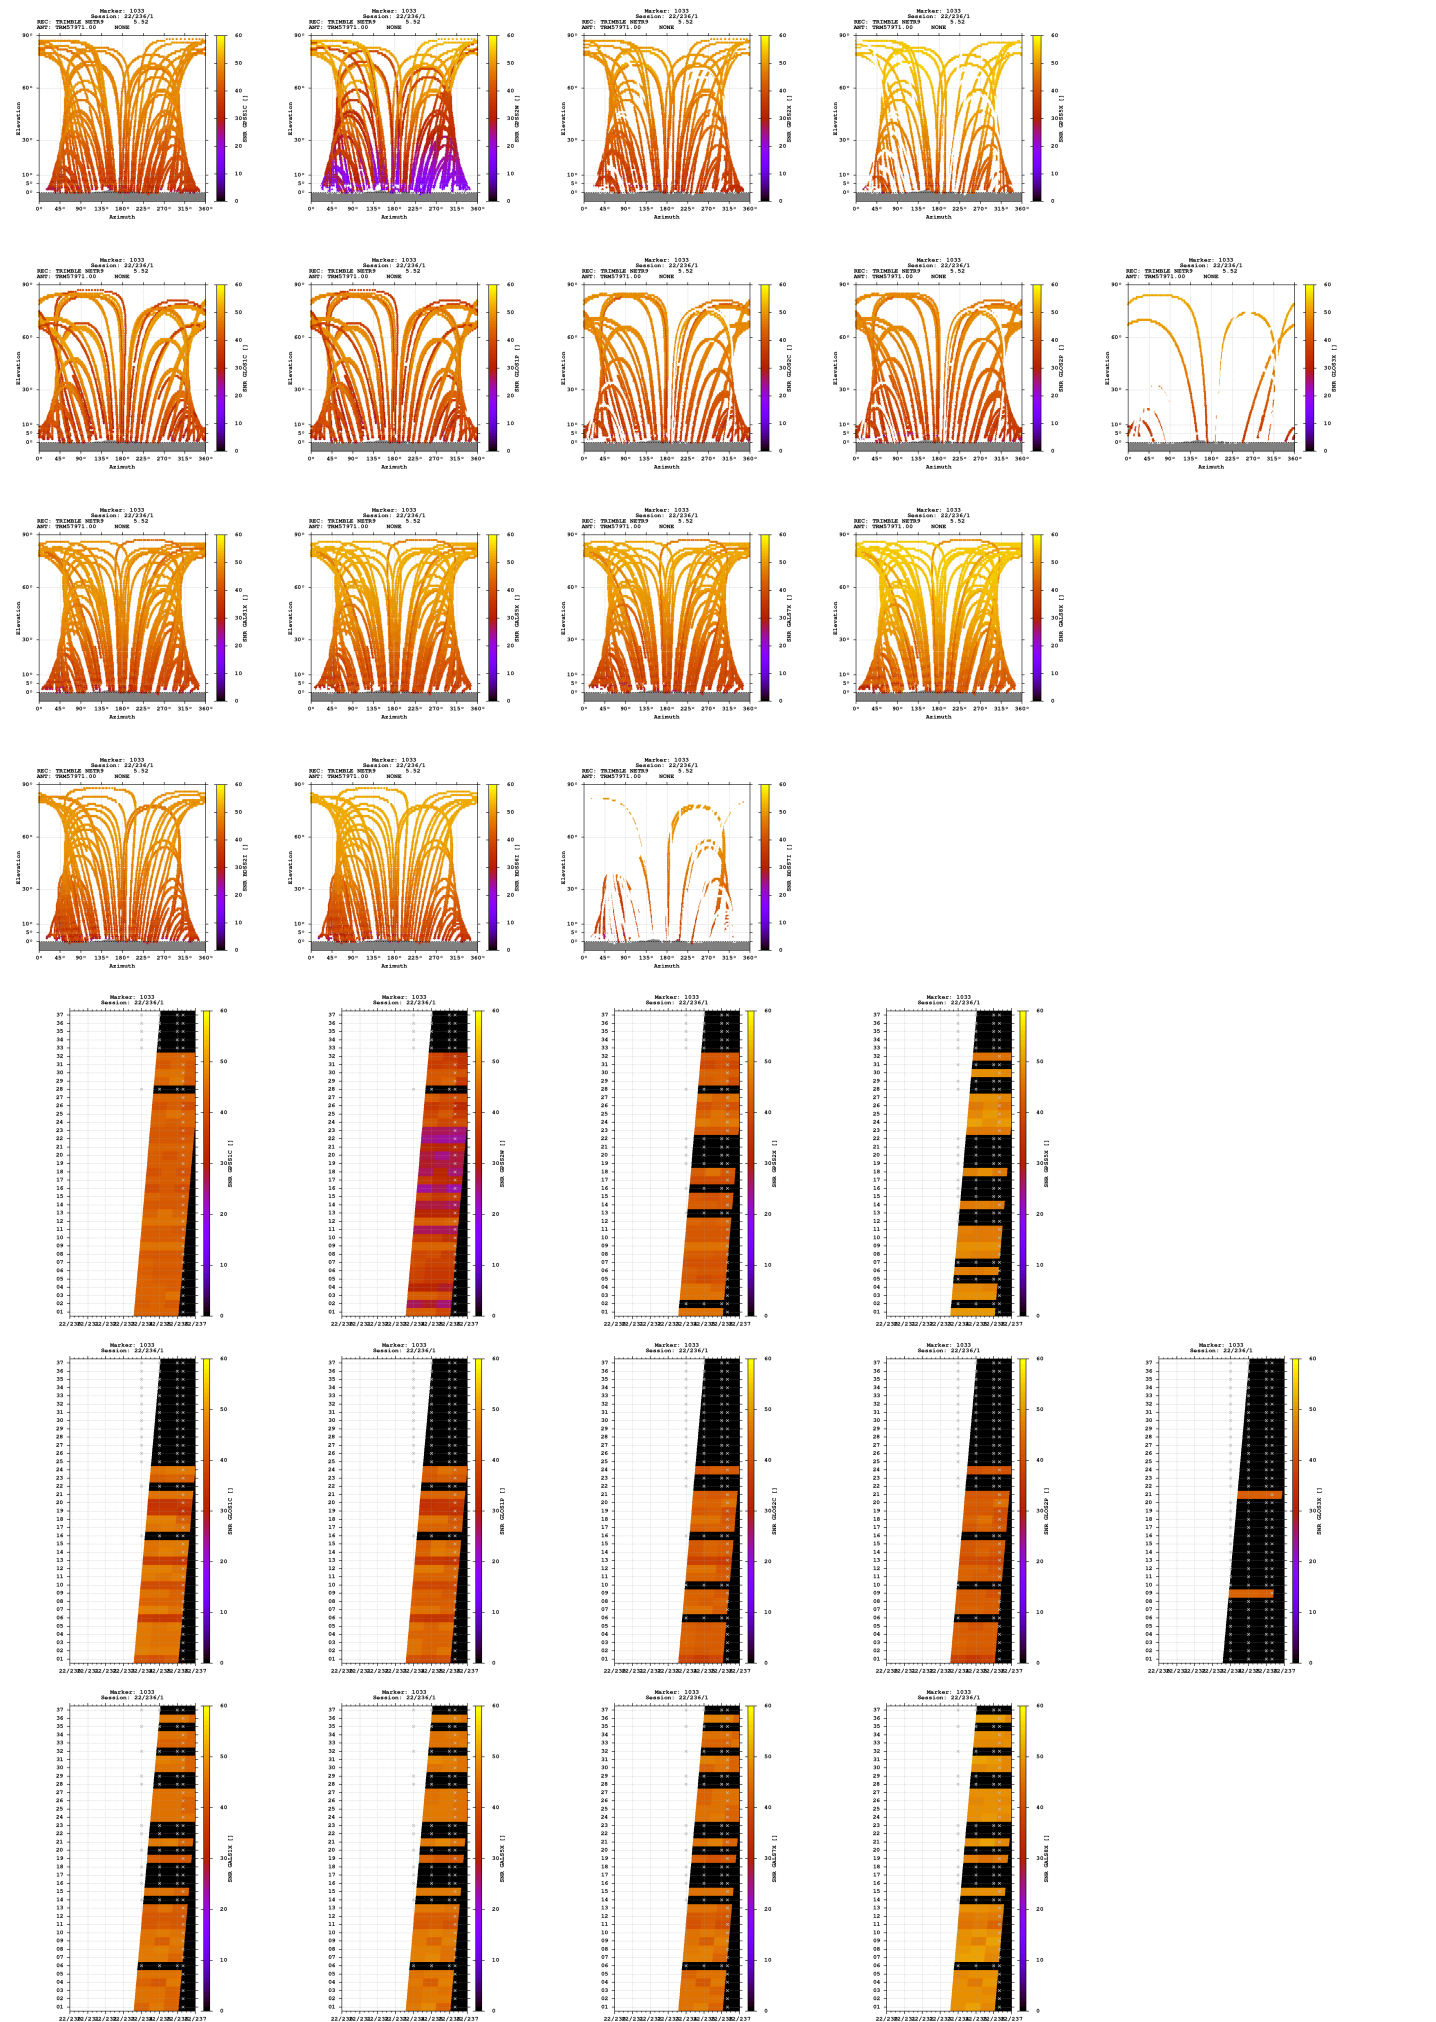

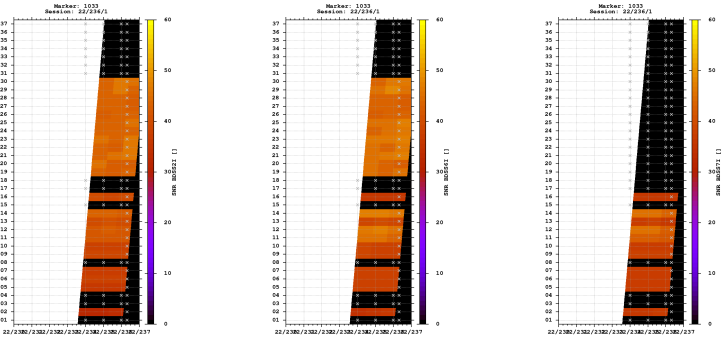



Estimates

2022-08-24 07:50:00	GPS	4251594.4428	675199.5487	4691495.8145	47.652418047	9.023834932	765.8853
2022-08-24 07:50:00	GLO	4251594.7079	675199.3449	4691495.0810	47.652412076	9.023831700	765.4980
2022-08-24 07:50:00	GAL	4251594.2168	675199.6228	4691495.4224	47.652417079	9.023836379	765.4530
2022-08-24 07:50:00	BDS	4251595.2430	675200.9124	4691498.0184	47.652424724	9.023851187	768.1906

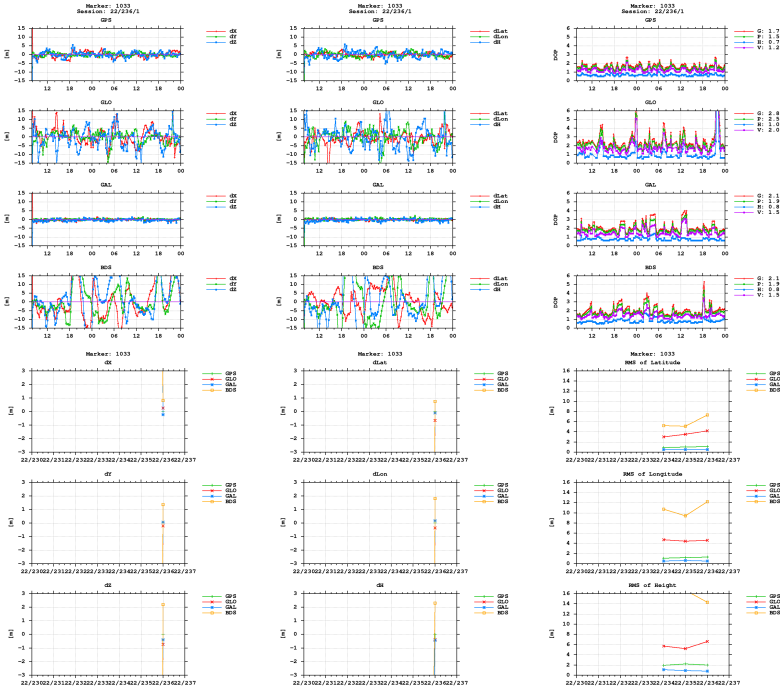

BNC

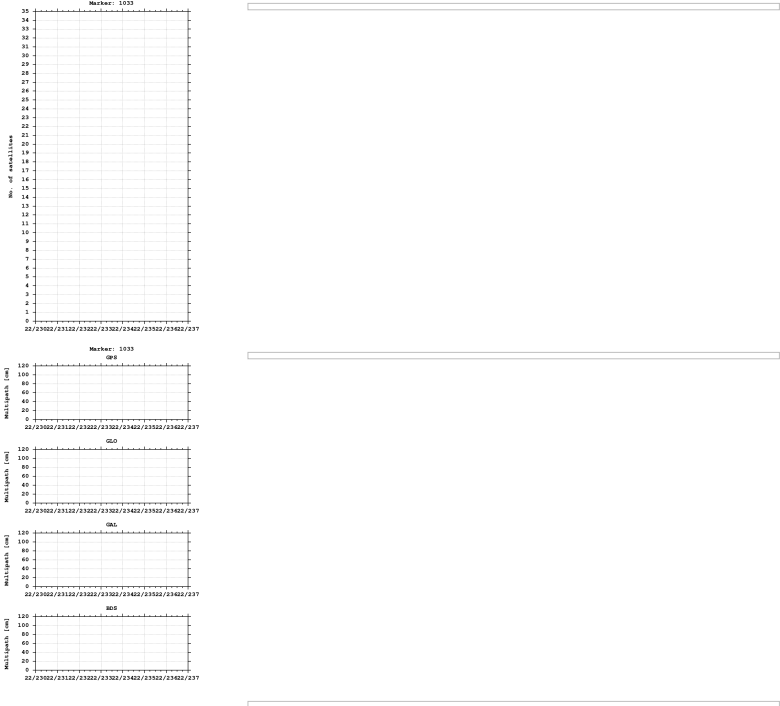

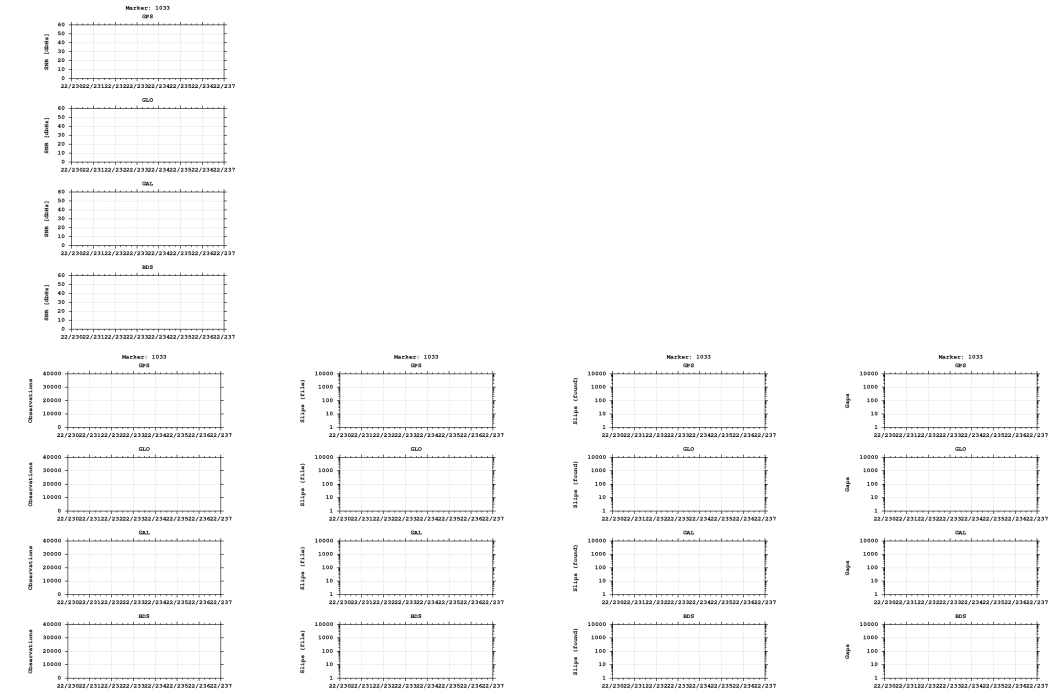

Equipment

2022-08-22 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)